

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		7530.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	38.0V x 37.1H
	At 50% of Imax	18.5V x 17.5H
	At 90% of Imax	4.7V x 6.1H
Beam Flux	Total	993.4 lumens per klm.
	To 10% of Imax	826.6 lumens per klm.
	To 50% of Imax	361.3 lumens per klm.
	To 90% of Imax	36.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.6V I:0.0478A P:5.364W PF:0.5087 Lamp Flux:136.346x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000030
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

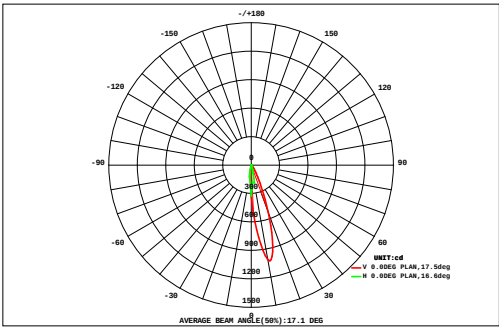

DATA OF LAMP		Eff:25.42lm/W	
MODEL	LWW-OP-D80-L6-RDM	Imax(cd)	1027
NOMINAL POWER(W)	5	AVAILABILITY(%)	84.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	115.5
NOMINAL FLUX(lm)	136.346	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	136.3
TEST VOLTAGE(V)	220.6	θ @50%(H,V)	17,19DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
	27	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.09	0.10	0.10	0.09	0.08	0.06	0.75	0.00	
	24	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.10	0.14	0.17	0.20	0.21	0.21	0.20	0.17	0.14	1.67	0.00
	21	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.11	0.16	0.21	0.25	0.28	0.28	0.27	0.24	0.21	0.16	2.31	0.62
	18	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.11	0.17	0.23	0.29	0.33	0.36	0.36	0.33	0.29	0.24	0.18	2.97	1.87
	15	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.12	0.21	0.35	0.57	0.83	1.06	1.15	1.05	0.84	0.62	0.43	7.35	6.88
	12	0.00	0.00	0.00	0.01	0.02	0.05	0.10	0.18	0.31	0.53	0.85	1.20	1.47	1.53	1.35	1.04	0.74	0.50	9.88	9.44
	9	0.00	0.00	0.00	0.02	0.05	0.10	0.18	0.31	0.52	0.88	1.33	1.76	1.99	1.87	1.49	1.06	0.70	0.45	12.7	12.3
		0.00	0.00	0.00	0.01	0.04	0.08	0.15	0.26	0.45	0.77	1.24	1.75	2.16	2.24	1.93	1.45	0.99	0.64	14.2	13.7
		0.00	0.00	0.00	0.00	0.02	0.05	0.10	0.19	0.34	0.63	1.10	1.69	2.30	2.61	2.39	1.87	1.31	0.84	15.4	15.0
		0.00	0.00	0.01	0.03	0.07	0.13	0.23	0.41	0.76	1.32	1.98	2.63	2.97	2.69	2.08	1.45	0.90	0.55	18.2	17.8
		0.00	0.00	0.01	0.03	0.06	0.12	0.22	0.38	0.71	1.22	1.82	2.43	2.75	2.51	1.94	1.37	0.86	0.54	17.0	16.5
		0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.10	0.16	0.27	0.49	0.78	1.14	1.43	1.40	1.16	0.87	0.59	8.46	7.99
		0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.13	0.18	0.27	0.40	0.56	0.72	0.83	0.79	0.67	0.52	0.37	5.57	5.03
	-12	0.00	0.00	0.00	0.01	0.03	0.06	0.11	0.17	0.24	0.31	0.37	0.39	0.32	0.21	0.16	0.13	0.12	0.13	2.76	1.56
	-15	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.08	0.13	0.20	0.28	0.37	0.42	0.42	0.37	0.30	0.23	2.87	2.10
	-18	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.03	0.04	0.06	0.10	0.16	0.21	0.24	0.23	0.20	0.16	1.45	0.48
	-21	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.04	0.03	0.02	0.02	0.02	0.02	0.03	0.03	0.31	0.00
	-24	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.05	0.05	0.05	0.04	0.04	0.38	0.00
-27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.05	0.05	0.05	0.04	0.04	0.38	0.00	
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)					6	9	12	15	18	21	24	27
Φ t	0.00	0.00	0.02	0.12	0.33	0.74	1.44	2.57	4.39	7.31	11.2	15.3	18.4	18.7	16.2	12.5	8.91	6.05	124	---	
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	0.17	1.15	2.94	6.38	10.3	14.6	17.7	18.0	15.6	11.8	7.91	4.86	---	111	


one-half-peak spread: U:6.7,D:12.0 , L:8.3,R:9.3 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.6V I:0.0478A P:5.364W PF:0.5087 Lamp Flux:136.346x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000030
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

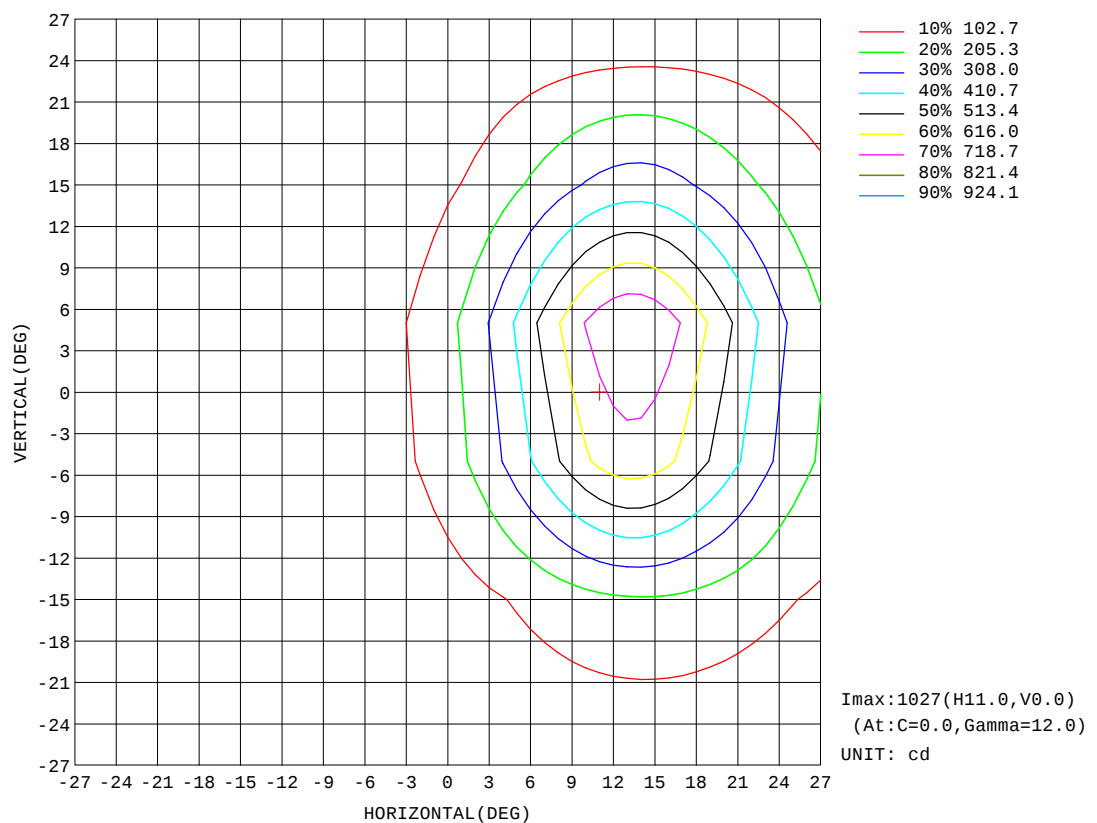


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.6V I:0.0478A P:5.364W PF:0.5087 Lamp Flux:136.346x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000030
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

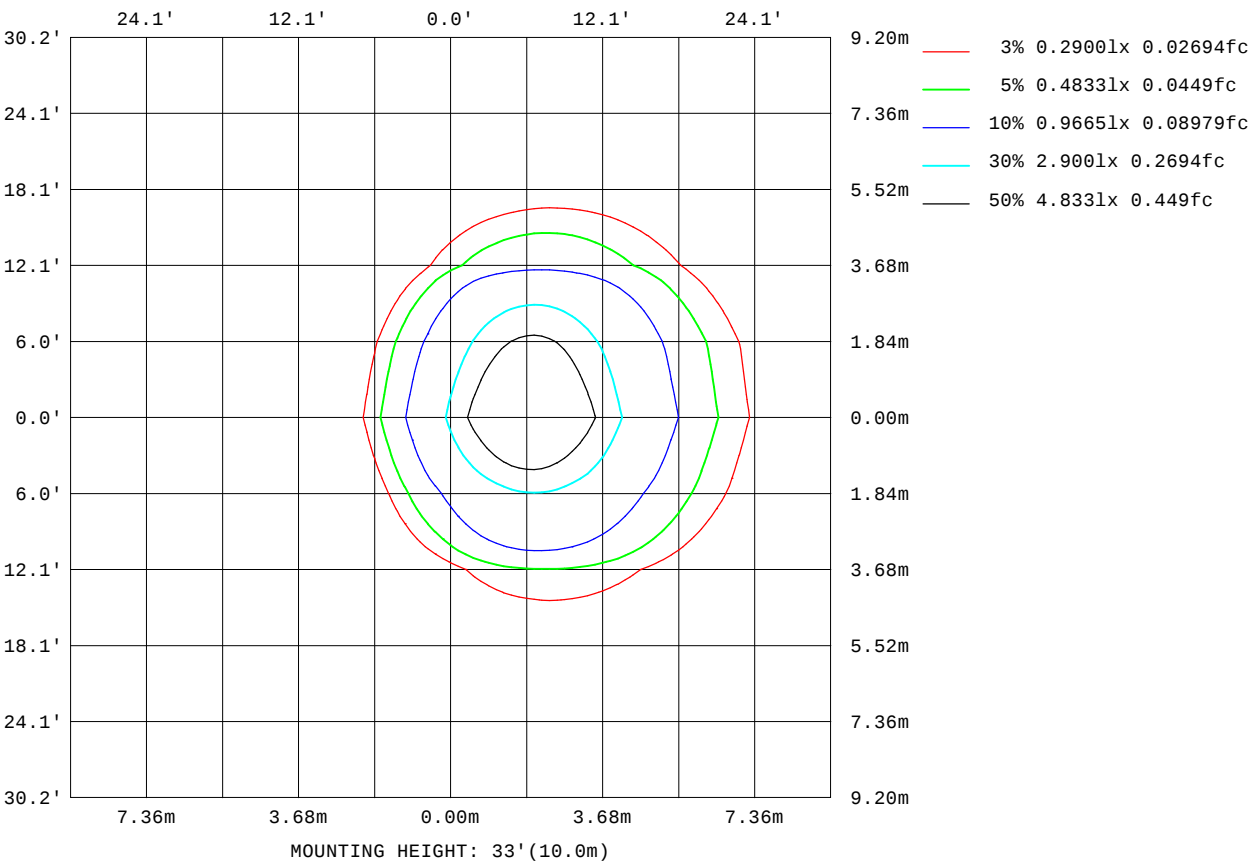


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.6V I:0.0478A P:5.364W PF:0.5087 Lamp Flux:136.346x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000030
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

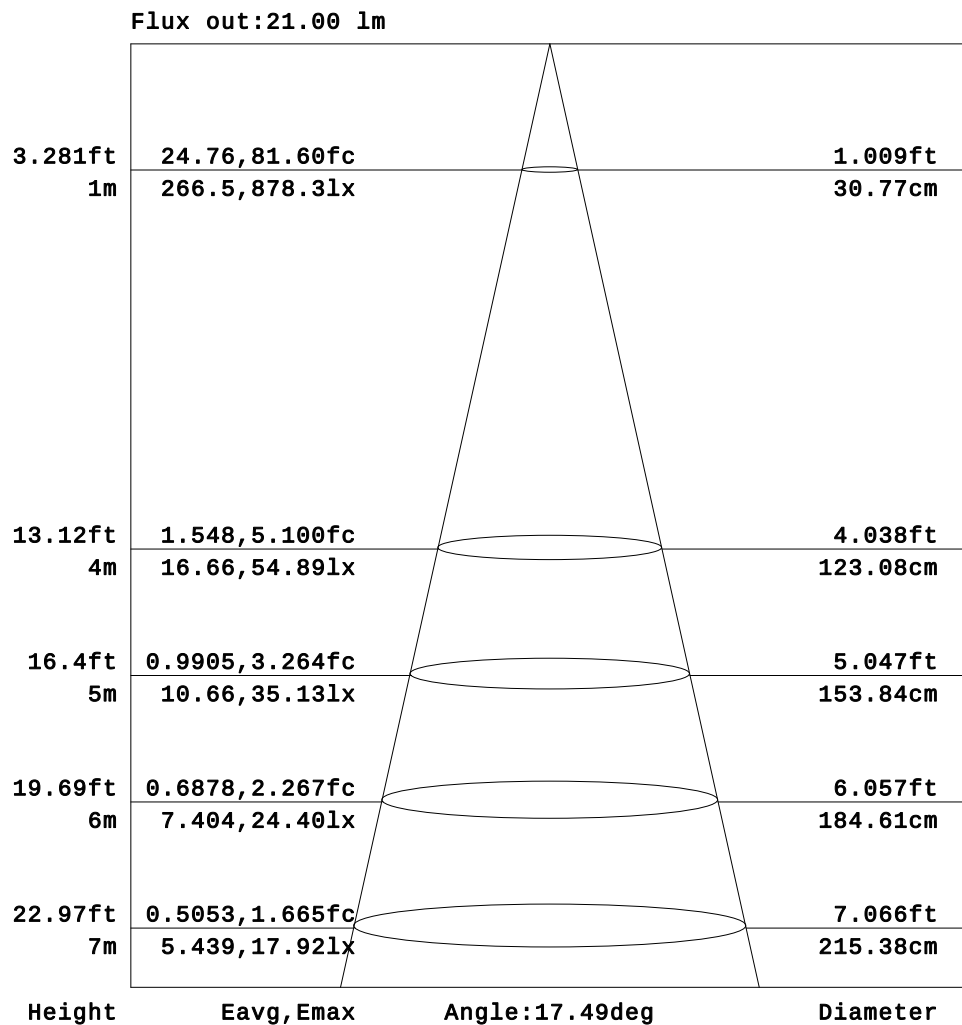


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

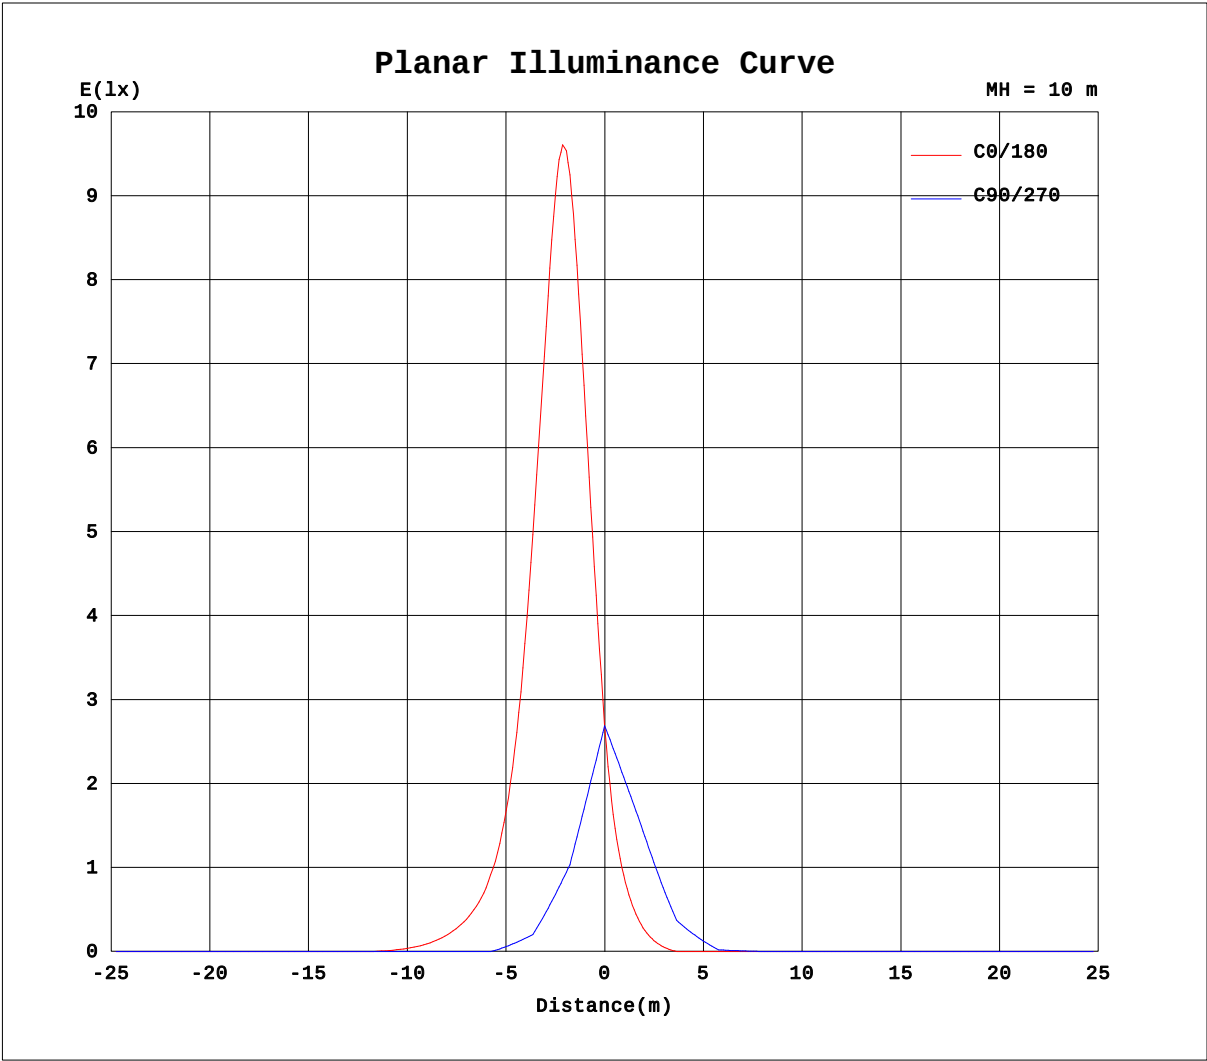

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.0478A P:5.364W PF:0.5087 Lamp Flux:136.346x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000030
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	4.10	10.7	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.91	12.7	28.2	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.04	7.39	25.4	58.0	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.91	23.2	60.4	124	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.00	22.3	63.3	157	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.68	14.5	46.5	122	330	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.12	25.3	70.9	180	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	9.13	31.8	83.3	195	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.15	12.1	37.2	89.6	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.86	24.1	50.9	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.91	8.23	20.8	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.42	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.13	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.0478A P:5.364W PF:0.5087 Lamp Flux:136.346x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000030
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	0.65	2.23	3.33	3.42	2.67	1.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	2.59	5.51	6.97	6.47	4.37	1.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	20.5	30.1	34.6	32.9	26.2	17.6	9.51	3.87	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	46.9	59.5	62.3	54.9	41.5	26.8	14.1	4.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	112	174	196	159	106	65.3	37.1	17.3	4.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	229	322	311	220	134	78.4	42.5	18.5	4.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	358	602	659	466	254	130	67.9	33.1	11.8	0.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	686	1008	879	529	253	121	61.4	27.6	8.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	424	724	793	549	290	143	73.9	36.2	13.2	1.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	409	593	544	344	183	97.2	51.4	23.0	6.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	192	315	350	260	155	86.8	48.0	23.0	7.20	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	79.4	99.1	102	86.8	63.5	40.8	22.0	8.22	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	38.3	53.3	60.1	55.8	43.5	29.1	16.3	6.49	1.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	10.2	15.5	17.7	16.2	12.1	6.68	1.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	3.94	6.77	8.58	8.66	6.94	4.43	1.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks: