

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		6465.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	40.4V x 38.6H
	At 50% of Imax	18.7V x 18.2H
	At 90% of Imax	5.0V x 7.2H
Beam Flux	Total	999.1 lumens per klm.
	To 10% of Imax	779.0 lumens per klm.
	To 50% of Imax	335.0 lumens per klm.
	To 90% of Imax	34.2 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.4V I:0.0553A P:6.343W PF:0.5206 Lamp Flux:351.908x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000033
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

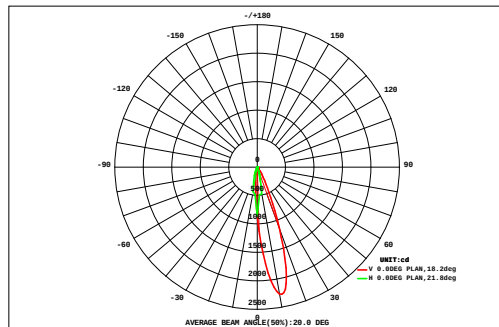

DATA OF LAMP		Eff:55.48lm/W	
MODEL	LWW-OP-D80-L6-RDM	Imax(cd)	2275
NOMINAL POWER(W)	6	AVAILABILITY(%)	79.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	279.2
NOMINAL FLUX(lm)	351.908	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	351.9
TEST VOLTAGE(V)	220.4	θ @50%(H,V)	18,19DEG

		AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
VERTICAL (DEG)	27	0.01	0.02	0.02	0.03	0.05	0.06	0.08	0.10	0.13	0.16	0.19	0.22	0.24	0.24	0.22	0.20	0.17	0.14	2.30	0.00		
	24	0.01	0.02	0.03	0.04	0.05	0.08	0.11	0.15	0.21	0.28	0.35	0.42	0.47	0.48	0.46	0.41	0.34	0.27	4.19	0.00		
	21	0.02	0.03	0.04	0.06	0.08	0.12	0.17	0.23	0.32	0.41	0.50	0.58	0.62	0.62	0.57	0.49	0.39	0.30	5.54	1.08		
	18	0.03	0.04	0.06	0.08	0.11	0.16	0.23	0.32	0.43	0.55	0.66	0.75	0.77	0.75	0.67	0.56	0.43	0.32	6.91	3.74		
	15	0.02	0.03	0.05	0.07	0.11	0.17	0.27	0.41	0.60	0.90	1.36	1.87	2.23	2.32	2.12	1.70	1.19	0.78	16.2	14.7		
	12	0.03	0.04	0.06	0.09	0.15	0.23	0.37	0.56	0.83	1.30	1.97	2.63	3.04	3.06	2.71	2.08	1.41	0.91	21.5	20.1		
	9	0.04	0.06	0.10	0.15	0.23	0.38	0.59	0.87	1.31	2.08	3.01	3.73	3.98	3.71	2.99	2.07	1.28	0.81	27.4	26.1		
		0.04	0.06	0.08	0.13	0.21	0.33	0.52	0.78	1.20	1.95	2.99	4.03	4.67	4.70	4.10	3.06	1.99	1.22	32.0	30.7		
		0.03	0.05	0.07	0.10	0.17	0.26	0.42	0.65	1.04	1.74	2.87	4.26	5.35	5.72	5.28	4.14	2.78	1.67	36.6	35.3		
		0.05	0.08	0.12	0.20	0.32	0.50	0.77	1.20	2.07	3.40	4.97	6.21	6.62	6.09	4.74	3.14	1.87	1.06	43.4	42.2		
		0.05	0.08	0.12	0.19	0.31	0.49	0.74	1.15	1.97	3.21	4.68	5.85	6.26	5.80	4.56	3.06	1.86	1.07	41.4	40.2		
	-9	0.03	0.04	0.06	0.09	0.14	0.22	0.33	0.48	0.65	0.99	1.57	2.36	3.12	3.52	3.44	2.87	2.07	1.35	23.3	21.7		
	-12	0.04	0.05	0.08	0.12	0.18	0.28	0.41	0.59	0.78	1.08	1.45	1.88	2.22	2.32	2.15	1.78	1.31	0.91	17.6	16.0		
	-15	0.05	0.07	0.10	0.15	0.24	0.36	0.52	0.73	0.99	1.29	1.46	1.49	1.36	1.08	0.75	0.57	0.45	0.40	12.1	9.53		
	-18	0.02	0.03	0.05	0.07	0.10	0.15	0.22	0.32	0.44	0.59	0.80	1.02	1.22	1.32	1.28	1.10	0.88	0.64	10.2	8.49		
	-21	0.02	0.03	0.04	0.05	0.07	0.11	0.15	0.21	0.27	0.32	0.42	0.54	0.67	0.79	0.83	0.77	0.65	0.50	6.44	3.18		
	-24	0.03	0.04	0.05	0.08	0.11	0.15	0.20	0.26	0.31	0.33	0.33	0.29	0.23	0.19	0.17	0.17	0.17	0.16	3.27	0.00		
	-27	0.02	0.02	0.04	0.05	0.07	0.10	0.13	0.17	0.21	0.23	0.24	0.24	0.25	0.26	0.25	0.23	0.20	0.17	2.88	0.00		
		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
Φ t	0.54	0.80	1.17	1.75	2.70	4.13	6.24	9.20	13.8	20.8	29.8	38.4	43.3	43.0	37.3	28.4	19.5	12.7	313	---			
Φ a	0.00	0.00	0.00	0.00	0.00	0.22	1.76	5.82	10.7	18.1	27.6	36.4	41.7	41.3	35.4	26.2	17.4	10.6	---	273			

one-half-peak spread: U:8.0,D:10.9 , L:9.3,R:9.1


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.4V I:0.0553A P:6.343W PF:0.5206 Lamp Flux:351.908x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000033
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

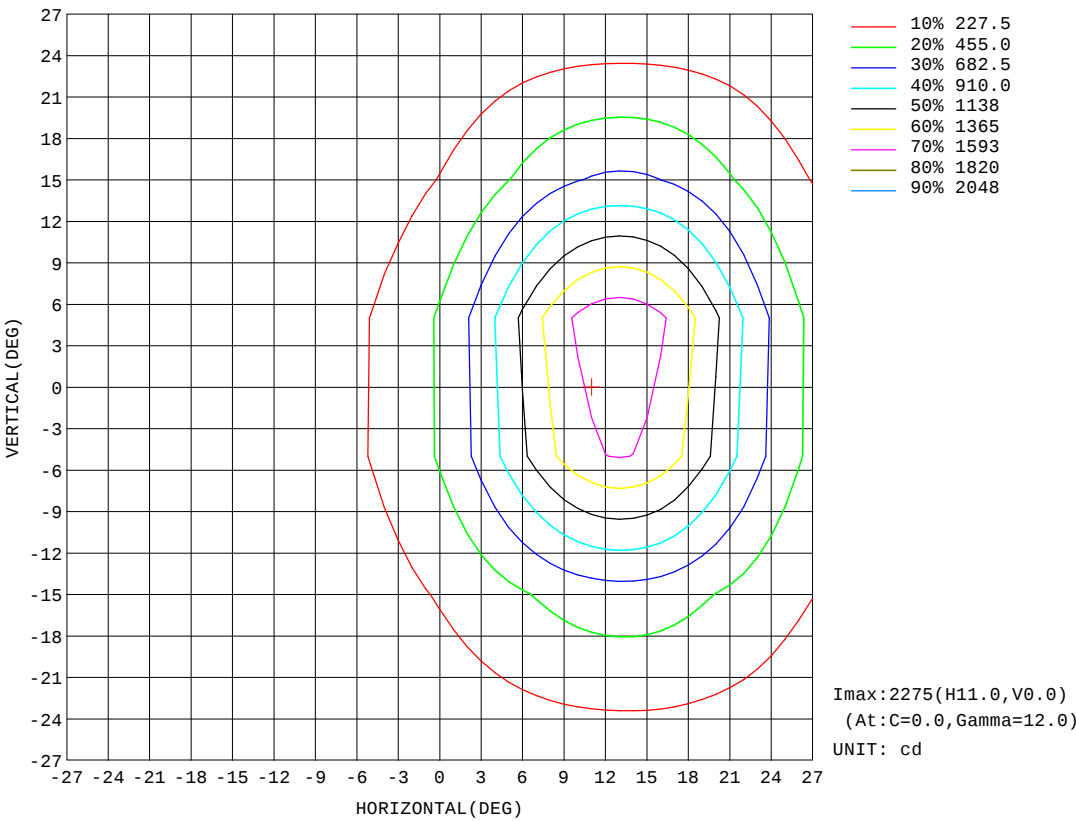


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.4V I:0.0553A P:6.343W PF:0.5206 Lamp Flux:351.908x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000033
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

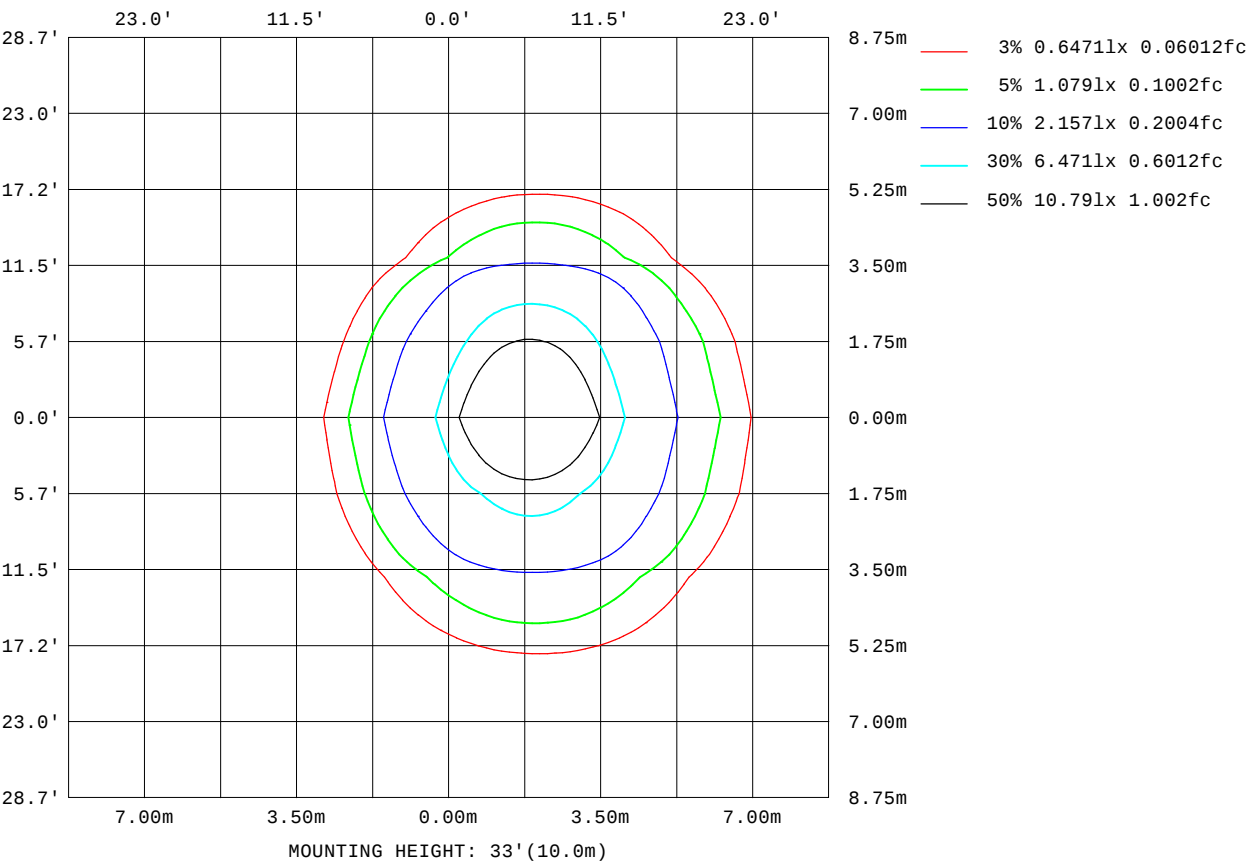


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.4V I:0.0553A P:6.343W PF:0.5206 Lamp Flux:351.908x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000033
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

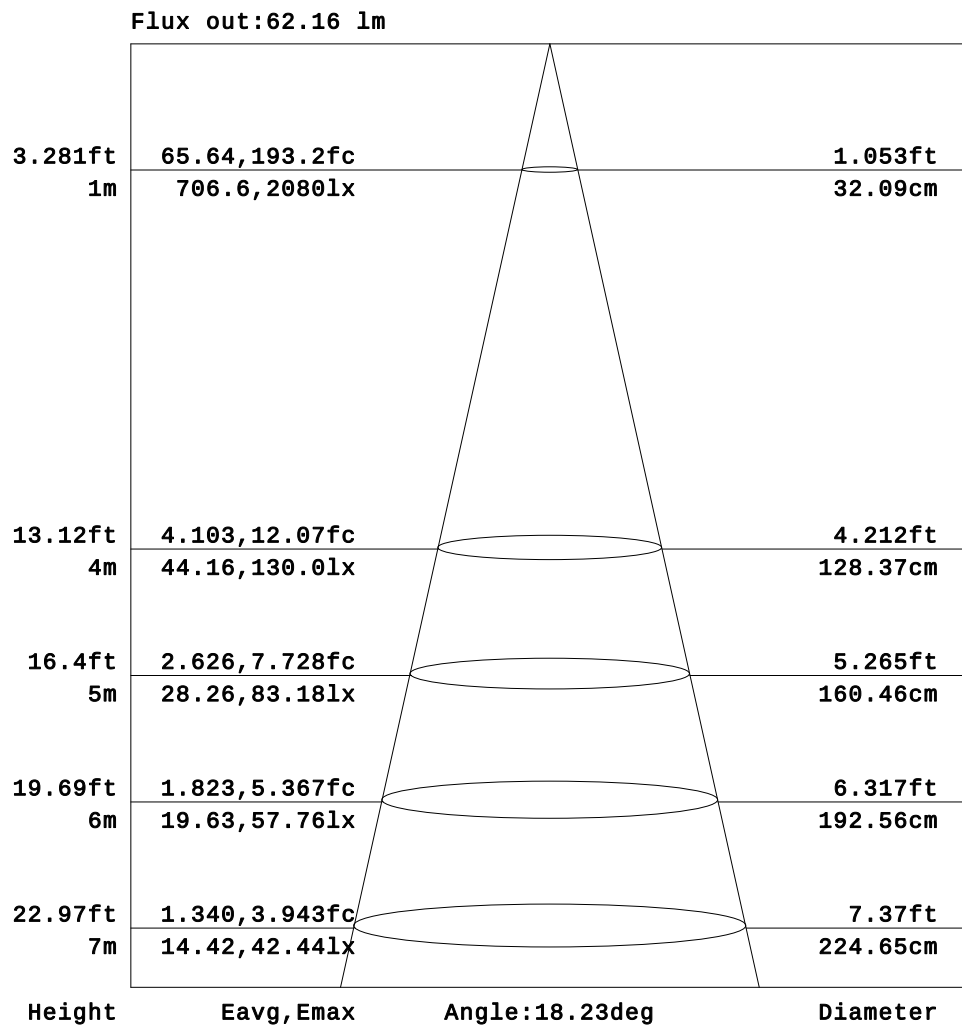


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

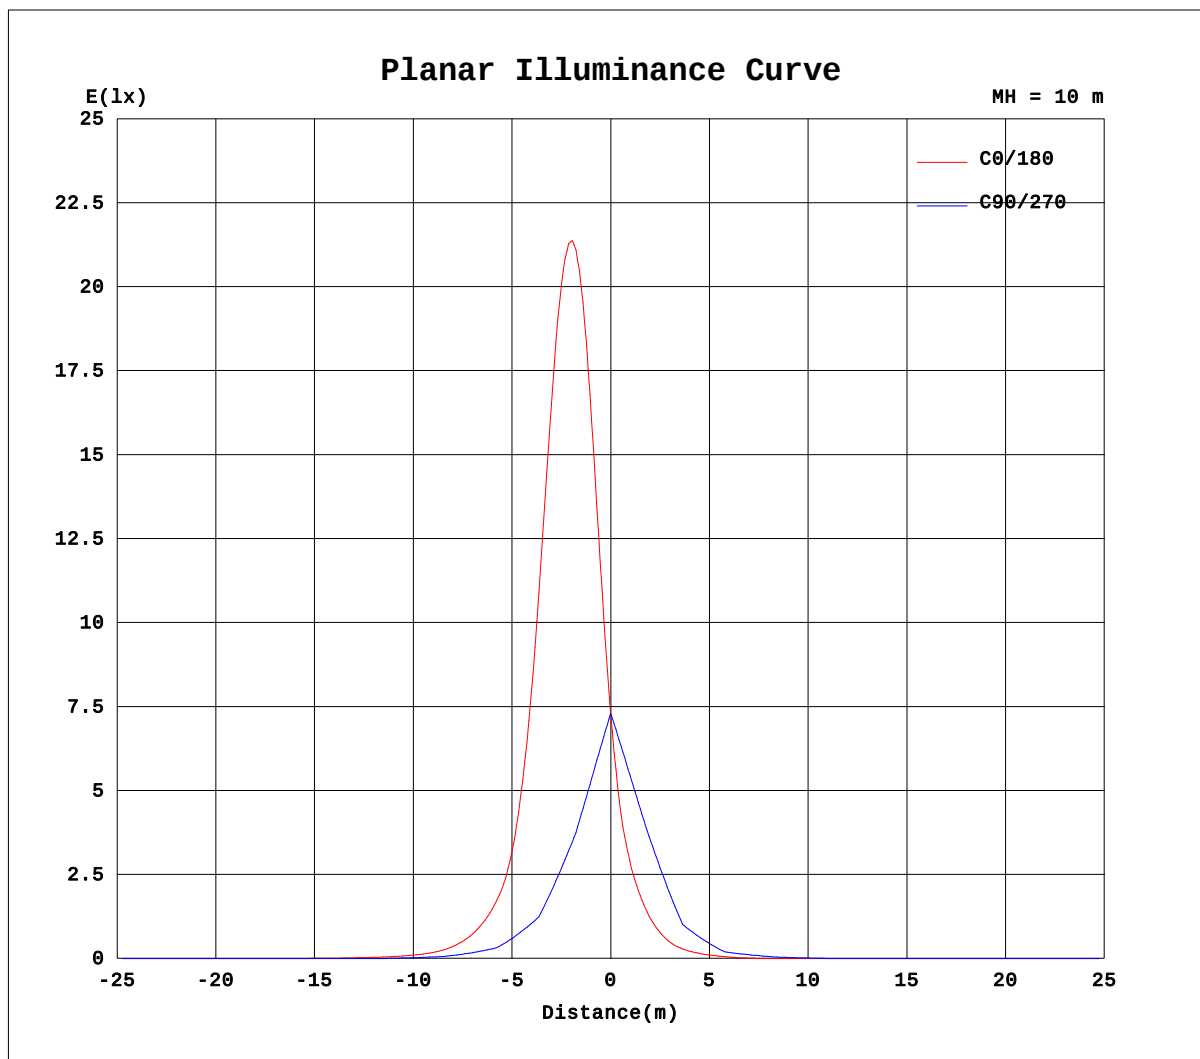

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 30.5DEG
Operators: QC1
Test Date: 2024-04-17

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 70%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.0553A P:6.343W PF:0.5206 Lamp Flux:351.908x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000033
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.81	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.11	3.02	5.21	7.47	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	3.64	7.80	12.1	16.8	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.01	3.60	7.79	13.6	21.3	30.8	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	3.96	9.50	16.2	25.2	37.6	53.1	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.48	5.40	11.8	20.9	36.1	60.7	93.2	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	5.09	11.6	20.4	35.9	64.4	108	161	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	4.76	11.4	21.2	39.0	75.8	141	244	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.98	9.34	18.1	33.4	65.9	131	246	443	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.45	7.37	15.4	28.5	56.0	118	234	482	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.28	11.2	21.3	40.2	85.6	181	367	863	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.37	7.11	14.7	26.8	52.8	112	230	486	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.73	8.43	15.9	29.1	57.6	121	242	481	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	3.98	9.69	17.6	32.3	63.8	126	235	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.81	8.85	15.4	26.8	47.3	82.7	134	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.97	3.69	8.40	14.9	25.6	43.8	71.2	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.99	5.91	10.3	16.1	24.2	33.5	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	2.17	4.57	8.68	13.9	20.2	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.84	4.86	8.38	11.9	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	1.88	3.44	5.22	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.68	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.0553A P:6.343W PF:0.5206 Lamp Flux:351.908x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000033
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.85	1.48	1.61	1.47	1.07	0.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	2.32	3.09	3.18	2.70	1.70	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	10.5	12.6	13.2	12.1	10.0	7.40	4.82	2.88	1.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	20.7	22.7	22.9	19.9	16.4	12.1	8.06	4.26	0.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	40.7	47.8	50.0	45.8	37.6	27.7	18.6	11.7	6.22	2.54	0.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	67.6	75.9	75.3	66.0	50.8	35.5	23.2	14.4	8.04	3.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	127	154	160	142	109	74.8	46.2	26.6	15.0	8.01	2.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	213	242	237	195	139	89.2	51.2	28.0	15.7	8.21	2.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	402	551	577	451	285	168	93.3	48.2	25.1	13.6	6.34	1.05	0.00	0.00	0.00	0.00	0.00	0.00
-10	722	920	843	574	323	178	93.5	45.8	23.6	12.7	5.47	0.18	0.00	0.00	0.00	0.00	0.00	0.00
-5	983	1496	1555	1090	554	266	138	66.5	32.3	17.2	8.57	2.47	0.00	0.00	0.00	0.00	0.00	0.00
0	1707	2260	1988	1138	490	234	115	52.6	26.3	14.0	6.40	0.71	0.00	0.00	0.00	0.00	0.00	0.00
5	1045	1630	1692	1173	568	263	135	63.7	31.2	16.8	8.54	2.53	0.00	0.00	0.00	0.00	0.00	0.00
10	919	1206	1089	671	328	172	85.8	41.6	22.1	12.2	5.48	0.30	0.00	0.00	0.00	0.00	0.00	0.00
15	451	675	704	522	287	154	82.5	42.2	22.7	12.9	6.45	1.30	0.00	0.00	0.00	0.00	0.00	0.00
20	189	222	215	171	116	70.3	40.6	23.6	14.0	8.02	3.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	103	130	136	118	87.2	57.4	35.4	21.6	13.3	7.76	3.12	0.19	0.00	0.00	0.00	0.00	0.00	0.00
30	42.1	47.6	47.3	41.8	33.6	24.8	17.4	12.1	7.73	3.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	25.7	31.1	31.8	29.2	24.7	19.3	14.0	9.73	6.09	2.76	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	13.6	16.1	15.3	13.7	11.5	9.27	6.93	4.36	1.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	7.16	9.52	9.18	8.31	7.30	5.71	3.99	2.72	1.39	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	2.37	2.93	2.73	2.65	1.75	0.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.79	1.48	1.44	1.31	1.13	0.61	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks: