

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5430.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	42.8V x 39.6H
	At 50% of Imax	20.5V x 18.0H
	At 90% of Imax	5.5V x 6.9H
Beam Flux	Total	999.1 lumens per klm.
	To 10% of Imax	711.0 lumens per klm.
	To 50% of Imax	327.5 lumens per klm.
	To 90% of Imax	34.8 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.2V I:0.1723A P:37.80W PF:0.9920 Lamp Flux:4756.28x1 lm		
NAME: 8.01.016.0085 20° LWL-PZT-W38A-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408042
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

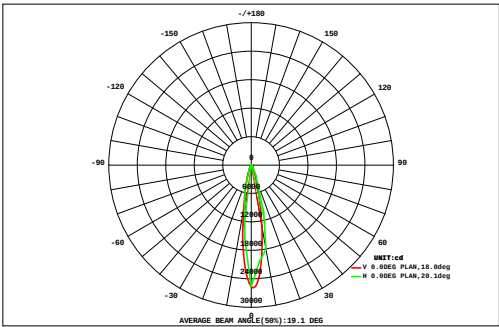

DATA OF LAMP		Eff:125.84lm/W	
MODEL LWL-PZT-W38A-L12-S		Imax(cd)	25831
NOMINAL POWER(W)	38	AVAILABILITY(%)	72.8
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	3463
NOMINAL FLUX(lm)	4756.28	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	4756
TEST VOLTAGE(V)	221.2	θ @50%(H,V)	18,21DEG

		AREA FLUX DIAGRAM															UNIT:lm				Φ t	Φ a
		1.15	1.40	1.74	2.16	2.66	3.23	3.81	4.31	4.73	4.92	4.82	4.47	3.96	3.38	2.79	2.25	1.79	1.43	55.0	4.81	
VERTICAL (DEG)	27	1.19	1.55	2.06	2.74	3.63	4.69	5.85	6.99	8.07	8.75	8.76	8.13	7.14	6.01	4.85	3.78	2.84	2.13	89.2	41.2	
	24	1.56	2.10	2.85	3.86	5.12	6.56	8.04	9.49	10.7	11.1	10.7	9.55	8.16	6.67	5.22	3.92	2.89	2.13	111	71.2	
	21	1.95	2.69	3.71	5.06	6.71	8.54	10.4	12.1	13.4	13.5	12.5	10.9	9.07	7.21	5.48	3.97	2.88	2.07	132	97.9	
	18	1.67	2.36	3.42	4.95	7.03	10.2	15.6	22.9	30.5	35.7	35.9	31.0	23.6	16.3	10.8	7.42	5.19	3.58	268	243	
	15	1.97	2.88	4.26	6.25	9.08	13.9	21.9	32.2	42.0	47.6	46.1	38.4	28.0	18.7	12.1	8.24	5.68	3.87	343	321	
	12	2.84	4.29	6.39	9.31	13.6	21.8	34.0	47.8	58.2	60.3	52.9	39.8	26.4	16.2	10.4	7.05	4.75	3.18	419	399	
	9	2.36	3.51	5.25	7.75	11.4	18.0	29.0	43.1	56.5	63.6	61.0	50.0	35.6	22.8	14.0	8.97	6.08	4.06	443	422	
	6	1.76	2.54	3.82	5.77	8.59	13.2	22.3	36.5	52.9	65.7	68.9	60.9	45.7	30.0	17.9	11.1	7.57	5.06	460	441	
	3	2.92	4.39	6.62	9.85	15.5	26.3	42.0	59.3	72.0	74.0	64.4	47.5	30.7	18.2	10.8	7.33	4.92	3.27	500	480	
	0	2.77	4.14	6.22	9.23	14.5	24.3	38.6	54.2	65.7	67.5	58.9	43.7	28.5	17.1	10.4	7.08	4.79	3.21	461	439	
-9	1.46	2.02	2.90	4.14	5.59	7.29	10.8	17.2	25.7	33.5	36.9	34.5	27.4	19.3	12.7	8.29	5.80	4.00	259	231		
	-12	1.71	2.38	3.37	4.67	6.16	7.65	9.87	13.1	16.9	19.8	20.6	18.7	15.1	11.4	8.28	5.78	4.12	2.90	173	142	
	-15	2.06	2.89	4.06	5.53	7.23	8.88	10.1	10.4	9.05	6.34	3.95	2.54	2.14	2.60	3.26	2.94	2.19	1.63	87.8	48.9	
	-18	1.15	1.48	1.97	2.64	3.53	4.59	5.91	7.61	9.55	11.1	11.7	10.9	9.19	7.21	5.54	4.24	3.17	2.35	104	63.2	
	-21	0.95	1.15	1.41	1.78	2.25	2.71	3.16	3.80	4.80	5.97	6.88	7.07	6.39	5.25	4.17	3.30	2.55	1.95	65.5	18.1	
	-24	1.14	1.39	1.67	2.00	2.32	2.60	2.63	2.32	1.73	1.33	1.17	1.16	1.27	1.40	1.35	1.19	1.05	0.92	28.6	0.00	
	-27	0.91	1.08	1.27	1.48	1.71	1.91	2.00	1.91	1.98	2.10	2.12	2.06	1.90	1.69	1.50	1.33	1.16	1.00	29.1	0.00	
		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27	
Φ t	31.5	44.2	63.0	89.2	127	186	276	385	484	533	508	421	310	211	141	98.2	69.4	48.7	4028	---		
Φ a	0.00	0.00	11.7	34.4	88.8	159	251	366	468	521	499	410	297	183	104	60.1	11.6	0.00	---	3463		


one-half-peak spread: U:6.8,D:13.8 , L:9.1,R:9.0 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.2V I:0.1723A P:37.80W PF:0.9920 Lamp Flux:4756.28x1 lm		
NAME: 8.01.016.0085 20° LWW-PZT-W38A-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408042
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

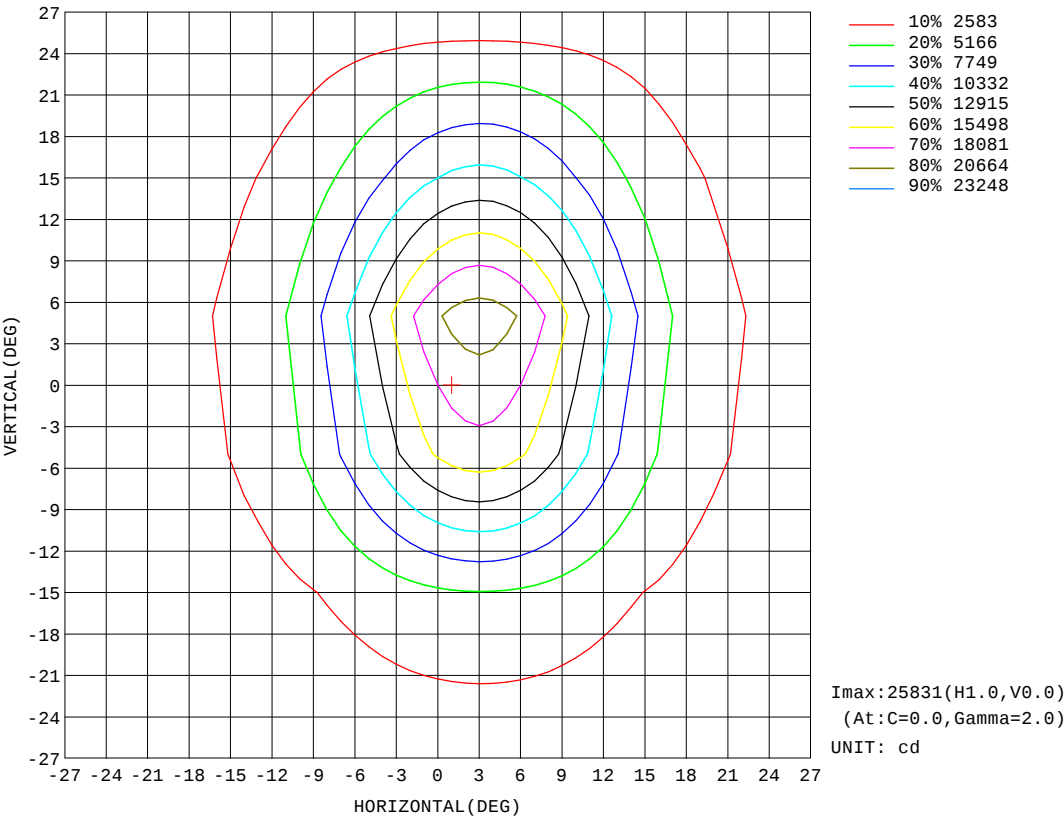


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.2V I:0.1723A P:37.80W PF:0.9920 Lamp Flux:4756.28x1 lm		
NAME: 8.01.016.0085 20° LWW-PZT-W38A-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408042
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

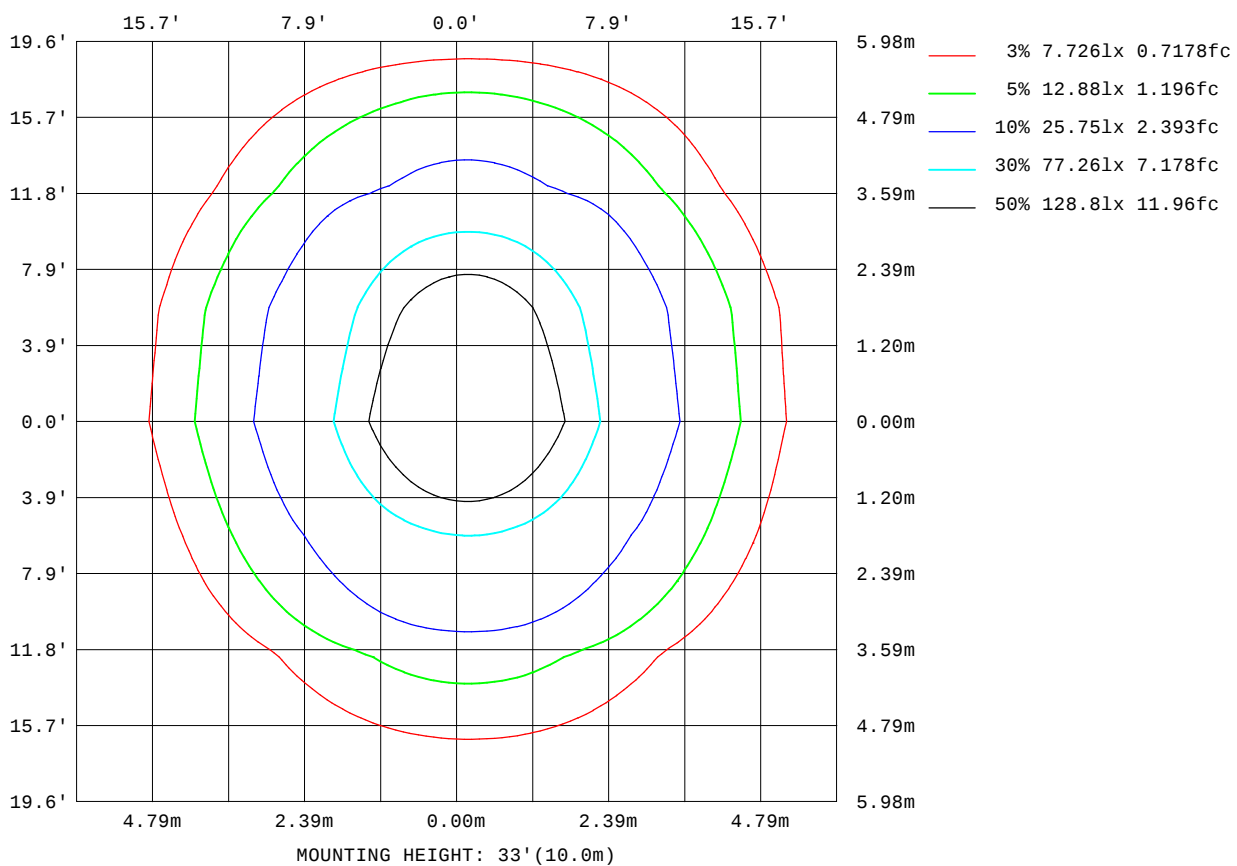


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.2V I:0.1723A P:37.80W PF:0.9920 Lamp Flux:4756.28x1 lm		
NAME: 8.01.016.0085 20° LWW-PZT-W38A-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408042
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

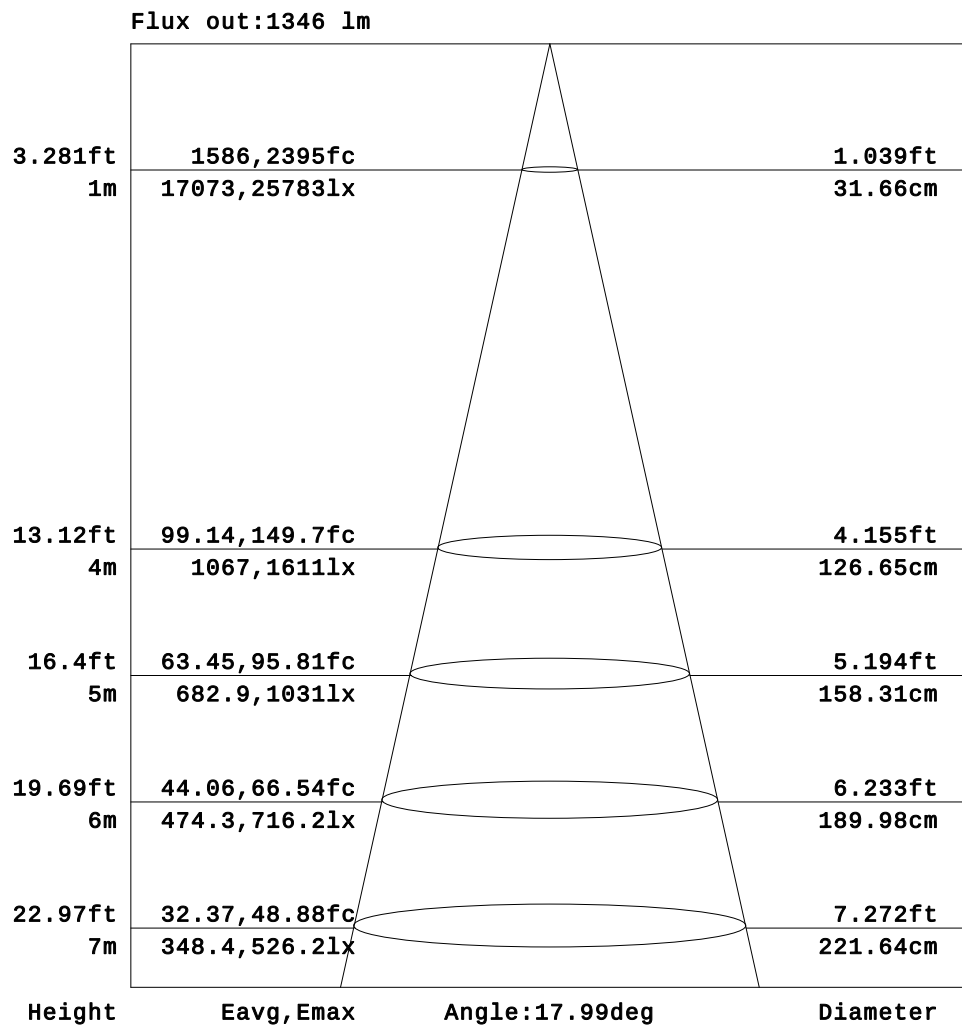


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

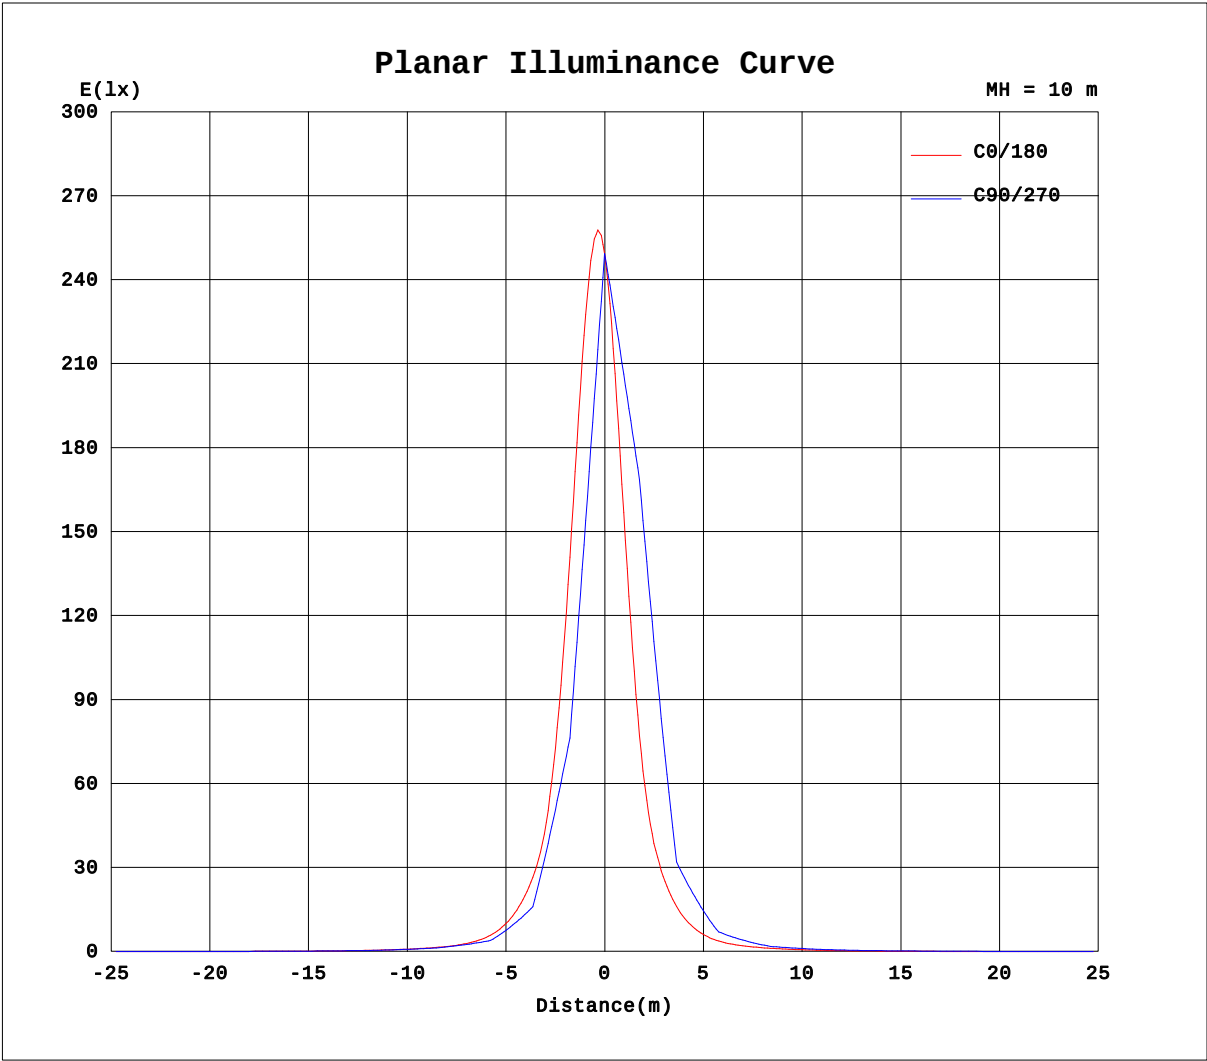

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.2V I:0.1723A P:37.80W PF:0.9920 Lamp Flux:4756.28x1 lm		
NAME: 8.01.016.0085 20° LWW-PZT-W38A-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408042
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1		UNIT: ×10cd																		
H(°) \ V(°)		-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.35	0.72	1.03	1.12	1.38	1.70	1.78	1.82	2.04
-70		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	0.96	1.77	2.14	2.37	3.02	3.41	3.53	3.79	4.19
-65		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	1.12	1.82	2.51	3.50	4.33	4.68	5.18	6.12	6.41	6.53	6.97
-60		0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.24	2.72	3.75	4.72	5.97	6.90	7.23	8.06	9.10	9.30	9.57	10.0
-55		0.00	0.00	0.00	0.00	0.00	0.01	0.63	1.62	3.40	4.97	6.01	7.33	8.76	9.85	10.6	11.9	12.6	13.0	13.5
-50		0.00	0.00	0.00	0.00	0.00	0.60	1.71	3.30	5.43	6.90	8.07	9.78	11.7	13.0	14.2	15.3	16.2	16.8	17.2
-45		0.00	0.00	0.00	0.00	0.00	0.57	2.19	3.82	5.77	7.84	9.40	11.2	13.3	15.6	17.7	19.9	21.8	23.2	24.2
-40		0.00	0.00	0.00	0.00	0.16	1.92	3.90	5.86	7.88	10.0	11.9	14.2	16.8	19.9	23.0	26.1	28.7	30.6	31.4
-35		0.00	0.00	0.00	0.00	0.14	1.77	4.15	6.14	8.16	10.4	12.9	15.9	19.5	23.7	28.3	33.4	38.6	43.3	46.4
-30		0.00	0.00	0.00	0.00	1.04	3.50	6.03	8.23	10.1	12.8	16.1	20.3	25.4	31.2	37.6	45.0	52.5	59.0	62.6
-25		0.00	0.00	0.00	0.00	0.97	3.15	5.70	7.76	10.3	13.1	16.9	21.9	28.4	36.6	48.6	65.8	87.7	110	126
-20		0.00	0.00	0.00	0.19	2.57	4.77	7.05	9.77	12.5	16.2	21.4	28.2	37.2	50.5	71.9	103	142	177	195
-15		0.00	0.00	0.00	0.11	2.05	4.16	6.63	8.92	12.0	15.8	21.2	28.5	38.9	56.7	89.7	146	231	354	481
-10		0.00	0.00	0.00	1.08	3.14	5.54	8.03	10.7	14.2	19.3	26.3	36.0	52.3	84.5	147	250	408	644	818
-5		0.00	0.00	0.00	0.33	2.62	4.76	7.33	9.92	13.0	17.7	24.3	33.7	48.9	80.2	144	264	509	1019	1579
0		0.00	0.00	0.00	1.45	3.68	6.07	8.69	11.4	15.1	20.9	29.0	41.3	65.3	117	222	424	954	1884	2560
5		0.00	0.00	0.00	0.38	2.69	4.93	7.46	10.1	13.2	18.1	25.1	35.1	51.8	87.4	162	302	603	1281	2037
10		0.00	0.00	0.00	1.27	3.45	5.77	8.33	11.1	14.8	20.4	28.2	39.4	60.5	105	195	352	705	1338	1813
15		0.00	0.00	0.00	0.18	2.34	4.50	6.95	9.56	12.6	16.9	23.1	31.7	44.9	70.2	121	212	372	686	1033
20		0.00	0.00	0.00	0.86	2.91	5.12	7.62	10.3	13.5	18.0	24.2	33.0	45.5	67.9	108	172	254	336	391
25		0.00	0.00	0.00	0.01	1.73	3.83	6.17	8.68	11.3	14.6	19.3	25.5	34.0	46.7	67.9	102	149	200	243
30		0.00	0.00	0.00	0.21	2.18	4.33	6.70	9.14	11.5	14.7	18.9	24.4	31.2	39.7	51.4	66.8	85.0	101	110
35		0.00	0.00	0.00	0.00	1.02	3.08	5.16	7.32	9.47	11.9	14.9	18.8	23.7	29.7	36.9	46.2	57.1	67.7	74.7
40		0.00	0.00	0.00	0.00	1.49	3.47	5.33	7.23	9.26	11.5	13.9	16.9	20.7	24.9	29.4	34.2	38.0	41.0	42.3
45		0.00	0.00	0.00	0.00	0.34	2.08	3.72	5.38	7.24	9.25	11.2	13.4	16.0	19.0	22.2	25.5	28.5	30.9	32.3
50		0.00	0.00	0.00	0.00	0.42	2.07	3.38	4.97	6.83	8.61	10.1	11.8	13.8	15.6	17.5	19.4	21.0	22.2	22.8
55		0.00	0.00	0.00	0.00	0.00	0.73	1.88	3.26	4.92	6.40	7.63	9.05	10.7	12.0	13.4	14.9	16.0	17.0	17.6
60		0.00	0.00	0.00	0.00	0.00	0.27	1.37	2.87	4.26	5.20	6.20	7.57	8.68	9.38	10.4	11.3	11.8	12.3	12.6
65		0.00	0.00	0.00	0.00	0.00	0.00	0.45	1.12	2.30	3.13	3.88	5.00	5.97	6.50	7.29	8.17	8.54	8.91	9.39
70		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	1.11	1.59	2.38	3.32	3.71	4.13	4.92	5.42	5.52	5.95	6.27
75		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.42	0.70	1.01	1.49	1.80	1.95	2.29	2.73	2.84	3.06	3.46
80		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.25	0.54	0.76
85		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.2V I:0.1723A P:37.80W PF:0.9920 Lamp Flux:4756.28x1 lm		
NAME: 8.01.016.0085 20° LWW-PZT-W38A-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408042
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																		UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	2.08	1.92	1.92	1.92	1.67	1.47	1.46	1.24	0.84	0.66	0.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	4.02	3.79	3.91	3.67	3.12	2.91	2.82	2.13	1.48	1.14	0.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	7.06	6.71	6.65	6.45	5.76	5.29	5.06	4.32	3.40	2.91	2.07	0.89	0.44	0.03	0.00	0.00	0.00	0.00	
-60	9.81	9.49	9.37	8.72	7.92	7.49	6.86	5.68	4.85	4.23	2.73	1.37	0.58	0.00	0.00	0.00	0.00	0.00	
-55	13.6	13.2	12.8	12.1	11.1	10.2	9.40	8.16	6.98	6.01	4.66	2.86	1.67	0.71	0.00	0.00	0.00	0.00	
-50	17.1	16.6	15.9	14.7	13.5	12.3	11.0	9.63	8.33	6.89	5.15	3.19	2.01	0.77	0.00	0.00	0.00	0.00	
-45	24.4	23.8	22.5	20.7	18.5	16.3	14.1	12.1	10.4	8.77	6.98	5.11	3.31	1.75	0.27	0.00	0.00	0.00	
-40	31.3	30.1	27.8	25.0	21.7	18.5	15.5	13.1	11.2	9.25	7.30	5.44	3.27	1.53	0.00	0.00	0.00	0.00	
-35	47.1	45.0	40.8	35.6	30.3	25.2	20.7	16.9	13.8	11.3	9.14	7.26	5.11	2.74	0.76	0.00	0.00	0.00	
-30	61.9	56.9	49.6	42.0	34.8	28.2	22.6	18.0	14.3	11.6	9.42	7.39	5.04	2.30	0.38	0.00	0.00	0.00	
-25	128	116	94.3	71.4	52.8	39.5	30.3	23.6	18.2	14.2	11.2	8.78	6.42	3.85	1.53	0.00	0.00	0.00	
-20	188	159	120	84.7	59.0	42.5	32.2	24.5	18.6	14.1	10.9	8.30	5.78	3.51	1.10	0.00	0.00	0.00	
-15	499	387	255	164	101	63.4	42.7	31.1	22.9	17.0	12.8	9.73	7.12	4.70	2.46	0.34	0.00	0.00	
-10	743	501	307	186	108	64.5	42.5	30.4	22.2	16.1	12.0	9.03	6.46	4.12	2.00	0.00	0.00	0.00	
-5	1647	1137	587	296	165	90.9	54.3	36.6	26.3	19.0	13.9	10.4	7.75	5.22	2.97	0.71	0.00	0.00	
0	2239	1285	568	285	151	81.2	48.8	33.5	24.0	17.3	12.7	9.64	6.97	4.45	2.18	0.00	0.00	0.00	
5	2131	1451	713	339	184	99.5	57.7	38.0	27.1	19.5	14.2	10.7	7.98	5.39	3.08	0.75	0.00	0.00	
10	1604	963	466	252	137	76.3	47.1	32.8	23.4	16.9	12.5	9.49	6.89	4.42	2.19	0.00	0.00	0.00	
15	1080	776	434	238	137	79.5	49.7	34.4	25.0	18.2	13.4	10.1	7.50	5.03	2.84	0.59	0.00	0.00	
20	367	292	207	132	82.7	53.6	37.8	27.8	20.6	15.3	11.4	8.60	6.10	3.83	1.77	0.00	0.00	0.00	
25	248	212	162	113	75.2	51.3	36.8	27.6	20.8	15.6	12.0	9.17	6.63	4.32	2.29	0.24	0.00	0.00	
30	107	94.1	76.5	59.3	45.7	35.7	27.7	21.5	16.5	12.9	10.2	7.65	5.24	3.14	1.21	0.00	0.00	0.00	
35	75.8	70.4	60.7	49.9	40.0	32.1	25.6	20.4	16.0	12.7	10.1	7.90	5.64	3.48	1.56	0.02	0.00	0.00	
40	41.8	39.7	36.2	32.1	27.5	23.2	19.1	15.6	12.7	10.3	8.29	6.33	4.24	2.25	0.45	0.00	0.00	0.00	
45	32.5	31.5	29.5	26.8	23.5	20.3	17.2	14.4	12.0	9.86	7.84	6.11	4.41	2.56	0.72	0.00	0.00	0.00	
50	22.8	22.0	20.8	18.9	17.0	14.9	13.0	11.2	9.68	7.76	5.96	4.55	3.14	1.35	0.00	0.00	0.00	0.00	
55	17.7	17.4	16.8	15.7	14.3	13.0	11.6	9.89	8.53	7.10	5.42	3.99	2.85	1.42	0.15	0.00	0.00	0.00	
60	12.5	12.3	12.1	11.3	10.6	10.1	8.76	7.36	6.33	5.10	3.64	2.49	1.53	0.14	0.00	0.00	0.00	0.00	
65	9.39	9.17	9.17	8.78	8.03	7.63	7.01	5.87	4.91	4.17	3.01	1.79	0.98	0.36	0.00	0.00	0.00	0.00	
70	6.06	5.99	6.07	5.60	5.05	4.87	4.38	3.50	2.94	2.44	1.35	0.36	0.00	0.00	0.00	0.00	0.00	0.00	
75	3.43	3.25	3.37	3.24	2.75	2.53	2.36	1.93	1.55	1.35	0.91	0.35	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.59	0.56	0.71	0.48	0.18	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: