

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		6618.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	39.0V x 38.4H
	At 50% of Imax	16.9V x 18.0H
	At 90% of Imax	4.7V x 6.7H
Beam Flux	Total	997.3 lumens per klm.
	To 10% of Imax	764.6 lumens per klm.
	To 50% of Imax	313.7 lumens per klm.
	To 90% of Imax	29.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-15

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.1V I:0.0555A P:6.540W PF:0.5330 Lamp Flux:879.387x1 lm		
NAME: 8.01.016.0086 20°LWW-PZT-W38A-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

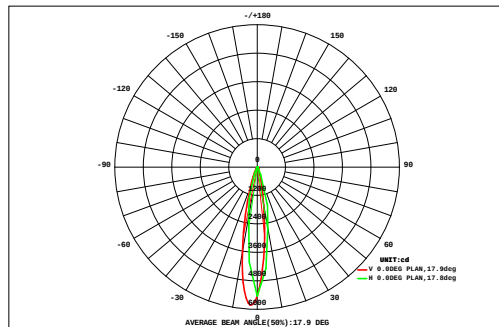

DATA OF LAMP		Eff:134.47lm/W	
MODEL	LWW-PZT-W38A-L3-S	Imax(cd)	5820
NOMINAL POWER(W)	7	AVAILABILITY(%)	78.4
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	689.3
NOMINAL FLUX(lm)	879.387	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	879.4
TEST VOLTAGE(V)	221.1	θ @50%(H,V)	18,17DEG

		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
		0.20	0.25	0.32	0.40	0.48	0.57	0.63	0.67	0.68	0.65	0.60	0.52	0.43	0.35	0.27	0.21	0.16	0.13	7.52	0.00
VERTICAL (DEG)	27	0.24	0.33	0.45	0.59	0.77	0.96	1.12	1.24	1.30	1.27	1.17	1.02	0.83	0.65	0.49	0.36	0.26	0.19	13.2	0.00
	24	0.34	0.47	0.64	0.85	1.09	1.32	1.51	1.63	1.65	1.56	1.39	1.16	0.92	0.70	0.51	0.37	0.26	0.19	16.6	3.38
	21	0.45	0.63	0.85	1.13	1.43	1.71	1.92	2.02	1.99	1.84	1.60	1.29	1.00	0.73	0.52	0.36	0.26	0.18	19.9	10.4
	18	0.42	0.63	0.95	1.37	1.96	2.86	3.99	5.02	5.55	5.36	4.56	3.46	2.43	1.69	1.16	0.77	0.51	0.33	43.0	36.6
	15	0.53	0.82	1.25	1.83	2.69	4.00	5.55	6.84	7.35	6.87	5.63	4.13	2.85	1.96	1.32	0.86	0.56	0.36	55.4	50.0
	12	0.82	1.27	1.90	2.74	4.11	6.04	7.97	9.16	9.07	7.76	5.81	3.93	2.62	1.76	1.14	0.71	0.45	0.29	67.6	62.7
	9	0.69	1.08	1.66	2.48	3.87	6.03	8.59	10.8	11.8	11.0	8.84	6.25	4.06	2.55	1.62	1.02	0.63	0.40	83.5	78.9
	-9	0.52	0.83	1.33	2.11	3.49	5.84	9.06	12.5	14.7	14.6	12.1	8.81	5.66	3.41	2.15	1.36	0.84	0.52	99.8	95.1
		0.96	1.54	2.37	3.96	6.74	10.4	14.3	16.9	16.9	14.1	10.2	6.47	3.82	2.27	1.40	0.85	0.52	0.33	114	110
		0.91	1.46	2.25	3.74	6.33	9.78	13.5	16.0	16.1	13.6	9.89	6.36	3.80	2.27	1.41	0.86	0.53	0.33	109	105
		0.39	0.61	0.96	1.32	1.89	3.03	4.74	6.84	8.59	9.14	8.07	6.19	4.24	2.70	1.74	1.11	0.70	0.44	62.7	56.8
		0.50	0.76	1.14	1.55	2.07	2.92	3.96	4.98	5.62	5.58	4.79	3.67	2.64	1.79	1.17	0.76	0.49	0.32	44.7	38.9
		0.64	0.96	1.40	1.91	2.48	3.11	3.49	3.32	2.64	1.80	1.19	0.86	0.81	0.74	0.53	0.35	0.25	0.17	26.7	19.6
		0.27	0.38	0.56	0.80	1.08	1.47	1.99	2.55	2.95	3.02	2.74	2.20	1.64	1.20	0.84	0.58	0.39	0.27	24.9	16.9
		0.18	0.24	0.32	0.44	0.54	0.65	0.86	1.17	1.50	1.71	1.70	1.47	1.14	0.86	0.63	0.45	0.31	0.22	14.4	5.28
	-12	0.24	0.31	0.38	0.46	0.51	0.50	0.38	0.26	0.18	0.15	0.14	0.15	0.16	0.14	0.12	0.12	0.11	0.09	4.40	0.00
-15	0.17	0.21	0.26	0.30	0.35	0.35	0.38	0.42	0.44	0.44	0.42	0.37	0.31	0.25	0.20	0.15	0.13	0.10	5.24	0.00	
-18	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27	
-21	Φ t	8.46	12.8	19.0	28.0	41.9	61.5	83.9	102	109	101	80.9	58.3	39.4	26.0	17.3	11.2	7.35	4.89	813	---
-24	Φ a	0.00	2.48	8.78	20.3	35.1	56.1	79.5	98.3	105	96.1	75.7	52.9	33.1	18.7	6.70	0.36	0.00	0.00	---	689

one-half-peak spread: U:7.5,D:9.6 , L:8.8,R:9.3


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-15

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.1V I:0.0555A P:6.540W PF:0.5330 Lamp Flux:879.387x1 lm		
NAME: 8.01.016.0086 20°LWW-PZT-W38A-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

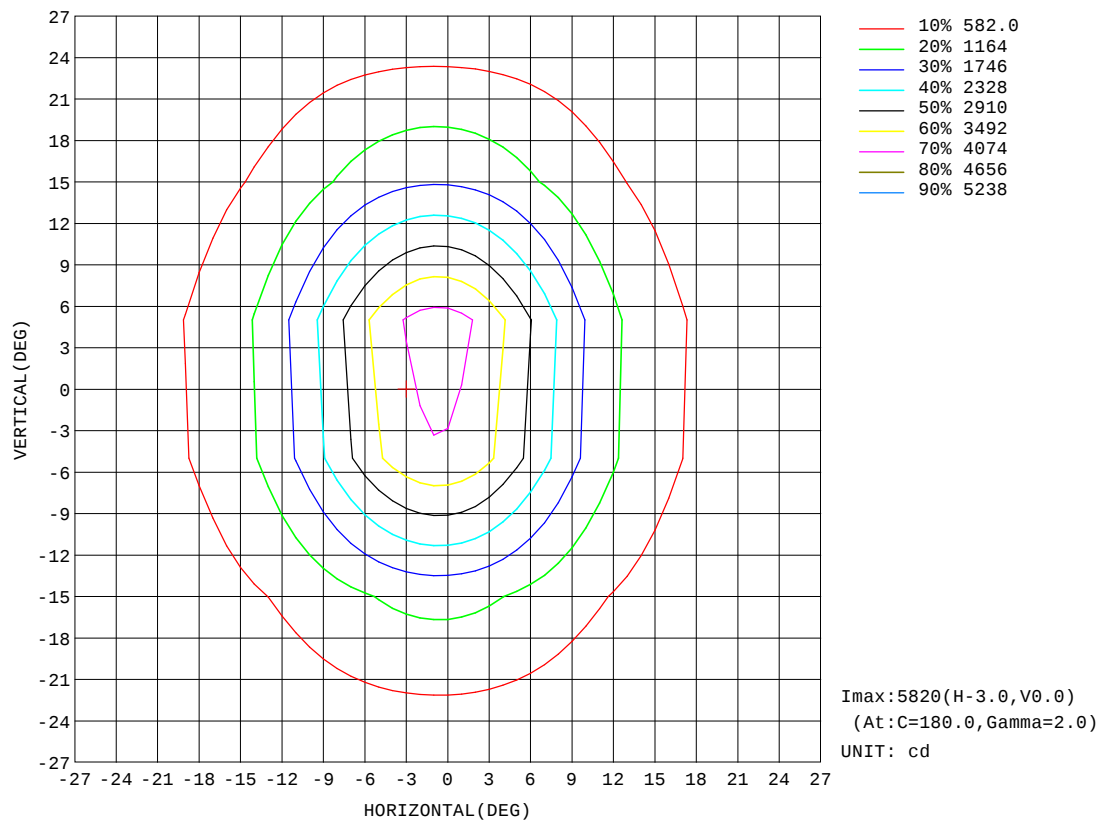


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-15

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.1V I:0.0555A P:6.540W PF:0.5330 Lamp Flux:879.387x1 lm		
NAME: 8.01.016.0086 20°LWW-PZT-W38A-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

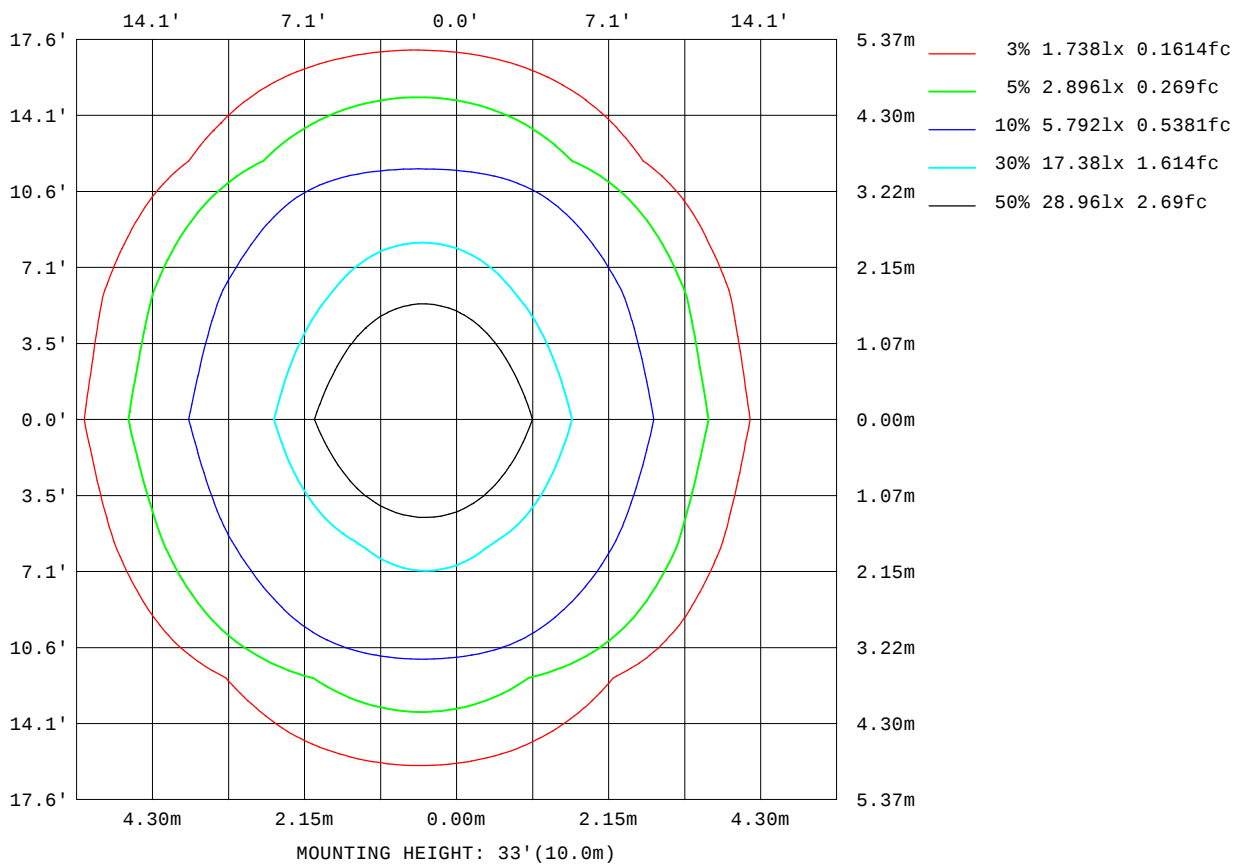


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-15

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.1V I:0.0555A P:6.540W PF:0.5330 Lamp Flux:879.387x1 lm		
NAME: 8.01.016.0086 20°LWW-PZT-W38A-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

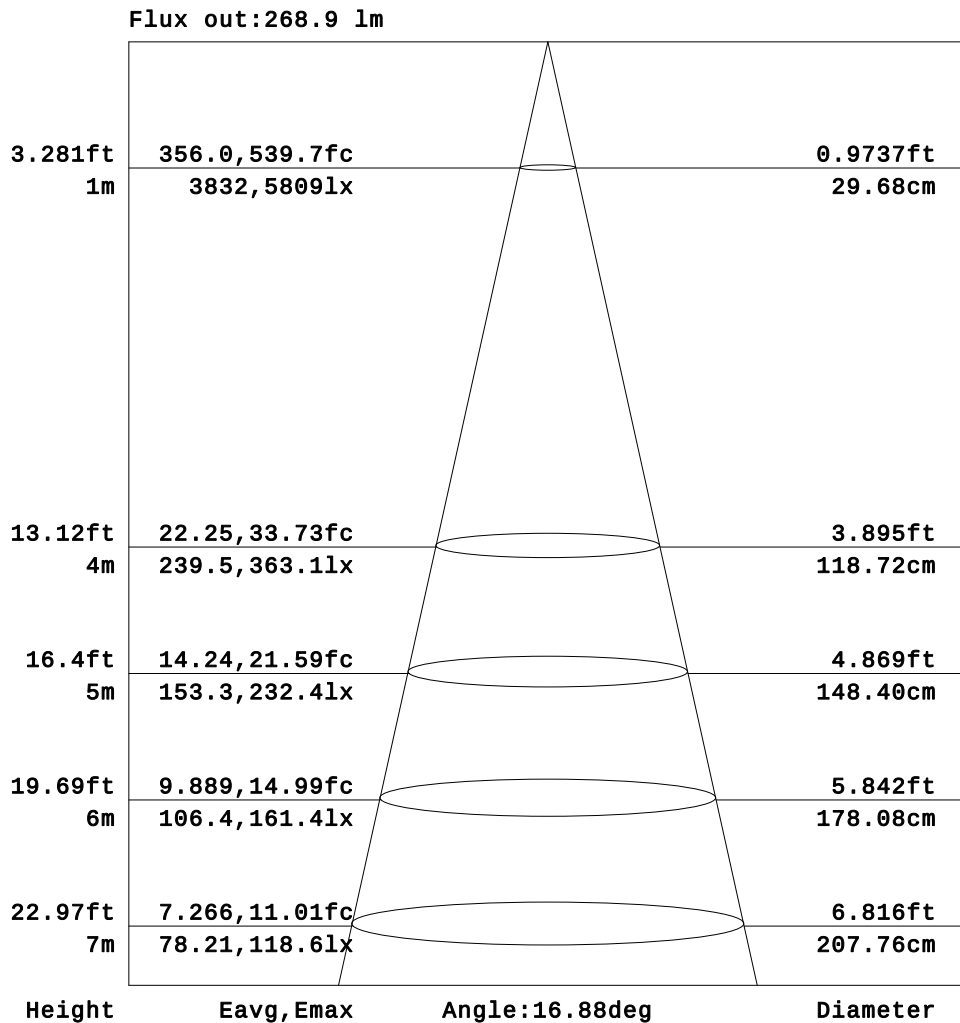


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-15

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

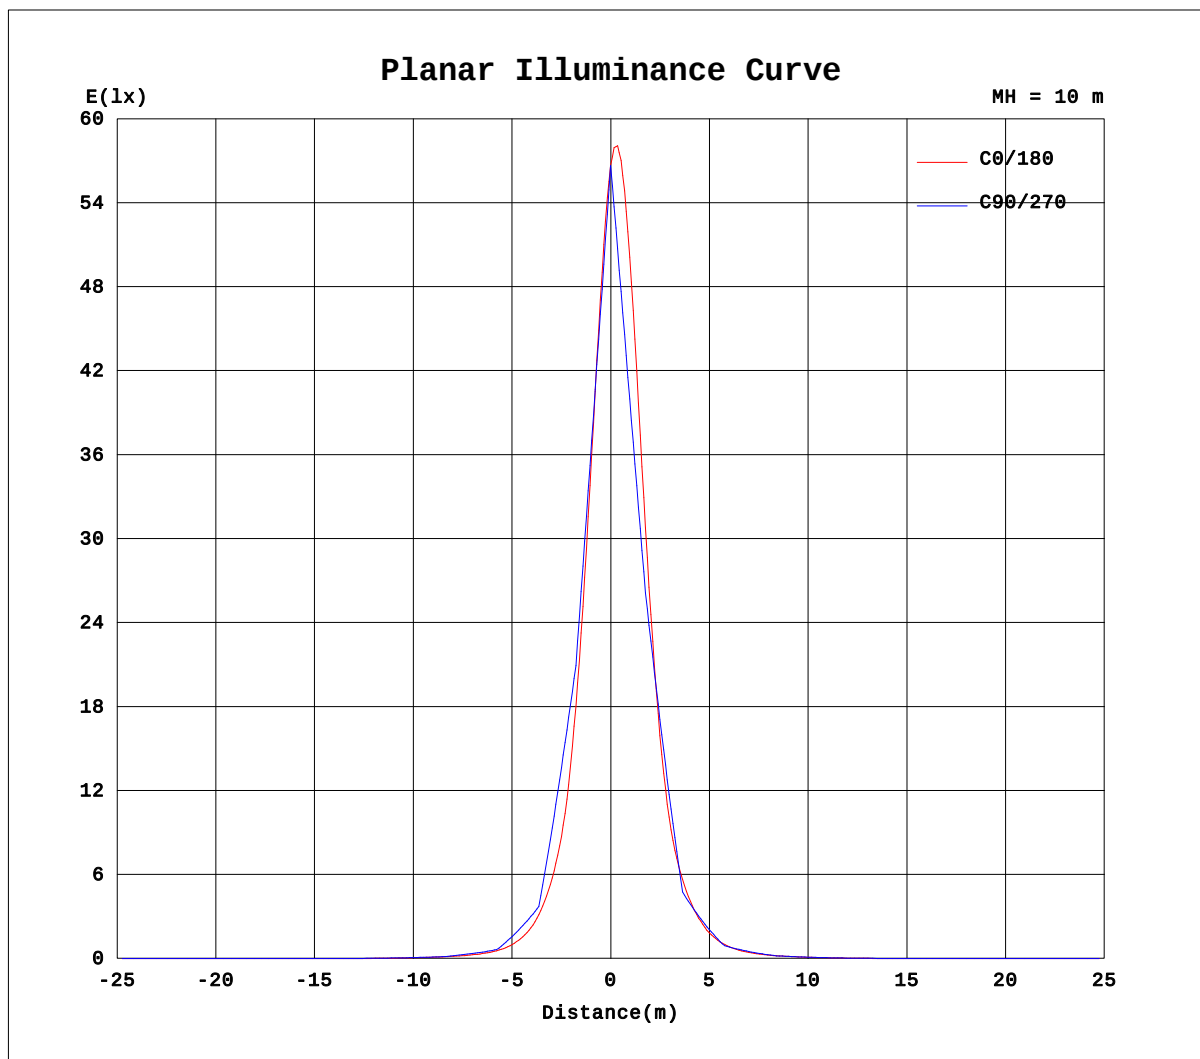

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-08-15

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.1V I:0.0555A P:6.540W PF:0.5330 Lamp Flux:879.387x1 lm		
NAME: 8.01.016.0086 20°LWW-PZT-W38A-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	1.33	2.38	3.38	4.29	4.93	5.33	5.41
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.31	3.54	5.58	7.53	9.17	10.2	10.8	10.7
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.90	2.81	5.12	8.79	12.4	15.8	18.7	20.9	22.3	22.6
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.30	7.24	11.8	17.0	22.0	26.6	30.2	33.0	34.3	34.1
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.60	5.19	10.6	16.8	23.9	31.8	40.8	50.6	59.7	66.1	67.6
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.67	5.12	11.1	18.8	27.3	37.0	48.5	62.7	78.5	92.4	100	99.2
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.14	5.75	12.7	21.6	32.4	47.3	70.1	106	157	217	264	278
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.52	11.3	20.9	32.6	47.9	73.4	117	187	281	385	449	442
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.39	10.2	20.0	32.5	50.3	82.9	148	272	477	794	1187	1341
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.92	7.21	16.1	28.5	44.6	73.6	134	261	502	887	1530	2142	2128
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.08	13.1	24.8	40.1	65.9	120	240	491	977	2024	3429	4013
0	0.00	0.00	0.00	0.00	0.00	0.00	2.04	8.63	18.7	32.4	52.1	91.7	181	381	781	1743	3647	5528	5439
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.22	13.4	25.4	41.3	68.3	126	253	516	1024	2158	3684	4296
10	0.00	0.00	0.00	0.00	0.00	0.00	1.17	7.56	16.9	30.1	47.8	80.4	152	295	568	1027	1900	2706	2640
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.77	10.9	21.4	35.3	55.6	94.1	173	320	560	981	1503	1687
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.06	12.4	23.1	36.6	55.4	88.7	148	242	370	498	576	564
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.38	6.63	14.3	24.5	37.5	56.6	87.4	137	207	287	347	361
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.30	6.30	13.0	22.1	32.7	45.5	61.9	83.9	109	131	143	139
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.06	6.57	12.7	20.4	29.5	40.0	53.4	68.5	83.0	92.8	94.2
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.67	4.61	9.23	15.0	21.5	28.1	34.8	40.1	44.4	46.0	45.5
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.49	3.62	7.14	11.6	16.2	21.0	25.2	28.5	30.6	30.7
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	2.81	5.42	8.13	10.9	13.1	14.7	15.7	15.3
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.86	2.20	3.51	4.92	6.15	7.06	7.74	7.90
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.06
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-15

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.1V I:0.0555A P:6.540W PF:0.5330 Lamp Flux:879.387x1 lm		
NAME: 8.01.016.0086 20°LWW-PZT-W38A-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	5.11	4.49	3.66	2.59	1.48	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	9.79	8.37	6.50	4.31	2.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	21.6	19.5	16.7	13.3	9.71	6.08	3.46	1.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	32.0	28.6	24.3	19.5	14.4	9.45	5.29	1.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	63.5	55.2	45.3	35.4	26.9	19.6	13.2	7.44	2.98	0.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	89.0	74.0	58.1	44.2	33.3	24.3	16.3	9.29	3.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	248	191	133	86.5	57.0	38.5	26.4	16.9	9.30	3.43	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	365	260	167	102	63.7	41.8	28.5	18.0	9.55	3.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	1094	689	401	213	114	65.3	40.8	26.6	15.9	7.58	1.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	1493	858	462	229	117	65.1	40.4	26.1	14.9	6.61	0.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	3046	1648	779	373	179	90.7	52.1	33.2	20.5	10.4	3.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	3438	1608	707	325	154	77.9	45.9	29.4	17.2	7.96	1.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	3240	1729	810	391	185	93.5	53.4	34.1	21.1	10.7	3.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	1785	960	511	251	127	69.3	42.4	27.6	15.9	7.24	1.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	1342	811	457	244	128	71.6	44.3	29.0	17.5	8.60	2.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	466	329	207	122	74.0	47.6	32.4	20.7	11.1	4.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	321	245	167	106	67.8	45.1	30.7	20.0	11.3	4.82	0.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	122	97.6	73.9	54.7	40.6	29.6	20.0	11.8	5.76	0.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	87.1	73.3	58.6	44.9	33.8	24.7	16.8	10.1	4.73	1.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	42.3	37.2	31.9	25.6	19.3	13.2	8.10	3.86	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	29.3	26.2	22.6	18.3	13.9	9.52	5.36	2.74	0.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	14.1	12.4	10.0	7.46	4.96	2.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	7.33	6.58	5.52	4.24	2.97	1.71	0.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-15

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: