

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2247.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	73.0V x 70.9H
	At 50% of Imax	30.8V x 29.9H
	At 90% of Imax	9.4V x 10.7H
Beam Flux	Total	999.4 lumens per klm.
	To 10% of Imax	835.9 lumens per klm.
	To 50% of Imax	339.4 lumens per klm.
	To 90% of Imax	40.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.2V I:0.1394A P:35.04W PF:0.9066 Lamp Flux:1157.47x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

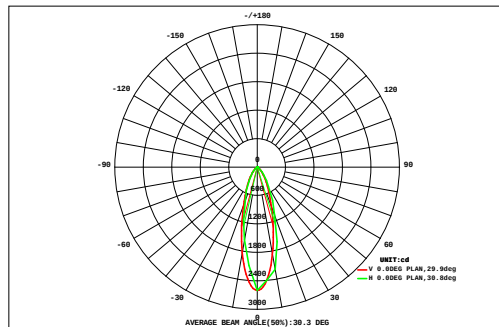

DATA OF LAMP		Eff:33.04lm/W	
MODEL:W-PZT-W38A-L12-DMX		Imax(cd)	2601
NOMINAL POWER(W)	36	AVAILABILITY(%)	83.6
RATED VOLTAGE(V)	278	Avai. FLUX(lm)	967.8
NOMINAL FLUX(lm)	1157.47	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1157
TEST VOLTAGE(V)	277.2	θ @50%(H,V)	30,31DEG

VERTICAL (DEG)	72	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	64	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.09	0.00			
	56	0.00	0.00	0.00	0.00	0.00	0.01	0.11	0.22	0.29	0.30	0.25	0.14	0.03	0.00	0.00	0.00	0.00	1.36	0.00			
	48	0.00	0.00	0.00	0.03	0.21	0.49	0.83	1.13	1.31	1.32	1.16	0.87	0.54	0.25	0.06	0.00	0.00	8.20	0.00			
	40	0.00	0.00	0.02	0.21	0.66	1.29	2.00	2.62	2.99	3.00	2.63	2.02	1.34	0.72	0.26	0.04	0.00	19.8	0.00			
	32	0.00	0.00	0.10	0.56	1.34	2.44	3.74	4.97	5.73	5.75	4.99	3.76	2.46	1.39	0.62	0.15	0.00	38.0	13.8			
	24	0.00	0.01	0.26	0.95	2.14	3.94	6.29	8.79	10.5	10.6	8.94	6.39	3.97	2.20	1.03	0.34	0.02	66.3	53.2			
	-24	0.00	0.04	0.43	1.36	3.00	5.76	9.98	15.5	19.9	20.1	15.8	10.2	5.86	3.07	1.41	0.49	0.06	0.00	113	103		
		0.00	0.06	0.53	1.62	3.63	7.18	13.5	24.3	35.2	35.6	25.1	14.1	7.45	3.76	1.71	0.62	0.10	0.00	174	165		
		0.00	0.08	0.59	1.75	3.93	7.91	15.6	30.1	45.6	46.0	30.9	16.3	8.27	4.11	1.86	0.68	0.12	0.00	214	205		
		0.00	0.08	0.58	1.69	3.79	7.61	15.0	28.9	43.5	43.8	29.4	15.6	7.97	3.98	1.81	0.66	0.12	0.00	204	195		
		0.00	0.06	0.49	1.45	3.20	6.19	11.3	18.7	25.2	25.5	19.3	11.9	6.61	3.38	1.58	0.58	0.10	0.00	135	126		
		0.00	0.03	0.36	1.11	2.43	4.55	7.71	11.3	13.8	13.9	11.5	8.02	4.85	2.63	1.24	0.44	0.05	0.00	84.0	72.1		
		-32	0.00	0.01	0.21	0.76	1.68	3.03	4.83	6.60	7.67	7.74	6.78	5.07	3.27	1.84	0.87	0.29	0.02	0.00	50.7	34.6	
		-40	0.00	0.00	0.08	0.43	1.01	1.79	2.72	3.53	4.02	4.08	3.66	2.88	1.96	1.12	0.52	0.13	0.00	0.00	27.9	0.00	
		-48	0.00	0.00	0.01	0.15	0.49	0.92	1.41	1.78	1.98	1.99	1.81	1.47	1.03	0.57	0.22	0.02	0.00	0.00	13.8	0.00	
		-56	0.00	0.00	0.00	0.01	0.12	0.31	0.51	0.67	0.78	0.79	0.70	0.55	0.36	0.17	0.03	0.00	0.00	0.00	4.99	0.00	
	-64	0.00	0.00	0.00	0.00	0.02	0.05	0.08	0.14	0.18	0.19	0.15	0.10	0.05	0.03	0.00	0.00	0.00	0.00	0.99	0.00		
	-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.09	0.00		
	-72 -64 -56 -48 -40 -32 -24 -16 HORIZONTAL(DEG) 16 24 32 40 48 56 64 72																						
Φ t	0.00	0.35	3.67	12.1	27.6	53.5	95.6	159	219	221	163	99.4	56.0	29.2	13.2	4.45	0.61	0.00	1157	---			
Φ a	0.00	0.00	0.00	0.00	5.25	37.9	82.9	146	205	207	150	86.6	40.4	6.87	0.00	0.00	0.00	0.00	---	968			

one-half-peak spread: U:13.3,D:17.8 , L:14.9,R:15.2


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.2V I:0.1394A P:35.04W PF:0.9066 Lamp Flux:1157.47x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

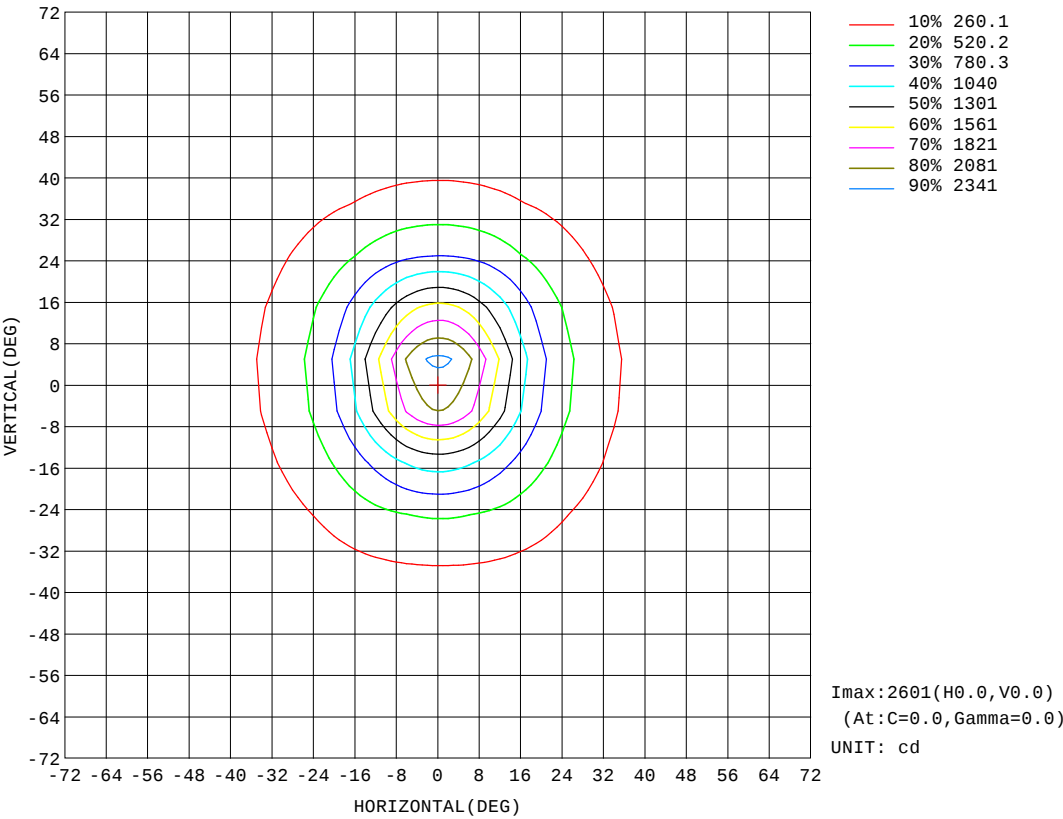


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:277.2V I:0.1394A P:35.04W PF:0.9066 Lamp Flux:1157.47x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

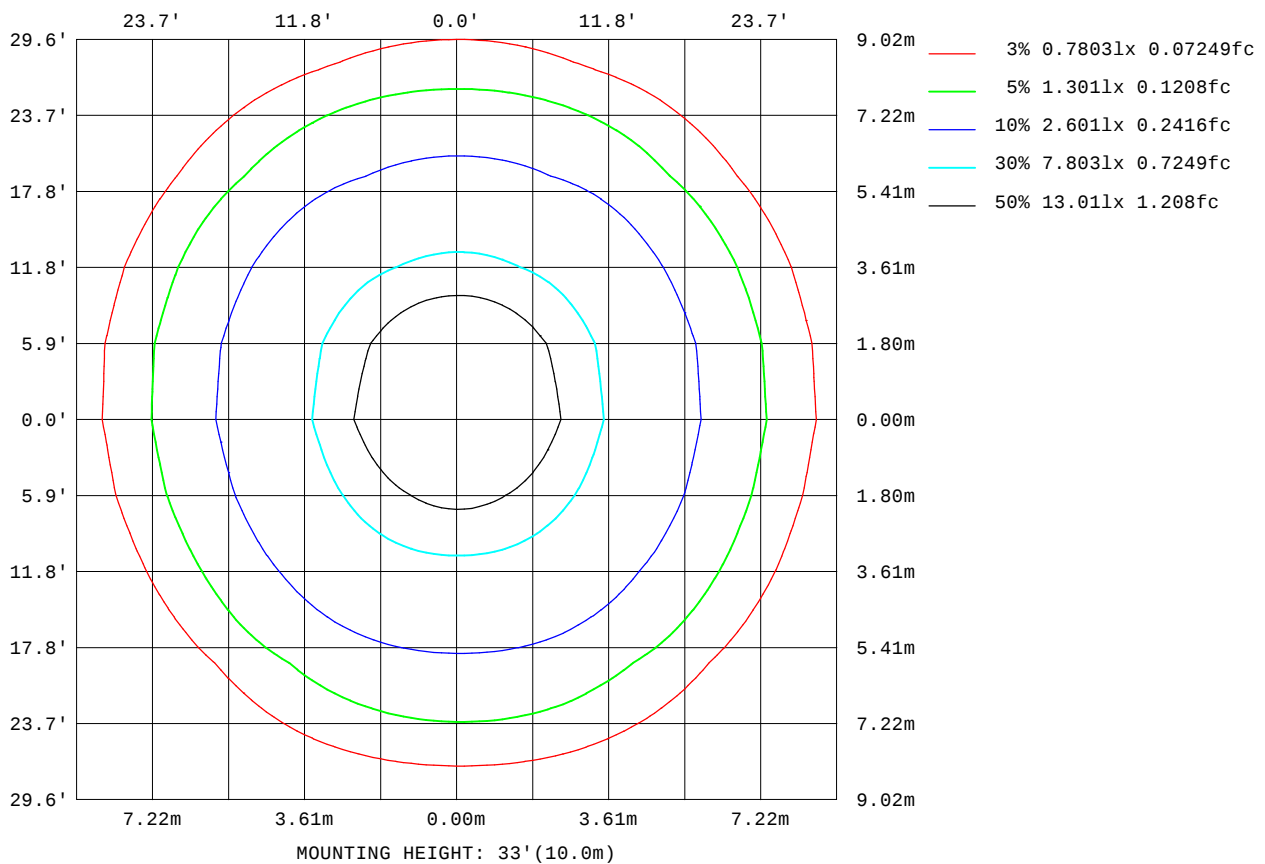


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.2V I:0.1394A P:35.04W PF:0.9066 Lamp Flux:1157.47x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

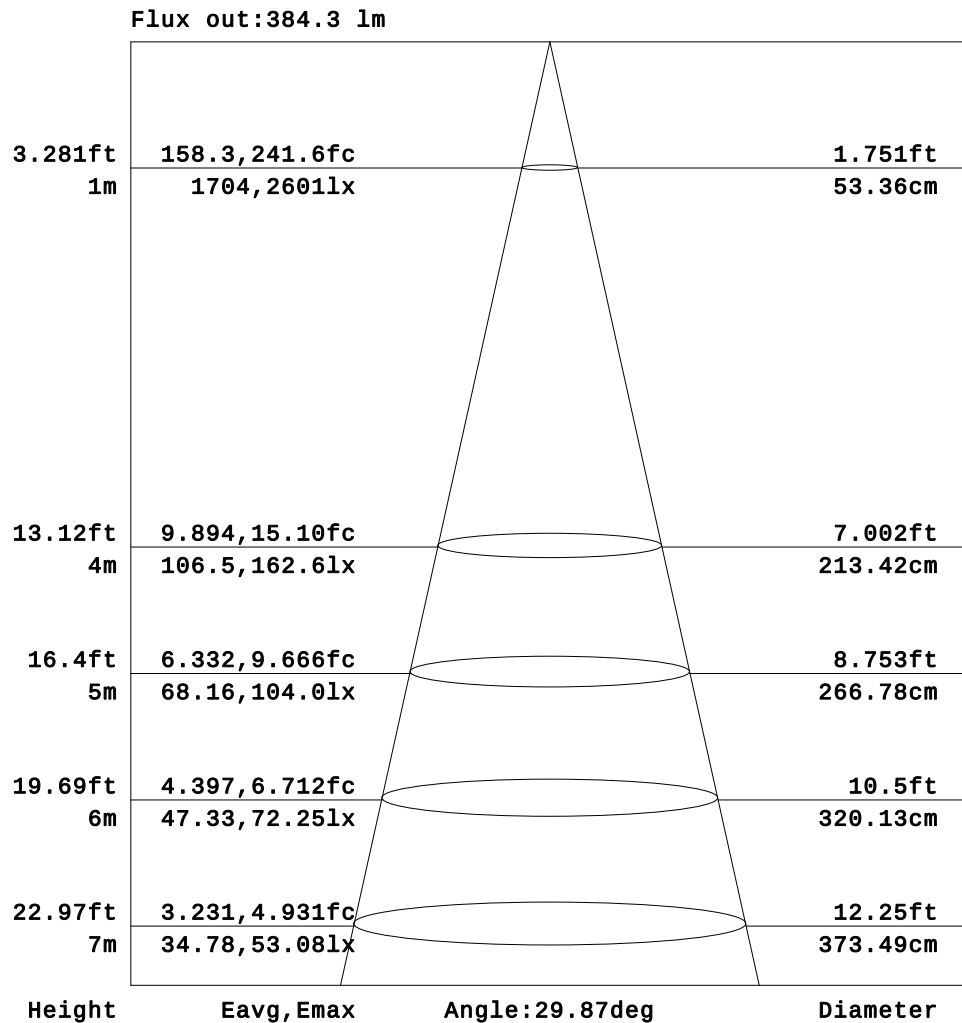


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

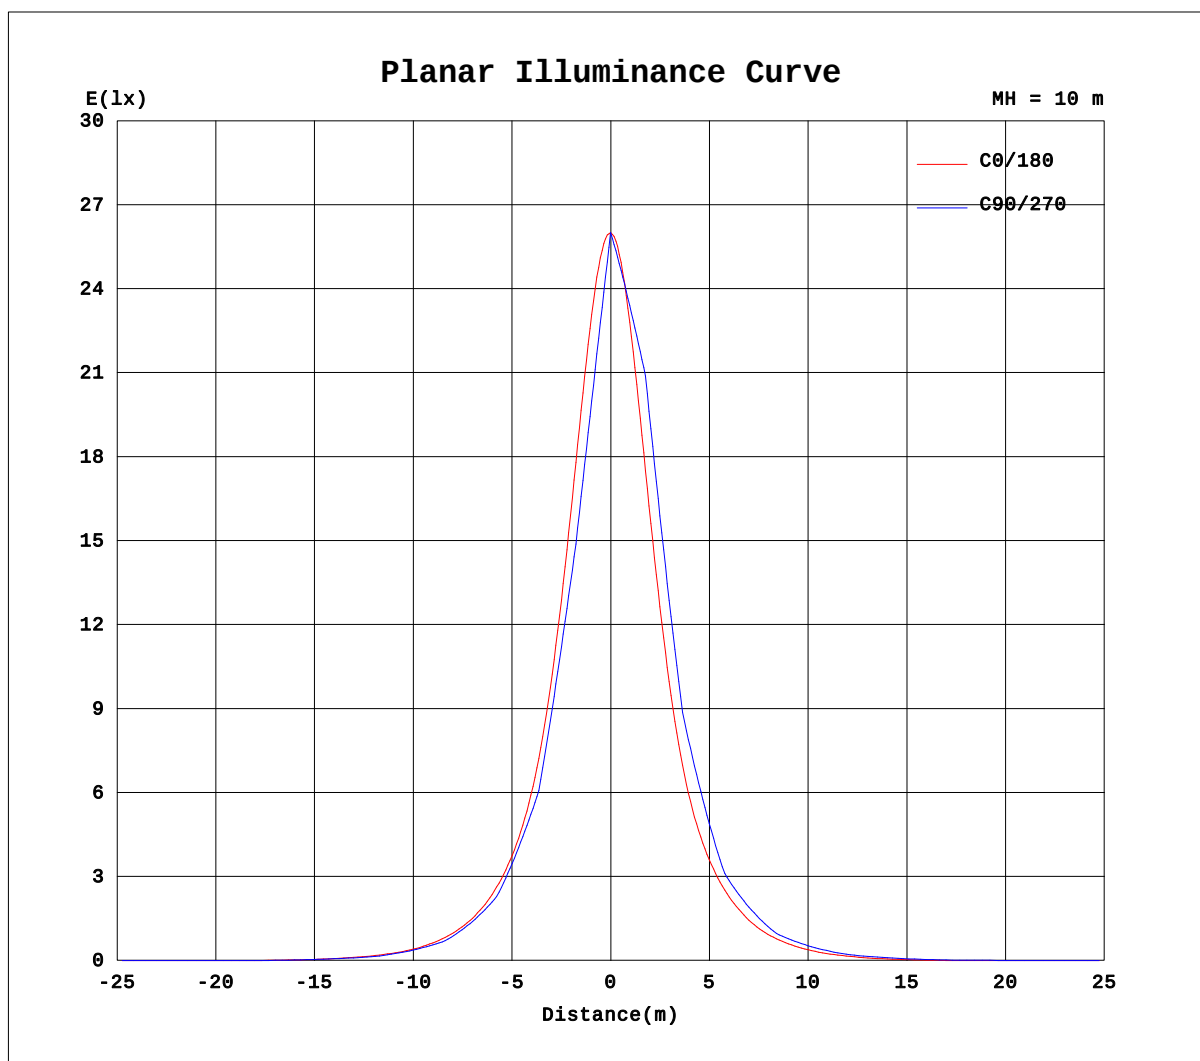

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2024-01-16

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.2V I:0.1394A P:35.04W PF:0.9066 Lamp Flux:1157.47x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.65	1.93	2.98	3.70	4.04	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.29	3.86	5.96	7.41	8.08	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.44	7.04	11.6	16.0	20.7	25.4	29.2	31.7	32.8	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.89	14.1	23.1	32.0	40.0	46.9	52.4	56.1	57.5	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.06	7.97	18.4	32.2	46.3	61.5	76.6	89.1	98.8	105	108	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.11	15.9	31.9	50.4	69.4	91.0	113	131	145	155	158	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.17	12.1	29.0	50.5	75.3	103	136	170	203	229	248	255	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.34	20.0	42.0	69.1	100	136	180	227	274	313	341	353	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.99	29.4	56.3	90.2	132	183	249	324	403	473	524	543	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	15.6	38.7	70.6	111	163	230	317	420	531	633	706	733	
-15	0.00	0.00	0.00	0.00	0.00	0.00	1.97	19.9	46.4	83.1	131	194	277	388	535	719	917	1079	1146	
-10	0.00	0.00	0.00	0.00	0.00	0.00	3.93	24.2	54.1	95.6	152	225	324	460	650	907	1200	1451	1559	
-5	0.00	0.00	0.00	0.00	0.00	0.00	5.20	26.6	58.5	103	163	244	357	512	745	1094	1516	1905	2080	
0	0.00	0.00	0.00	0.00	0.00	0.00	6.47	29.0	62.9	111	175	263	389	564	841	1280	1833	2359	2601	
5	0.00	0.00	0.00	0.00	0.00	0.00	5.56	27.7	60.9	108	172	259	380	549	808	1208	1709	2179	2394	
10	0.00	0.00	0.00	0.00	0.00	0.00	4.64	26.3	58.9	105	169	254	372	534	775	1136	1584	1999	2187	
15	0.00	0.00	0.00	0.00	0.00	0.00	2.74	22.6	52.8	95.5	153	228	331	468	658	922	1233	1507	1628	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.85	18.9	46.8	85.7	137	202	290	402	542	709	882	1015	1069	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.42	13.0	36.6	69.4	112	166	237	322	424	540	654	740	774	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.16	26.4	53.2	88.0	130	183	242	307	371	426	465	480	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.58	17.1	38.4	65.9	99.3	139	183	229	274	312	338	348	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.84	23.6	43.8	68.2	95.3	124	152	178	199	212	217	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.92	11.8	26.4	44.1	63.9	84.8	105	124	138	148	152	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	9.01	20.0	32.4	45.8	58.4	69.5	78.3	84.2	86.5	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	4.51	10.00	16.2	23.9	32.3	39.7	45.6	49.6	51.1	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.06	6.13	9.85	12.9	15.0	15.8	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.03	3.06	4.92	6.47	7.49	7.89	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.2V I:0.1394A P:35.04W PF:0.9066 Lamp Flux:1157.47x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2		UNIT: cd																	
H(°)	V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	3.93	3.40	2.47	1.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	7.85	6.79	4.93	2.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	32.3	30.4	26.9	22.5	17.5	13.3	8.92	4.69	0.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	56.8	53.9	48.9	42.5	35.0	26.6	17.8	9.39	1.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	106	101	91.9	80.3	66.9	51.9	36.9	23.7	11.7	4.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	156	148	135	118	98.8	77.2	55.9	37.9	22.0	8.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	251	236	210	179	146	113	82.6	57.1	35.6	17.9	5.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	347	324	284	241	194	149	109	76.2	49.2	27.4	10.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	529	483	415	339	264	198	143	98.7	64.0	36.7	15.6	1.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	710	643	546	437	334	247	177	121	78.9	46.0	21.2	3.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	1090	937	746	562	411	296	207	141	91.7	54.2	26.2	6.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	1469	1232	945	687	489	345	237	161	104	62.3	31.2	9.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	1927	1548	1127	779	539	375	257	173	111	66.1	33.2	10.2	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	2385	1863	1309	871	588	405	277	184	117	70.0	35.2	11.3	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	2209	1749	1248	841	573	397	270	180	115	68.5	34.3	10.8	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	2033	1635	1186	812	557	388	263	176	113	67.0	33.5	10.3	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	1530	1266	956	683	483	341	235	158	102	59.6	28.8	7.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	1026	897	726	554	408	294	207	140	89.7	52.2	24.2	4.90	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	747	665	552	433	326	240	171	117	74.5	42.3	18.3	2.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	468	433	378	312	244	185	134	93.0	59.3	32.4	12.3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	340	316	278	232	184	141	103	70.2	43.3	21.9	6.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	213	199	178	152	125	97.0	71.0	47.4	27.4	11.3	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	149	139	124	106	86.7	66.6	47.4	30.0	15.3	5.67	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	84.9	79.5	71.1	60.5	48.6	36.2	23.8	12.7	3.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	50.2	46.7	41.2	34.2	26.3	18.1	11.9	6.33	1.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	15.5	13.9	11.2	7.82	4.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	7.73	6.95	5.62	3.91	2.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: