

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2449.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	71.5V x 64.6H
	At 50% of Imax	30.7V x 29.3H
	At 90% of Imax	7.2V x 10.8H
Beam Flux	Total	998.3 lumens per klm.
	To 10% of Imax	858.1 lumens per klm.
	To 50% of Imax	356.9 lumens per klm.
	To 90% of Imax	35.8 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.8V I:0.2865A P:34.18W PF:0.9957 Lamp Flux:437.366x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010076
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

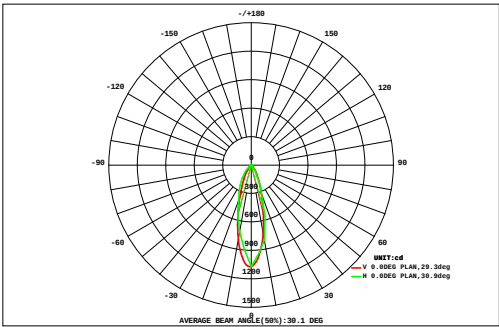

DATA OF LAMP		Eff:12.79lm/W	
MODEL	LWW-PZT-W38A-L12-DMX	Imax(cd)	1071
NOMINAL POWER(W)	34	AVAILABILITY(%)	86.2
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	377.2
NOMINAL FLUX(lm)	437.366	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	437.4
TEST VOLTAGE(V)	119.8	θ @50%(H,V)	29,31DEG

72 64 56 48 40 32 24 16 8 0 -8 -16 -24 -32 -40 -48 -56 -64 -72	AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.09	0.09	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.32	0.00	
0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.18	0.30	0.40	0.41	0.34	0.22	0.11	0.02	0.00	0.00	0.00	2.07	0.00	
0.00	0.00	0.00	0.00	0.00	0.09	0.33	0.62	0.90	1.09	1.11	0.94	0.65	0.34	0.10	0.02	0.00	0.00	6.21	0.00	
0.00	0.00	0.00	0.06	0.32	0.74	1.32	1.99	2.46	2.49	2.03	1.33	0.73	0.31	0.06	0.00	0.00	0.00	13.8	5.75	
0.00	0.00	0.01	0.17	0.58	1.32	2.61	4.46	6.01	6.05	4.55	2.66	1.33	0.59	0.18	0.01	0.00	0.00	30.5	26.1	
0.00	0.00	0.02	0.26	0.80	1.89	4.12	8.16	12.4	12.8	8.96	4.68	2.16	0.93	0.33	0.04	0.00	0.00	57.5	53.8	
0.00	0.00	0.03	0.35	1.03	2.42	5.38	11.1	17.5	18.3	12.5	6.26	2.82	1.21	0.44	0.08	0.00	0.00	79.4	76.1	
0.00	0.00	0.07	0.46	1.29	2.97	6.46	12.7	18.8	18.4	12.1	6.14	2.87	1.23	0.43	0.07	0.00	0.00	84.0	80.8	
0.00	0.00	0.06	0.43	1.23	2.75	5.31	8.89	12.0	12.1	9.27	5.52	2.80	1.24	0.44	0.07	0.00	0.00	62.1	58.8	
0.00	0.00	0.03	0.31	0.93	2.04	3.71	5.65	7.16	7.55	6.50	4.41	2.41	1.11	0.39	0.06	0.00	0.00	42.3	38.7	
0.00	0.00	0.01	0.17	0.65	1.45	2.58	3.84	4.74	4.92	4.30	3.09	1.79	0.85	0.29	0.03	0.00	0.00	28.7	24.4	
0.00	0.00	0.00	0.09	0.40	0.94	1.66	2.44	2.98	3.06	2.63	1.88	1.10	0.51	0.14	0.01	0.00	0.00	17.8	12.1	
0.00	0.00	0.00	0.02	0.18	0.51	0.95	1.37	1.60	1.59	1.33	0.93	0.51	0.18	0.02	0.00	0.00	0.00	9.17	0.51	
0.00	0.00	0.00	0.00	0.00	0.09	0.26	0.43	0.55	0.57	0.47	0.32	0.16	0.05	0.01	0.00	0.00	0.00	2.92	0.00	
0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.08	0.10	0.09	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.47	0.00	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	
-72 -64 -56 -48 -40 -32 -24 -16 HORIZONTAL(DEG) 16 24 32 40 48 56 64 72																				
Φ t	0.00	0.00	0.23	2.30	7.52	17.5	35.2	62.4	87.8	89.6	66.0	38.2	19.2	8.33	2.75	0.37	0.00	0.00	437	---
Φ a	0.00	0.00	0.00	0.00	0.69	10.7	30.4	57.7	83.7	85.4	61.5	33.6	12.7	0.91	0.00	0.00	0.00	0.00	---	377


one-half-peak spread: U:15.5,D:15.5 , L:14.4, ~~NEVA~~ Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.8V I:0.2865A P:34.18W PF:0.9957 Lamp Flux:437.366x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010076
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

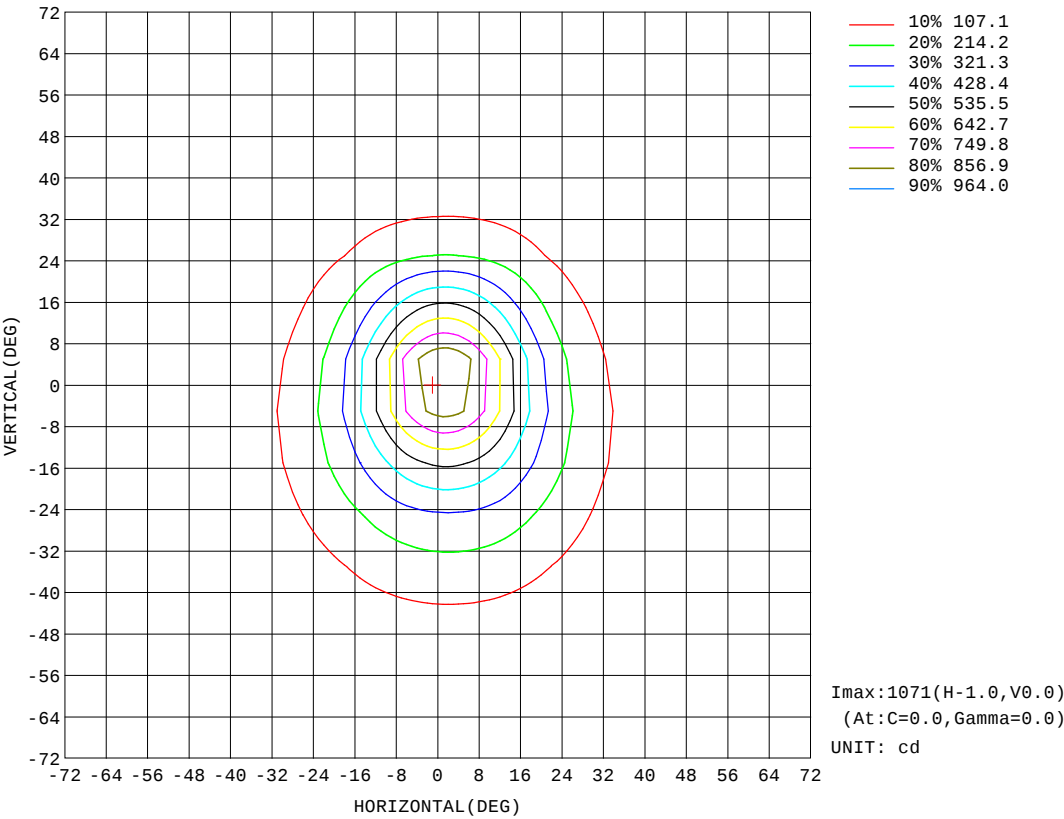


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.8V I:0.2865A P:34.18W PF:0.9957 Lamp Flux:437.366x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010076
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

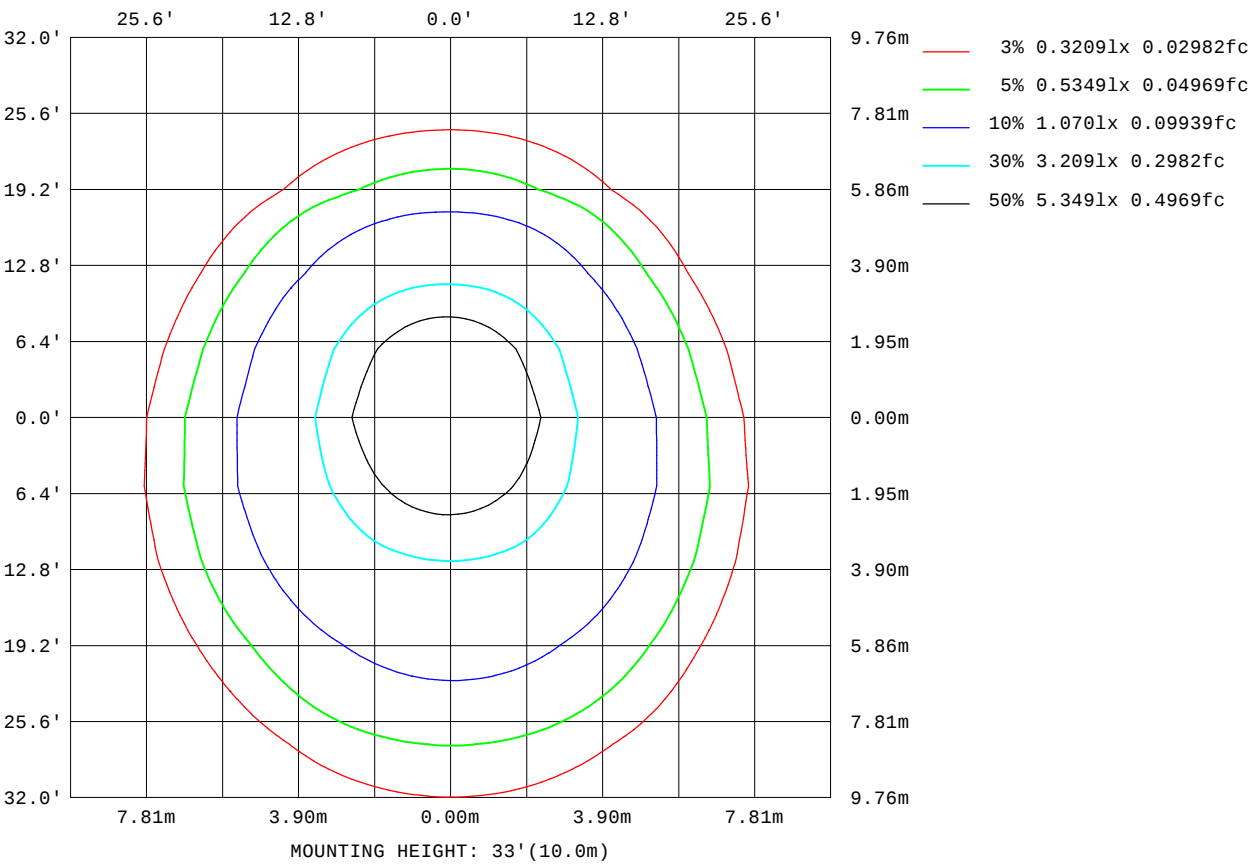


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:119.8V I:0.2865A P:34.18W PF:0.9957 Lamp Flux:437.366x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010076
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

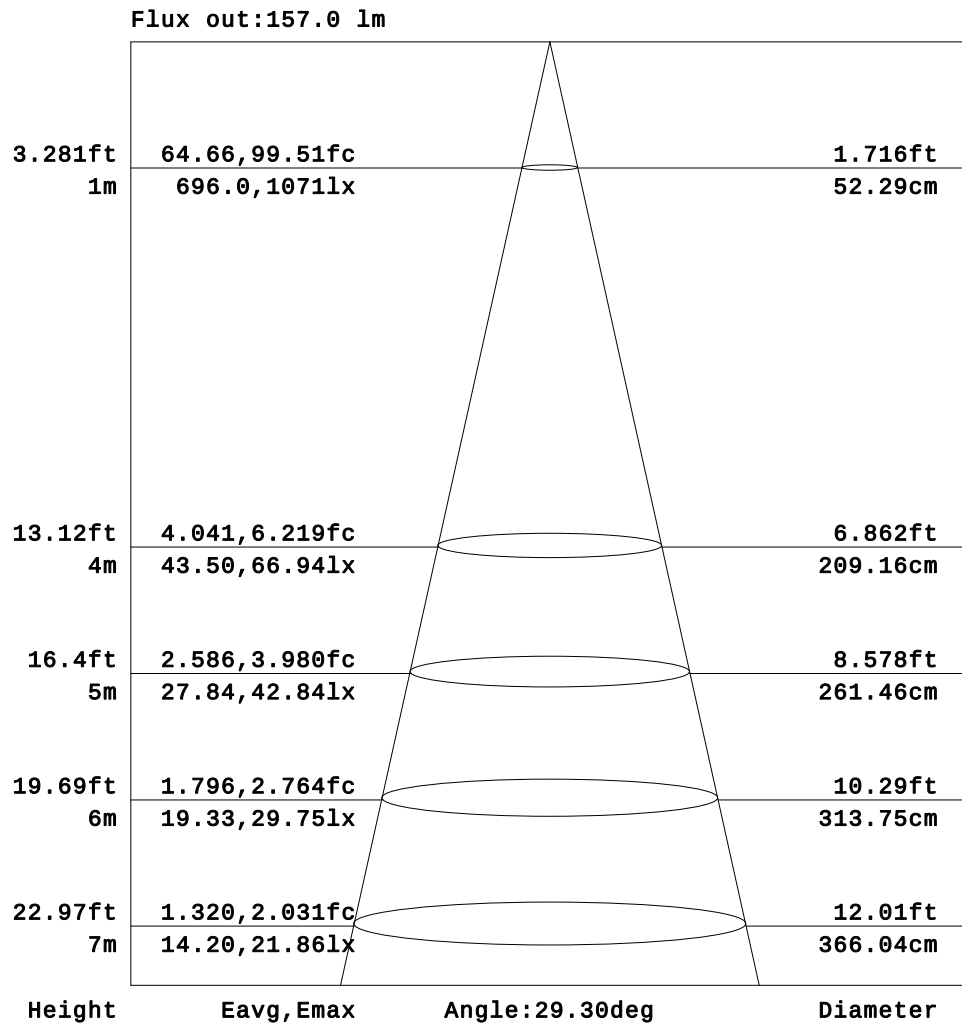


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

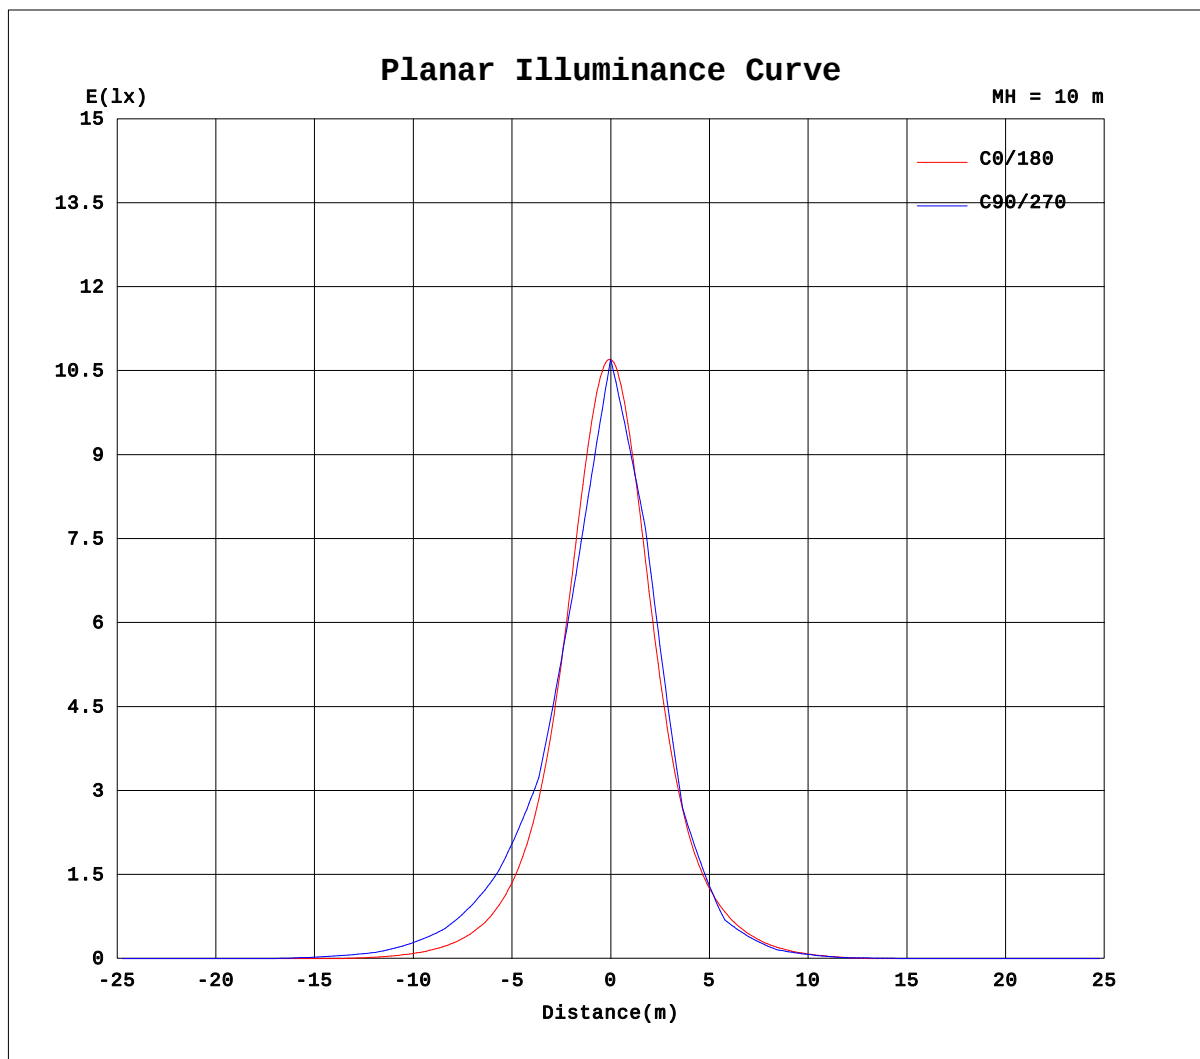

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.8V I:0.2865A P:34.18W PF:0.9957 Lamp Flux:437.366x1 lm																	
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-B									TYPE:LED			WEIGHT:					
DIM.:									SPEC.:			SERIAL No.:2024010076					
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:			PROTECTION ANGLE:					

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	0.83
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.17	1.83
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.27	6.28	10.2	14.0	17.4	20.2	22.1
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	7.94	15.7	23.5	30.9	37.0	41.2	42.8	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.31	8.08	17.6	29.4	42.7	56.4	68.2	76.7	81.2
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.79	21.7	36.7	53.4	72.9	91.9	107	117	121
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.75	12.2	27.4	46.4	68.2	93.9	122	147	165	176
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	10.5	26.5	47.4	72.9	103	137	173	203	225	234
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.78	10.3	26.8	49.1	78.4	116	160	209	257	292	310
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.36	22.0	43.3	72.5	112	162	222	284	341	378	391
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.12	17.5	38.0	66.5	106	161	233	321	420	506	551
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.0	28.0	53.2	89.3	141	213	311	436	574	682	717
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.82	20.0	41.7	73.0	118	183	281	424	607	787	889
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.3	27.7	52.2	88.6	142	221	353	550	794	1001	1070
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.46	17.3	36.6	64.4	105	165	262	413	614	816	933
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.43	20.8	40.5	68.8	111	175	276	426	604	754	803
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.97	10.7	25.7	46.0	74.8	117	180	272	388	499	562
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.98	11.5	25.3	43.6	68.6	103	149	207	266	312	325
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.46	12.7	25.7	42.5	64.2	92.7	128	166	198	215
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.05	9.63	20.2	32.5	46.7	63.0	79.7	94.3	104	107
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.00	8.37	17.2	27.1	38.2	49.5	59.8	67.6	71.5
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.34	9.61	16.1	22.4	28.0	32.4	35.4	36.4
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.49	3.54	6.72	9.98	13.9	17.5	20.1	21.5
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	2.89	4.94	6.34	6.74
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.98	2.08	2.94	3.36
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2024-01-16

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.8V I:0.2865A P:34.18W PF:0.9957 Lamp Flux:437.366x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010076
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.87	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	1.50	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	22.1	20.2	17.1	13.7	9.91	6.05	2.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	41.5	37.6	31.6	24.4	16.8	9.09	2.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	80.8	75.6	66.3	54.4	41.1	27.8	15.9	7.10	1.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	117	107	91.8	74.1	54.7	36.4	21.7	9.52	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	175	164	143	117	89.2	62.6	40.7	23.4	9.62	1.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	227	206	174	138	102	70.0	44.9	25.4	10.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	309	287	249	199	148	103	67.4	40.5	21.0	6.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	378	341	285	219	157	105	66.3	38.4	18.8	4.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	541	482	391	293	206	139	89.4	53.7	29.2	11.9	0.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	667	555	417	295	198	129	80.8	47.2	24.3	8.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	858	716	527	359	236	153	96.3	57.6	31.6	13.6	0.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	955	728	491	315	200	126	77.2	44.8	22.9	7.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	894	728	516	336	212	135	84.0	49.9	27.0	11.1	0.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	722	559	384	244	154	97.7	60.1	34.6	17.0	4.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	542	453	334	226	146	94.2	59.1	34.8	17.9	5.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	304	254	193	135	90.9	59.2	36.4	20.1	8.18	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	211	187	151	112	78.1	52.5	33.1	18.6	7.71	1.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	103	92.8	77.2	59.6	43.1	28.9	17.1	7.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	70.9	65.6	56.6	45.1	33.4	22.5	13.0	5.57	1.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	35.3	32.0	27.2	21.2	14.6	8.04	2.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	21.3	19.5	16.5	12.6	8.63	5.31	2.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	6.24	4.86	2.87	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	3.27	2.75	1.88	0.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: