

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2459.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	71.2V x 64.4H
	At 50% of Imax	30.5V x 29.2H
	At 90% of Imax	7.2V x 10.8H
Beam Flux	Total	998.3 lumens per klm.
	To 10% of Imax	857.2 lumens per klm.
	To 50% of Imax	355.0 lumens per klm.
	To 90% of Imax	35.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.1V I:0.1344A P:33.56W PF:0.9011 Lamp Flux:446.247x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

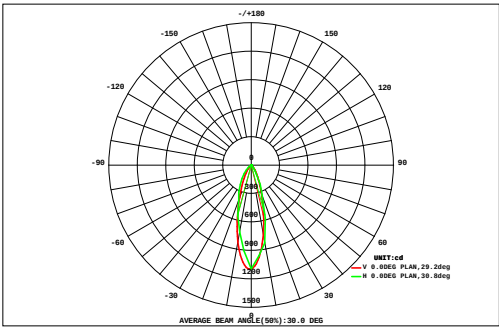

DATA OF LAMP		Eff:13.30lm/W	
MODEL:W-PZT-W38A-L12-DMX		Imax(cd)	1098
NOMINAL POWER(W)	34	AVAILABILITY(%)	86.2
RATED VOLTAGE(V)	278	Avai. FLUX(lm)	384.8
NOMINAL FLUX(lm)	446.247	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	446.2
TEST VOLTAGE(V)	277.1	θ @50%(H,V)	29,31DEG

72	AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a	
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
48	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.09	0.09	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.32	0.00		
40	0.00	0.00	0.00	0.00	0.01	0.09	0.19	0.32	0.40	0.42	0.35	0.22	0.11	0.03	0.00	0.00	0.00	2.14	0.00		
32	0.00	0.00	0.00	0.01	0.10	0.35	0.66	0.95	1.14	1.15	0.97	0.68	0.36	0.11	0.02	0.00	0.00	6.49	0.00		
24	0.00	0.00	0.00	0.07	0.35	0.79	1.40	2.09	2.59	2.60	2.11	1.39	0.76	0.33	0.06	0.00	0.00	14.6	6.42		
VERTICAL (DEG)	0.00	0.00	0.01	0.19	0.62	1.40	2.75	4.66	6.27	6.29	4.72	2.77	1.39	0.61	0.19	0.01	0.00	31.9	27.4		
	0.00	0.00	0.02	0.28	0.85	1.98	4.31	8.52	12.9	13.2	9.23	4.80	2.22	0.96	0.34	0.05	0.00	59.7	55.9		
	0.00	0.00	0.04	0.36	1.07	2.51	5.58	11.5	18.1	18.8	12.8	6.35	2.86	1.22	0.44	0.08	0.00	81.7	78.3		
	0.00	0.00	0.08	0.47	1.33	3.04	6.62	13.1	19.2	18.7	12.1	6.13	2.86	1.22	0.43	0.07	0.00	85.3	82.0		
	0.00	0.00	0.07	0.44	1.25	2.79	5.37	8.95	12.0	12.1	9.18	5.43	2.75	1.21	0.43	0.07	0.00	62.0	58.5		
	0.00	0.00	0.03	0.32	0.97	2.13	3.86	5.82	7.27	7.61	6.51	4.41	2.41	1.11	0.39	0.06	0.00	42.9	39.2		
	0.00	0.00	0.01	0.19	0.68	1.50	2.69	3.97	4.81	4.94	4.31	3.09	1.80	0.84	0.28	0.03	0.00	29.1	24.8		
	0.00	0.00	0.00	0.10	0.42	0.97	1.72	2.49	2.99	3.04	2.59	1.86	1.10	0.49	0.13	0.01	0.00	17.9	11.9		
	0.00	0.00	0.00	0.02	0.20	0.53	0.97	1.35	1.56	1.53	1.27	0.89	0.49	0.16	0.02	0.00	0.00	8.99	0.31		
	0.00	0.00	0.00	0.00	0.00	0.10	0.27	0.43	0.54	0.55	0.45	0.30	0.15	0.04	0.01	0.00	0.00	2.83	0.00		
-24	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.07	0.09	0.08	0.06	0.04	0.01	0.00	0.00	0.00	0.44	0.00		
-32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00		
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)					16	24	32	40	48	56	64	72
Φ t	0.00	0.00	0.26	2.45	7.85	18.2	36.4	64.2	89.9	91.1	66.7	38.4	19.3	8.35	2.74	0.36	0.00	0.00	446	---	
Φ a	0.00	0.00	0.00	0.00	0.68	11.2	31.5	59.6	85.7	86.8	62.3	33.7	12.5	0.83	0.00	0.00	0.00	0.00	---	385	


one-half-peak spread: U:15.2,D:15.6 , L:14.5,NEW Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.1V I:0.1344A P:33.56W PF:0.9011 Lamp Flux:446.247x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

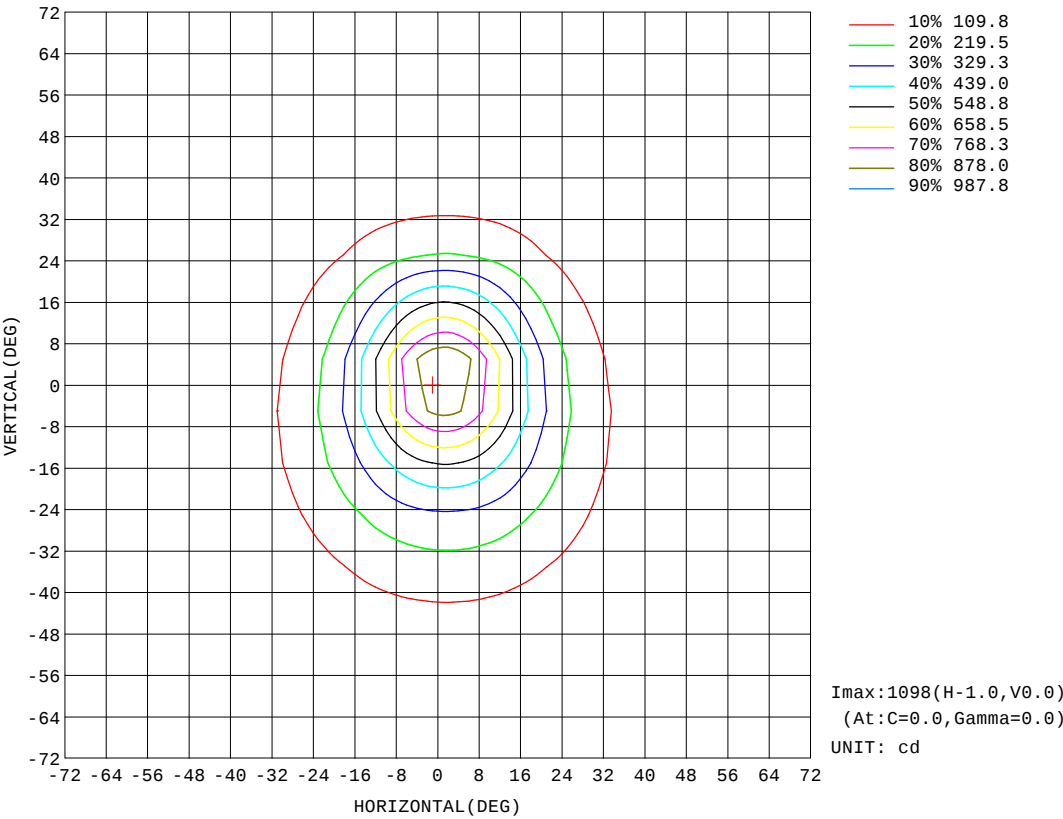


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:277.1V I:0.1344A P:33.56W PF:0.9011 Lamp Flux:446.247x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

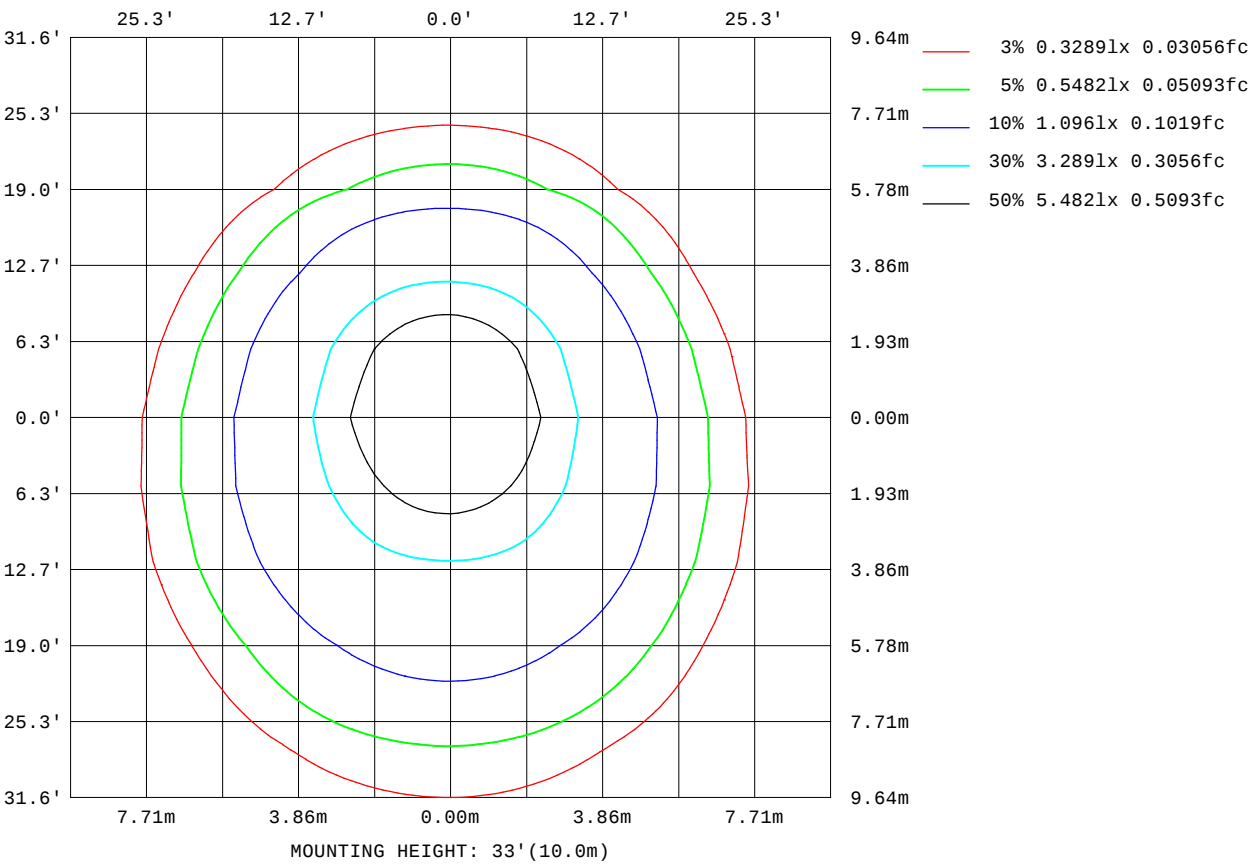


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.1V I:0.1344A P:33.56W PF:0.9011 Lamp Flux:446.247x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

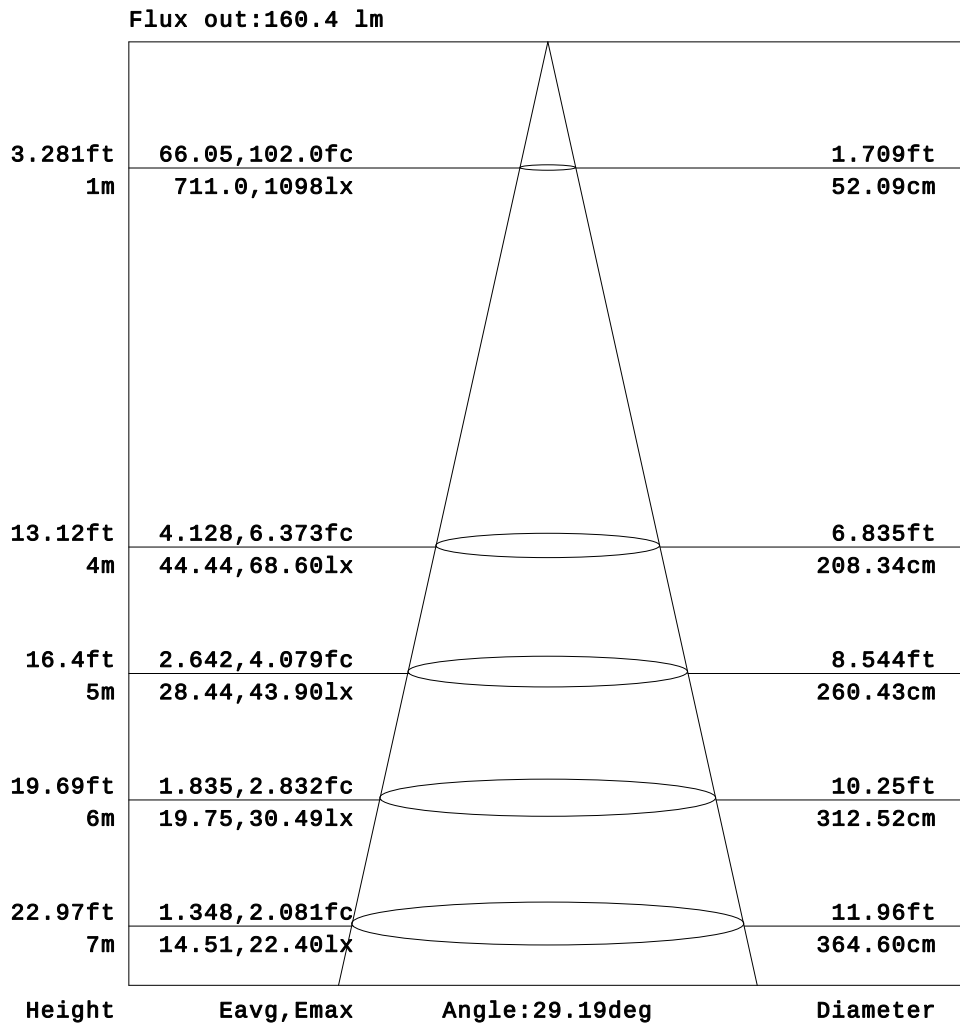


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

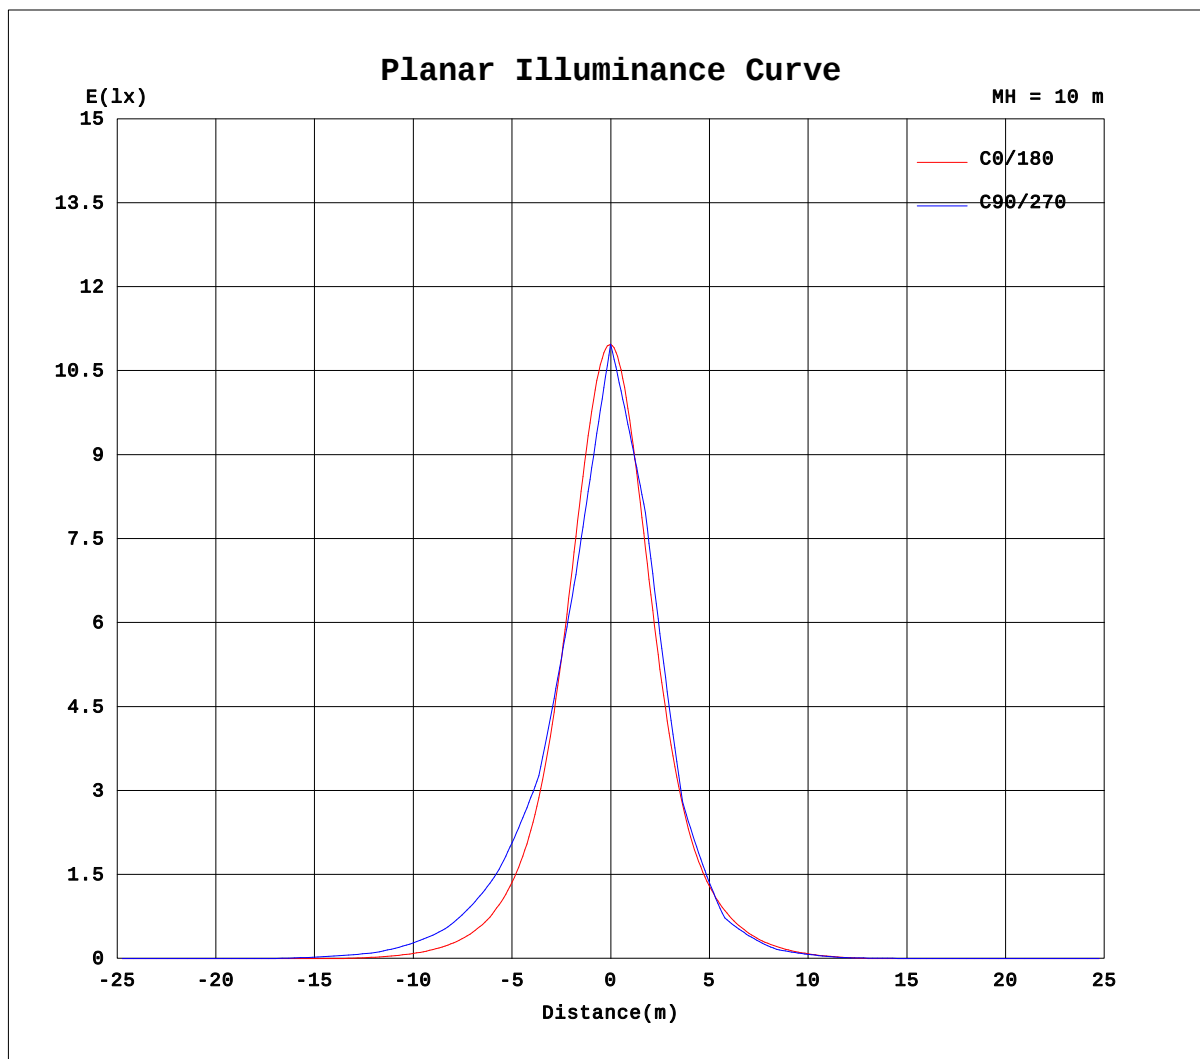

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.1V I:0.1344A P:33.56W PF:0.9011 Lamp Flux:446.247x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.51
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.65	1.11
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.82	6.54	10.4	14.1	17.3	19.7	21.3
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.43	8.56	16.2	23.9	30.9	36.6	40.5	41.7
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.83	8.84	18.7	30.6	44.1	57.0	68.0	75.8	79.8
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.1	23.1	37.9	55.8	74.9	92.4	106	115	118
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.42	13.6	29.0	47.8	70.6	97.5	125	149	167	176
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	12.1	28.3	49.0	75.0	106	143	179	208	228	235
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.02	11.3	28.3	51.1	81.2	120	167	217	264	297	313
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.94	22.9	44.9	75.5	116	169	231	295	350	384	394
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.66	18.3	39.2	68.5	109	166	239	328	427	511	554
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	10.8	29.0	54.3	90.8	144	216	315	441	579	685	718
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.46	21.0	43.1	74.9	120	187	287	433	620	803	903
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	11.2	28.9	54.2	91.3	146	228	363	566	818	1028	1095
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.14	18.4	38.4	67.0	109	171	271	428	636	844	961
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.28	22.3	42.6	72.3	116	183	289	445	630	784	832
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.32	11.8	27.5	48.6	78.7	123	188	285	405	521	583
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.70	12.8	27.2	46.4	72.5	108	157	217	278	325	338
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.98	14.1	27.7	45.3	68.1	97.8	135	174	208	224
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.90	10.9	22.0	34.9	49.9	66.9	84.3	99.3	109	112
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.56	9.57	18.7	29.0	40.5	52.2	62.9	70.7	74.6
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.15	10.5	17.2	23.5	29.1	33.5	36.4	37.4
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.88	3.97	7.22	10.5	14.6	18.1	20.6	21.9
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.63	3.36	4.90	6.21	6.55
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.06	2.09	2.88	3.27
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.1V I:0.1344A P:33.56W PF:0.9011 Lamp Flux:446.247x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	20.9	19.0	16.3	12.9	9.21	5.44	1.83	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	40.1	36.0	30.0	22.9	15.3	7.88	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	78.9	73.4	64.0	52.3	39.7	26.9	14.9	6.50	1.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	114	104	89.0	71.7	53.7	35.9	20.5	8.58	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	174	162	142	116	88.7	62.5	39.9	22.2	8.80	1.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	227	206	174	138	102	69.8	44.1	24.0	9.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	310	288	248	199	148	103	67.1	40.0	20.4	6.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	380	342	285	218	156	105	66.2	38.4	18.6	4.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	542	481	389	291	205	138	88.4	53.1	28.7	11.4	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	666	552	413	291	195	127	79.1	46.1	23.5	7.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	868	722	528	358	235	152	95.5	57.0	31.1	13.2	0.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	973	739	496	317	201	126	77.3	44.8	22.9	7.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	917	744	525	341	215	137	85.0	50.4	27.2	11.2	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	745	575	394	250	158	100	61.7	35.6	17.5	4.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	561	468	344	233	151	97.4	61.2	36.0	18.8	6.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	316	264	200	141	94.7	61.9	38.2	21.3	8.92	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	220	194	156	116	81.5	55.0	34.9	19.7	8.59	1.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	108	96.8	80.4	62.2	45.2	30.3	18.2	8.34	0.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	73.8	68.2	58.7	47.0	34.9	23.7	14.0	6.00	1.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	36.1	32.8	28.0	22.0	15.4	8.81	2.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	21.6	19.9	17.0	13.0	9.02	5.69	2.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	6.11	4.85	2.93	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	3.19	2.72	1.90	0.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: