

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2290.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	73.7V x 66.3H
	At 50% of Imax	31.2V x 29.3H
	At 90% of Imax	11.9V x 10.6H
Beam Flux	Total	999.5 lumens per klm.
	To 10% of Imax	851.0 lumens per klm.
	To 50% of Imax	356.3 lumens per klm.
	To 90% of Imax	51.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.9V I:0.2287A P:27.21W PF:0.9923 Lamp Flux:795.371x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010075
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

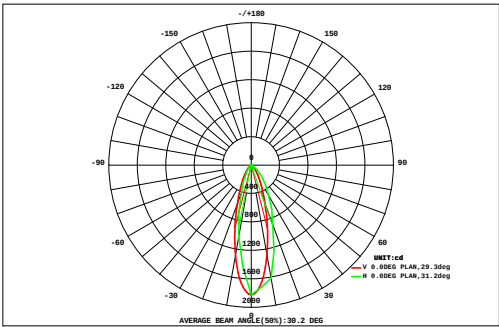

DATA OF LAMP		Eff:29.23lm/W	
MODEL	LW-PZT-W38A-L12-DMX	Imax(cd)	1822
NOMINAL POWER(W)	28	AVAILABILITY(%)	85.7
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	681.5
NOMINAL FLUX(lm)	795.371	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	795.4
TEST VOLTAGE(V)	119.9	θ @50%(H,V)	29,31DEG


AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.12	0.00
64	0.00	0.00	0.00	0.00	0.00	0.01	0.14	0.30	0.41	0.41	0.32	0.16	0.02	0.00	0.00	0.00	0.00	1.78	0.00
56	0.00	0.00	0.00	0.01	0.17	0.49	0.93	1.37	1.65	1.65	1.37	0.94	0.50	0.19	0.02	0.00	0.00	9.29	0.00
48	0.00	0.00	0.00	0.13	0.55	1.26	2.14	3.00	3.55	3.53	2.96	2.09	1.23	0.55	0.14	0.01	0.00	21.1	7.00
40	0.00	0.00	0.03	0.38	1.12	2.28	3.77	5.28	6.25	6.23	5.22	3.65	2.16	1.06	0.38	0.04	0.00	37.9	28.6
32	0.00	0.00	0.12	0.66	1.70	3.44	5.84	8.39	10.1	10.2	8.44	5.74	3.30	1.62	0.65	0.14	0.00	60.3	53.2
24	0.00	0.00	0.22	0.90	2.26	4.67	8.41	13.0	16.6	16.7	13.2	8.28	4.44	2.08	0.83	0.22	0.00	91.8	85.7
	0.00	0.01	0.27	1.01	2.51	5.32	10.3	18.5	26.4	26.7	18.8	10.4	5.14	2.34	0.94	0.27	0.01	129	123
	0.00	0.01	0.28	1.00	2.48	5.36	11.0	21.6	32.6	32.8	21.7	11.1	5.23	2.34	0.94	0.28	0.01	149	143
	0.00	0.01	0.25	0.89	2.16	4.68	9.90	19.8	30.0	29.9	19.5	9.77	4.55	2.05	0.83	0.25	0.01	134	128
	0.00	0.00	0.17	0.69	1.64	3.42	6.71	11.8	16.0	16.0	11.7	6.72	3.33	1.57	0.66	0.19	0.00	80.5	73.4
	0.00	0.00	0.09	0.46	1.11	2.16	3.84	6.01	7.58	7.58	6.03	3.89	2.14	1.06	0.44	0.10	0.00	42.5	33.0
-24	0.00	0.00	0.03	0.26	0.68	1.29	2.09	2.95	3.51	3.54	3.02	2.14	1.29	0.67	0.27	0.04	0.00	21.8	6.34
-32	0.00	0.00	0.00	0.09	0.34	0.67	1.02	1.33	1.52	1.55	1.38	1.07	0.69	0.36	0.12	0.01	0.00	10.1	0.00
-40	0.00	0.00	0.00	0.01	0.10	0.28	0.48	0.64	0.71	0.71	0.64	0.50	0.30	0.12	0.02	0.00	0.00	4.52	0.00
-48	0.00	0.00	0.00	0.00	0.01	0.04	0.11	0.17	0.21	0.22	0.18	0.12	0.05	0.01	0.00	0.00	0.00	1.13	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.18	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72		
Φ t	0.00	0.03	1.46	6.48	16.8	35.4	66.8	114	157	158	114	66.5	34.4	16.0	6.23	1.54	0.05	0.00	795
Φ a	0.00	0.00	0.00	0.00	2.43	25.0	57.9	106	150	151	107	57.4	23.6	1.49	0.00	0.00	0.00	---	681

one-half-peak spread: U:11.8,D:19.7 , L:14.8, Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Temperature:27.1DEG	Humidity:61%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2024-01-16	Remarks:

ISOCANDELA DIAGRAM

Test:U:119.9V I:0.2287A P:27.21W PF:0.9923 Lamp Flux:795.37lx1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010075
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

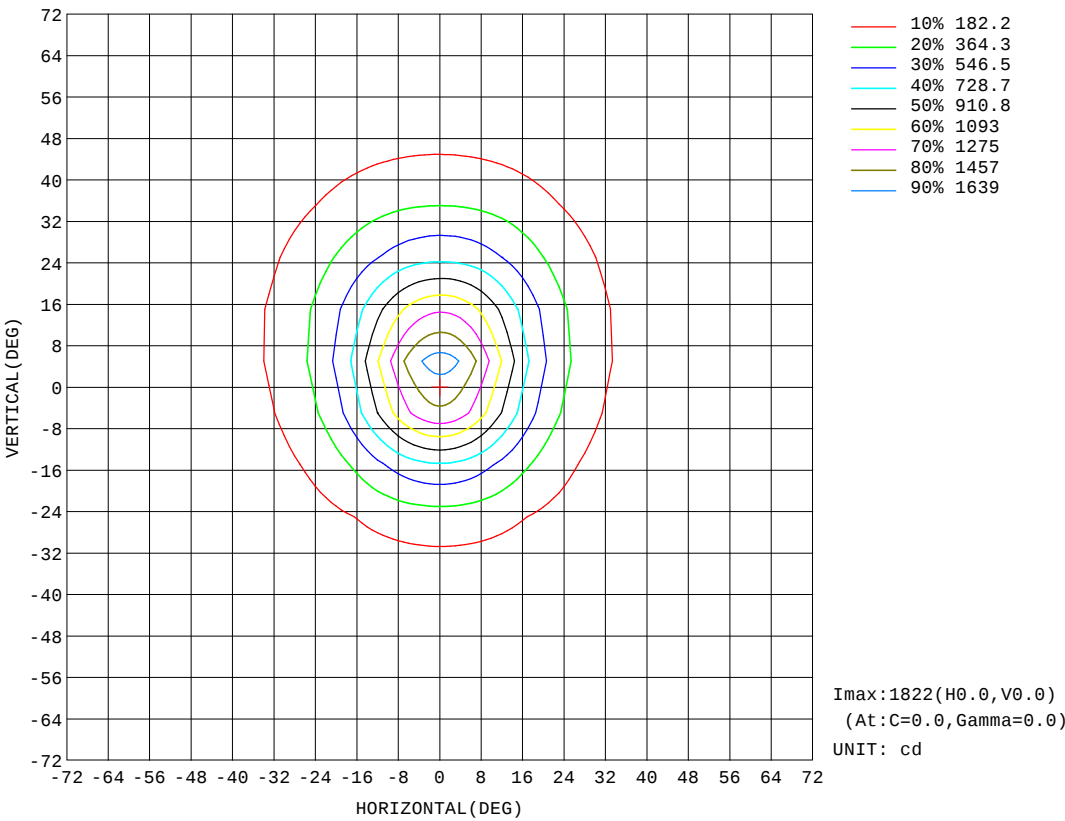


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.9V I:0.2287A P:27.21W PF:0.9923 Lamp Flux:795.37lx1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010075
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

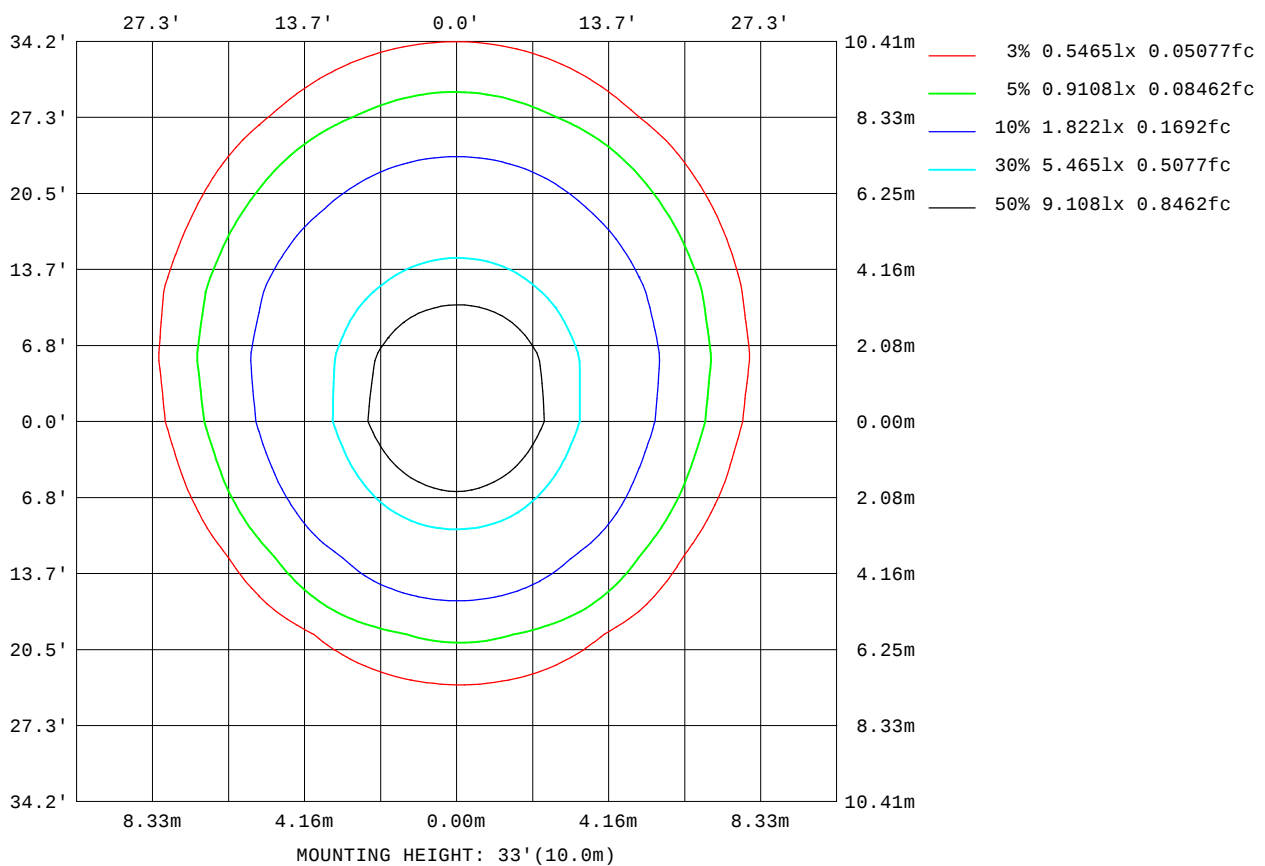


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:119.9V I:0.2287A P:27.21W PF:0.9923 Lamp Flux:795.37lx1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010075
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

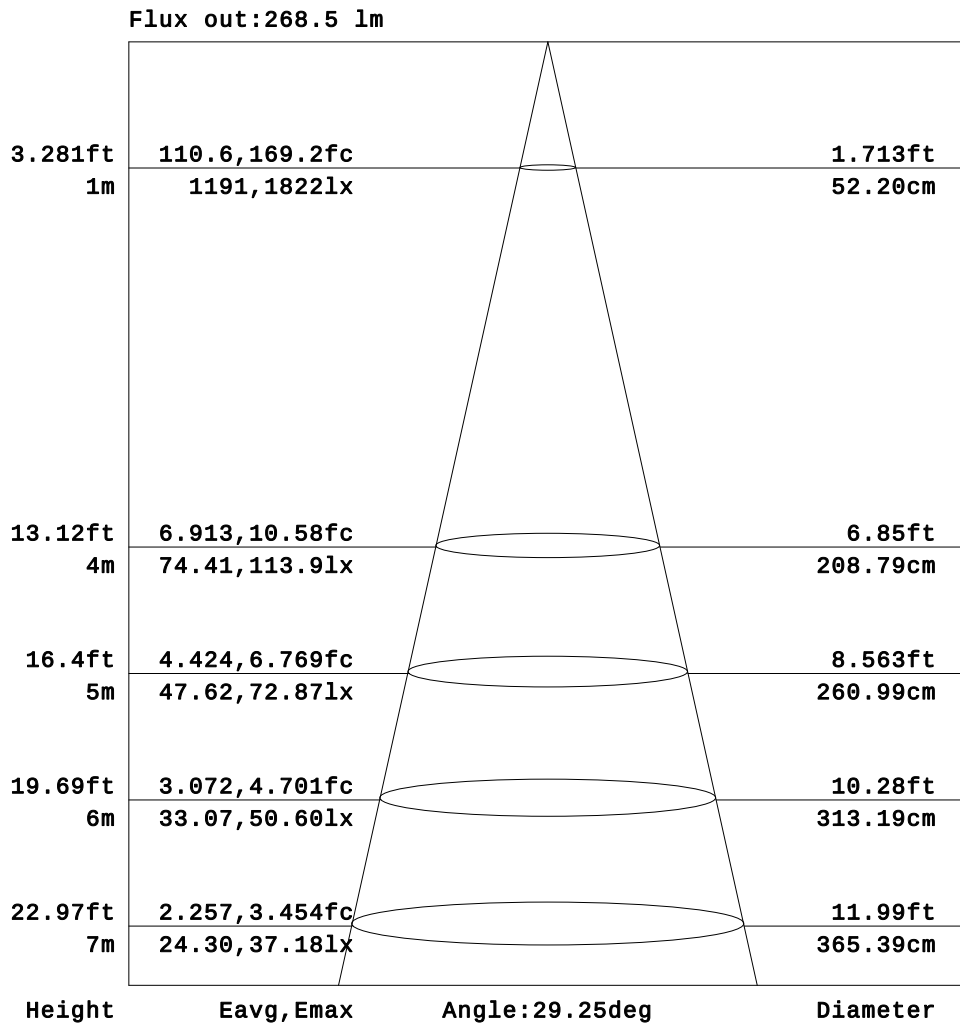


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

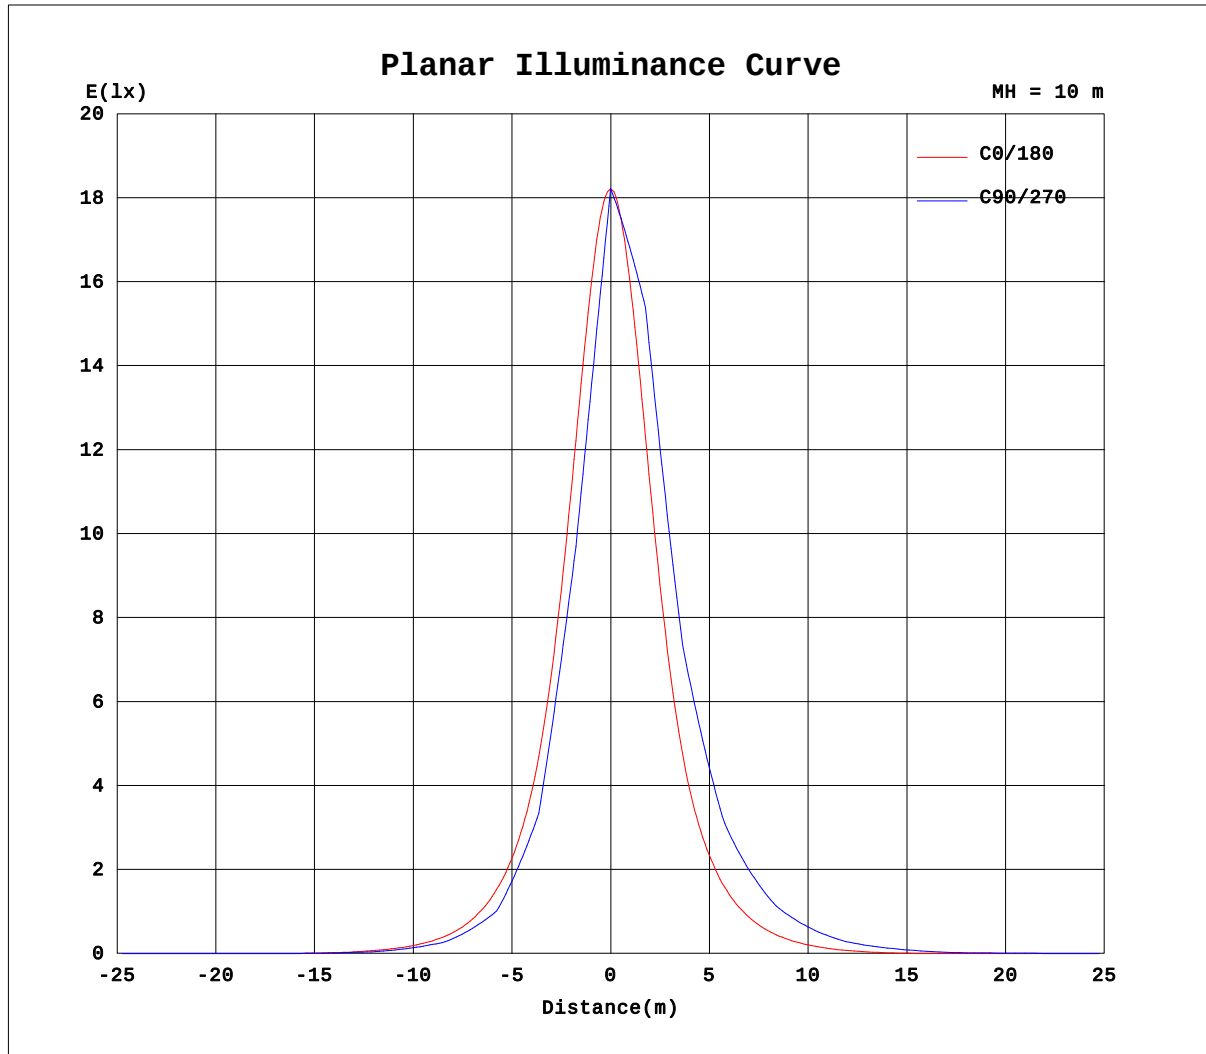

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.9V I:0.2287A P:27.21W PF:0.9923 Lamp Flux:795.371x1 lm																	
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-R									TYPE:LED						WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:2024010075		
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:						PROTECTION ANGLE:		

Table--1		UNIT: cd																	
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.20	3.29	5.16	6.68	7.92	8.79	9.10
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.39	6.59	10.3	13.4	15.8	17.6	18.2
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.17	7.44	13.2	19.7	26.4	32.1	36.5	39.4	40.5
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.34	14.9	24.0	32.8	42.5	50.9	57.3	61.2	62.8
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.75	5.90	15.6	27.4	40.5	54.0	68.9	84.1	96.7	106	110
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.49	11.8	25.0	40.0	56.9	75.2	95.4	117	136	151	157
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	6.95	20.3	37.0	57.5	82.4	113	152	196	239	269	280
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	12.4	28.8	49.1	74.9	108	152	208	275	341	387	404
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.93	17.3	37.2	62.8	96.9	144	210	303	427	560	667	709
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.57	22.1	45.7	76.5	119	181	268	398	579	779	947	1015
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.61	26.0	52.6	88.2	139	212	320	486	734	1034	1303	1418
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.65	30.0	59.5	99.9	158	243	372	574	889	1289	1658	1822
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.65	30.5	61.3	104	166	254	382	576	868	1235	1569	1716
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.65	31.0	63.1	108	173	265	393	578	847	1182	1480	1611
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.95	28.6	59.3	102	163	248	363	518	723	960	1162	1249
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.25	26.1	55.6	96.9	153	230	333	457	599	739	845	887
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.13	20.0	45.8	81.7	130	194	277	373	479	580	653	682
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	14.0	36.0	66.6	106	158	220	290	360	420	462	477
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	7.33	25.1	50.0	82.2	123	172	224	277	323	353	364
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.69	14.3	33.3	58.3	88.8	123	159	195	225	245	252
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	7.15	19.0	37.4	59.9	85.3	112	138	160	175	180
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.58	16.4	31.0	47.5	65.0	81.7	95.4	105	108
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.29	8.22	15.5	24.7	36.3	47.4	56.6	63.0	65.2
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.95	7.61	13.1	17.8	21.0	22.0
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.97	3.81	6.55	8.90	10.5	11.0
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.9V I:0.2287A P:27.21W PF:0.9923 Lamp Flux:795.371x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010075
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	8.96	8.33	7.17	5.69	3.96	2.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	17.9	16.7	14.3	11.4	7.91	4.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	39.8	37.2	33.1	27.8	21.3	14.4	8.16	4.29	0.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	61.6	57.8	51.9	44.2	34.8	24.9	16.3	8.58	1.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	107	99.1	86.3	71.4	55.6	40.7	28.0	17.1	7.57	1.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	153	140	121	98.6	76.4	56.5	39.7	25.6	13.9	3.98	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	270	241	199	155	115	81.1	55.8	36.1	20.7	8.47	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	387	341	278	211	153	106	72.0	46.6	27.6	13.0	1.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	666	557	426	304	208	140	93.1	59.5	35.8	17.9	4.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	945	774	574	397	264	175	114	72.3	43.9	22.9	7.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	1302	1027	727	482	314	205	132	82.5	49.5	26.0	9.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	1658	1280	879	566	364	236	151	92.7	55.1	29.1	10.6	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	1579	1242	871	575	376	245	157	96.9	57.4	29.9	10.8	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	1500	1204	863	584	388	253	163	101	59.7	30.7	11.1	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	1177	977	733	516	353	235	152	94.7	55.6	28.0	9.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	854	750	602	449	319	217	142	88.4	51.4	25.3	7.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	659	587	481	366	266	184	122	76.1	43.7	20.3	4.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	464	423	359	283	213	151	101	63.8	35.9	15.3	1.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	354	322	274	218	165	117	78.5	48.2	25.4	8.75	0.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	244	222	189	153	117	84.2	55.7	32.6	14.9	2.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	174	158	135	109	82.8	58.3	37.0	19.7	7.47	1.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	105	95.1	81.3	65.0	48.3	32.4	18.2	6.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	63.0	56.7	47.6	37.0	25.9	16.2	9.12	3.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	21.2	18.4	14.0	8.91	3.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	10.6	9.19	7.00	4.45	1.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: