

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2290.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	73.6V x 66.1H
	At 50% of Imax	31.0V x 29.2H
	At 90% of Imax	12.3V x 10.6H

Beam Flux	Total	999.5 lumens per klm.
	To 10% of Imax	852.4 lumens per klm.
	To 50% of Imax	359.0 lumens per klm.
	To 90% of Imax	54.6 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.1V I:0.1121A P:26.74W PF:0.8608 Lamp Flux:817.365x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

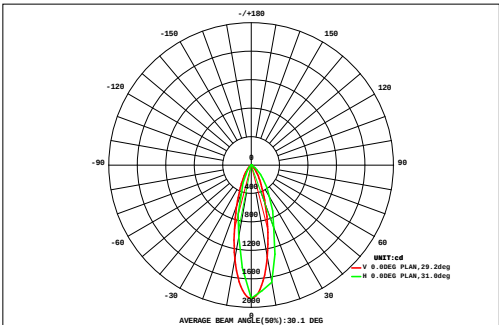

DATA OF LAMP		Eff:30.57lm/W	
MODEL:W-PZT-W38A-L12-DMX		Imax(cd)	1872
NOMINAL POWER(W)	26	AVAILABILITY(%)	85.8
RATED VOLTAGE(V)	278	Avai. FLUX(lm)	701.4
NOMINAL FLUX(lm)	817.365	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	817.4
TEST VOLTAGE(V)	277.1	θ @50%(H,V)	29,31DEG


AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.12	0.00
64	0.00	0.00	0.00	0.00	0.00	0.01	0.14	0.30	0.40	0.40	0.31	0.16	0.02	0.00	0.00	0.00	0.00	1.74	0.00
56	0.00	0.00	0.00	0.01	0.18	0.51	0.97	1.41	1.69	1.69	1.40	0.96	0.52	0.20	0.02	0.00	0.00	9.58	0.00
48	0.00	0.00	0.01	0.14	0.59	1.33	2.25	3.14	3.70	3.67	3.07	2.17	1.28	0.58	0.15	0.01	0.00	22.1	7.65
40	0.00	0.00	0.04	0.41	1.19	2.41	3.98	5.57	6.59	6.55	5.46	3.82	2.27	1.12	0.40	0.05	0.00	39.9	30.6
32	0.00	0.00	0.13	0.70	1.79	3.63	6.18	8.90	10.7	10.7	8.86	6.00	3.43	1.68	0.67	0.14	0.00	63.5	56.3
24	0.00	0.00	0.23	0.94	2.34	4.83	8.71	13.5	17.2	17.3	13.6	8.54	4.58	2.15	0.86	0.23	0.00	95.1	88.8
16	0.00	0.01	0.28	1.04	2.59	5.50	10.7	19.2	27.5	27.7	19.4	10.7	5.28	2.39	0.96	0.27	0.01	133	128
8	0.00	0.01	0.29	1.04	2.56	5.54	11.5	22.4	33.8	33.8	22.3	11.3	5.32	2.37	0.95	0.28	0.01	153	147
0	0.00	0.01	0.26	0.92	2.21	4.81	10.2	20.3	30.7	30.5	19.8	9.87	4.58	2.05	0.83	0.24	0.01	137	131
-8	0.00	0.00	0.18	0.70	1.65	3.45	6.78	11.8	16.0	16.0	11.6	6.65	3.29	1.54	0.65	0.18	0.00	80.4	73.0
-16	0.00	0.00	0.10	0.47	1.14	2.24	3.98	6.16	7.67	7.61	6.02	3.88	2.15	1.07	0.45	0.10	0.00	43.0	33.2
-24	0.00	0.00	0.03	0.27	0.70	1.32	2.16	3.03	3.54	3.53	3.00	2.14	1.30	0.67	0.26	0.04	0.00	22.0	5.97
-32	0.00	0.00	0.00	0.10	0.35	0.68	1.04	1.33	1.50	1.51	1.34	1.05	0.69	0.34	0.10	0.01	0.00	10.0	0.00
-40	0.00	0.00	0.00	0.01	0.11	0.28	0.48	0.61	0.67	0.67	0.60	0.47	0.29	0.11	0.01	0.00	0.00	4.31	0.00
-48	0.00	0.00	0.00	0.00	0.01	0.04	0.10	0.16	0.19	0.19	0.16	0.11	0.04	0.01	0.00	0.00	0.00	1.02	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.17	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72		
Φ t	0.00	0.03	1.54	6.74	17.4	36.6	69.2	118	162	162	117	67.8	35.0	16.3	6.32	1.55	0.05	0.00	817
Φ a	0.00	0.00	0.00	0.00	2.61	26.0	60.3	110	155	155	109	58.7	23.8	1.37	0.00	0.00	0.00	---	701

one-half-peak spread: U:11.4,D:19.9 , L:14.9,Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Temperature:27.1DEG	Humidity:61%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2024-01-16	Remarks:

ISOCANDELA DIAGRAM

Test:U:277.1V I:0.1121A P:26.74W PF:0.8608 Lamp Flux:817.365x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

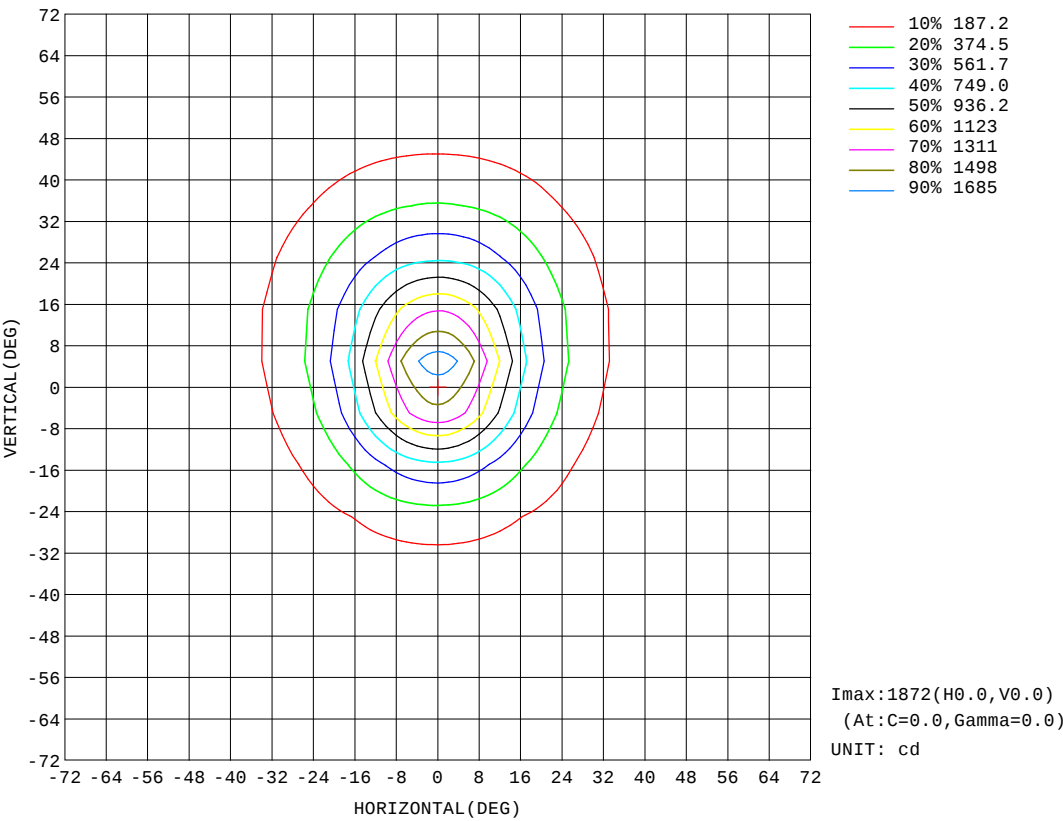


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:277.1V I:0.1121A P:26.74W PF:0.8608 Lamp Flux:817.365x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

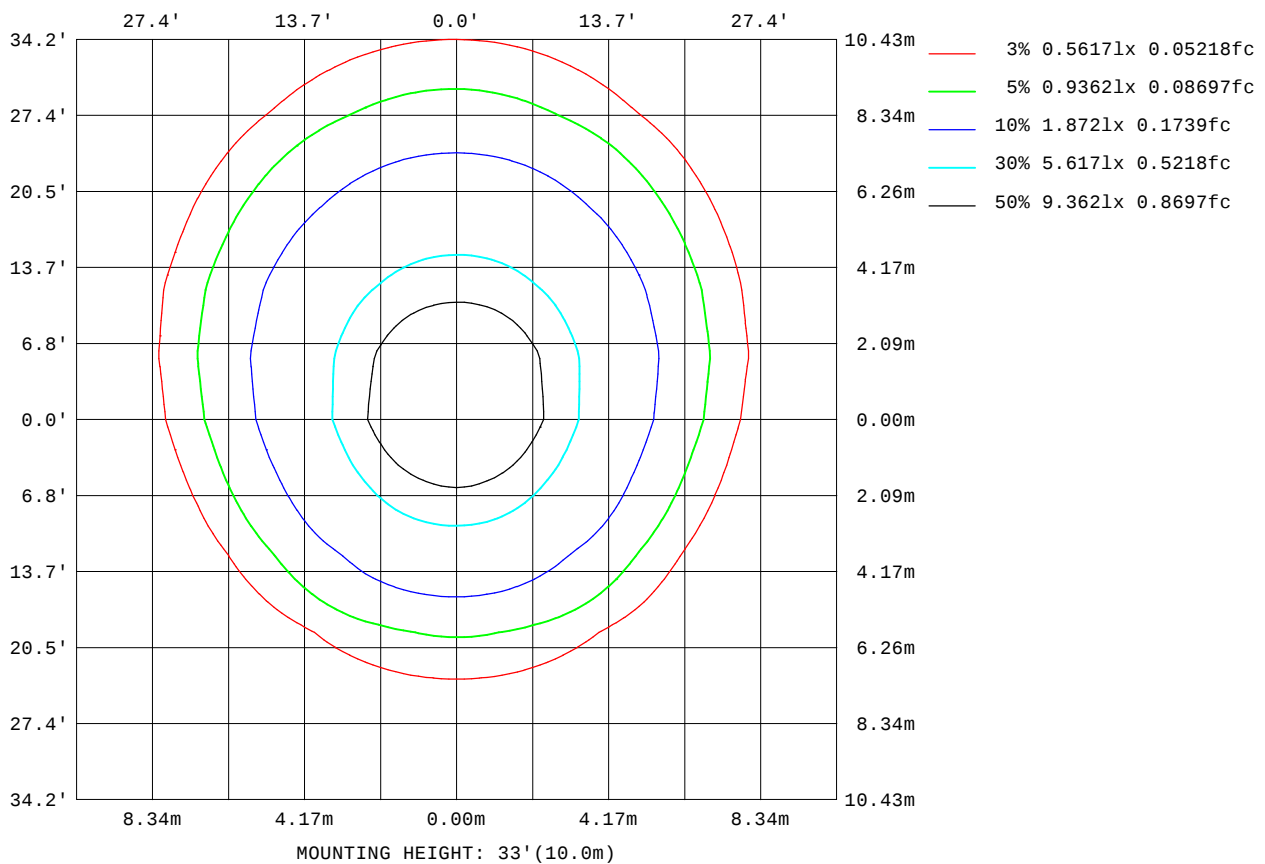


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.1V I:0.1121A P:26.74W PF:0.8608 Lamp Flux:817.365x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

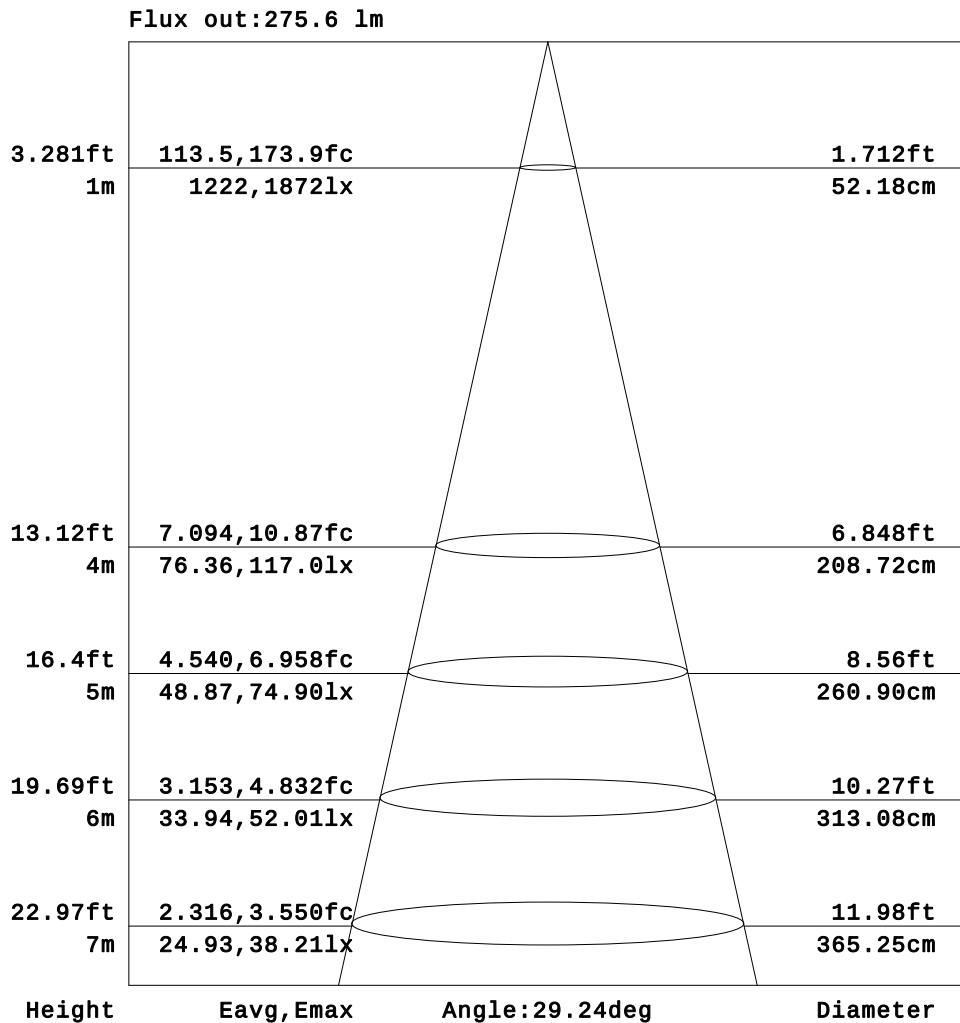


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

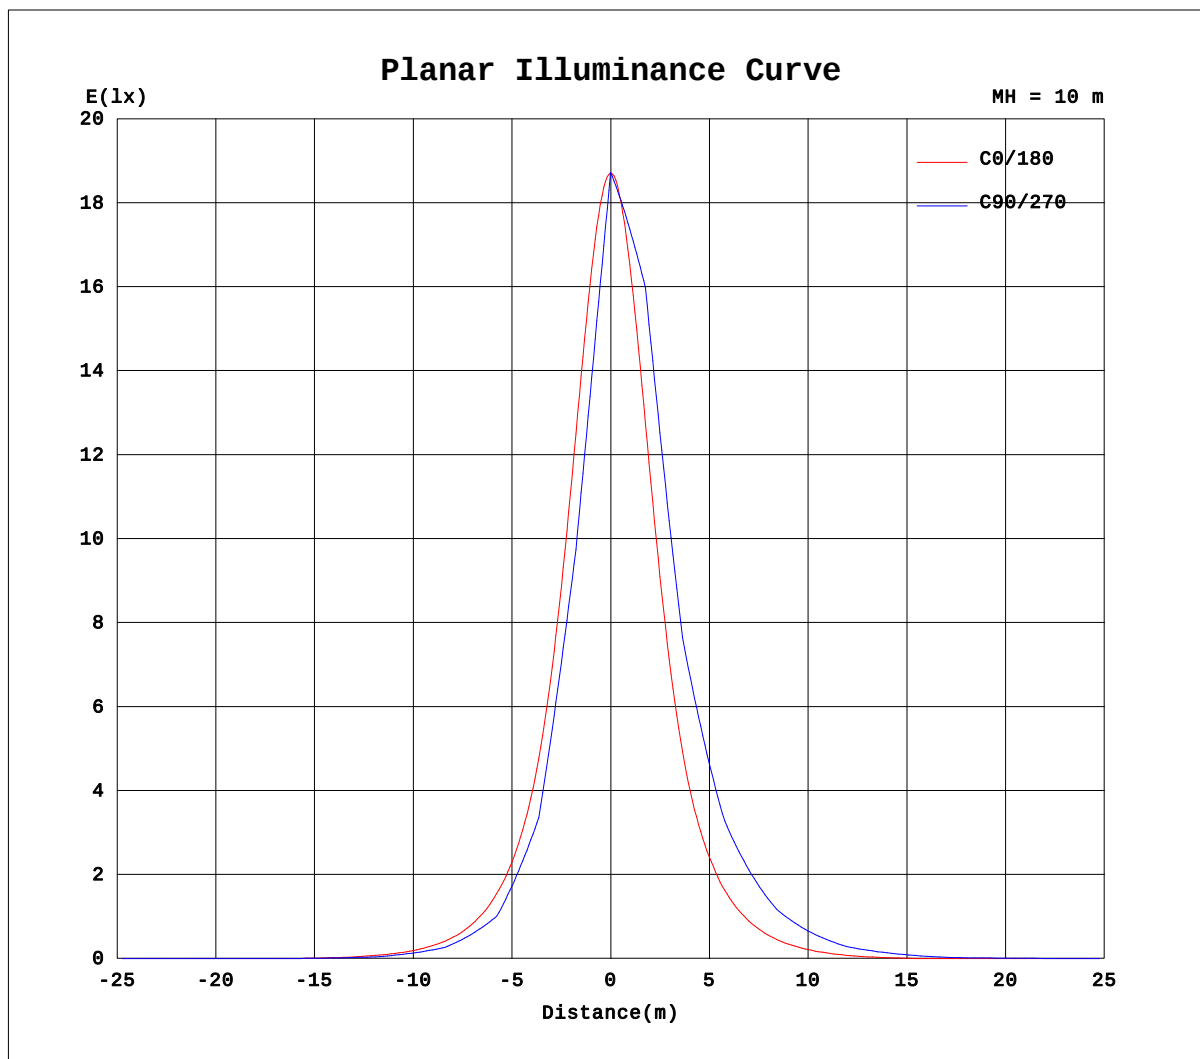

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.1V I:0.1121A P:26.74W PF:0.8608 Lamp Flux:817.365x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.23	3.22	4.96	6.33	7.43	8.14	8.32
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.46	6.44	9.93	12.7	14.9	16.3	16.6
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.55	7.85	13.3	20.1	26.5	31.5	35.4	37.8	38.6
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.11	15.7	24.2	33.8	43.2	50.4	55.9	59.3	60.6
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.92	6.48	16.6	28.3	40.9	55.3	70.6	85.2	97.0	105	108
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.84	13.0	26.1	40.8	57.5	76.7	98.1	120	138	151	156
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	7.30	21.1	38.2	59.0	84.6	117	157	202	243	272	281
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	12.7	29.3	50.3	77.2	112	157	216	284	348	392	406
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.31	17.8	38.0	63.9	98.8	147	214	310	435	568	672	713
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.09	22.9	46.7	77.6	120	183	271	404	585	787	953	1020
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.20	27.1	54.0	90.3	142	217	328	499	753	1060	1331	1446
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.3	31.3	61.4	103	163	251	384	594	920	1334	1710	1872
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.3	31.8	63.3	107	171	263	395	597	900	1281	1624	1772
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.2	32.2	65.2	111	179	274	407	601	880	1229	1538	1673
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.49	29.8	61.5	106	169	256	376	537	751	999	1208	1297
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.75	27.4	57.8	100	159	238	345	474	622	768	878	921
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.39	21.1	47.9	85.1	135	202	289	390	502	607	684	713
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	14.9	37.9	69.8	112	167	233	307	382	446	491	505
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	8.27	27.0	52.9	86.9	130	181	237	293	341	374	384
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.68	16.1	36.0	62.2	94.0	130	168	205	236	257	263
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.84	8.04	20.8	40.0	63.4	90.0	118	145	167	182	187
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.64	17.8	32.9	50.1	68.1	84.9	98.5	108	111
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.82	8.89	16.4	26.0	37.8	48.9	57.9	64.1	66.2
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.96	7.49	12.8	17.3	20.3	21.4
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.98	3.74	6.41	8.64	10.2	10.7
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.1V I:0.1121A P:26.74W PF:0.8608 Lamp Flux:817.365x1 lm		
NAME: 8.01.016.0044 30°LWW-PZT-W38A-L12-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	8.18	7.54	6.42	5.02	3.37	1.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	16.4	15.1	12.8	10.0	6.74	3.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	37.8	35.2	31.2	26.2	20.3	13.8	7.72	3.86	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	59.2	55.4	49.6	42.3	33.9	24.6	15.4	7.72	0.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	105	97.1	84.7	70.4	55.4	40.6	27.3	16.2	6.94	1.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	152	139	120	98.4	76.8	56.5	39.1	24.6	13.1	3.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	270	240	199	155	115	81.5	55.8	35.9	20.4	8.12	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	388	341	278	211	153	106	72.6	47.1	27.7	12.7	1.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	667	557	425	303	207	140	92.6	59.3	35.4	17.5	4.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	947	773	572	395	261	173	113	71.4	43.2	22.3	6.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	1323	1041	734	485	315	206	132	82.4	49.3	25.7	8.75	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	1699	1309	896	575	369	239	152	93.3	55.5	29.2	10.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	1627	1276	893	588	383	249	159	98.1	58.2	30.3	10.9	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	1554	1243	890	600	398	259	166	103	60.9	31.3	11.3	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	1219	1009	756	532	364	241	156	96.9	56.9	28.7	9.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	885	776	622	463	329	224	147	90.9	52.9	26.1	7.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	688	611	499	380	275	190	126	78.5	45.0	21.0	4.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	490	445	376	297	222	157	105	66.1	37.1	16.0	1.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	372	338	287	229	172	123	82.2	50.5	26.7	9.34	0.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	255	231	198	160	123	88.8	59.3	34.9	16.3	2.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	181	164	141	113	86.4	61.3	39.3	21.2	8.16	1.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	107	97.7	83.6	66.9	49.8	33.7	19.4	7.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	64.0	57.8	48.7	37.9	26.6	16.9	9.70	3.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	20.6	18.0	13.8	8.76	3.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	10.3	8.98	6.88	4.38	1.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: