

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3878.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	50.0V x 48.6H
	At 50% of Imax	23.9V x 23.2H
	At 90% of Imax	6.4V x 8.9H
Beam Flux	Total	999.6 lumens per klm.
	To 10% of Imax	745.7 lumens per klm.
	To 50% of Imax	343.8 lumens per klm.
	To 90% of Imax	36.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.9DEG
Operators:QC1
Test Date:2024-04-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:71%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.7544A P:18.11W PF:1.000 Lamp Flux:577.773x1 lm		
NAME: 8.01.016.0064 25°LWW-PZT-W38A-L6-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000053
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

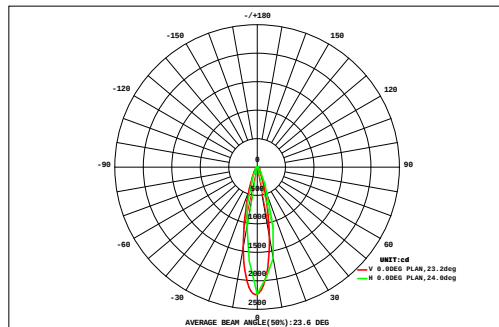

DATA OF LAMP		Eff:31.91lm/W	
MODELLWW-PZT-W38A-L6-DMX		Imax(cd)	2241
NOMINAL POWER(W)	18	AVAILABILITY(%)	75.3
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	435.3
NOMINAL FLUX(lm)	577.773	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	577.8
TEST VOLTAGE(V)	24.0	θ @50%(H,V)	23,24DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	45	0.09	0.12	0.16	0.20	0.25	0.31	0.36	0.39	0.42	0.42	0.40	0.37	0.32	0.27	0.22	0.17	0.13	0.10	4.70	0.00	
	40	0.12	0.16	0.21	0.27	0.34	0.41	0.47	0.52	0.55	0.54	0.51	0.46	0.39	0.32	0.26	0.20	0.15	0.11	6.00	0.00	
	35	0.13	0.19	0.26	0.35	0.46	0.60	0.75	0.88	0.97	0.98	0.91	0.79	0.64	0.50	0.38	0.29	0.21	0.15	9.43	0.00	
	30	0.17	0.24	0.34	0.46	0.62	0.82	1.03	1.21	1.32	1.30	1.17	0.98	0.77	0.59	0.44	0.32	0.23	0.16	12.2	0.00	
	25	0.18	0.27	0.39	0.57	0.85	1.28	1.89	2.59	3.08	3.11	2.65	1.99	1.39	0.94	0.64	0.44	0.30	0.20	22.8	15.0	
	20	0.23	0.34	0.52	0.78	1.21	1.89	2.85	3.87	4.47	4.29	3.46	2.46	1.63	1.06	0.69	0.46	0.31	0.21	30.7	23.9	
	15	0.22	0.34	0.52	0.84	1.43	2.57	4.68	7.54	9.78	9.97	7.97	5.12	2.91	1.64	0.97	0.60	0.39	0.25	57.7	52.1	
	10	0.27	0.42	0.68	1.15	2.08	3.98	7.40	11.6	14.3	13.6	10.0	5.93	3.16	1.69	0.97	0.59	0.37	0.24	78.4	73.1	
	5	0.24	0.37	0.58	0.96	1.72	3.33	6.53	11.2	15.0	15.5	12.4	7.68	4.04	2.09	1.15	0.68	0.42	0.27	84.1	78.8	
	0	0.28	0.44	0.71	1.23	2.32	4.67	9.06	14.5	17.9	17.0	12.3	6.99	3.49	1.80	1.00	0.59	0.37	0.24	94.9	89.7	
	-5	0.22	0.34	0.51	0.81	1.35	2.36	4.25	7.10	9.66	10.3	8.57	5.68	3.21	1.76	1.02	0.62	0.39	0.25	58.4	52.6	
	-10	0.24	0.36	0.55	0.87	1.40	2.27	3.57	5.04	5.88	5.54	4.30	2.91	1.85	1.15	0.73	0.48	0.32	0.21	37.7	31.4	
	-15	0.18	0.27	0.39	0.56	0.83	1.24	1.85	2.68	3.45	3.70	3.27	2.44	1.63	1.05	0.69	0.46	0.31	0.21	25.2	17.7	
	-20	0.19	0.26	0.37	0.51	0.68	0.85	0.95	0.91	0.85	0.79	0.74	0.72	0.67	0.56	0.43	0.31	0.22	0.16	10.2	1.03	
	-25	0.14	0.19	0.26	0.35	0.47	0.61	0.78	0.95	1.09	1.13	1.06	0.90	0.72	0.55	0.41	0.30	0.21	0.15	10.2	0.00	
	-30	0.13	0.17	0.22	0.28	0.34	0.40	0.43	0.43	0.42	0.40	0.40	0.38	0.35	0.30	0.25	0.20	0.15	0.11	5.36	0.00	
-35	0.09	0.13	0.16	0.21	0.26	0.32	0.37	0.42	0.45	0.45	0.44	0.40	0.34	0.29	0.23	0.18	0.14	0.10	4.96	0.00		
-40	0.08	0.11	0.13	0.16	0.19	0.21	0.23	0.24	0.25	0.24	0.23	0.21	0.19	0.17	0.14	0.11	0.09	0.06	3.06	0.00		
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)				10	15	20	25	30	35	40	45		
Φ t	3.19	4.71	6.97	10.6	16.8	28.1	47.4	72.0	89.8	89.2	70.8	46.4	27.7	16.7	10.6	6.99	4.72	3.19	556	---		
Φ a	0.00	0.00	0.00	0.19	6.61	21.0	41.2	66.1	83.9	83.4	65.0	41.0	20.2	6.77	0.00	0.00	0.00	0.00	---	435		

one-half-peak spread: U:9.5,D:14.6 , L:11.4,R:12.0


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.9DEG
Operators:QC1
Test Date:2024-04-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:71%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.7544A P:18.11W PF:1.000 Lamp Flux:577.773x1 lm		
NAME: 8.01.016.0064 25°LWW-PZT-W38A-L6-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000053
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

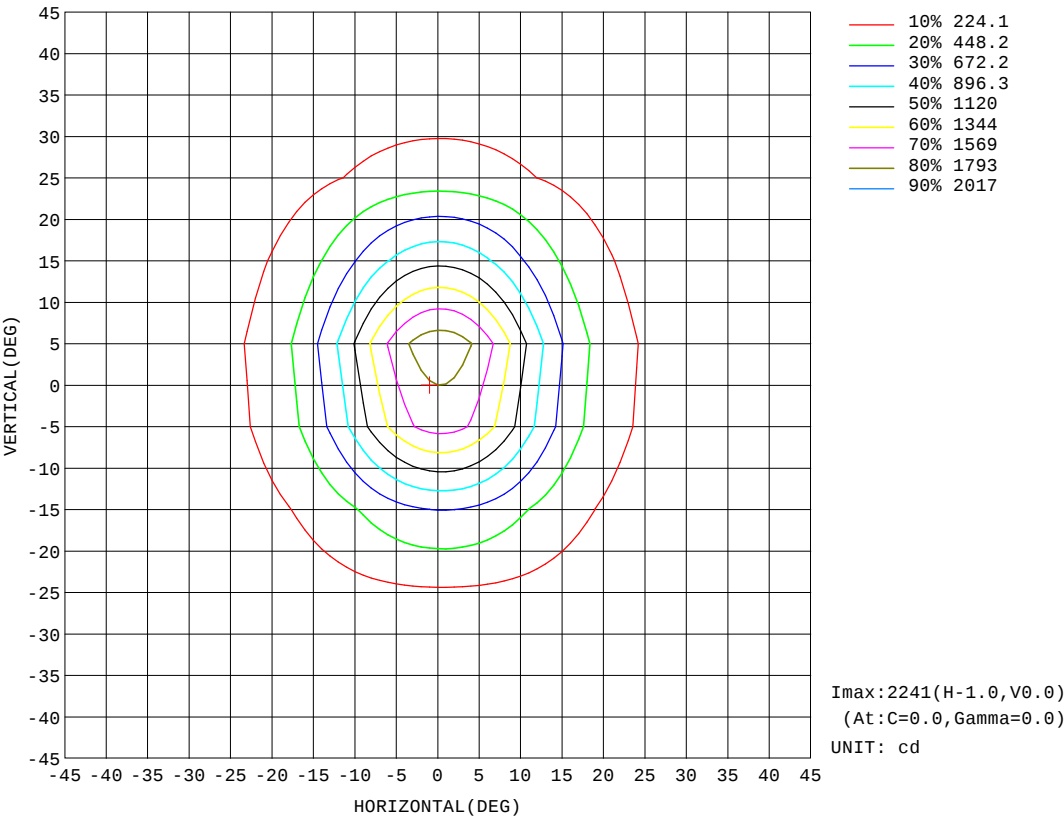


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.9DEG
Operators:QC1
Test Date:2024-04-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:71%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.7544A P:18.11W PF:1.000 Lamp Flux:577.773x1 lm		
NAME: 8.01.016.0064 25°LWW-PZT-W38A-L6-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000053
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

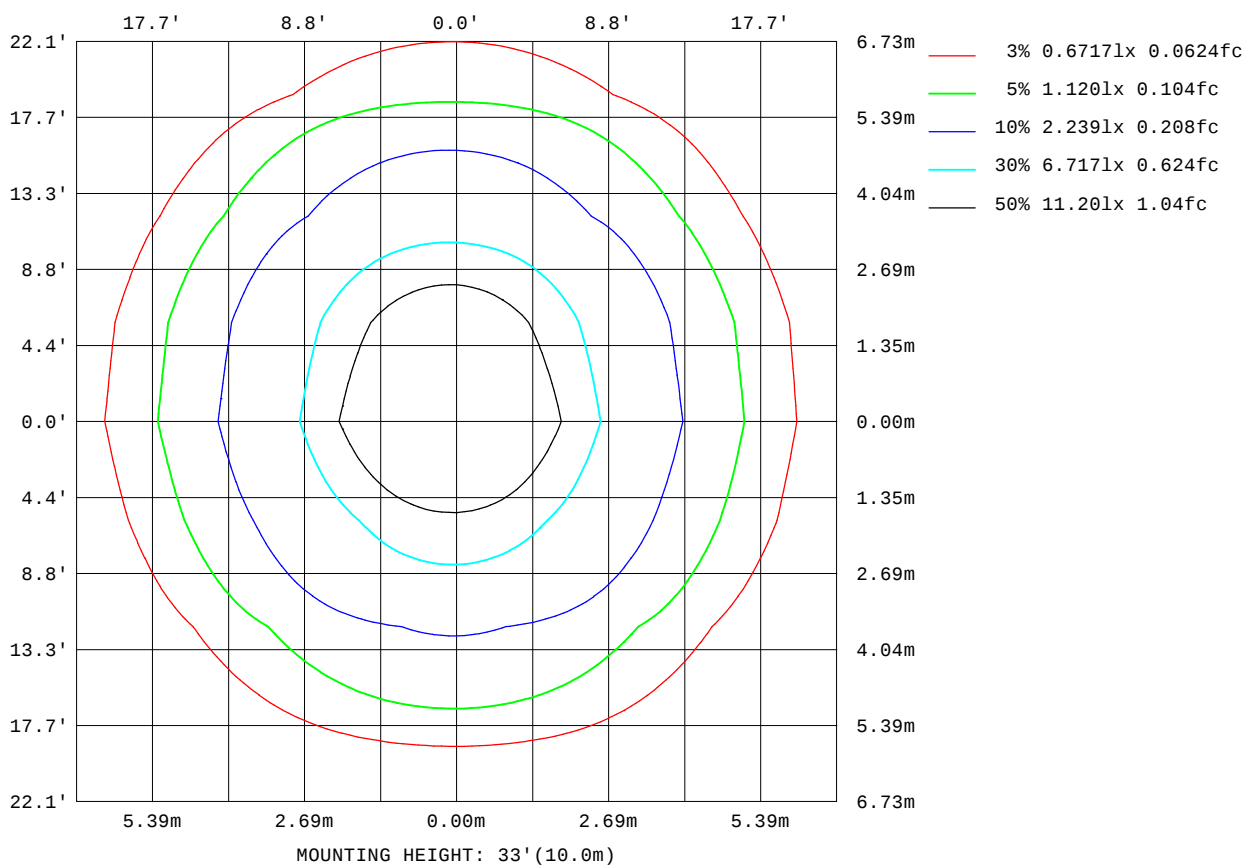


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.9DEG
Operators:QC1
Test Date:2024-04-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:71%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.7544A P:18.11W PF:1.000 Lamp Flux:577.773x1 lm		
NAME: 8.01.016.0064 25°LWW-PZT-W38A-L6-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000053
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

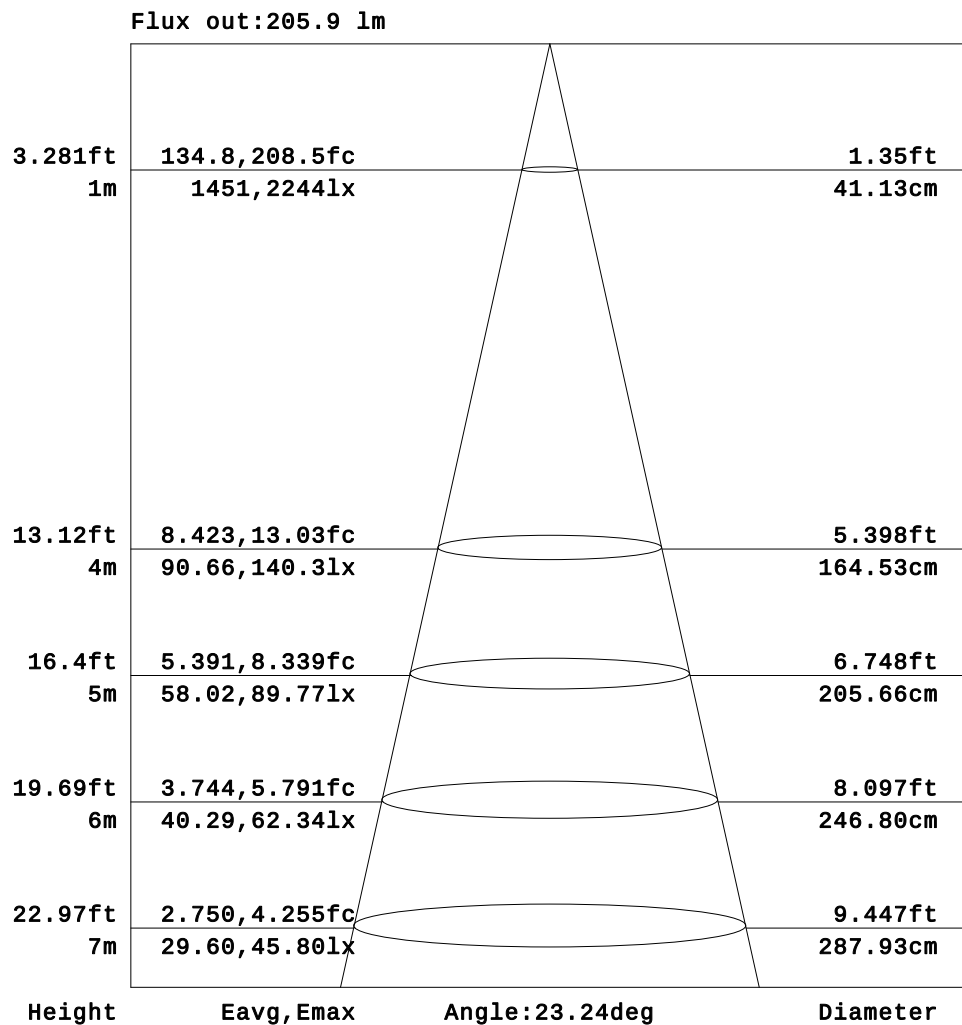


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.9DEG
Operators:QC1
Test Date:2024-04-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:71%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

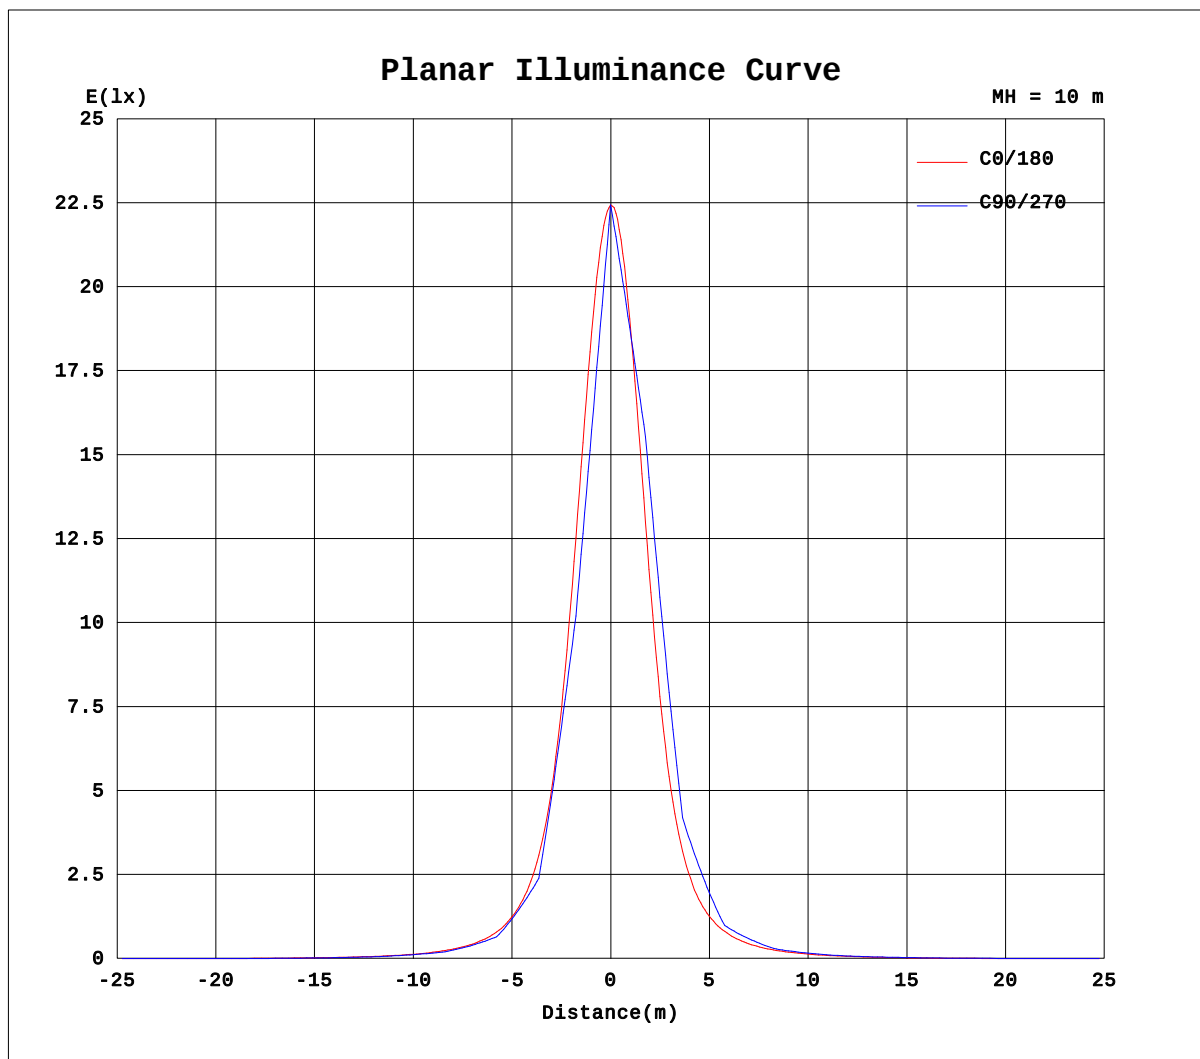

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.9DEG
Operators:QC1
Test Date:2024-04-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:71%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.7544A P:18.11W PF:1.000 Lamp Flux:577.773x1 lm		
NAME: 8.01.016.0064 25°LWW-PZT-W38A-L6-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000053
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd		
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	1.01	1.82	2.50	3.06	3.46	3.71	3.79
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.56	2.36	3.94	5.25	6.30	7.05	7.47	7.59
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	2.16	3.73	5.26	7.51	9.53	11.3	12.8	14.0	14.7	14.9
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.64	4.96	8.04	10.9	13.5	15.9	18.0	19.8	21.2	22.1	22.3
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.84	4.57	8.39	12.0	15.6	19.1	22.5	25.9	29.0	31.6	33.4	34.1
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.22	4.59	9.04	13.3	17.5	21.7	26.0	30.5	35.1	39.4	42.9	45.2	45.9
-35	0.00	0.00	0.00	0.00	0.00	0.00	1.64	6.25	11.2	16.2	21.3	26.9	33.3	40.7	48.8	57.2	65.0	70.8	73.3
-30	0.00	0.00	0.00	0.00	0.00	0.00	4.39	9.91	15.4	21.0	27.3	34.6	43.5	54.0	65.9	78.4	89.8	98.0	101
-25	0.00	0.00	0.00	0.00	0.00	0.34	5.15	11.1	17.1	23.7	31.5	41.4	54.4	71.4	93.9	122	154	182	195
-20	0.00	0.00	0.00	0.00	0.00	1.94	8.29	14.7	21.4	29.3	39.3	52.8	71.3	96.9	132	178	230	273	289
-15	0.00	0.00	0.00	0.00	0.00	1.55	8.14	14.8	22.0	30.6	42.1	58.2	82.2	120	182	284	435	596	677
-10	0.00	0.00	0.00	0.00	0.00	3.77	10.6	17.7	25.7	36.0	50.4	71.6	105	164	266	443	709	970	1066
-5	0.00	0.00	0.00	0.00	0.00	2.89	9.84	17.0	25.1	35.4	50.0	72.1	108	174	301	552	972	1429	1653
0	0.00	0.00	0.00	0.00	0.00	4.78	11.9	19.3	28.1	39.9	57.1	84.2	131	221	412	803	1430	2030	2236
5	0.00	0.00	0.00	0.00	0.00	3.07	10.1	17.3	25.5	36.2	51.5	74.8	114	187	333	631	1133	1674	1933
10	0.00	0.00	0.00	0.00	0.00	4.16	11.1	18.4	26.7	37.7	53.6	77.9	119	195	342	629	1069	1484	1622
15	0.00	0.00	0.00	0.00	0.00	2.05	8.80	15.7	23.2	32.7	45.6	64.4	94.2	145	236	404	667	939	1066
20	0.00	0.00	0.00	0.00	0.00	2.64	9.18	15.9	23.1	32.1	44.0	60.8	85.5	123	183	270	381	476	504
25	0.00	0.00	0.00	0.00	0.00	0.66	6.23	12.5	19.0	26.4	35.6	48.0	65.3	90.1	126	178	243	303	329
30	0.00	0.00	0.00	0.00	0.00	0.23	5.78	11.7	17.6	24.1	31.7	41.3	53.6	69.1	88.2	110	131	147	152
35	0.00	0.00	0.00	0.00	0.00	0.00	2.58	8.07	13.5	19.0	25.1	32.3	41.0	51.7	64.4	78.6	92.4	103	108
40	0.00	0.00	0.00	0.00	0.00	0.00	1.60	6.64	11.5	16.3	21.2	26.5	32.4	39.1	46.1	53.0	58.8	62.6	63.7
45	0.00	0.00	0.00	0.00	0.00	0.00	0.29	2.83	7.00	11.3	15.4	19.7	24.3	29.2	34.2	39.0	43.2	46.1	47.2
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	4.21	7.92	11.4	14.7	18.0	21.2	24.2	26.9	29.0	30.3	30.7
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.73	3.60	6.08	8.97	11.7	14.3	16.7	18.8	20.5	21.6	22.0
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.96	4.32	6.51	8.47	10.1	11.5	12.5	13.1	13.2
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.73	1.93	3.04	4.05	4.92	5.63	6.16	6.50	6.62
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.9DEG
Operators:QC1
Test Date:2024-04-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:71%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.7544A P:18.11W PF:1.000 Lamp Flux:577.773x1 lm		
NAME: 8.01.016.0064 25°LWW-PZT-W38A-L6-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000053
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	3.72	3.44	3.00	2.42	1.70	0.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	7.35	6.74	5.79	4.57	3.07	1.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	14.7	14.0	12.8	11.3	9.42	7.33	5.15	3.70	2.15	0.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	21.9	20.8	19.3	17.3	15.0	12.5	9.73	6.81	3.64	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	33.6	32.0	29.4	26.2	22.7	19.1	15.6	12.0	8.38	4.56	1.83	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	44.9	42.2	38.3	33.8	29.0	24.4	20.0	15.8	11.6	7.30	2.75	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	72.0	66.9	59.3	50.7	42.1	34.4	27.6	21.7	16.5	11.6	6.53	1.83	0.00	0.00	0.00	0.00	0.00	0.00
-30	97.5	88.9	77.0	64.1	52.0	41.5	32.7	25.5	19.4	13.8	8.28	2.44	0.00	0.00	0.00	0.00	0.00	0.00
-25	187	162	130	100	75.9	57.3	43.3	32.7	24.5	17.8	11.7	5.56	0.50	0.00	0.00	0.00	0.00	0.00
-20	269	223	171	126	91.4	66.8	49.1	36.3	26.8	19.3	12.7	6.17	0.17	0.00	0.00	0.00	0.00	0.00
-15	626	479	321	204	132	89.2	62.3	44.5	32.1	23.1	15.7	8.83	2.07	0.00	0.00	0.00	0.00	0.00
-10	935	669	415	246	151	98.8	67.2	47.0	33.5	23.8	15.9	8.77	1.75	0.00	0.00	0.00	0.00	0.00
-5	1486	1052	613	335	192	118	77.8	53.3	37.4	26.5	18.1	10.7	3.50	0.00	0.00	0.00	0.00	0.00
0	1892	1245	672	350	195	118	76.6	52.2	36.4	25.5	17.2	9.67	2.40	0.00	0.00	0.00	0.00	0.00
5	1726	1202	683	366	205	124	81.2	55.3	38.7	27.3	18.6	11.1	3.80	0.00	0.00	0.00	0.00	0.00
10	1383	931	533	297	174	110	73.3	50.6	35.7	25.2	17.0	9.52	2.32	0.00	0.00	0.00	0.00	0.00
15	961	696	431	257	157	103	70.2	49.4	35.3	25.2	17.2	9.96	2.94	0.00	0.00	0.00	0.00	0.00
20	449	345	244	167	114	80.0	57.3	41.6	30.3	21.8	14.5	7.56	0.77	0.00	0.00	0.00	0.00	0.00
25	306	249	186	135	96.5	70.3	51.9	38.5	28.6	20.7	13.9	7.38	1.14	0.00	0.00	0.00	0.00	0.00
30	145	128	106	85.4	67.1	52.2	40.3	31.0	23.4	16.9	10.7	4.59	0.00	0.00	0.00	0.00	0.00	0.00
35	105	95.2	81.9	67.9	55.0	43.9	34.7	27.2	20.7	14.9	9.25	3.60	0.08	0.00	0.00	0.00	0.00	0.00
40	62.0	57.8	51.8	45.0	38.1	31.7	25.9	20.6	15.6	10.6	5.53	0.42	0.00	0.00	0.00	0.00	0.00	0.00
45	46.4	43.9	40.1	35.4	30.5	25.7	21.2	16.8	12.4	8.03	3.48	0.68	0.00	0.00	0.00	0.00	0.00	0.00
50	30.1	28.7	26.5	23.9	21.0	17.9	14.6	11.2	7.55	3.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	21.7	20.7	19.2	17.3	15.1	12.5	9.83	6.91	4.15	2.23	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	13.0	12.3	11.3	9.86	8.15	6.17	3.91	1.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	6.54	6.23	5.75	5.08	4.26	3.29	2.19	0.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.9DEG
Operators:QC1
Test Date:2024-04-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:71%
Test Distance:8.300m [K=1.0000]
Remarks: