

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2286.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	82.9V x 57.6H
	At 50% of Imax	48.0V x 20.2H
	At 90% of Imax	17.1V x 6.9H

Beam Flux	Total	999.5 lumens per klm.
	To 10% of Imax	764.8 lumens per klm.
	To 50% of Imax	339.3 lumens per klm.
	To 90% of Imax	63.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-10-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.1V I:0.1234A P:15.70W PF:0.5757 Freq:50.00Hz Lamp Flux:686.135x1 lm		
NAME: 8.01.017.0117 15X55°LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2023100020
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

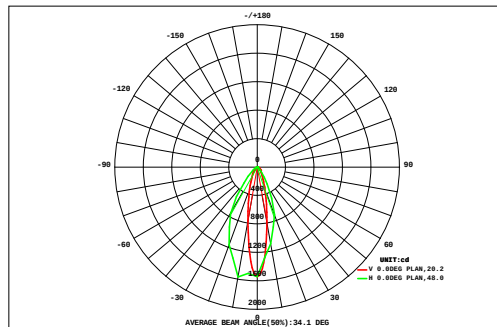

DATA OF LAMP		Eff:43.69lm/W	
MODEL LWW-WZB-W55-L3-RDM		Imax(cd)	1569
NOMINAL POWER(W)	16	AVAILABILITY(%)	76.7
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	526.1
NOMINAL FLUX(lm)	686.135	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	686.1
TEST VOLTAGE(V)	221.3	θ @50%(H,V)	20,48DEG

		AREA FLUX DIAGRAM																UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	72	0.00	0.00	0.00	0.01	0.07	0.22	0.35	0.44	0.50	0.52	0.48	0.39	0.28	0.17	0.06	0.01	0.00	0.00	3.51	0.00	
	64	0.00	0.00	0.07	0.21	0.37	0.52	0.66	0.78	0.85	0.87	0.81	0.70	0.57	0.42	0.26	0.11	0.01	0.00	7.21	0.00	
	56	0.00	0.02	0.15	0.35	0.54	0.75	0.97	1.22	1.47	1.53	1.31	1.06	0.83	0.62	0.42	0.24	0.08	0.00	11.6	0.00	
	48	0.00	0.06	0.24	0.48	0.73	1.04	1.46	2.09	3.18	3.52	2.45	1.65	1.18	0.83	0.56	0.33	0.14	0.02	20.0	6.19	
	40	0.00	0.12	0.33	0.63	0.99	1.50	2.29	3.83	7.04	7.59	4.26	2.44	1.59	1.04	0.67	0.39	0.18	0.03	34.9	22.7	
	32	0.01	0.14	0.39	0.75	1.23	1.96	3.25	6.29	13.6	14.0	6.66	3.40	2.06	1.29	0.79	0.46	0.22	0.05	56.5	45.9	
	24	0.02	0.15	0.43	0.84	1.41	2.35	4.22	8.64	18.2	19.8	9.94	4.74	2.60	1.53	0.92	0.52	0.26	0.07	76.7	67.3	
		0.02	0.16	0.45	0.88	1.49	2.58	5.01	10.6	22.4	26.3	13.8	6.29	3.08	1.72	1.01	0.57	0.28	0.09	96.7	87.8	
		0.02	0.17	0.47	0.92	1.55	2.70	5.43	11.7	24.4	28.3	14.9	6.76	3.20	1.74	1.02	0.57	0.28	0.09	104	95.6	
		0.03	0.19	0.49	0.94	1.57	2.73	5.43	11.6	23.5	23.7	11.8	5.45	2.75	1.56	0.92	0.52	0.25	0.07	93.4	84.4	
		0.02	0.16	0.44	0.84	1.37	2.23	3.88	7.72	16.1	17.3	8.82	4.27	2.37	1.42	0.85	0.49	0.24	0.06	68.6	58.6	
	-24	0.01	0.12	0.35	0.69	1.12	1.72	2.72	5.02	10.7	12.6	6.63	3.32	1.95	1.21	0.75	0.43	0.21	0.05	49.6	38.4	
	-32	0.00	0.08	0.28	0.56	0.88	1.31	1.93	3.08	5.66	6.73	4.03	2.27	1.46	0.96	0.62	0.36	0.17	0.04	30.4	17.7	
	-40	0.00	0.05	0.21	0.43	0.67	0.95	1.31	1.83	2.46	2.41	1.85	1.34	0.98	0.69	0.46	0.27	0.11	0.01	16.0	1.46	
	-48	0.00	0.03	0.14	0.31	0.48	0.65	0.83	0.98	0.97	0.84	0.83	0.75	0.60	0.45	0.30	0.16	0.04	0.00	8.36	0.00	
	-56	0.00	0.00	0.03	0.13	0.26	0.41	0.52	0.59	0.61	0.60	0.57	0.50	0.41	0.29	0.17	0.06	0.01	0.00	5.17	0.00	
-64	0.00	0.00	0.00	0.01	0.02	0.12	0.22	0.29	0.33	0.32	0.28	0.22	0.15	0.09	0.04	0.02	0.00	0.00	2.11	0.00		
-72	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.06	0.07	0.07	0.06	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.40	0.00		
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)				16	24	32	40	48	56	64	72		
Φ t	0.15	1.44	4.48	8.98	14.8	23.8	40.5	76.7	152	167	89.5	45.6	26.1	16.0	9.82	5.52	2.50	0.60	685	---		
Φ a	0.00	0.00	0.00	0.00	0.00	5.34	27.2	66.9	144	160	80.4	33.7	8.66	0.00	0.00	0.00	0.00	0.00	---	526		


one-half-peak spread: U:29.1,D:19.4 , L:10.3, ~~NEW~~ Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-10-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.1V I:0.1234A P:15.70W PF:0.5757 Freq:50.00Hz Lamp Flux:686.135x1 lm		
NAME: 8.01.017.0117 15X55°LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2023100020
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

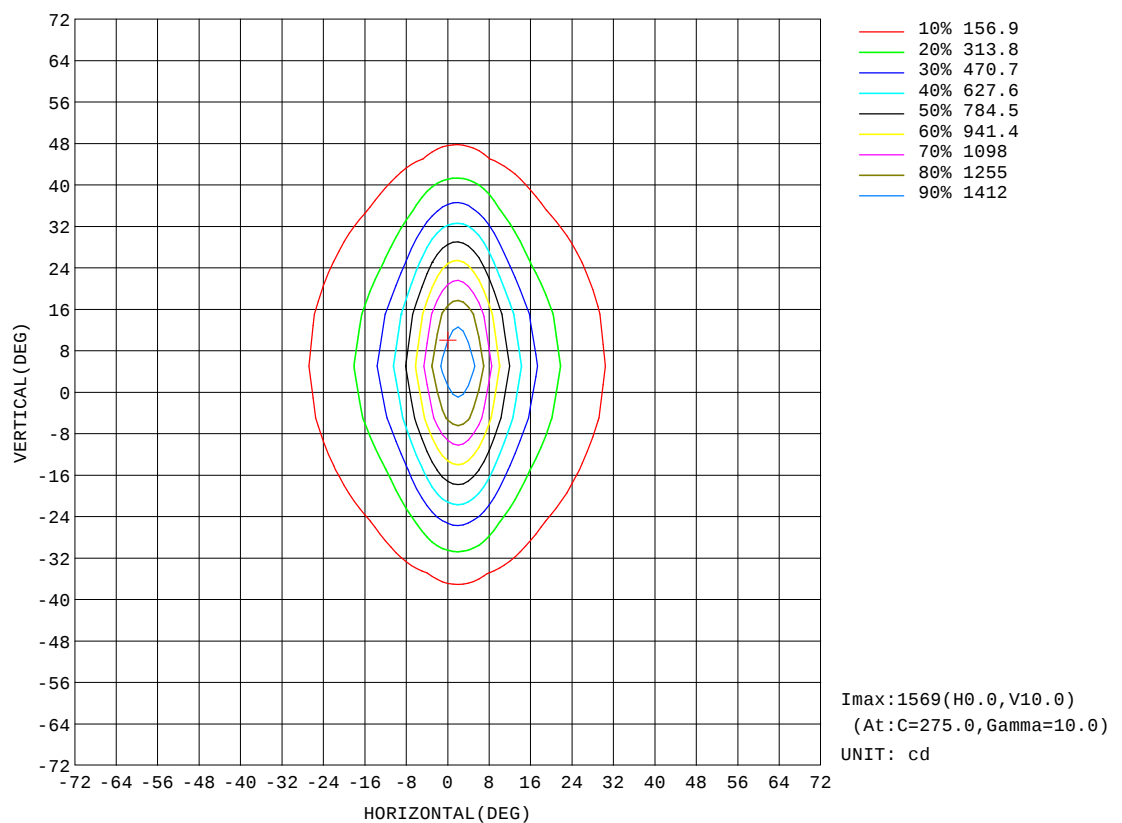


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-10-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:221.1V I:0.1234A P:15.70W PF:0.5757 Freq:50.00Hz Lamp Flux:686.135x1 lm		
NAME: 8.01.017.0117 15X55°LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2023100020
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

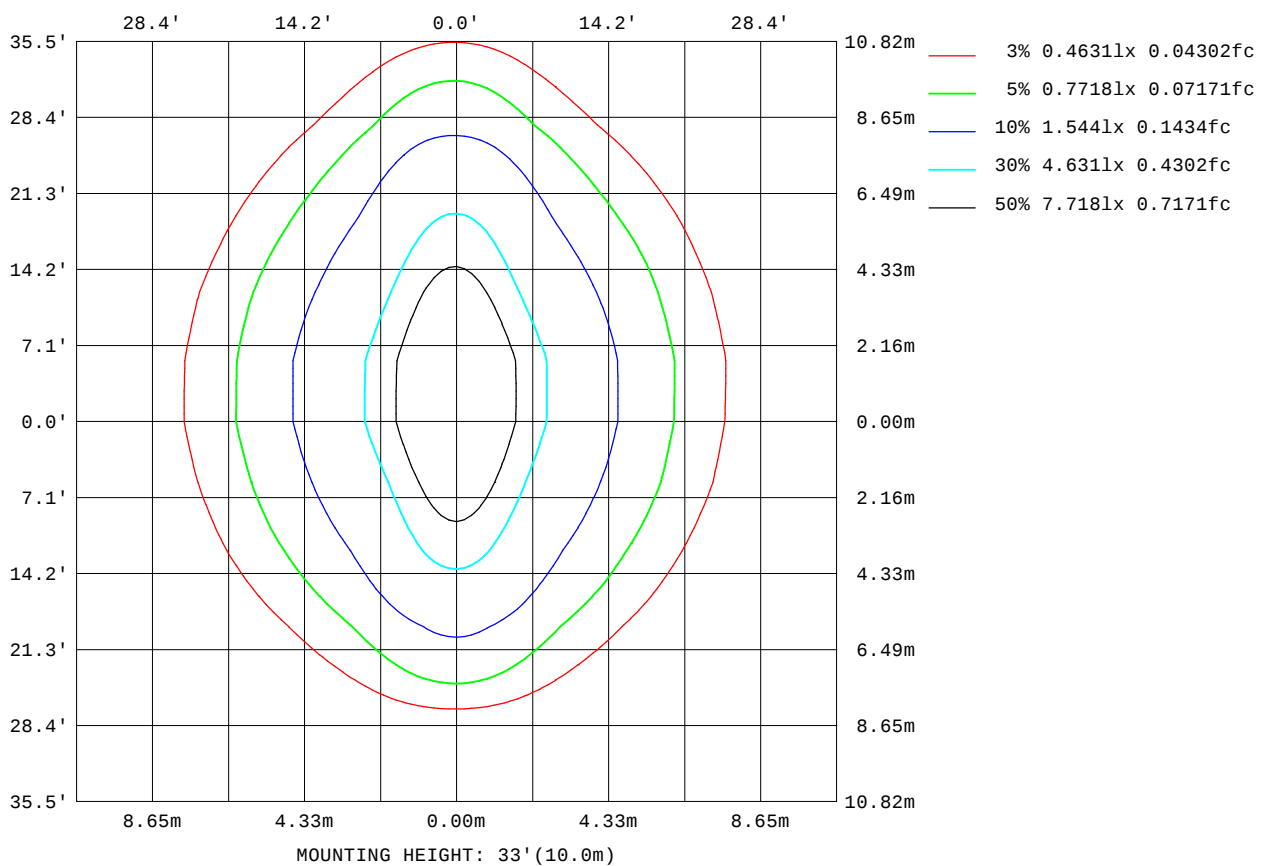

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-10-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

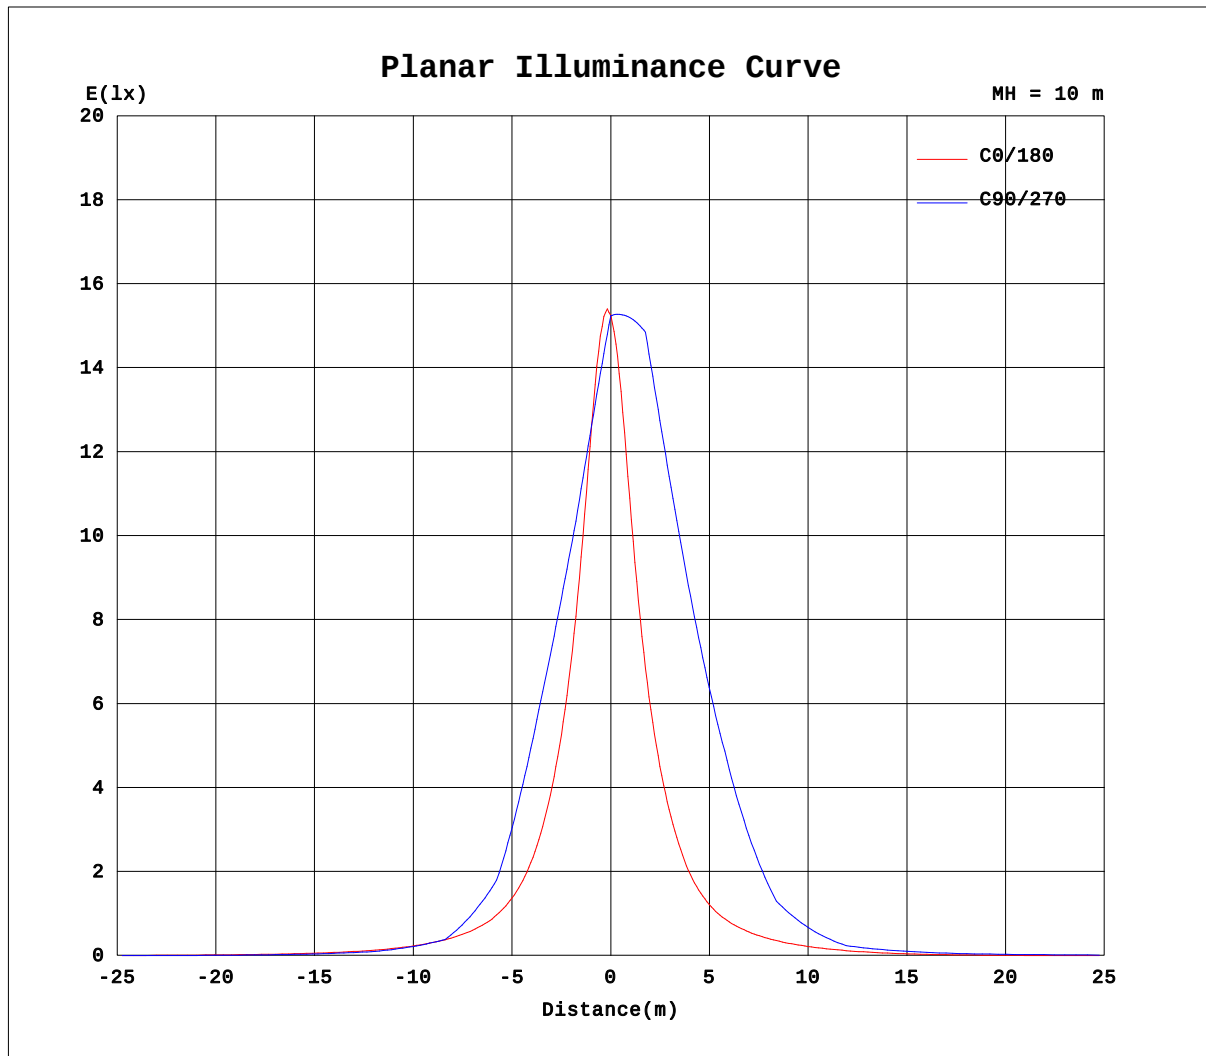


H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2023-10-17

V(β) Range: -80 - 80DEG
V(β) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.1V I:0.1234A P:15.70W PF:0.5757 Freq:50.00Hz Lamp Flux:686.135x1 lm		
NAME: 8.01.017.0117 15X55°LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2023100020
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

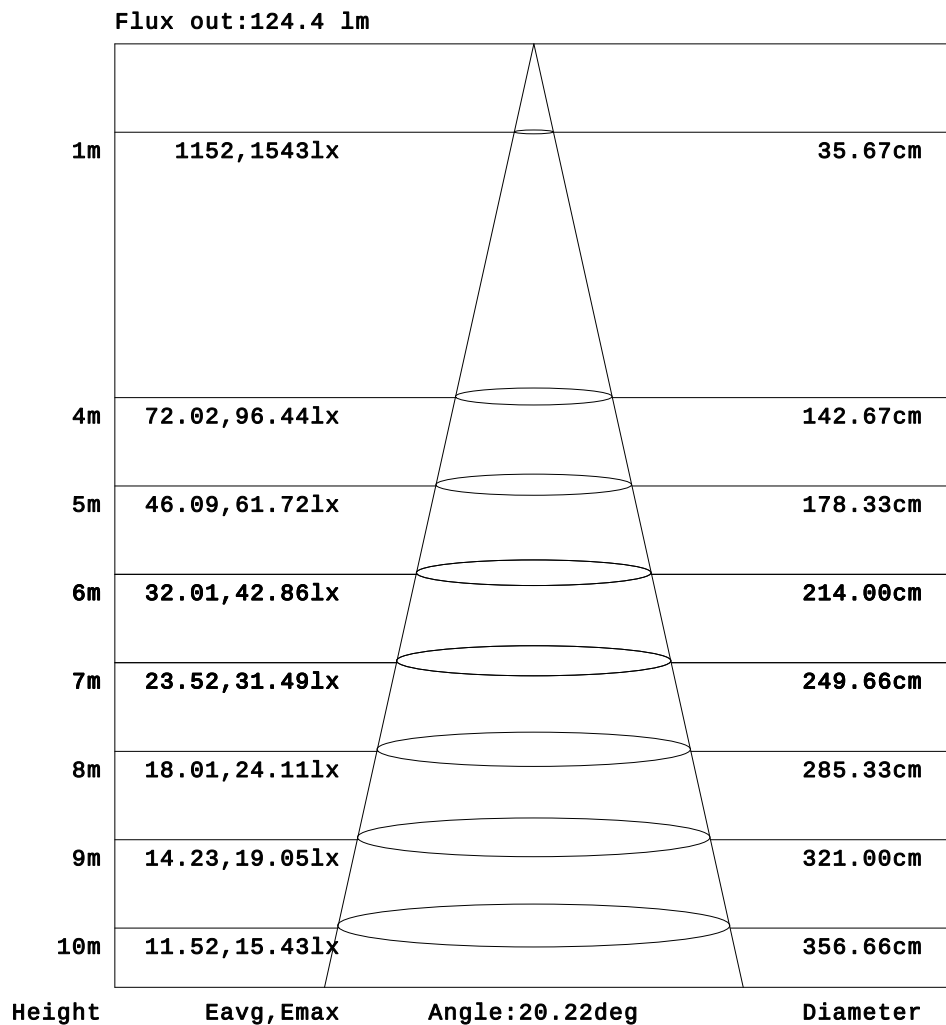

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-10-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.1V I:0.1234A P:15.70W PF:0.5757 Freq:50.00Hz Lamp Flux:686.135x1 lm		
NAME: 8.01.017.0117 15X55°LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2023100020
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.03	4.42	5.91	7.04	7.81	8.29	8.50
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	6.15	10.2	12.8	14.8	16.1	16.8	17.0
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.37	4.93	7.12	9.82	14.4	18.8	22.0	24.5	26.4	27.6	27.9
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.43	6.84	11.6	16.2	21.8	26.5	30.1	33.3	36.0	37.9	38.8	38.8
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.25	4.11	10.3	16.6	22.2	27.8	33.2	38.2	43.3	48.4	53.9	59.1	62.3
-40	0.00	0.00	0.00	0.00	0.00	0.00	3.42	11.3	19.0	26.2	32.5	38.2	43.9	50.3	57.2	65.2	74.1	82.8	86.3
-35	0.00	0.00	0.00	0.00	0.00	0.00	3.17	11.3	20.3	29.0	37.0	44.5	52.8	62.4	74.0	89.2	112	148	179
-30	0.00	0.00	0.00	0.00	0.00	1.17	9.12	18.2	28.6	38.3	47.3	57.2	68.9	83.2	102	129	176	243	279
-25	0.00	0.00	0.00	0.00	0.00	0.91	7.99	17.3	28.4	39.9	50.7	62.3	76.5	94.5	119	155	224	351	481
-20	0.00	0.00	0.00	0.00	0.00	5.05	13.8	25.0	37.5	50.2	62.9	78.0	97.3	123	161	224	357	582	711
-15	0.00	0.00	0.00	0.00	0.00	3.02	11.6	22.6	35.3	49.4	63.1	79.2	99.8	129	173	244	373	615	873
-10	0.00	0.00	0.00	0.00	0.01	7.71	17.3	30.0	44.6	59.4	75.4	95.4	123	166	233	345	550	888	1093
-5	0.00	0.00	0.00	0.00	0.00	5.09	14.2	26.3	40.4	56.2	72.4	92.3	119	162	233	353	552	899	1272
0	0.00	0.00	0.00	0.00	0.62	9.62	19.8	33.3	49.3	65.6	84.1	109	144	206	316	494	789	1254	1541
5	0.00	0.00	0.00	0.00	0.00	5.88	15.1	27.5	42.1	58.7	76.0	97.7	128	178	264	414	656	1059	1500
10	0.00	0.00	0.00	0.00	0.44	9.46	19.3	32.7	48.5	65.3	83.8	109	146	208	318	500	798	1265	1569
15	0.00	0.00	0.00	0.00	0.00	5.32	14.4	26.0	39.9	56.2	72.7	93.1	121	165	238	361	571	929	1322
20	0.00	0.00	0.00	0.00	0.00	8.38	17.4	30.0	44.2	60.1	76.6	97.7	127	171	241	362	586	954	1161
25	0.00	0.00	0.00	0.00	0.00	3.50	12.2	22.5	35.1	49.4	63.6	80.3	102	133	179	254	392	653	932
30	0.00	0.00	0.00	0.00	0.00	5.48	14.4	24.9	36.9	50.0	63.0	78.9	99.4	127	168	233	370	615	754
35	0.00	0.00	0.00	0.00	0.00	1.08	8.90	18.0	28.9	40.2	51.2	63.2	78.0	97.3	124	162	232	369	510
40	0.00	0.00	0.00	0.00	0.00	2.10	10.5	19.8	29.8	39.3	48.3	58.4	70.9	86.4	106	135	185	256	290
45	0.00	0.00	0.00	0.00	0.00	0.00	4.07	12.5	21.6	30.3	38.3	45.9	54.4	64.5	76.8	92.7	117	155	188
50	0.00	0.00	0.00	0.00	0.00	0.00	4.03	12.5	20.6	28.0	34.1	39.8	45.6	52.0	59.0	67.2	76.7	86.2	90.6
55	0.00	0.00	0.00	0.00	0.00	0.00	0.54	4.80	11.9	18.8	25.0	30.5	35.6	40.6	45.9	51.3	57.0	62.9	67.2
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.83	8.87	14.8	20.2	25.3	29.6	33.4	37.0	39.9	42.1	43.8	44.7
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	3.22	6.23	9.05	12.6	17.1	21.8	25.2	28.0	30.3	32.1	33.3
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	3.55	8.72	13.2	15.8	18.2	20.1	21.6	22.4
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.93	3.10	5.86	7.40	8.64	9.70	10.8	11.8
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.00	1.57
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-10-17

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.1V I:0.1234A P:15.70W PF:0.5757 Freq:50.00Hz Lamp Flux:686.135x1 lm		
NAME: 8.01.017.0117 15X55°LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2023100020
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	8.33	7.82	7.11	6.19	5.11	3.98	2.89	1.61	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	16.3	15.1	13.5	11.6	9.34	7.04	4.81	2.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	27.5	26.3	24.5	22.4	20.0	17.4	14.7	11.4	7.76	5.16	2.66	0.18	0.00	0.00	0.00	0.00	0.00	0.00
-50	38.0	36.1	33.9	31.4	28.7	25.7	22.0	17.9	13.2	8.33	3.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	61.4	56.4	50.5	45.1	40.2	35.5	30.9	26.2	21.3	16.1	10.5	4.69	1.10	0.00	0.00	0.00	0.00	0.00
-40	81.4	72.0	62.7	54.8	47.9	41.7	36.0	30.7	25.3	19.4	13.1	6.34	0.01	0.00	0.00	0.00	0.00	0.00
-35	174	138	105	83.9	69.5	58.1	48.8	40.8	33.7	26.9	20.1	12.9	5.44	0.19	0.00	0.00	0.00	0.00
-30	242	175	128	100	81.4	66.7	54.9	45.1	36.7	29.0	21.4	13.5	5.37	0.00	0.00	0.00	0.00	0.00
-25	460	316	205	146	111	87.9	70.6	57.1	46.0	36.6	28.0	19.6	11.0	2.27	0.00	0.00	0.00	0.00
-20	572	352	225	160	121	94.1	74.8	59.7	47.4	37.2	28.0	18.9	9.70	0.30	0.00	0.00	0.00	0.00
-15	834	555	340	226	161	120	92.7	73.0	57.7	45.1	34.6	24.9	15.3	5.72	0.00	0.00	0.00	0.00
-10	891	556	348	231	164	121	93.5	73.2	57.2	44.2	33.4	23.3	13.2	3.21	0.00	0.00	0.00	0.00
-5	1214	806	497	317	211	149	110	84.9	66.2	51.2	39.0	28.4	18.1	7.85	0.00	0.00	0.00	0.00
0	1233	769	480	305	200	139	104	80.4	62.5	47.8	36.0	25.3	14.7	4.28	0.00	0.00	0.00	0.00
5	1432	946	585	368	235	161	118	89.8	69.8	53.8	40.9	29.8	19.2	8.63	0.00	0.00	0.00	0.00
10	1266	788	490	311	201	142	106	81.9	63.4	48.7	36.7	25.8	15.2	4.71	0.00	0.00	0.00	0.00
15	1254	821	505	323	214	151	112	86.5	67.5	52.3	39.9	29.0	18.5	8.09	0.00	0.00	0.00	0.00
20	916	558	350	236	169	124	95.6	74.7	58.5	45.2	34.2	23.8	13.5	3.35	0.00	0.00	0.00	0.00
25	873	561	341	229	166	124	96.2	75.7	59.9	47.0	36.1	26.0	16.1	6.20	0.00	0.00	0.00	0.00
30	593	354	225	164	126	99.2	78.9	63.1	50.3	39.7	29.9	20.3	10.7	1.29	0.00	0.00	0.00	0.00
35	480	320	206	149	116	92.9	74.9	60.8	49.2	39.4	30.3	21.2	12.1	3.08	0.00	0.00	0.00	0.00
40	245	177	132	105	86.1	71.0	58.8	48.7	40.0	31.7	23.4	14.8	6.15	0.00	0.00	0.00	0.00	0.00
45	180	141	109	89.0	74.7	63.2	53.5	45.1	37.6	30.2	22.6	14.6	6.61	0.55	0.00	0.00	0.00	0.00
50	86.5	77.5	68.5	60.6	53.6	47.1	41.2	35.4	29.3	22.7	15.5	8.02	0.73	0.00	0.00	0.00	0.00	0.00
55	66.9	62.6	56.9	51.3	46.1	40.9	35.8	30.7	25.2	19.2	12.9	6.39	1.80	0.00	0.00	0.00	0.00	0.00
60	44.6	43.2	40.8	37.7	34.4	30.6	26.3	21.6	16.4	10.8	5.18	0.01	0.00	0.00	0.00	0.00	0.00	0.00
65	33.6	32.9	31.2	28.7	25.8	22.6	19.0	15.1	10.9	6.54	3.72	0.89	0.00	0.00	0.00	0.00	0.00	0.00
70	22.3	21.4	19.7	17.4	14.7	11.8	8.64	5.33	1.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	12.0	11.5	10.3	9.18	7.91	6.51	4.96	3.32	1.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	1.51	0.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-10-17

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks: