

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2900.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	58.2V x 56.4H
	At 50% of Imax	27.9V x 25.4H
	At 90% of Imax	7.3V x 10.5H
Beam Flux	Total	999.9 lumens per klm.
	To 10% of Imax	744.3 lumens per klm.
	To 50% of Imax	332.4 lumens per klm.
	To 90% of Imax	40.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-07-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:50%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.6V I:0.2394A P:51.83W PF:0.9815 Lamp Flux:7831.48x1 lm		
NAME: LWL-WZB-W55-L10-S 无玻璃	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023070055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

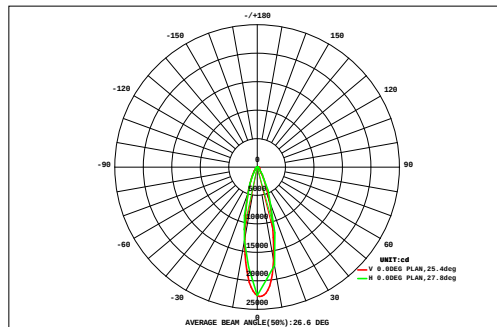

DATA OF LAMP		Eff:151.11lm/W	
MODEL	LWL-WZB-W55-L10-S	Imax(cd)	22718
NOMINAL POWER(W)	52	AVAILABILITY(%)	74.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	5844
NOMINAL FLUX(lm)	7831.48	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	7831
TEST VOLTAGE(V)	220.1	θ @50%(H,V)	25, 28DEG

AREA FLUX DIAGRAM																	UNIT:lm		Φ t	Φ a
45	1.51	2.03	2.67	3.37	4.14	4.83	5.29	5.54	5.71	5.83	5.82	5.79	5.37	4.67	3.97	3.32	2.69	2.08	74.6	0.00
40	1.84	2.57	3.36	4.28	5.34	6.28	6.87	7.18	7.36	7.46	7.45	7.25	6.59	5.72	4.74	3.82	2.88	2.15	93.2	0.00
35	1.95	2.86	3.98	5.29	6.84	8.91	11.2	13.1	14.5	15.1	14.7	13.5	11.4	8.87	6.60	4.90	3.68	2.68	150	3.47
30	2.44	3.64	5.11	6.85	9.00	12.0	15.4	18.2	20.2	20.8	19.8	17.4	14.0	10.4	7.34	5.26	3.86	2.72	194	89.7
25	2.51	3.74	5.33	7.88	11.6	17.0	24.9	33.7	40.7	43.7	41.2	34.3	25.4	17.2	11.3	7.22	4.75	3.34	336	267
20	3.22	4.64	6.75	10.4	16.0	24.4	36.4	49.1	58.4	60.7	54.9	43.4	30.2	19.3	12.1	7.40	4.72	3.30	445	384
15	2.97	4.56	6.85	10.8	17.7	29.5	48.1	74.4	102	113	102	75.4	49.3	30.2	17.7	10.3	6.01	3.97	704	651
10	3.69	5.62	8.82	14.4	24.6	42.5	70.3	109	145	153	128	87.4	53.8	31.6	17.6	9.96	5.72	3.82	915	865
5	3.12	4.87	7.60	12.4	21.2	36.9	62.5	103	145	163	148	106	65.0	38.2	21.6	12.1	6.75	4.24	962	912
0	3.69	5.74	9.31	15.7	27.7	48.4	82.2	133	175	181	153	100	58.5	33.4	18.6	10.3	5.80	3.85	1065	1016
-5	3.01	4.50	6.76	10.8	17.6	29.3	47.8	74.4	104	119	111	84.0	54.3	32.8	19.0	11.0	6.37	4.09	740	689
-10	3.40	4.87	7.32	11.7	18.6	29.8	46.1	64.3	79.4	82.8	70.5	52.8	36.0	22.3	13.5	8.13	5.04	3.53	560	502
-15	2.54	3.80	5.36	7.93	11.9	17.7	26.0	36.3	46.4	52.5	50.7	42.0	30.5	20.2	12.9	8.09	5.17	3.55	384	318
-20	2.65	3.86	5.34	7.61	10.8	14.3	18.0	20.6	20.7	20.0	19.5	18.1	14.6	10.7	7.78	5.35	3.93	2.85	207	95.2
-25	1.95	2.91	4.03	5.49	7.33	9.53	12.2	15.0	17.3	18.6	18.4	16.8	14.1	10.7	7.79	5.57	3.97	2.87	175	51.0
-30	1.92	2.77	3.78	4.89	5.75	6.55	7.15	7.19	7.05	6.91	6.85	6.92	6.69	6.07	4.90	3.98	3.08	2.26	94.7	0.00
-35	1.53	2.09	2.79	3.55	4.40	5.22	6.00	6.59	6.94	7.15	7.15	7.04	6.43	5.58	4.64	3.75	2.95	2.22	86.0	0.00
-40	1.46	1.91	2.39	2.83	3.32	3.69	3.78	3.69	3.52	3.45	3.56	3.72	3.52	3.31	3.11	2.74	2.24	1.73	54.0	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)	10	15	20	25	30	35	40	45			
Φ t	45.4	67.0	97.5	146	224	347	530	774	999	1074	962	723	486	311	195	123	79.6	55.2	7239	---
Φ a	0.00	0.00	0.00	14.7	124	265	458	711	942	1021	907	660	411	238	89.5	1.85	0.00	0.00	---	5844

one-half-peak spread: U:12.4,D:15.7 , L:12.4,R:13.2


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:30.3DEG
 Operators:QC1
 Test Date:2023-07-20

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:50%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.6V I:0.2394A P:51.83W PF:0.9815 Lamp Flux:7831.48x1 lm		
NAME: LWL-WZB-W55-L10-S 无玻璃	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023070055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

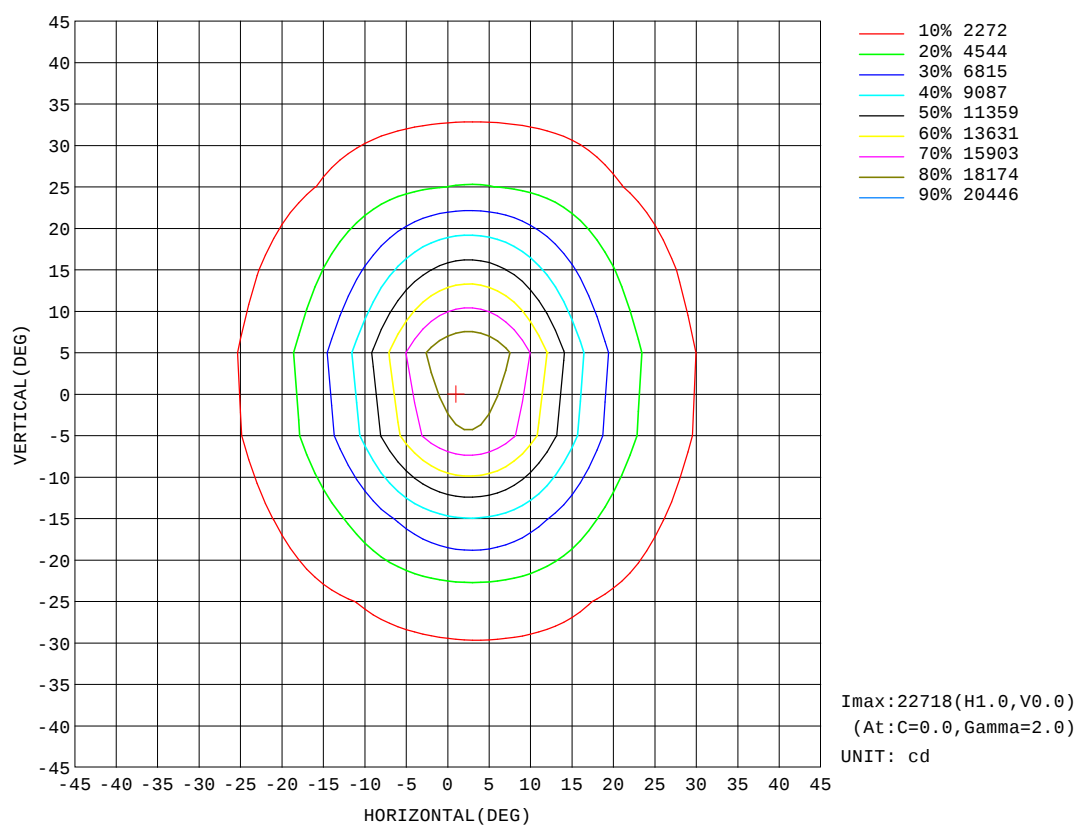


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-07-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:50%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.6V I:0.2394A P:51.83W PF:0.9815 Lamp Flux:7831.48x1 lm		
NAME: LWL-WZB-W55-L10-S 无玻璃	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023070055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

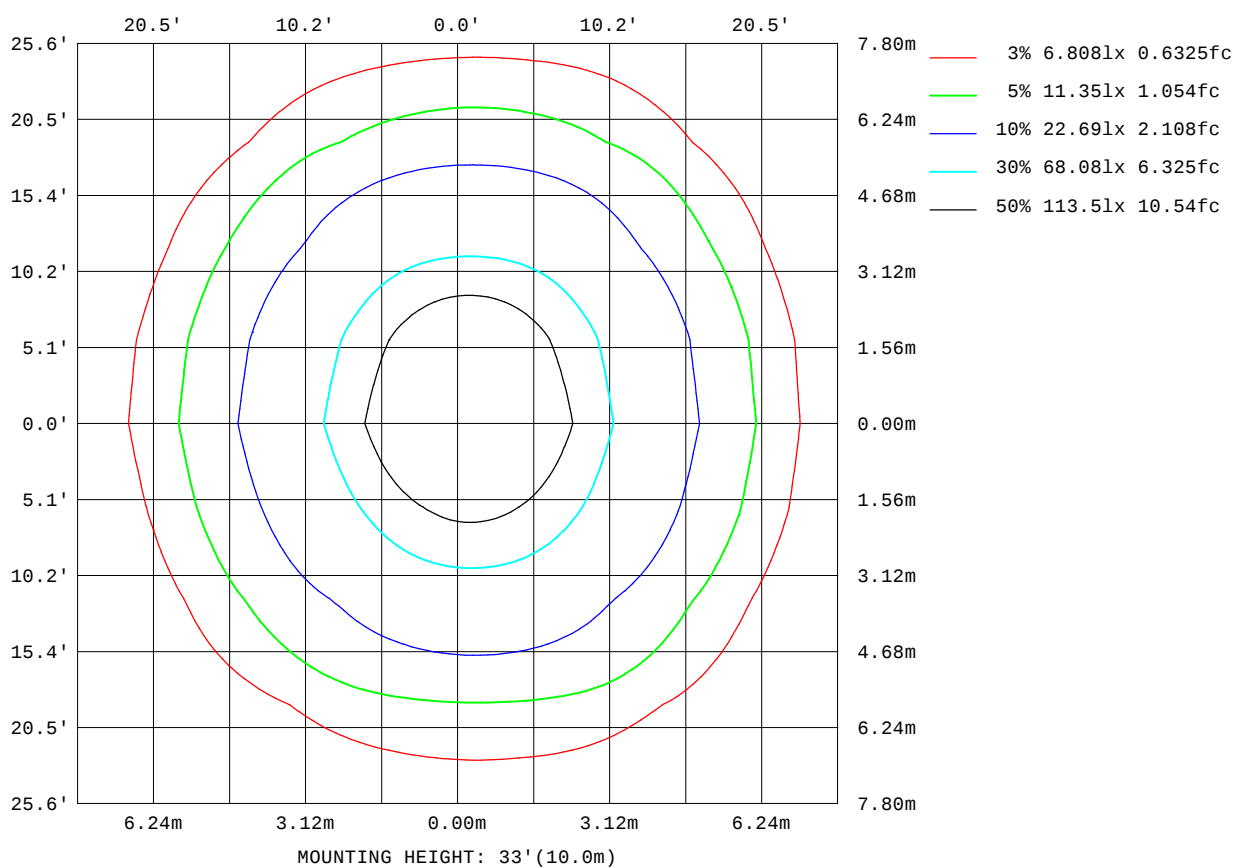


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-07-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:50%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.6V I:0.2394A P:51.83W PF:0.9815 Lamp Flux:7831.48x1 lm		
NAME: LWL-WZB-W55-L10-S 无玻璃	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023070055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Flux out:2520 lm

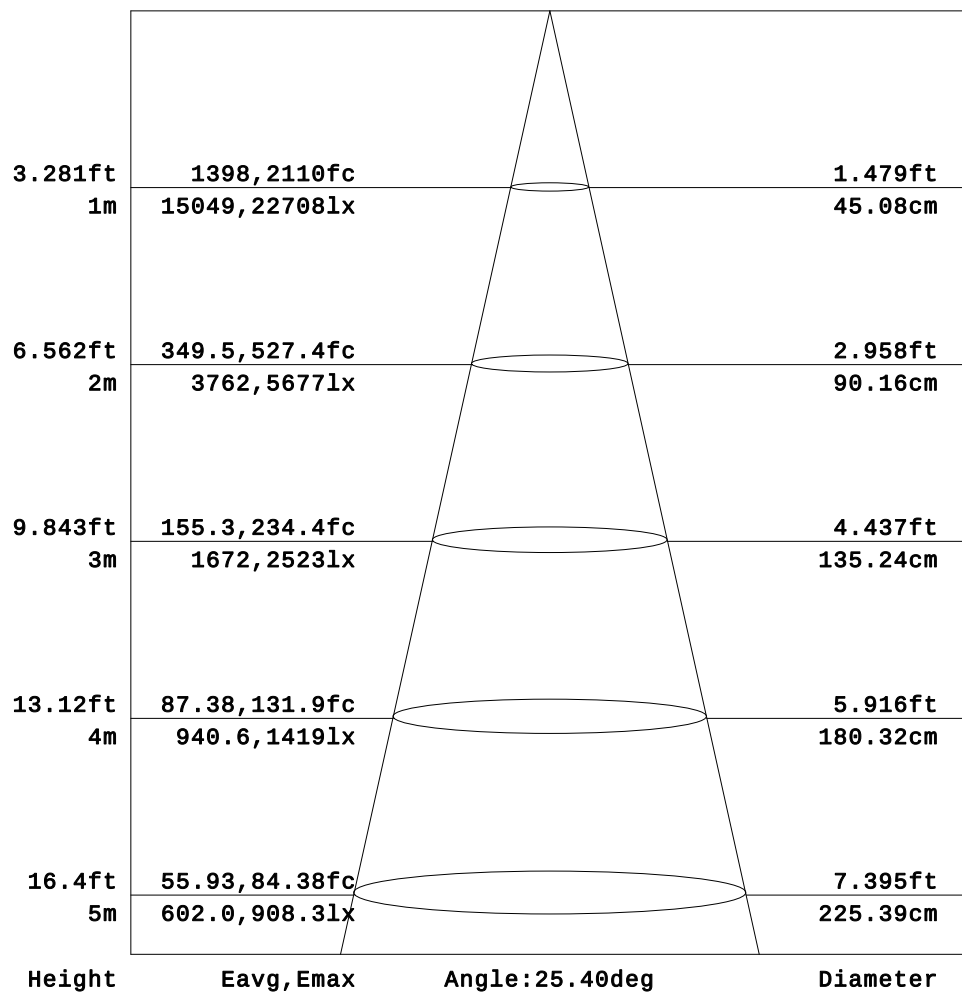


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-07-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:50%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

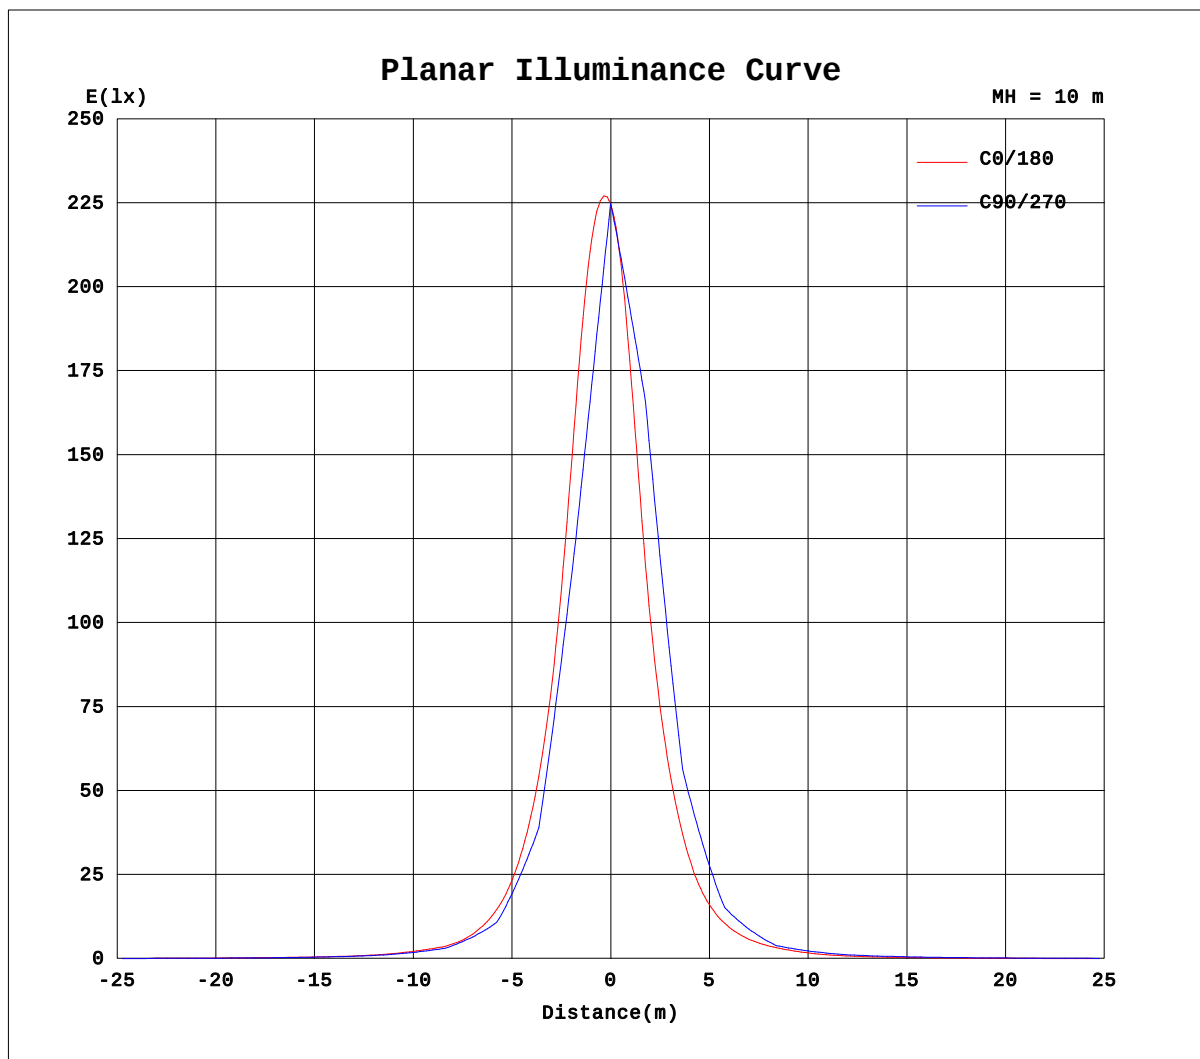

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-07-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:50%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.2394A P:51.83W PF:0.9815 Lamp Flux:7831.48x1 lm		
NAME: LWL-WZB-W55-L10-S 无玻璃	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023070055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.97	2.53	3.45	4.23	4.64	5.30	4.39
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.82	1.99	3.06	3.82	4.83	6.17	7.21	8.31	8.27	8.76	8.36
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	2.15	4.45	6.44	7.93	9.18	10.3	11.7	12.2	12.1	12.4	12.4
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.98	2.72	5.00	7.34	9.62	11.4	12.7	16.3	16.6	16.3	16.4	17.1	17.0
-60	0.00	0.00	0.00	0.00	0.00	0.03	2.66	6.12	8.82	11.2	13.6	15.5	17.0	23.3	21.5	20.1	21.2	21.9	21.8
-55	0.00	0.00	0.00	0.00	0.00	1.23	4.31	7.91	11.3	14.1	16.9	19.6	23.4	28.0	28.2	26.6	27.2	28.4	29.2
-50	0.00	0.00	0.00	0.00	0.07	3.19	7.53	11.1	14.9	18.0	21.2	25.1	31.1	33.9	34.1	32.9	33.7	35.1	37.1
-45	0.00	0.00	0.00	0.00	0.77	4.26	8.69	12.8	16.9	20.8	24.7	30.2	36.8	42.1	46.3	48.6	50.6	52.0	53.0
-40	0.00	0.00	0.00	0.00	2.39	7.13	11.6	16.1	20.5	25.1	30.2	38.0	44.8	52.2	59.6	65.2	68.2	69.1	69.5
-35	0.00	0.00	0.00	0.03	2.77	7.65	12.2	17.0	21.9	26.9	34.0	44.5	55.5	67.7	79.9	92.9	104	112	117
-30	0.00	0.00	0.00	0.42	5.02	10.0	14.7	19.8	25.3	31.1	42.1	55.1	71.0	88.2	105	126	144	158	167
-25	0.00	0.00	0.00	0.63	4.99	10.0	14.7	19.9	26.0	33.3	46.3	61.7	81.0	109	144	189	240	286	316
-20	0.00	0.00	0.00	2.16	7.05	11.7	16.7	22.5	29.3	39.4	56.5	75.1	101	143	199	272	357	430	472
-15	0.00	0.00	0.00	1.52	6.48	11.3	16.2	21.7	28.9	40.5	59.2	79.5	112	166	248	374	545	738	882
-10	0.00	0.00	0.00	2.87	8.11	12.9	17.7	23.7	32.3	48.5	68.9	94.1	141	216	340	539	811	1118	1319
-5	0.00	0.00	0.00	2.09	7.26	12.2	16.9	22.6	30.6	45.3	67.6	94.7	142	224	367	601	960	1433	1762
0	0.00	0.00	0.00	3.45	8.63	13.4	18.0	24.1	33.2	51.0	75.2	110	170	276	472	785	1289	1924	2258
5	0.00	0.00	0.00	2.20	7.35	12.2	16.9	22.7	30.6	45.7	69.1	98.5	148	235	392	650	1051	1594	1973
10	0.00	0.00	0.00	3.18	8.29	13.0	17.8	23.9	32.4	49.5	72.9	103	155	242	398	649	1018	1468	1747
15	0.00	0.00	0.00	1.83	6.86	11.7	16.4	22.0	29.5	42.5	63.1	86.5	124	187	292	458	698	987	1197
20	0.00	0.00	0.00	2.63	7.61	12.3	17.0	22.9	30.8	43.1	61.5	81.9	115	167	241	353	490	614	684
25	0.00	0.00	0.00	1.15	5.80	10.6	15.3	20.6	27.3	36.1	51.3	68.4	92.1	126	173	242	326	404	455
30	0.00	0.00	0.00	1.40	6.01	10.8	15.7	21.0	27.0	34.0	47.6	62.9	81.6	102	129	164	196	221	235
35	0.00	0.00	0.00	0.36	4.23	8.90	13.4	18.3	23.8	29.4	38.4	50.6	64.0	78.9	97.0	118	137	151	160
40	0.00	0.00	0.00	0.33	4.24	8.83	13.2	17.8	22.6	27.4	33.9	43.3	52.2	62.6	73.0	80.0	83.5	85.3	86.9
45	0.00	0.00	0.00	0.01	2.11	6.23	10.5	14.7	19.1	23.2	27.9	34.7	41.8	48.9	55.4	59.7	62.3	63.9	65.6
50	0.00	0.00	0.00	0.00	1.39	5.33	9.58	13.4	17.3	20.7	24.3	28.9	34.1	37.9	39.9	40.7	41.8	43.2	44.8
55	0.00	0.00	0.00	0.00	0.41	2.72	6.53	10.2	13.7	16.7	19.5	22.7	26.7	31.7	32.6	32.1	33.1	34.5	35.5
60	0.00	0.00	0.00	0.00	0.00	1.35	4.86	8.46	11.3	13.8	15.9	18.1	21.3	26.3	25.2	23.7	25.0	26.3	26.4
65	0.00	0.00	0.00	0.00	0.00	0.43	2.11	4.48	7.30	9.95	11.9	13.9	15.9	19.4	20.7	19.5	19.7	20.7	21.0
70	0.00	0.00	0.00	0.00	0.00	0.00	0.03	1.65	4.45	6.98	8.72	10.6	11.8	12.9	16.9	14.9	14.9	15.2	15.7
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.58	1.96	3.27	4.34	5.95	7.66	8.82	10.9	10.9	10.9	11.3	11.2
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	2.09	3.88	5.10	6.12	6.55	7.17	7.58	6.69
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:30.3DEG
 Operators:QC1
 Test Date:2023-07-20

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:50%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.2394A P:51.83W PF:0.9815 Lamp Flux:7831.48x1 lm		
NAME: LWV-WZB-W55-L10-S 无玻璃	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023070055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	5.38	7.55	5.64	5.04	4.63	3.93	3.07	2.11	0.96	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	8.91	10.1	10.6	10.4	9.03	8.18	6.87	5.77	4.57	3.34	2.46	1.24	0.22	0.00	0.00	0.00	0.00	0.00
-70	12.6	13.2	15.5	15.6	13.1	12.1	10.1	8.98	7.70	6.19	4.52	1.93	0.26	0.00	0.00	0.00	0.00	0.00
-65	17.4	17.9	19.5	19.2	18.0	16.9	15.1	15.1	12.2	9.57	7.76	5.08	2.33	0.83	0.01	0.00	0.00	0.00
-60	22.2	23.4	23.7	22.7	22.6	21.0	20.2	20.5	15.0	12.3	10.2	7.00	3.70	1.24	0.00	0.00	0.00	0.00
-55	29.9	30.6	31.1	28.7	27.6	26.7	25.7	25.0	21.2	17.1	13.3	10.2	6.38	2.99	0.67	0.00	0.00	0.00
-50	37.8	38.5	37.4	34.0	32.4	31.7	31.6	28.2	25.2	20.6	15.4	12.1	7.64	3.73	0.80	0.00	0.00	0.00
-45	53.8	54.9	54.4	50.1	46.3	42.9	39.5	34.3	28.9	24.4	19.0	14.7	10.5	5.88	2.07	0.00	0.00	0.00
-40	69.9	72.3	69.7	64.4	58.9	52.7	45.8	38.1	30.9	26.2	20.6	15.8	11.6	6.34	2.09	0.00	0.00	0.00
-35	119	117	111	98.0	83.4	68.8	57.1	46.0	36.5	29.3	24.0	18.1	13.7	9.09	3.95	0.16	0.00	0.00
-30	167	161	147	126	102	79.8	63.9	49.9	38.6	30.3	25.1	18.5	14.1	9.81	4.06	0.00	0.00	0.00
-25	321	299	255	197	146	106	77.7	59.7	45.7	34.2	27.5	21.5	15.7	11.3	5.94	0.91	0.00	0.00
-20	470	423	341	245	173	119	82.9	63.4	47.6	34.9	27.8	21.7	15.6	11.0	5.77	0.55	0.00	0.00
-15	891	761	570	387	250	162	105	73.4	55.1	39.8	30.2	24.5	16.9	12.3	7.23	1.90	0.00	0.00
-10	1278	1027	722	467	286	177	111	75.6	56.2	39.7	30.1	24.4	16.3	11.8	6.49	1.24	0.00	0.00
-5	1764	1437	965	601	362	217	131	83.0	61.8	43.7	31.9	26.1	17.4	12.7	7.70	2.32	0.00	0.00
0	2170	1659	1040	624	367	214	126	80.2	59.7	41.1	31.0	25.7	16.5	11.8	6.57	1.27	0.00	0.00
5	1970	1584	1043	642	384	226	135	84.2	62.5	43.9	32.0	26.2	17.4	12.7	7.67	2.31	0.00	0.00
10	1673	1291	857	538	323	193	117	77.3	57.3	39.9	30.3	24.8	16.2	11.7	6.45	1.22	0.00	0.00
15	1199	992	705	462	291	181	113	76.3	56.8	40.5	30.4	24.7	16.8	12.2	7.18	1.97	0.00	0.00
20	671	580	445	307	205	135	89.4	66.8	49.2	35.7	27.9	22.1	15.5	10.9	5.71	0.77	0.00	0.00
25	458	413	336	247	173	120	84.5	63.3	47.8	35.4	27.8	21.9	15.7	11.3	6.25	1.35	0.00	0.00
30	234	219	191	153	116	88.0	69.0	53.3	40.9	31.4	25.5	18.9	14.2	9.82	4.88	0.32	0.00	0.00
35	162	156	142	120	97.0	77.1	62.1	49.6	38.9	30.6	24.9	18.8	14.0	9.75	5.00	0.63	0.00	0.00
40	87.7	88.6	85.5	77.4	68.7	59.5	50.1	41.3	32.9	27.4	21.9	16.5	12.1	7.79	3.34	0.00	0.00	0.00
45	66.4	67.2	66.5	60.2	54.3	48.7	43.9	37.7	31.2	26.0	20.5	15.6	11.5	7.42	3.22	0.11	0.00	0.00
50	45.3	46.5	45.3	40.5	37.4	36.1	35.5	31.5	27.3	22.5	16.8	13.1	9.35	5.37	1.44	0.00	0.00	0.00
55	36.2	37.2	37.3	34.0	31.9	30.6	29.4	27.8	24.0	19.1	14.8	11.5	8.12	4.47	1.19	0.00	0.00	0.00
60	27.5	28.7	27.9	26.4	25.7	24.6	23.0	22.8	18.6	14.0	11.5	8.66	5.50	2.17	0.00	0.00	0.00	0.00
65	21.4	22.1	23.1	22.4	21.6	20.1	19.3	17.1	14.8	11.3	9.02	6.63	3.80	1.42	0.09	0.00	0.00	0.00
70	15.6	16.0	18.2	18.4	16.7	14.9	14.7	10.9	9.33	7.61	5.67	3.45	1.12	0.00	0.00	0.00	0.00	0.00
75	11.5	12.4	13.9	12.9	12.0	10.6	10.3	7.53	6.16	4.52	3.04	1.99	0.76	0.00	0.00	0.00	0.00	0.00
80	7.52	9.78	8.77	7.35	6.65	5.87	4.79	3.68	2.35	0.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:30.3DEG
 Operators:QC1
 Test Date:2023-07-20

V(β) Range:-80 - 80DEG
 V(β) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:50%
 Test Distance:8.300m [K=1.0000]
 Remarks: