

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5588.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	40.2V x 40.0H
	At 50% of Imax	19.0V x 18.0H
	At 90% of Imax	5.0V x 6.6H
Beam Flux	Total	999.3 lumens per klm.
	To 10% of Imax	690.3 lumens per klm.
	To 50% of Imax	287.8 lumens per klm.
	To 90% of Imax	27.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.2V I:0.2932A P:63.24W PF:0.9750 Lamp Flux:3243.96x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700014
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

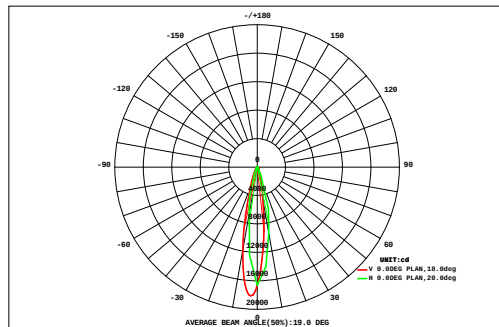

DATA OF LAMP		Eff:51.29lm/W	
MODELLWW-WZB-W55-L12-RDM	Imax(cd)	18130	
NOMINAL POWER(W)	64	AVAILABILITY(%)	70.7
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	2293
NOMINAL FLUX(lm)	3243.96	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3244
TEST VOLTAGE(V)	221.2	θ @50%(H,V)	18,19DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	27	0.99	1.21	1.47	1.75	2.04	2.32	2.54	2.69	2.72	2.63	2.43	2.17	1.88	1.58	1.32	1.08	0.89	0.74	32.5	0.00	
	24	1.19	1.54	1.96	2.45	3.00	3.57	4.10	4.52	4.70	4.64	4.31	3.82	3.25	2.68	2.17	1.72	1.34	1.04	52.0	3.38	
	21	1.61	2.09	2.67	3.34	4.06	4.76	5.38	5.78	5.85	5.58	5.04	4.34	3.61	2.92	2.30	1.79	1.37	1.04	63.5	27.3	
	18	2.05	2.69	3.43	4.28	5.16	6.00	6.71	7.06	6.99	6.49	5.72	4.81	3.91	3.10	2.40	1.82	1.36	1.02	75.0	45.9	
	15	1.92	2.63	3.64	4.98	6.99	10.1	14.2	18.1	20.1	19.4	16.2	12.1	8.47	5.92	4.30	3.15	2.31	1.68	156	135	
	12	2.33	3.25	4.58	6.46	9.47	14.1	19.8	24.7	26.7	24.7	19.9	14.3	9.73	6.73	4.81	3.48	2.53	1.82	199	181	
	9	3.33	4.68	6.61	9.46	14.3	21.4	28.6	33.3	33.0	27.6	20.2	13.5	8.73	6.10	4.31	3.07	2.20	1.55	242	227	
		2.88	4.05	5.78	8.43	13.1	20.5	29.2	36.7	39.8	36.4	28.6	20.0	12.8	8.24	5.56	3.89	2.75	1.94	281	265	
		2.30	3.24	4.70	7.04	11.4	18.9	28.9	39.5	46.6	45.7	37.6	27.2	17.4	10.6	6.94	4.79	3.36	2.38	319	303	
		3.64	5.26	7.77	13.0	21.9	33.4	45.0	52.7	51.5	42.0	30.1	19.1	11.3	7.11	4.85	3.35	2.37	1.65	356	343	
		3.47	5.01	7.38	12.3	20.5	31.2	42.0	49.4	48.6	39.9	28.8	18.5	11.1	7.03	4.81	3.34	2.37	1.65	337	323	
	-9	1.89	2.58	3.54	4.46	6.14	9.80	15.3	21.7	27.2	28.3	24.3	18.5	12.6	8.23	5.60	3.98	2.84	2.03	199	179	
		2.18	2.94	4.04	5.07	6.59	9.20	12.5	15.7	17.6	17.1	14.3	10.9	7.94	5.66	4.07	2.98	2.15	1.54	143	121	
	-12	2.58	3.46	4.77	6.11	7.76	9.53	10.7	10.2	7.89	5.20	3.41	2.43	2.66	2.74	2.34	1.83	1.36	0.97	86.0	60.7	
	-15	1.31	1.76	2.35	3.06	3.91	5.05	6.63	8.36	9.59	9.74	8.71	7.06	5.35	4.05	3.11	2.35	1.76	1.31	85.5	58.2	
	-18	1.00	1.32	1.66	2.04	2.34	2.63	3.22	4.18	5.26	5.94	5.83	5.11	4.05	3.17	2.50	1.92	1.46	1.12	54.7	20.1	
	-21	1.17	1.54	1.85	2.15	2.33	2.23	1.79	1.24	0.97	0.90	0.96	1.18	1.28	1.26	1.07	0.86	0.69	0.57	24.1	0.00	
	-24	0.86	1.09	1.31	1.51	1.68	1.69	1.56	1.67	1.74	1.74	1.66	1.51	1.38	1.27	1.10	0.92	0.75	0.62	24.1	0.00	
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27		
Φ t	36.7	50.3	69.5	97.9	143	206	278	337	357	324	258	187	127	88.4	63.6	46.3	33.9	24.7	2729	---		
Φ a	0.52	13.3	35.3	72.9	122	189	264	325	346	313	244	167	106	63.3	29.0	3.42	0.00	0.00	---	2293		

one-half-peak spread: U:7.6,D:11.6 , L:9.1,R:9.1


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.2V I:0.2932A P:63.24W PF:0.9750 Lamp Flux:3243.96x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700014
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

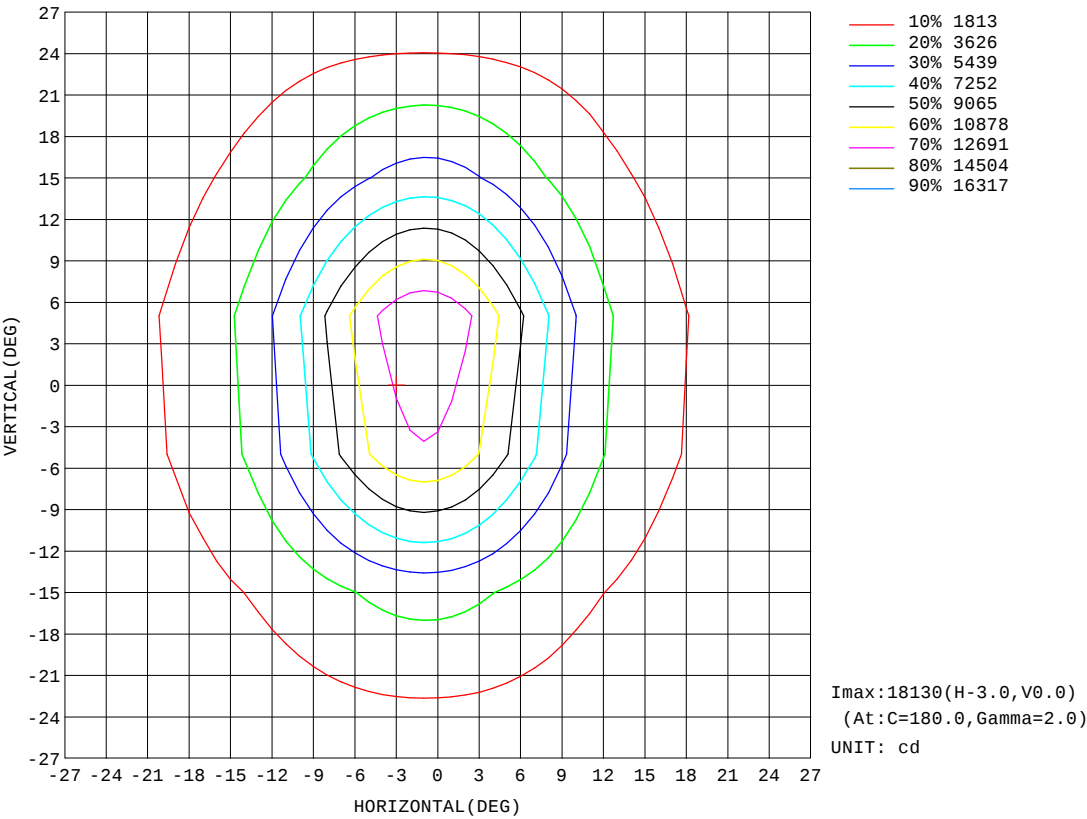


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.2V I:0.2932A P:63.24W PF:0.9750 Lamp Flux:3243.96x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700014
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

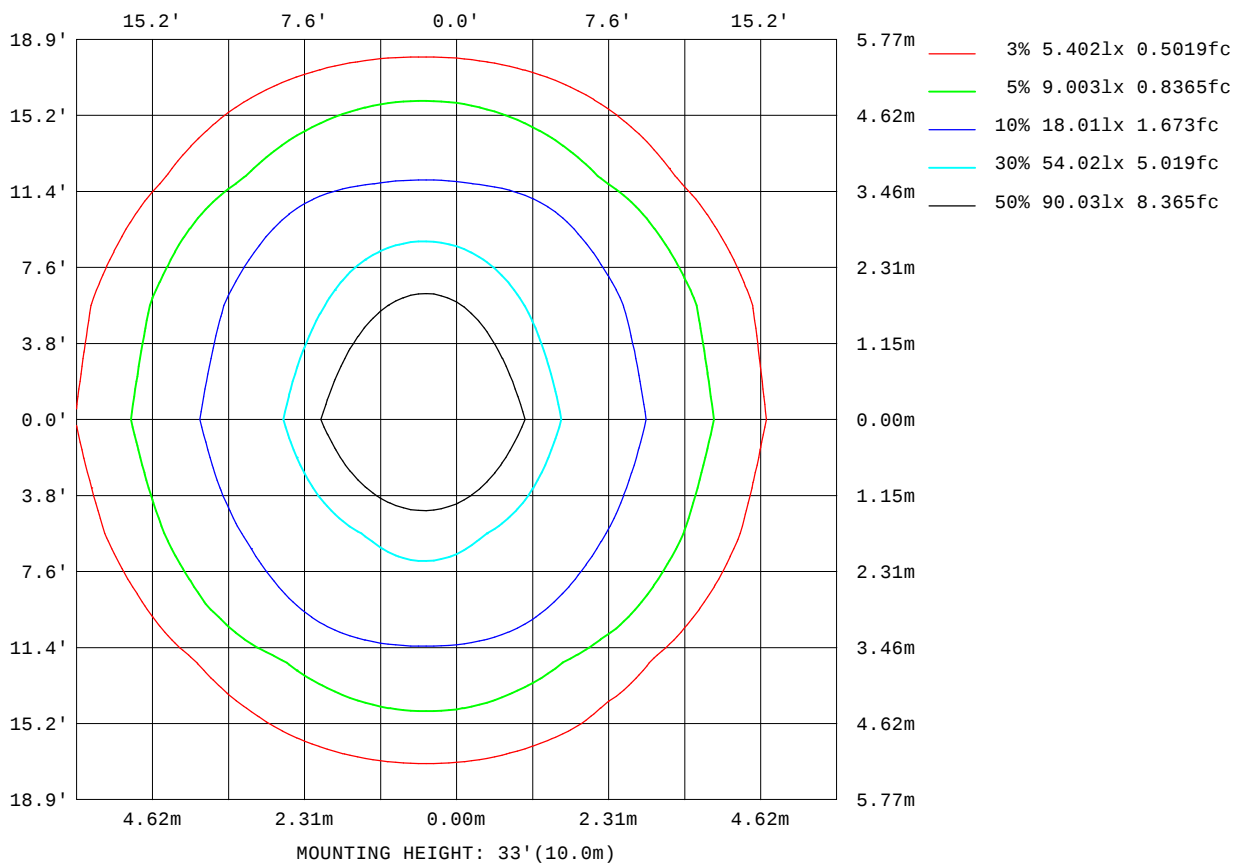


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.2V I:0.2932A P:63.24W PF:0.9750 Lamp Flux:3243.96x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700014
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

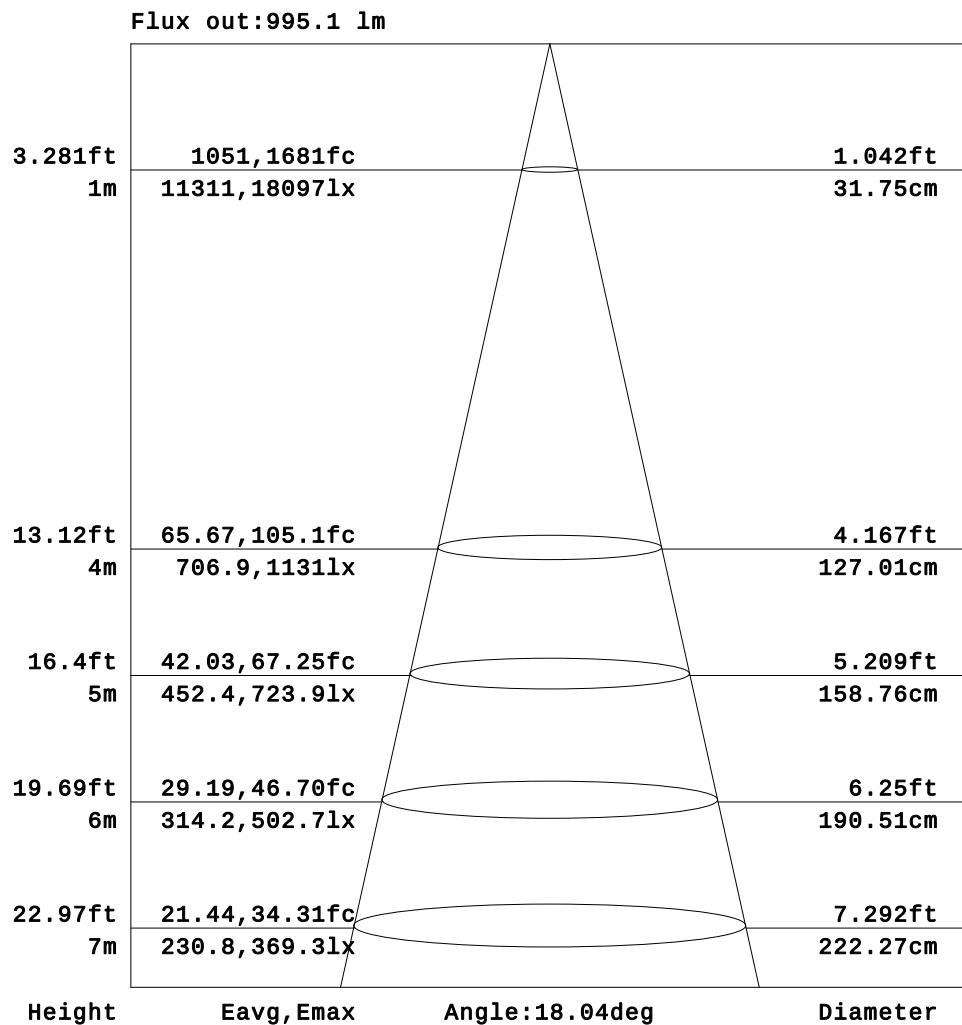


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

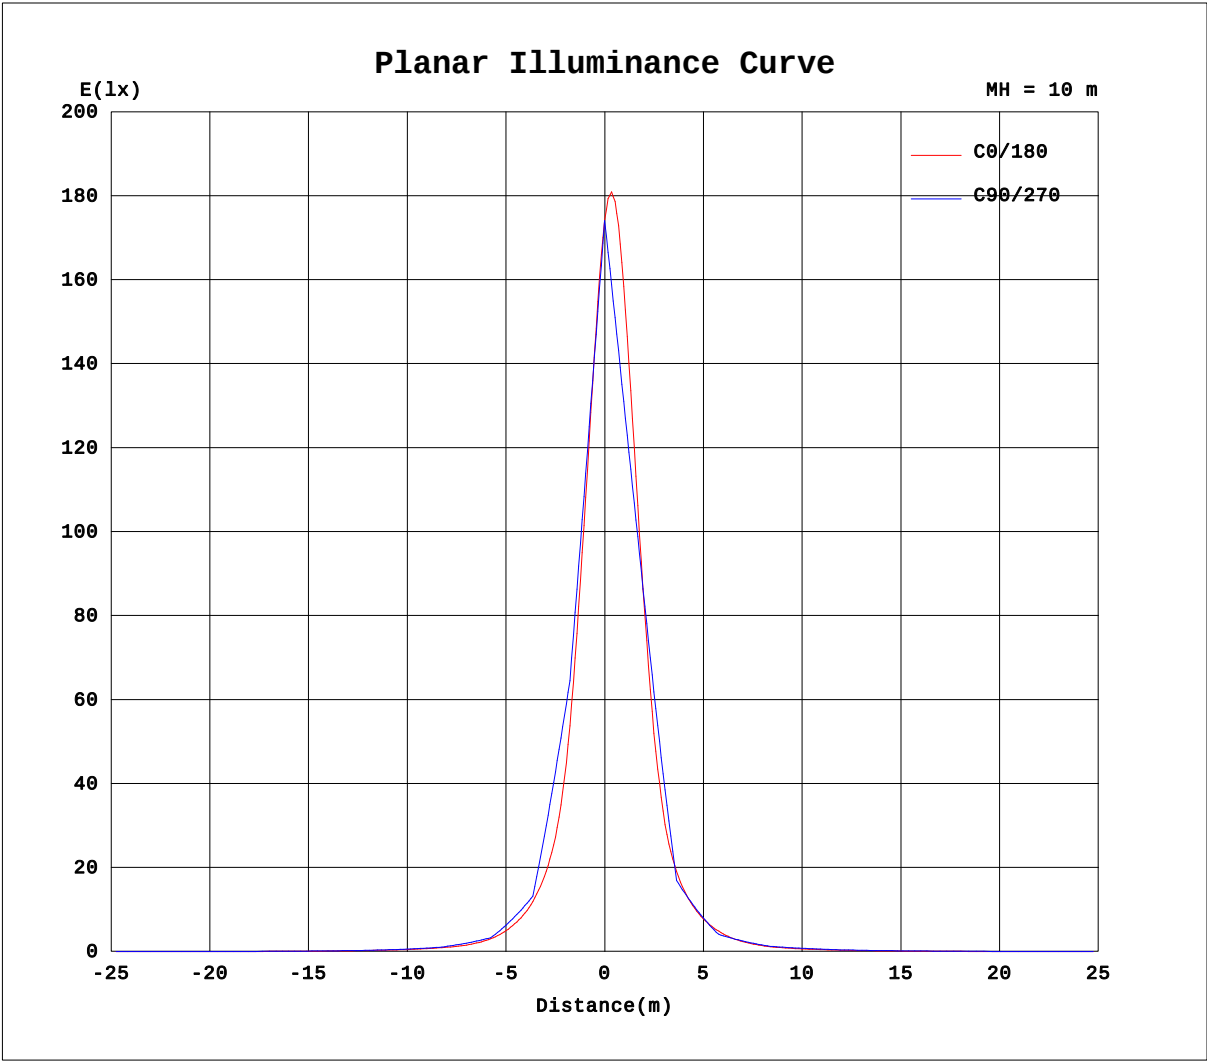

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.2V I:0.2932A P:63.24W PF:0.9750 Lamp Flux:3243.96x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700014
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: ×10cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.22	0.40	0.58	0.73	0.86	0.91	0.80	1.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	0.55	0.93	1.29	1.59	1.78	1.85	1.96	2.15
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.61	1.11	1.50	1.99	2.50	2.94	3.36	3.69	3.81	3.82	4.13
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.64	1.67	2.53	3.10	3.80	4.43	4.98	5.43	5.72	5.87	6.19	6.31
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.41	1.09	2.24	3.41	4.27	5.32	6.27	7.01	7.75	8.37	8.67	9.22	9.36
-50	0.00	0.00	0.00	0.00	0.00	0.22	1.16	2.38	3.88	5.06	6.26	7.62	8.75	9.67	10.6	11.0	12.1	12.3	12.5
-45	0.00	0.00	0.00	0.00	0.00	0.37	1.58	2.97	4.48	5.81	7.28	9.04	10.8	12.4	13.9	15.7	16.6	17.4	17.8
-40	0.00	0.00	0.00	0.00	0.00	1.31	2.96	4.79	6.32	7.70	9.62	12.0	14.3	16.1	18.7	20.9	22.4	22.6	23.1
-35	0.00	0.00	0.00	0.00	0.20	1.55	3.14	4.90	6.49	8.48	11.1	13.9	16.8	20.0	23.5	28.1	33.1	36.3	37.3
-30	0.00	0.00	0.00	0.00	1.04	2.90	4.68	6.02	8.11	11.2	14.6	18.3	21.7	26.5	31.8	39.5	46.9	51.2	50.9
-25	0.00	0.00	0.00	0.21	1.18	2.96	4.69	6.71	8.68	11.6	15.4	19.7	25.5	35.7	50.4	68.0	87.5	102	106
-20	0.00	0.00	0.00	1.06	2.56	4.17	6.35	8.54	11.2	14.9	19.5	25.5	36.9	55.0	82.3	112	141	159	158
-15	0.00	0.00	0.00	0.35	2.10	3.85	5.86	8.24	11.1	15.0	20.0	27.7	41.6	67.1	107	166	262	383	426
-10	0.00	0.00	0.00	0.98	2.97	4.97	7.23	10.0	13.7	18.9	25.7	39.1	64.5	106	177	285	482	671	652
-5	0.00	0.00	0.00	0.43	2.38	4.32	6.52	9.08	12.5	17.3	23.6	35.9	60.0	102	173	324	653	1083	1243
0	0.00	0.00	0.00	1.44	3.30	5.37	7.71	10.7	14.9	20.4	29.1	48.3	84.2	145	261	570	1175	1742	1660
5	0.00	0.00	0.00	0.51	2.43	4.39	6.61	9.22	12.7	17.7	24.3	37.4	63.2	107	185	348	722	1218	1405
10	0.00	0.00	0.00	1.28	3.10	5.13	7.45	10.3	14.3	19.7	27.4	43.4	72.7	121	204	359	674	980	953
15	0.00	0.00	0.00	0.33	2.15	4.07	6.25	8.75	11.9	16.4	22.0	31.2	49.0	78.6	126	203	347	540	611
20	0.00	0.00	0.00	0.96	2.71	4.69	6.93	9.50	12.8	17.2	22.5	30.7	45.9	69.1	101	140	179	205	202
25	0.00	0.00	0.00	0.11	1.69	3.54	5.58	7.80	10.4	13.7	17.8	23.2	31.5	44.2	62.5	85.6	110	130	135
30	0.00	0.00	0.00	0.44	2.12	3.96	5.96	8.03	10.4	13.3	17.1	21.2	26.1	32.7	41.3	50.8	59.2	63.7	62.9
35	0.00	0.00	0.00	0.00	1.15	2.85	4.59	6.43	8.44	10.7	13.4	16.6	20.1	24.3	29.6	35.5	41.3	45.4	46.3
40	0.00	0.00	0.00	0.00	1.56	3.10	4.68	6.38	8.20	10.1	12.3	14.8	17.4	20.0	22.6	25.0	27.3	28.6	28.4
45	0.00	0.00	0.00	0.00	0.46	2.00	3.31	4.80	6.41	8.06	9.71	11.6	13.6	15.6	17.6	19.5	21.3	22.6	22.9
50	0.00	0.00	0.00	0.00	0.67	1.95	3.09	4.48	5.94	7.27	8.58	10.0	11.4	12.8	14.1	15.4	16.4	17.0	16.9
55	0.00	0.00	0.00	0.00	0.01	0.75	1.79	3.07	4.36	5.42	6.49	7.74	8.85	9.85	10.9	11.9	12.6	13.2	13.4
60	0.00	0.00	0.00	0.00	0.00	0.43	1.41	2.75	3.65	4.38	5.38	6.42	7.11	7.79	8.57	9.06	9.37	9.66	9.66
65	0.00	0.00	0.00	0.00	0.00	0.01	0.48	1.12	2.14	2.69	3.41	4.31	4.88	5.31	5.97	6.47	6.64	6.90	7.06
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.42	1.12	1.49	2.18	2.76	2.95	3.32	3.87	4.03	4.10	4.34	4.36
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.46	0.66	0.94	1.29	1.44	1.56	1.83	2.01	2.02	2.12	2.20
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.2V I:0.2932A P:63.24W PF:0.9750 Lamp Flux:3243.96x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700014
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: ×10cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	1.07	1.00	0.86	0.62	0.43	0.23	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	2.10	1.89	1.55	1.04	0.71	0.34	0.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	4.22	3.99	3.63	3.11	2.61	2.08	1.74	1.36	1.12	0.98	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	6.22	5.83	5.43	4.72	4.19	3.53	2.94	2.68	1.87	1.19	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	9.30	8.88	8.25	7.37	6.50	5.83	5.09	4.29	3.85	3.10	2.08	0.56	0.00	0.00	0.00	0.00	0.00	0.00	
-50	12.1	11.5	10.5	9.27	8.26	7.66	6.69	5.58	5.91	4.43	3.08	0.66	0.00	0.00	0.00	0.00	0.00	0.00	
-45	17.5	16.6	15.4	13.7	12.0	10.5	8.91	7.96	6.45	4.81	3.97	1.88	0.54	0.00	0.00	0.00	0.00	0.00	
-40	22.3	20.7	19.2	16.7	14.5	12.2	10.7	9.39	6.43	4.75	3.57	2.10	0.40	0.00	0.00	0.00	0.00	0.00	
-35	35.9	32.1	27.6	23.2	19.0	16.1	13.1	11.1	8.52	6.44	4.95	3.30	1.73	0.29	0.00	0.00	0.00	0.00	
-30	46.6	40.0	32.0	25.8	21.2	17.5	14.2	11.0	8.82	6.91	4.98	3.29	1.71	0.00	0.00	0.00	0.00	0.00	
-25	97.7	80.7	61.3	44.6	31.5	23.4	18.3	14.2	11.0	8.41	6.32	4.40	2.69	0.96	0.00	0.00	0.00	0.00	
-20	136	106	76.2	51.4	34.5	24.6	19.2	14.6	10.9	8.26	6.26	4.04	2.32	0.59	0.00	0.00	0.00	0.00	
-15	341	219	140	89.5	56.1	35.3	24.1	18.1	13.6	10.1	7.45	5.24	3.31	1.61	0.02	0.00	0.00	0.00	
-10	445	259	159	97.4	58.2	35.2	23.5	17.7	13.1	9.61	7.01	4.82	2.89	1.24	0.00	0.00	0.00	0.00	
-5	915	493	246	140	82.4	48.0	29.3	20.8	15.5	11.3	8.26	5.90	3.82	2.08	0.13	0.00	0.00	0.00	
0	1032	476	231	129	74.4	42.8	26.7	19.5	14.2	10.3	7.52	5.27	3.28	1.56	0.00	0.00	0.00	0.00	
5	1031	546	264	149	86.8	50.5	30.7	21.5	16.0	11.6	8.51	6.13	4.01	2.25	0.20	0.00	0.00	0.00	
10	622	326	185	110	65.4	39.3	25.5	18.8	13.9	10.2	7.49	5.21	3.25	1.51	0.00	0.00	0.00	0.00	
15	476	286	167	104	64.3	40.2	26.7	19.7	14.7	10.9	8.13	5.80	3.74	1.99	0.09	0.00	0.00	0.00	
20	170	129	91.1	61.5	40.8	28.2	21.3	16.4	12.2	9.26	6.86	4.67	2.76	1.04	0.00	0.00	0.00	0.00	
25	122	98.6	73.7	52.8	37.3	27.2	20.8	16.3	12.5	9.61	7.31	5.20	3.24	1.48	0.00	0.00	0.00	0.00	
30	56.6	47.6	38.5	30.3	24.6	20.3	16.5	13.0	10.3	8.01	6.07	4.08	2.28	0.49	0.00	0.00	0.00	0.00	
35	43.5	38.2	32.4	26.9	22.2	18.5	15.3	12.4	9.96	7.84	6.00	4.30	2.68	0.86	0.00	0.00	0.00	0.00	
40	26.5	24.1	21.8	19.3	16.7	14.1	11.8	9.74	7.91	6.13	4.56	3.21	1.67	0.00	0.00	0.00	0.00	0.00	
45	21.9	20.2	18.5	16.7	14.7	12.7	10.8	9.04	7.51	5.86	4.26	2.97	1.73	0.26	0.00	0.00	0.00	0.00	
50	16.0	15.0	13.8	12.5	11.1	9.74	8.33	7.10	5.81	4.27	2.84	1.82	0.43	0.00	0.00	0.00	0.00	0.00	
55	12.9	12.2	11.5	10.5	9.46	8.43	7.22	5.97	4.95	3.85	2.48	1.28	0.56	0.00	0.00	0.00	0.00	0.00	
60	9.28	8.92	8.43	7.66	6.97	6.19	5.07	4.00	3.28	2.39	1.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	6.81	6.47	6.25	5.70	4.99	4.51	3.85	2.83	2.04	1.40	0.80	0.17	0.00	0.00	0.00	0.00	0.00	0.00	
70	4.02	3.87	3.74	3.13	2.60	2.41	1.85	0.94	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	2.08	1.94	1.92	1.71	1.38	1.24	1.08	0.64	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: