

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		8079.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	31.9V x 37.4H
	At 50% of Imax	19.8V x 16.9H
	At 90% of Imax	3.5V x 2.8H
Beam Flux	Total	951.7 lumens per klm.
	To 10% of Imax	726.7 lumens per klm.
	To 50% of Imax	232.7 lumens per klm.
	To 90% of Imax	3.8 lumens per klm.
Upward LOR		0.0 %
Downward LOR		95.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.3V I:0.1131A P:22.07W PF:0.8821 Lamp Flux:284.598x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

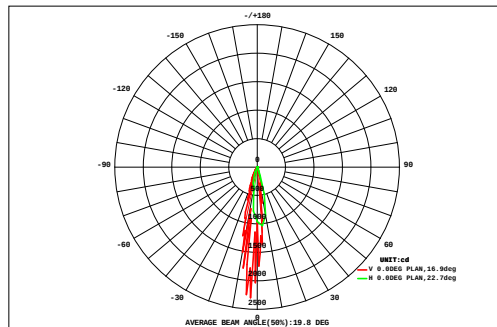

DATA OF LAMP		Eff:12.89lm/W	
MODEL:W-WZB-W55-L12-RDM-W		Imax(cd)	2299
NOMINAL POWER(W)	22	AVAILABILITY(%)	81.2
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	231.1
NOMINAL FLUX(lm)	284.598	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	284.6
TEST VOLTAGE(V)	221.3	θ @50%(H,V)	17,20DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	27	0.06	0.11	0.17	0.16	0.20	0.21	0.23	0.24	0.15	0.25	0.15	0.08	0.16	0.05	0.04	0.05	0.02	0.01	2.33	0.00	
	24	0.14	0.15	0.22	0.26	0.37	0.28	0.44	0.53	0.24	0.49	0.38	0.17	0.26	0.15	0.07	0.08	0.05	0.02	4.28	0.68	
	21	0.24	0.30	0.21	0.48	0.48	0.32	0.69	0.61	0.38	0.57	0.43	0.27	0.27	0.17	0.12	0.06	0.05	0.03	5.66	2.95	
	18	0.33	0.46	0.24	0.71	0.59	0.38	0.97	0.76	0.55	0.64	0.50	0.37	0.29	0.19	0.16	0.05	0.06	0.04	7.29	5.15	
	15	0.21	0.29	0.59	0.62	0.93	0.83	2.33	1.24	2.37	2.75	0.91	0.91	0.47	0.31	0.26	0.18	0.07	0.05	15.3	13.0	
	12	0.31	0.37	0.78	0.78	1.22	1.39	3.12	2.22	3.10	3.29	1.12	1.03	0.48	0.42	0.28	0.20	0.09	0.05	20.3	18.6	
	9	0.66	0.55	0.96	1.17	1.76	2.54	4.08	4.02	3.45	2.97	1.03	0.82	0.28	0.56	0.23	0.12	0.14	0.02	25.4	24.3	
		0.49	0.44	0.88	1.12	1.61	2.28	4.06	3.34	4.19	4.09	2.28	1.61	0.77	0.69	0.34	0.20	0.14	0.05	28.6	27.0	
		0.29	0.38	0.76	1.03	1.47	1.90	4.01	2.50	4.95	5.33	3.66	2.48	1.30	0.83	0.46	0.29	0.14	0.07	31.9	30.3	
		0.55	0.60	0.90	1.48	3.02	3.01	3.86	7.35	3.32	4.27	3.66	1.05	1.13	0.58	0.16	0.19	0.10	0.04	35.3	34.2	
		0.57	0.57	0.90	1.46	2.76	2.91	3.57	6.94	3.06	3.90	3.57	1.06	1.12	0.59	0.18	0.18	0.12	0.05	33.5	32.2	
		0.35	0.27	0.52	0.80	0.59	1.19	2.47	1.48	3.02	2.84	2.21	1.71	0.84	0.74	0.35	0.17	0.16	0.06	19.8	17.7	
		0.34	0.35	0.57	0.66	0.72	0.89	1.92	1.59	1.77	1.56	1.12	0.90	0.43	0.46	0.23	0.09	0.11	0.05	13.8	11.2	
		0.34	0.46	0.61	0.67	0.87	0.85	1.51	1.66	0.72	0.51	0.26	0.21	0.15	0.15	0.13	0.04	0.04	0.05	9.25	7.69	
		0.15	0.25	0.21	0.43	0.36	0.39	0.83	0.67	0.91	0.99	0.64	0.55	0.33	0.22	0.19	0.08	0.06	0.05	7.30	3.95	
	0.09	0.18	0.16	0.29	0.16	0.34	0.46	0.35	0.57	0.64	0.39	0.41	0.25	0.13	0.15	0.06	0.04	0.04	4.71	1.89		
	0.08	0.11	0.17	0.13	0.16	0.33	0.13	0.06	0.32	0.04	0.05	0.12	0.04	0.05	0.03	0.01	0.01	0.01	1.85	0.00		
	0.05	0.07	0.10	0.11	0.13	0.22	0.15	0.12	0.23	0.11	0.09	0.12	0.06	0.05	0.04	0.02	0.01	0.01	1.69	0.07		
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27		
Φ t	5.27	5.91	8.96	12.3	17.4	20.3	34.8	35.7	33.3	35.3	22.4	13.8	8.62	6.33	3.43	2.06	1.44	0.73	268	---		
Φ a	1.82	3.46	6.95	10.4	15.2	18.0	33.3	34.6	31.7	33.7	20.8	11.8	5.85	3.11	0.22	0.00	0.00	0.00	---	231		

one-half-peak spread: U:7.9,D:12.1 , L:4.4,R:7.5


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.3V I:0.1131A P:22.07W PF:0.8821 Lamp Flux:284.598x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

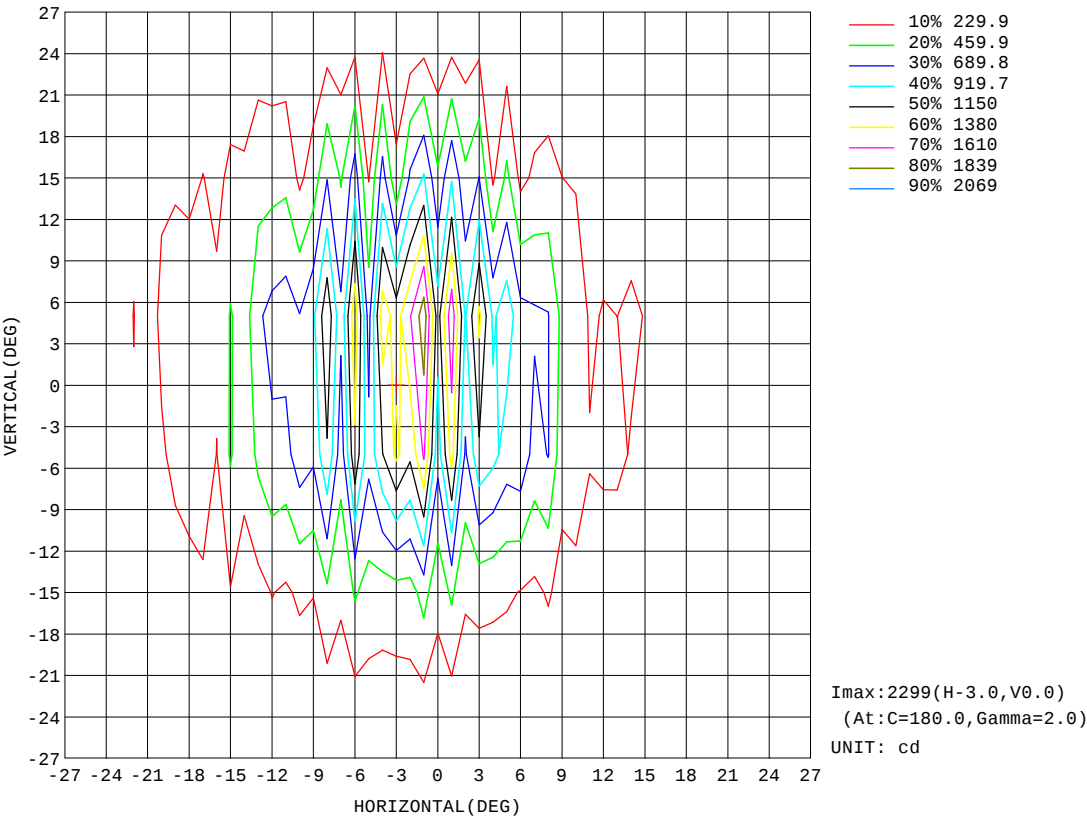


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.3V I:0.1131A P:22.07W PF:0.8821 Lamp Flux:284.598x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

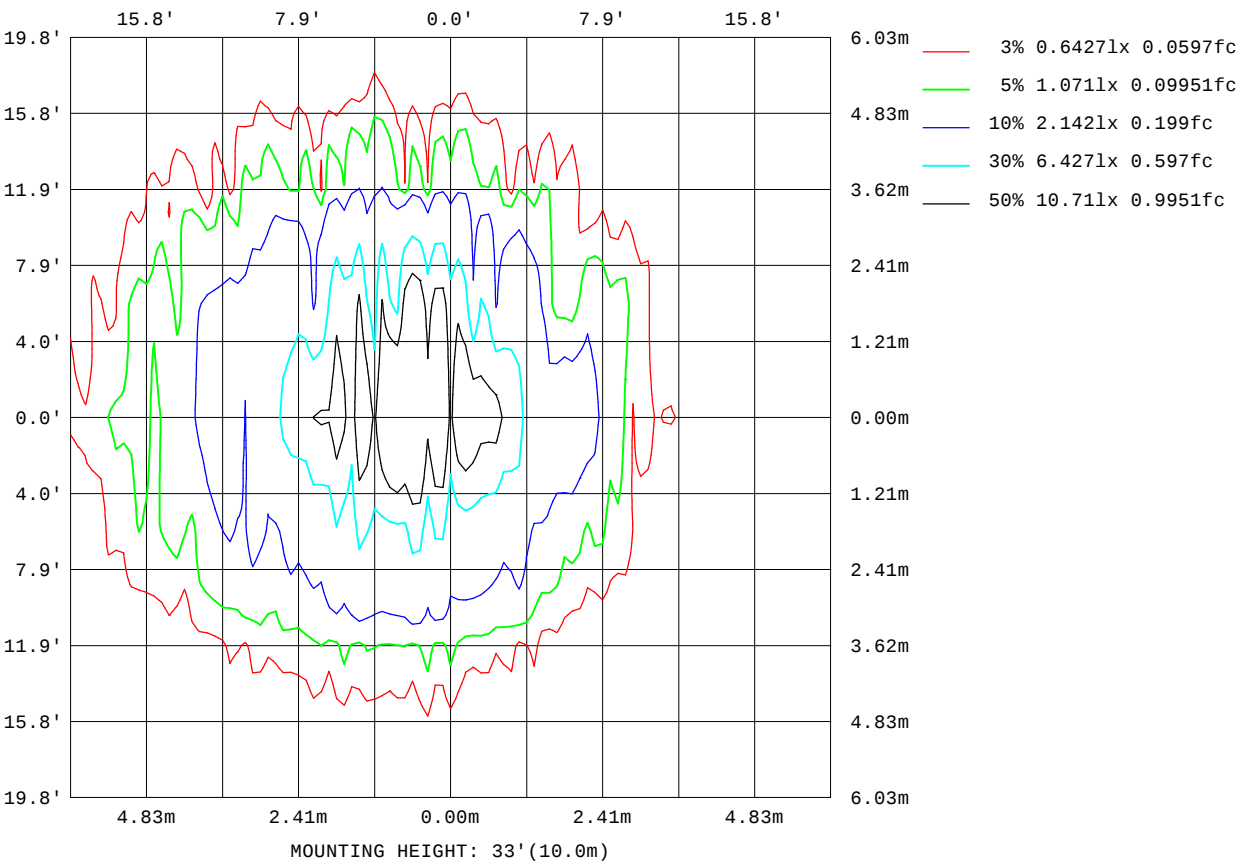


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.3V I:0.1131A P:22.07W PF:0.8821 Lamp Flux:284.598x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

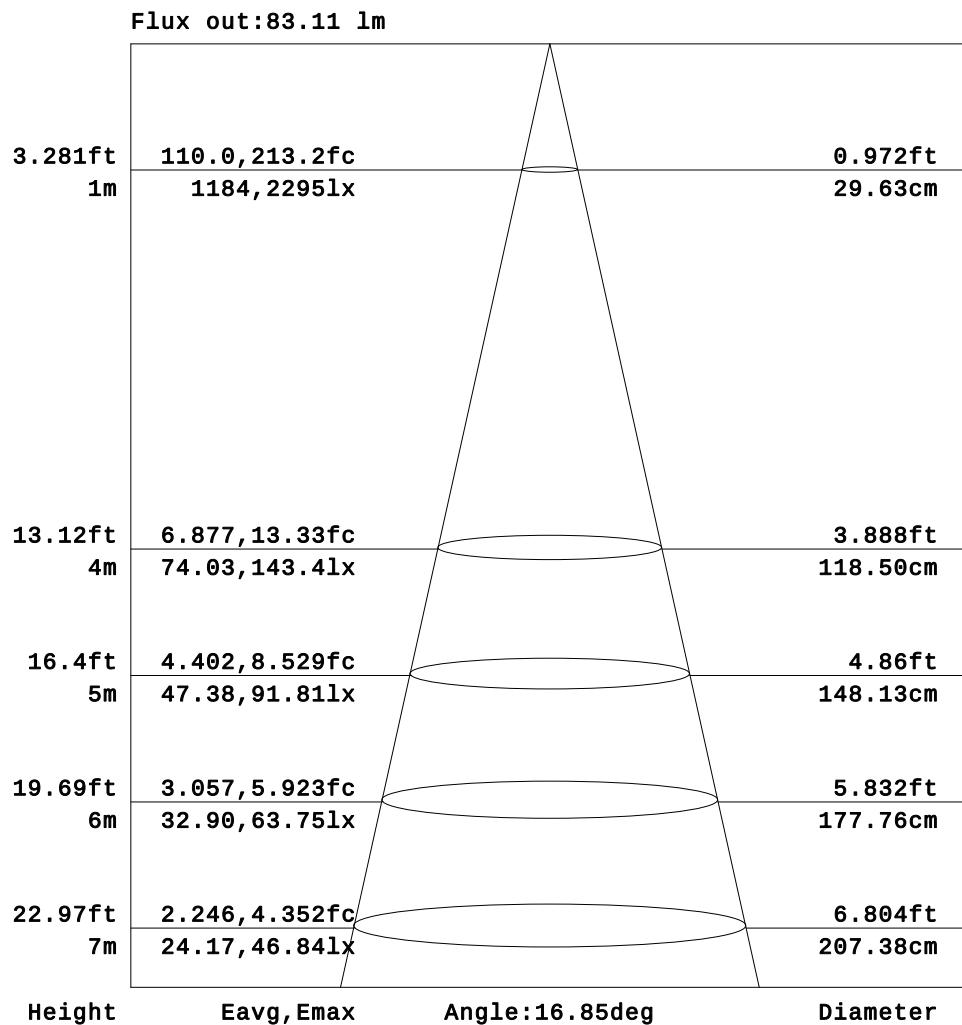


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

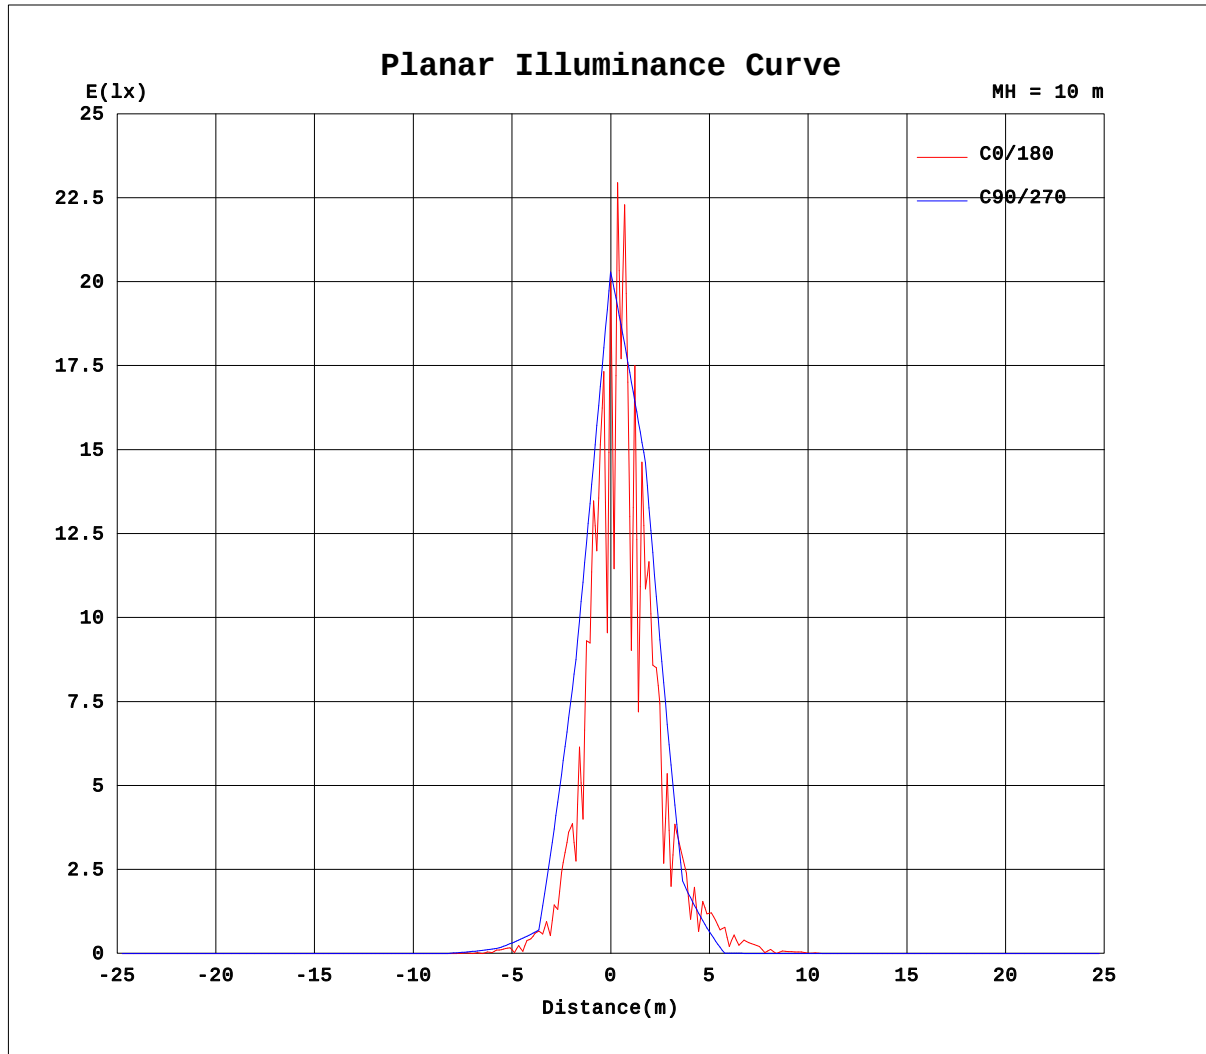

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.3V I:0.1131A P:22.07W PF:0.8821 Lamp Flux:284.598x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.90	0.20	0.02	0.03	1.04	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.97	0.01	0.07	0.01	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	2.14	2.11	9.48	9.45	8.87	7.60	15.0	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.86	1.95	5.72	8.80	15.9	22.1	18.7	16.9	13.3	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.60	6.03	19.7	26.9	36.7	47.9	64.1	77.3	97.2	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.06	16.2	31.0	68.2	70.7	89.1	93.3	119	153	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	10.7	20.8	49.6	76.8	85.8	219	263	371	285	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.11	14.9	52.3	87.8	131	256	223	734	618	362	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.39	17.9	40.9	49.1	134	205	483	825	760	775	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	13.3	27.6	70.9	107	87.3	397	815	1519	2246	955	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.39	20.5	26.6	51.8	156	278	478	698	590	1036	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	9.34	28.7	57.6	29.8	173	317	493	1138	318	856	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.27	15.9	11.2	53.0	81.4	196	272	184	220	496	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	19.9	29.5	48.5	59.5	33.0	219	223	210	160	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.24	5.21	12.7	24.7	19.8	88.3	97.1	120	109	57.8	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.53	0.04	0.12	12.4	25.5	53.8	43.3	5.62	35.3	42.8	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	2.59	7.48	14.3	24.2	0.94	23.2	30.7	28.5	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.80	4.44	4.54	5.07	0.07	17.9	11.1	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	0.99	1.47	1.47	0.03	5.87	9.55	4.62	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.3V I:0.1131A P:22.07W PF:0.8821 Lamp Flux:284.598x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	2.40	1.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	1.54	2.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	13.6	9.51	2.66	0.87	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	19.3	14.0	7.08	0.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	61.6	32.7	18.1	10.0	7.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	102	50.4	23.4	13.8	8.24	3.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	257	130	93.6	37.0	19.6	0.09	0.02	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	262	143	118	43.5	18.4	7.17	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	811	425	210	62.6	17.1	9.18	3.03	0.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	941	409	163	74.6	5.23	5.92	4.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	1060	440	221	44.8	22.3	16.9	6.22	1.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	512	84.3	160	11.5	5.62	11.5	3.36	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	513	202	121	25.6	20.8	7.83	5.64	0.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	34.4	118	62.3	26.6	12.1	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	85.2	81.0	33.3	19.8	5.74	2.61	2.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	38.7	31.8	0.15	6.52	3.50	0.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	30.6	0.13	1.07	6.45	2.72	2.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	6.08	2.13	0.03	0.12	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	2.84	0.02	0.01	2.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: