

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5407.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	41.6V x 40.5H
	At 50% of Imax	20.7V x 18.4H
	At 90% of Imax	5.7V x 6.7H
Beam Flux	Total	999.5 lumens per klm.
	To 10% of Imax	716.4 lumens per klm.
	To 50% of Imax	320.1 lumens per klm.
	To 90% of Imax	32.6 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.7V I:0.2613A P:56.18W PF:0.9698 Lamp Flux:3558.49x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700017
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

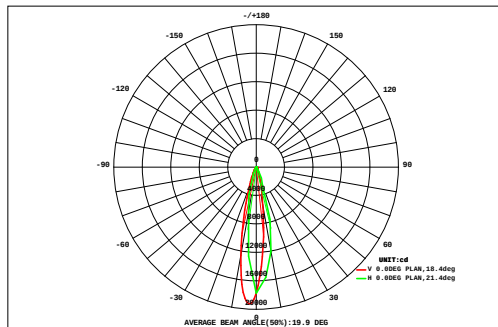

DATA OF LAMP		Eff:63.34lm/W	
MODELLWW-WZB-W55-L12-RDM	Imax(cd)	19243	
NOMINAL POWER(W)	56	AVAILABILITY(%)	73.1
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	2601
NOMINAL FLUX(lm)	3558.49	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3558
TEST VOLTAGE(V)	221.7	θ @50%(H,V)	18,21DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	27	1.12	1.38	1.70	2.06	2.44	2.82	3.13	3.32	3.34	3.19	2.90	2.54	2.16	1.79	1.46	1.17	0.94	0.77	38.2	0.00	
	24	1.44	1.89	2.45	3.12	3.90	4.68	5.42	5.94	6.08	5.82	5.23	4.49	3.70	2.96	2.32	1.79	1.36	1.03	63.6	23.5	
	21	1.83	2.43	3.18	4.09	5.10	6.11	7.02	7.59	7.64	7.17	6.33	5.34	4.33	3.40	2.62	1.98	1.48	1.10	78.7	47.4	
	18	2.24	3.00	3.94	5.08	6.34	7.57	8.65	9.26	9.20	8.49	7.40	6.15	4.91	3.81	2.89	2.15	1.58	1.15	93.8	67.3	
	15	2.37	3.37	4.77	6.83	10.1	14.7	20.0	24.3	25.7	23.4	18.7	13.5	9.35	6.46	4.57	3.26	2.33	1.65	195	177	
	12	2.80	4.07	5.88	8.66	13.2	19.8	27.0	32.6	33.9	30.2	23.5	16.5	11.1	7.52	5.24	3.69	2.60	1.82	250	233	
	9	3.60	5.30	7.74	11.6	18.1	26.9	36.0	41.9	41.6	35.2	26.1	17.6	11.5	7.70	5.28	3.67	2.56	1.76	304	290	
		3.26	4.80	7.09	10.9	17.3	26.5	36.7	44.5	46.3	40.8	31.2	21.5	13.8	8.90	5.99	4.13	2.86	1.97	329	313	
		2.80	4.13	6.19	9.74	16.0	25.4	36.5	46.4	50.5	46.3	36.5	25.5	16.2	10.1	6.73	4.61	3.17	2.20	349	334	
		3.62	5.44	8.34	13.8	22.9	34.6	46.5	54.5	54.0	45.1	33.1	21.8	13.3	8.40	5.64	3.84	2.64	1.82	379	365	
		3.46	5.15	7.86	12.9	21.2	31.9	42.8	50.2	49.8	41.8	30.9	20.4	12.6	8.05	5.45	3.73	2.58	1.78	353	338	
	-9	2.28	3.19	4.50	6.28	9.09	13.5	19.1	24.6	27.5	26.2	21.5	15.9	10.9	7.42	5.17	3.68	2.59	1.82	205	186	
	-12	2.31	3.17	4.35	5.68	7.39	9.96	13.1	15.7	16.9	15.8	13.2	10.1	7.50	5.52	4.03	2.94	2.11	1.49	141	119	
	-15	2.41	3.25	4.34	5.32	6.08	6.87	7.45	7.17	6.13	5.05	4.30	3.81	3.77	3.45	2.79	2.12	1.57	1.13	77.0	41.4	
	-18	1.49	2.00	2.68	3.53	4.54	5.82	7.33	8.69	9.34	8.97	7.77	6.25	4.82	3.72	2.84	2.13	1.58	1.17	84.7	55.6	
	-21	1.15	1.49	1.90	2.39	2.87	3.35	3.94	4.61	5.14	5.29	4.93	4.27	3.46	2.77	2.17	1.67	1.28	0.97	53.7	13.4	
	-24	1.07	1.33	1.59	1.82	1.96	1.84	1.46	1.11	0.98	1.01	1.14	1.37	1.42	1.30	1.10	0.90	0.73	0.61	22.7	0.00	
	-27	0.85	1.04	1.23	1.41	1.54	1.53	1.56	1.67	1.71	1.68	1.57	1.42	1.35	1.22	1.04	0.87	0.72	0.60	23.0	0.00	
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
Φ t	40.1	56.4	79.7	115	170	244	324	384	396	351	276	198	136	94.5	67.4	48.3	34.7	24.9	3041	---		
Φ a	0.00	15.2	45.6	91.6	152	229	310	374	386	342	264	181	109	67.6	32.3	1.74	0.00	0.00	---	2601		

one-half-peak spread: U:7.3,D:13.5 , L:9.3,R:9.3


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.7V I:0.2613A P:56.18W PF:0.9698 Lamp Flux:3558.49x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700017
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

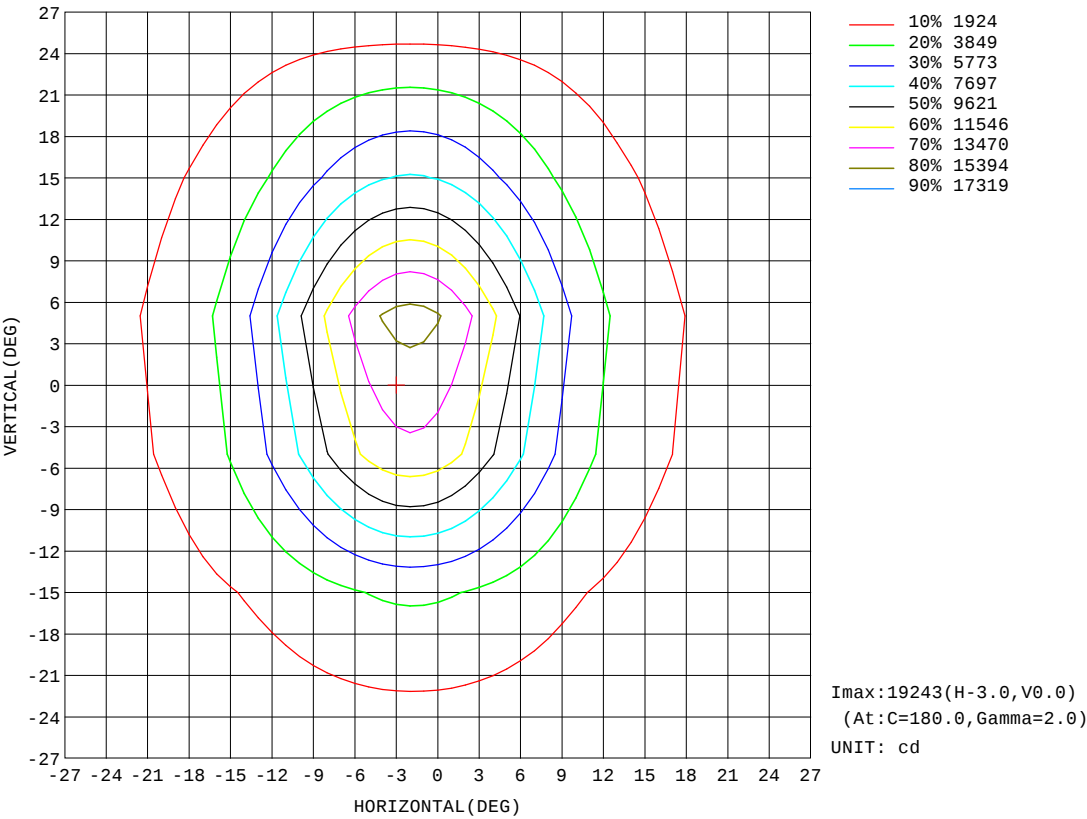


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.7V I:0.2613A P:56.18W PF:0.9698 Lamp Flux:3558.49x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700017
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

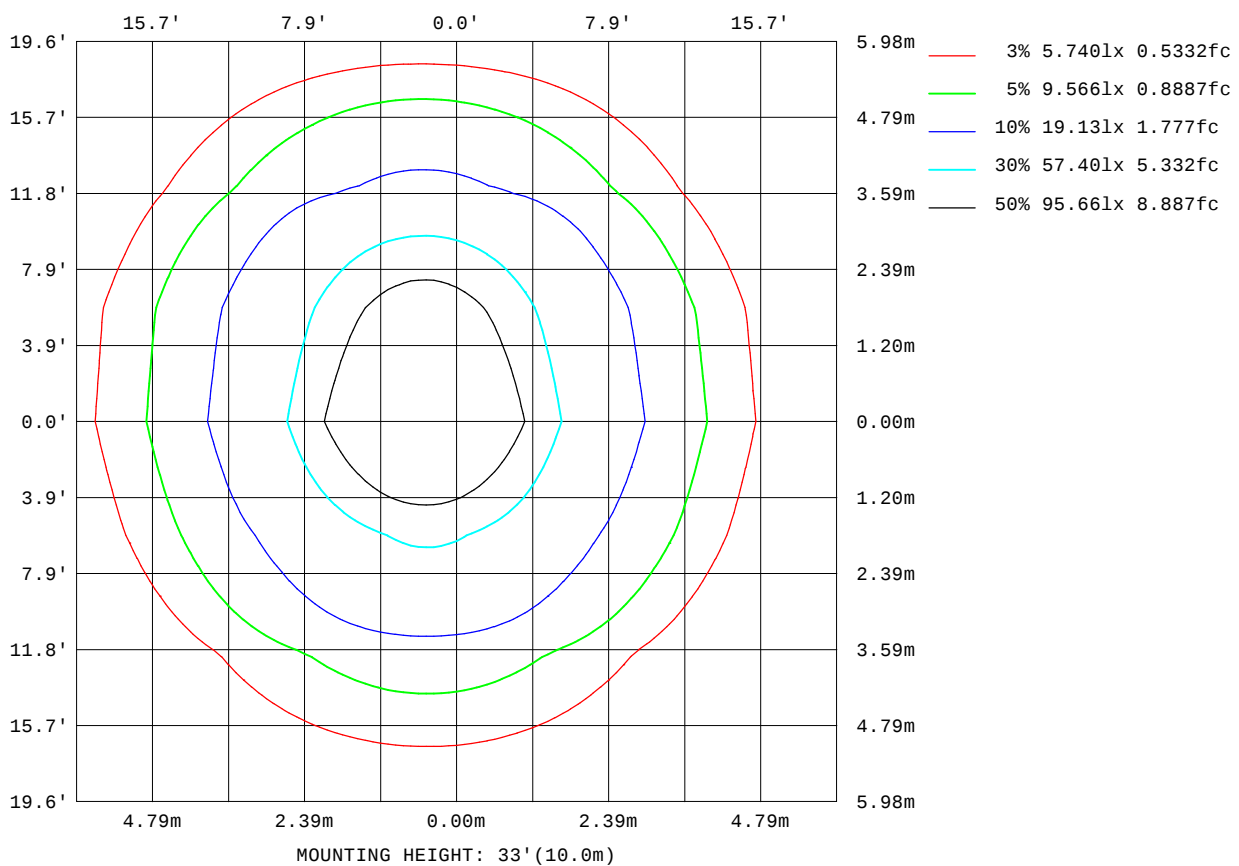


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.7V I:0.2613A P:56.18W PF:0.9698 Lamp Flux:3558.49x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700017
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

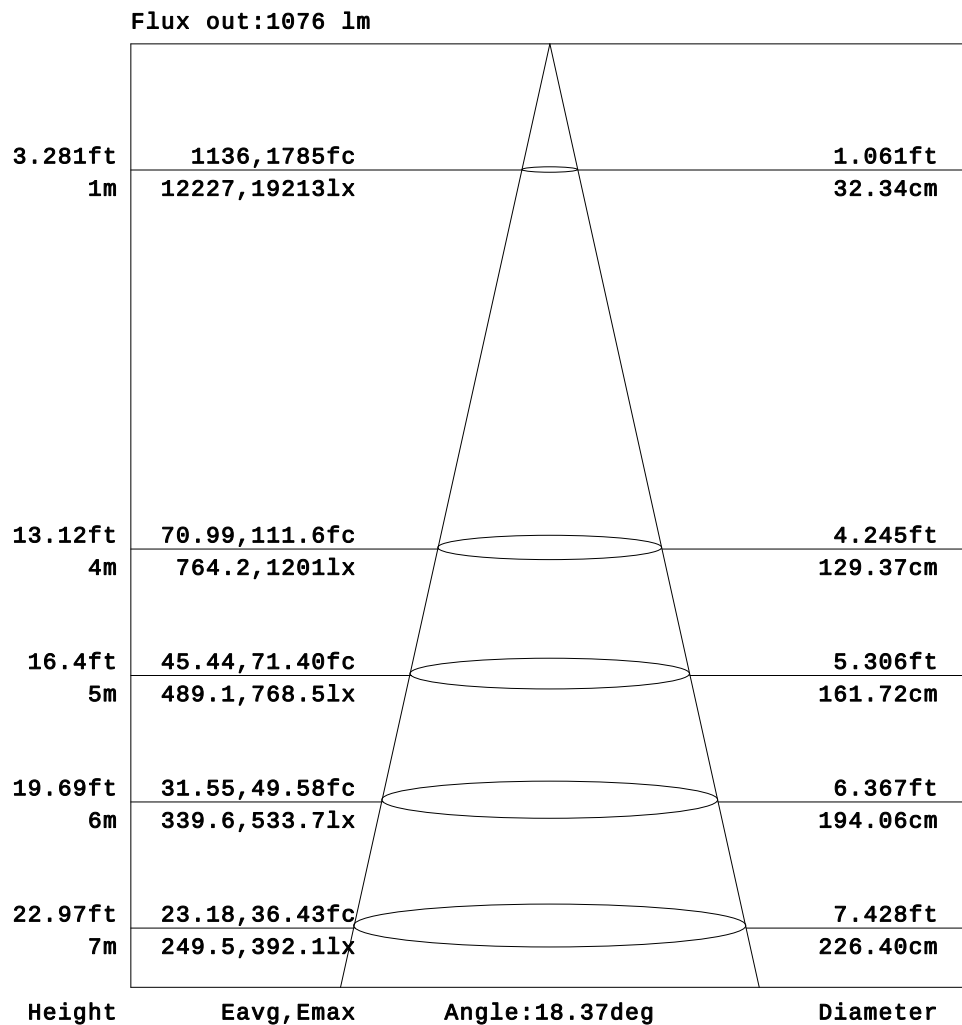


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

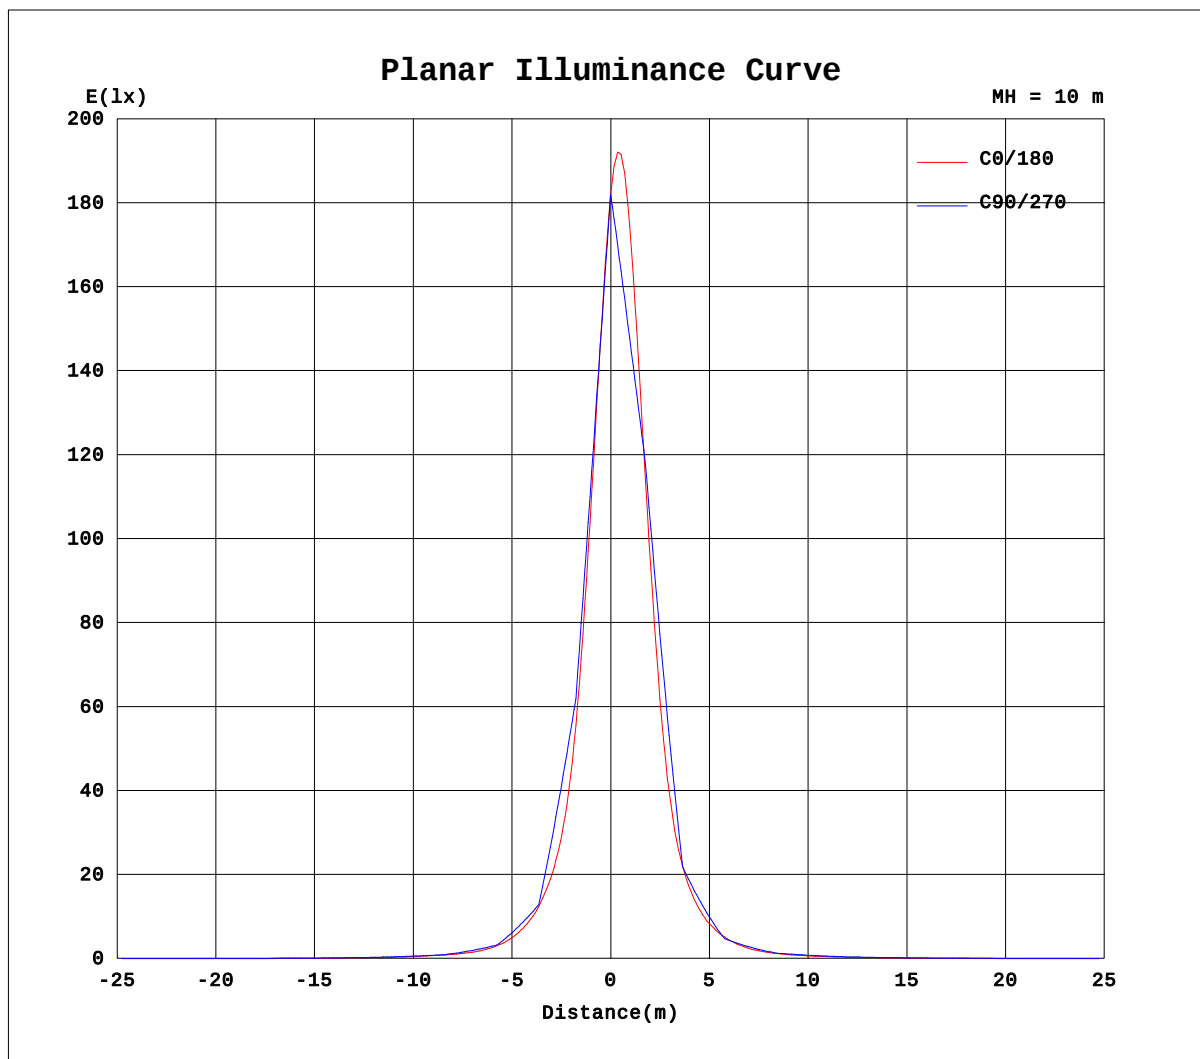

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-07-08

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.7V I:0.2613A P:56.18W PF:0.9698 Lamp Flux:3558.49x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700017
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.21	0.36	0.48	0.58	0.68	0.71	0.71	0.81
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.48	0.78	1.00	1.21	1.37	1.44	1.46	1.46	1.60
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.75	1.16	1.50	1.99	2.41	2.72	3.02	3.28	3.37	3.48	3.66
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.73	1.69	2.46	3.02	3.67	4.17	4.56	4.94	5.26	5.33	5.62	5.66
-55	0.00	0.00	0.00	0.00	0.00	0.18	0.67	1.54	2.71	3.65	4.43	5.32	6.07	6.77	7.47	8.13	8.64	9.08	9.21
-50	0.00	0.00	0.00	0.00	0.00	0.57	1.53	2.83	4.14	5.17	6.16	7.31	8.24	9.25	10.2	11.3	12.1	12.7	12.6
-45	0.00	0.00	0.00	0.00	0.02	0.80	2.07	3.48	4.93	6.21	7.66	9.22	10.8	12.4	14.1	15.4	16.5	17.3	17.3
-40	0.00	0.00	0.00	0.00	0.25	1.54	3.16	4.71	6.17	7.87	9.72	11.8	14.0	16.3	18.5	20.1	21.3	22.0	21.9
-35	0.00	0.00	0.00	0.00	0.41	1.98	3.61	5.24	7.04	9.04	11.5	14.3	17.4	20.8	24.9	29.2	33.2	35.7	36.1
-30	0.00	0.00	0.00	0.00	1.15	3.03	4.69	6.49	8.52	11.2	14.4	18.1	22.1	26.9	33.0	40.0	46.4	50.0	49.9
-25	0.00	0.00	0.00	0.17	1.37	3.15	4.94	6.95	9.35	12.4	16.2	20.8	27.7	37.9	52.7	70.9	89.1	102	103
-20	0.00	0.00	0.00	0.71	2.19	3.95	5.90	8.35	11.2	15.1	19.7	25.8	36.8	54.2	79.2	109	138	156	155
-15	0.00	0.00	0.00	0.53	2.20	3.97	5.96	8.43	11.5	15.8	21.1	29.6	45.6	73.3	118	184	282	389	407
-10	0.00	0.00	0.00	1.04	2.82	4.77	6.92	9.59	13.3	18.5	25.2	38.3	63.6	107	180	291	472	650	637
-5	0.00	0.00	0.04	1.37	3.09	4.82	6.84	9.42	13.0	18.0	25.0	38.6	65.8	114	206	397	776	1196	1257
0	0.00	0.00	0.44	2.44	4.12	5.63	7.67	10.5	14.5	20.0	28.7	47.1	83.6	149	285	626	1261	1851	1772
5	0.00	0.00	0.04	1.48	3.21	4.98	7.05	9.70	13.4	18.7	26.2	41.4	71.8	126	232	465	949	1483	1555
10	0.00	0.00	0.00	1.29	3.08	5.09	7.36	10.2	14.2	19.9	28.1	44.8	77.4	135	242	458	868	1251	1203
15	0.00	0.00	0.00	0.80	2.55	4.48	6.65	9.19	12.6	17.5	23.9	35.3	57.4	95.6	162	280	496	730	761
20	0.00	0.00	0.00	1.03	2.74	4.69	6.87	9.39	12.7	17.3	23.1	32.7	49.7	77.3	117	171	227	267	261
25	0.00	0.00	0.00	0.48	2.14	3.98	6.01	8.22	10.9	14.6	19.3	25.6	36.1	52.4	76.1	107	141	168	170
30	0.00	0.00	0.00	0.59	2.23	4.05	6.01	8.02	10.4	13.5	17.6	22.1	27.9	35.8	46.1	57.6	68.4	74.4	72.9
35	0.00	0.00	0.00	0.13	1.65	3.31	5.05	6.85	8.88	11.3	14.3	17.8	21.9	27.0	33.4	40.4	47.3	51.8	51.9
40	0.00	0.00	0.00	0.13	1.72	3.25	4.80	6.44	8.19	10.1	12.3	15.0	17.8	20.6	23.4	26.1	28.6	30.0	29.8
45	0.00	0.00	0.00	0.00	0.97	2.41	3.72	5.20	6.81	8.36	10.0	12.0	14.1	16.3	18.4	20.4	22.2	23.4	23.5
50	0.00	0.00	0.00	0.00	0.84	2.08	3.21	4.61	6.06	7.27	8.52	9.89	11.3	12.8	14.2	15.5	16.5	17.1	16.9
55	0.00	0.00	0.00	0.00	0.27	1.16	2.17	3.43	4.71	5.72	6.75	7.90	8.95	9.99	11.1	12.0	12.8	13.2	13.3
60	0.00	0.00	0.00	0.00	0.00	0.63	1.59	2.80	3.79	4.56	5.44	6.35	7.00	7.64	8.36	8.88	9.23	9.51	9.47
65	0.00	0.00	0.00	0.00	0.00	0.23	0.69	1.47	2.35	2.93	3.65	4.42	4.88	5.35	5.98	6.40	6.62	6.87	6.91
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.55	1.15	1.54	2.19	2.72	2.93	3.31	3.83	4.01	4.10	4.30	4.26
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.53	0.72	1.02	1.32	1.44	1.60	1.87	2.00	2.04	2.13	2.15
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.7V I:0.2613A P:56.18W PF:0.9698 Lamp Flux:3558.49x1 lm		
NAME: 8.01.017.0083 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700017
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: ×10cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.74	0.60	0.46	0.30	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	1.43	1.14	0.86	0.54	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	3.46	3.14	2.78	2.36	1.86	1.46	1.15	0.80	0.46	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	5.38	4.99	4.55	3.99	3.38	2.79	2.17	1.47	0.80	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	8.81	8.11	7.39	6.63	5.78	4.94	4.07	3.15	2.27	1.42	0.74	0.15	0.00	0.00	0.00	0.00	0.00	0.00	
-50	12.0	10.9	9.95	8.94	7.84	6.75	5.60	4.47	3.40	2.35	1.27	0.09	0.00	0.00	0.00	0.00	0.00	0.00	
-45	16.7	15.5	14.0	12.5	10.8	9.23	7.67	6.21	4.88	3.57	2.30	1.08	0.22	0.00	0.00	0.00	0.00	0.00	
-40	21.1	19.4	17.5	15.4	13.1	11.1	9.13	7.41	5.84	4.26	2.85	1.60	0.14	0.00	0.00	0.00	0.00	0.00	
-35	34.1	30.2	25.7	21.3	17.7	14.7	11.9	9.45	7.43	5.60	4.00	2.49	1.01	0.02	0.00	0.00	0.00	0.00	
-30	45.8	39.3	31.8	25.6	20.9	17.1	13.6	10.6	8.25	6.27	4.54	2.82	1.25	0.00	0.00	0.00	0.00	0.00	
-25	93.1	75.6	56.9	40.7	29.3	21.9	17.1	13.1	10.00	7.54	5.56	3.61	1.89	0.25	0.00	0.00	0.00	0.00	
-20	134	104	74.8	50.6	34.1	24.5	18.8	14.3	10.7	7.96	5.81	3.68	1.86	0.14	0.00	0.00	0.00	0.00	
-15	316	207	134	84.3	52.1	32.9	22.8	16.9	12.6	9.28	6.77	4.54	2.56	0.76	0.00	0.00	0.00	0.00	
-10	452	275	170	103	60.4	36.2	24.0	17.7	13.0	9.50	6.83	4.57	2.53	0.68	0.00	0.00	0.00	0.00	
-5	879	468	243	137	78.4	44.9	27.7	19.8	14.5	10.5	7.57	5.23	3.10	1.19	0.00	0.00	0.00	0.00	
0	1124	540	262	142	79.5	44.6	27.5	19.6	14.1	10.2	7.32	5.02	2.88	0.90	0.00	0.00	0.00	0.00	
5	1070	551	274	150	84.9	47.9	29.0	20.5	14.9	10.7	7.71	5.38	3.21	1.24	0.00	0.00	0.00	0.00	
10	785	413	221	125	71.8	41.3	26.0	18.8	13.7	9.86	7.11	4.86	2.73	0.78	0.00	0.00	0.00	0.00	
15	551	319	183	108	64.4	38.8	25.5	18.7	13.6	9.95	7.22	4.95	2.86	0.96	0.00	0.00	0.00	0.00	
20	215	158	107	69.4	44.2	29.5	21.7	16.2	11.9	8.83	6.38	4.20	2.21	0.38	0.00	0.00	0.00	0.00	
25	147	113	80.4	55.3	37.6	26.7	20.1	15.4	11.5	8.66	6.39	4.29	2.29	0.48	0.00	0.00	0.00	0.00	
30	65.0	53.7	42.5	32.7	25.7	20.6	16.4	12.7	9.83	7.52	5.56	3.57	1.63	0.02	0.00	0.00	0.00	0.00	
35	47.5	40.7	33.7	27.3	22.1	18.1	14.6	11.6	9.08	6.95	5.15	3.42	1.59	0.11	0.00	0.00	0.00	0.00	
40	27.5	24.8	22.3	19.5	16.7	14.0	11.5	9.37	7.43	5.62	4.07	2.56	0.80	0.00	0.00	0.00	0.00	0.00	
45	22.1	20.2	18.3	16.3	14.1	12.1	10.0	8.27	6.63	4.97	3.45	2.10	0.61	0.00	0.00	0.00	0.00	0.00	
50	16.1	14.9	13.6	12.2	10.7	9.29	7.84	6.52	5.17	3.69	2.29	1.08	0.00	0.00	0.00	0.00	0.00	0.00	
55	12.7	11.9	11.0	9.95	8.81	7.74	6.47	5.21	4.14	2.93	1.58	0.67	0.02	0.00	0.00	0.00	0.00	0.00	
60	9.06	8.63	8.09	7.28	6.50	5.71	4.56	3.46	2.65	1.63	0.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	6.56	6.19	5.84	5.19	4.47	3.91	3.10	2.10	1.41	0.94	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	3.89	3.63	3.39	2.79	2.21	1.86	1.23	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	1.98	1.83	1.73	1.47	1.15	0.97	0.70	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: