

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5496.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	40.8V x 39.9H
	At 50% of Imax	20.1V x 18.0H
	At 90% of Imax	5.3V x 6.6H
Beam Flux	Total	999.6 lumens per klm.
	To 10% of Imax	697.4 lumens per klm.
	To 50% of Imax	308.4 lumens per klm.
	To 90% of Imax	29.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.9V I:0.2854A P:61.42W PF:0.9743 Lamp Flux:4112.58x1 lm		
NAME: 8.01.017.0086 20° LW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

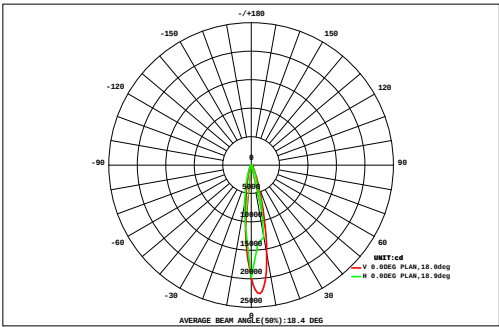

DATA OF LAMP		Eff:66.96lm/W	
MODELLW-WZB-W55-L12-RDM	Imax(cd)	22603	
NOMINAL POWER(W)	62	AVAILABILITY(%)	71.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2938
NOMINAL FLUX(lm)	4112.58	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	4113
TEST VOLTAGE(V)	220.9	θ @50%(H,V)	18,20DEG

		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
		0.84	1.01	1.22	1.49	1.81	2.18	2.59	3.00	3.36	3.64	3.75	3.66	3.39	3.03	2.61	2.19	1.80	1.45	43.0	0.00
VERTICAL (DEG)	27	0.88	1.12	1.44	1.86	2.39	3.04	3.79	4.60	5.41	6.11	6.52	6.50	6.05	5.37	4.56	3.75	3.00	2.35	68.7	15.5
	24	1.12	1.47	1.94	2.55	3.30	4.20	5.22	6.26	7.26	8.00	8.24	7.91	7.12	6.14	5.10	4.09	3.20	2.45	85.6	45.9
	21	1.39	1.86	2.48	3.29	4.27	5.44	6.73	8.00	9.18	9.93	9.96	9.27	8.14	6.85	5.56	4.36	3.34	2.51	103	69.5
	18	1.22	1.66	2.29	3.17	4.42	6.14	8.77	13.1	18.8	24.7	28.4	27.9	23.6	17.8	12.3	8.41	5.93	4.28	213	191
	15	1.42	1.98	2.78	3.94	5.59	8.00	12.0	18.4	26.5	34.1	37.9	35.8	29.1	21.1	14.2	9.50	6.61	4.71	274	254
	12	2.00	2.84	3.99	5.76	8.18	11.9	18.5	28.3	39.1	47.1	47.6	40.7	30.2	20.0	12.7	8.40	5.86	4.11	337	320
	9	1.69	2.40	3.40	4.85	6.94	10.1	15.8	25.2	36.8	47.5	52.9	49.7	39.9	28.3	18.3	11.5	7.53	5.18	368	351
	6	1.31	1.85	2.64	3.70	5.34	7.83	12.2	20.8	33.0	46.6	57.5	59.0	50.4	37.5	24.5	14.8	9.37	6.36	395	380
	3	2.07	2.97	4.21	6.07	9.00	14.2	24.3	38.2	52.8	63.8	64.8	54.9	40.4	26.4	15.7	9.53	6.38	4.43	440	423
	0	1.97	2.82	4.00	5.74	8.47	13.3	22.5	35.3	48.6	58.8	60.0	51.2	38.0	25.1	15.2	9.33	6.29	4.40	411	393
-9	-3	1.10	1.51	2.11	2.89	3.91	5.10	6.56	10.0	16.0	23.5	30.9	34.0	30.8	24.2	17.1	11.1	7.42	5.21	233	212
	-6	1.28	1.75	2.42	3.28	4.40	5.63	6.88	9.09	12.6	16.4	19.6	20.2	17.9	14.2	10.5	7.50	5.37	3.90	163	138
	-9	1.51	2.08	2.85	3.85	5.17	6.61	7.99	9.25	10.3	10.3	8.34	5.76	3.91	3.15	3.05	3.38	3.04	2.41	92.9	58.5
	-12	0.87	1.12	1.47	1.95	2.58	3.38	4.33	5.48	7.05	8.97	10.7	11.3	10.6	8.88	6.97	5.28	4.04	3.07	98.0	64.8
	-15	0.74	0.90	1.13	1.44	1.81	2.27	2.71	3.06	3.57	4.49	5.71	6.72	6.92	6.28	5.24	4.11	3.23	2.50	62.8	21.3
-21	-18	0.88	1.08	1.33	1.67	2.03	2.38	2.67	2.76	2.47	1.87	1.36	1.20	1.22	1.43	1.62	1.60	1.39	1.14	30.1	0.00
	-24	0.71	0.84	1.01	1.22	1.46	1.71	1.93	2.04	1.95	1.92	2.04	2.07	2.01	1.86	1.71	1.62	1.42	1.18	28.7	0.00
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)					6	9	12	15	18	21	24	27
Φ t	23.0	31.2	42.7	58.7	81.1	113	166	243	335	418	456	428	350	258	177	120	85.2	61.6	3447	---	
Φ a	0.00	0.00	0.00	11.9	31.6	81.8	139	219	315	403	442	416	337	240	152	88.4	49.1	11.7	---	2938	


one-half-peak spread: U:7.2,D:13.0 , L:9.3,R:8.8 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.9V I:0.2854A P:61.42W PF:0.9743 Lamp Flux:4112.58x1 lm		
NAME: 8.01.017.0086 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

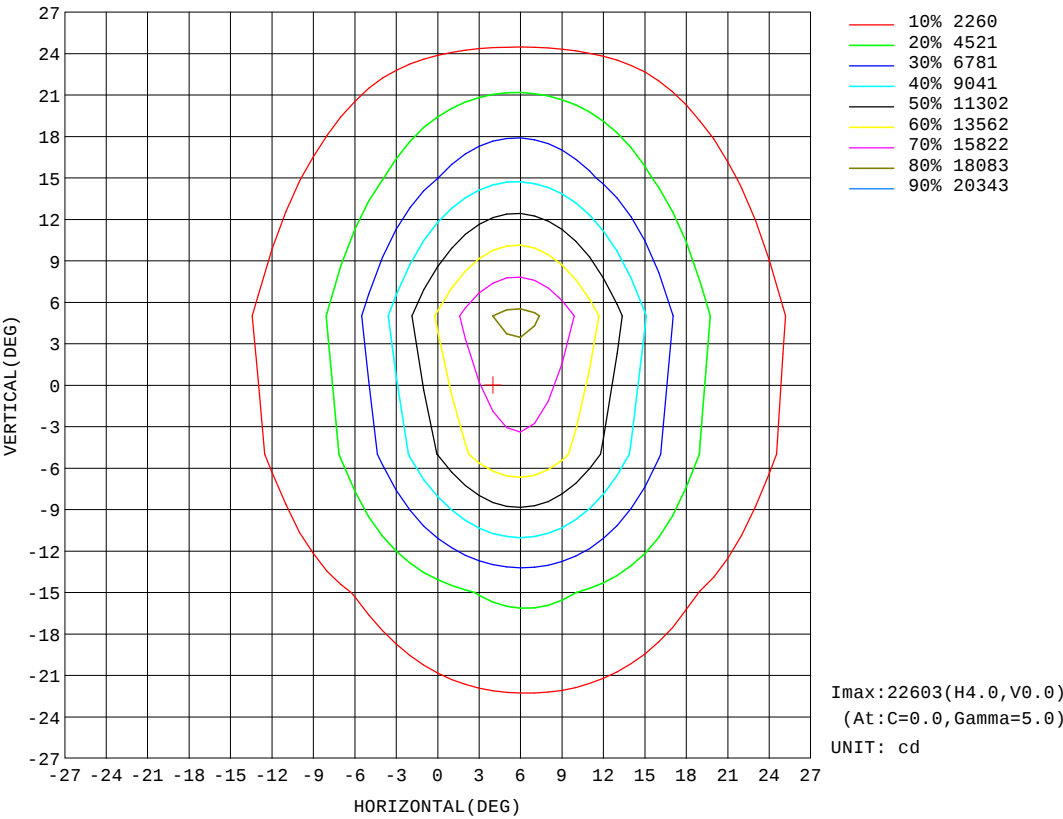


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.9V I:0.2854A P:61.42W PF:0.9743 Lamp Flux:4112.58x1 lm		
NAME: 8.01.017.0086 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

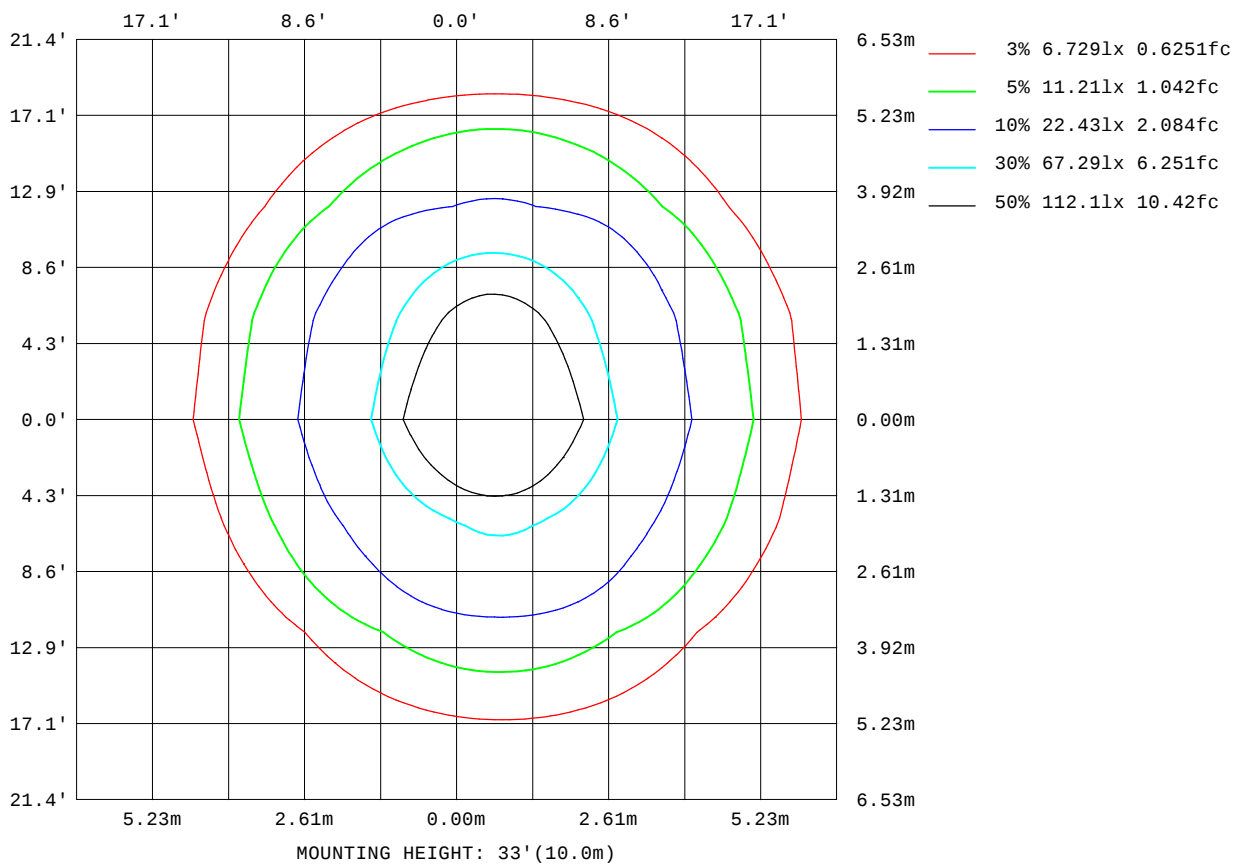


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.9V I:0.2854A P:61.42W PF:0.9743 Lamp Flux:4112.58x1 lm		
NAME: 8.01.017.0086 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

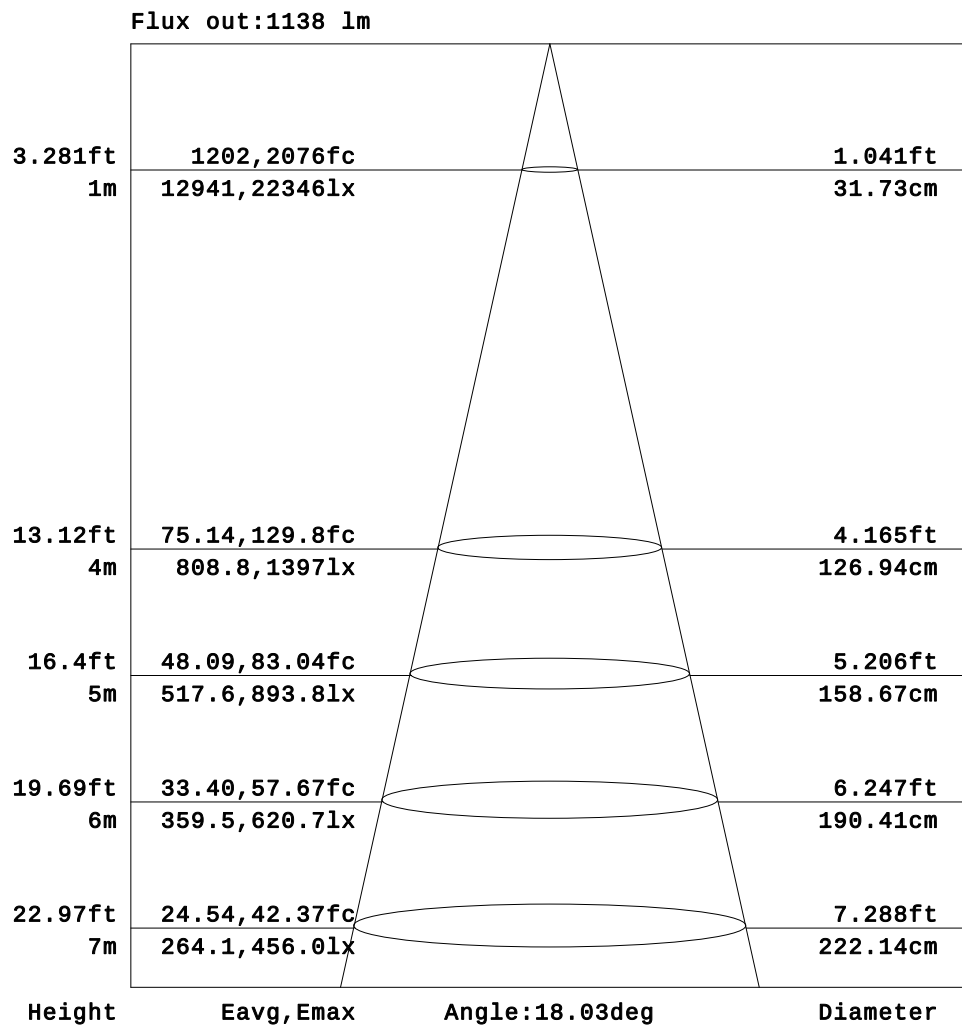


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

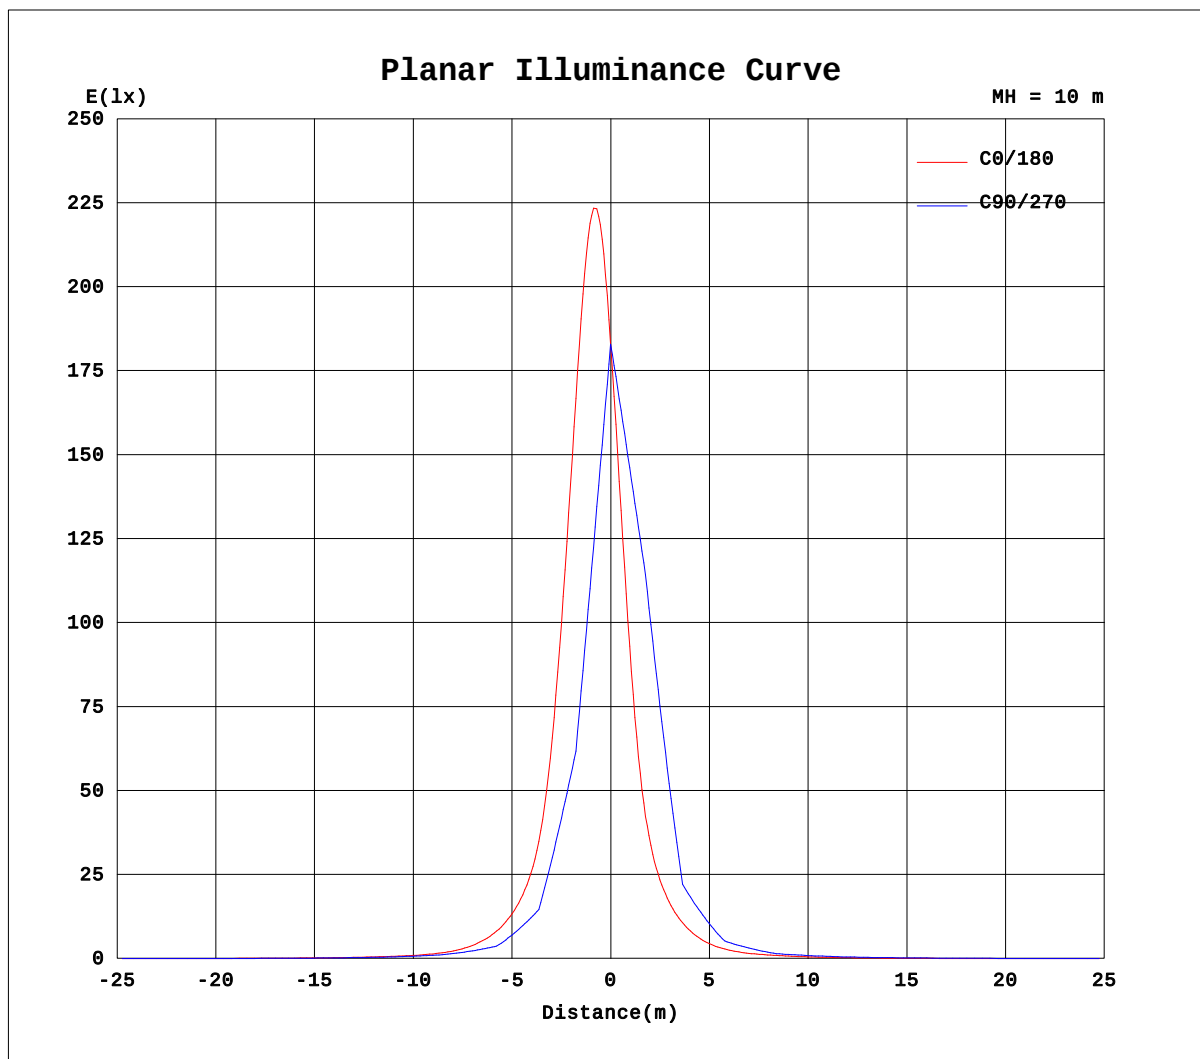

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.9V I:0.2854A P:61.42W PF:0.9743 Lamp Flux:4112.58x1 lm		
NAME: 8.01.017.0086 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.40	0.60	0.84	1.16	1.35	1.43	1.63
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.42	0.99	1.36	1.94	2.52	2.75	3.00	3.40
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.40	1.00	1.41	1.95	2.80	3.34	3.89	4.60	5.10	5.36	5.77
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.36	2.32	3.13	4.19	5.12	5.72	6.40	7.17	7.65	8.01	8.46
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.78	2.00	3.33	4.41	5.60	6.83	7.80	8.65	9.61	10.4	11.1	11.7
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.63	2.20	3.80	5.22	6.60	8.01	9.40	10.6	11.7	12.8	13.8	14.7	15.3
-45	0.00	0.00	0.00	0.00	0.00	0.00	1.13	2.73	4.34	5.94	7.59	9.23	11.0	12.9	14.8	16.8	18.5	20.0	21.3
-40	0.00	0.00	0.00	0.00	0.00	0.92	3.00	4.47	6.14	7.99	9.91	11.8	14.1	16.7	19.6	22.3	24.5	26.5	27.9
-35	0.00	0.00	0.00	0.00	0.00	0.69	2.99	4.71	6.47	8.42	10.6	13.0	16.1	19.4	23.2	27.5	32.3	37.4	42.0
-30	0.00	0.00	0.00	0.00	0.00	2.37	4.51	6.33	8.37	10.6	13.2	16.5	20.7	25.1	30.0	36.3	44.1	52.2	58.8
-25	0.00	0.00	0.00	0.00	0.00	1.75	4.03	6.16	8.34	10.8	13.8	17.6	22.4	28.5	37.7	51.7	70.7	93.0	114
-20	0.00	0.00	0.00	0.00	0.71	3.03	5.35	7.78	10.2	13.2	17.3	22.3	28.4	38.4	55.2	81.1	115	151	182
-15	0.00	0.00	0.00	0.00	0.07	2.49	4.76	7.20	9.76	12.8	17.0	22.5	29.7	42.4	65.8	104	164	252	384
-10	0.00	0.00	0.00	0.00	1.27	3.80	6.12	8.62	11.5	15.4	20.9	27.8	39.2	61.9	103	170	275	449	693
-5	0.00	0.00	0.00	0.00	0.16	2.97	5.39	7.86	10.7	14.2	19.4	26.1	36.9	58.6	99.7	171	307	618	1136
0	0.00	0.00	0.00	0.00	1.36	4.09	6.60	9.21	12.3	16.7	22.9	31.2	48.5	82.5	144	257	523	1174	1975
5	0.00	0.00	0.00	0.00	0.11	2.94	5.46	8.00	10.9	14.5	20.0	27.0	38.9	63.0	108	189	346	731	1385
10	0.00	0.00	0.00	0.00	1.13	3.80	6.32	8.95	12.1	16.3	22.3	30.2	44.9	73.7	125	217	390	779	1288
15	0.00	0.00	0.00	0.00	0.01	2.52	5.02	7.53	10.3	13.7	18.5	24.7	33.6	50.8	81.9	135	223	396	676
20	0.00	0.00	0.00	0.00	0.61	3.21	5.68	8.27	11.1	14.5	19.2	25.2	33.7	48.7	73.8	112	163	223	276
25	0.00	0.00	0.00	0.00	0.00	1.79	4.34	6.70	9.19	11.9	15.4	20.1	25.8	34.4	48.0	68.9	97.6	133	168
30	0.00	0.00	0.00	0.00	0.00	2.46	4.88	7.11	9.35	11.9	15.0	19.3	24.0	29.5	36.9	47.1	59.2	72.8	82.9
35	0.00	0.00	0.00	0.00	0.00	0.76	3.38	5.42	7.42	9.62	12.1	15.1	18.7	22.7	27.6	33.8	41.0	49.2	56.4
40	0.00	0.00	0.00	0.00	0.00	1.23	3.60	5.31	7.17	9.28	11.4	13.7	16.5	19.6	22.9	26.1	29.1	31.9	34.1
45	0.00	0.00	0.00	0.00	0.00	0.08	1.67	3.54	5.29	7.15	8.94	10.8	13.0	15.3	17.8	20.3	22.6	24.9	26.7
50	0.00	0.00	0.00	0.00	0.00	0.00	1.32	3.14	4.87	6.50	7.96	9.57	11.3	12.9	14.7	16.4	18.0	19.3	20.1
55	0.00	0.00	0.00	0.00	0.00	0.00	0.28	1.22	2.97	4.49	5.70	7.08	8.58	9.87	11.2	12.7	13.9	14.9	15.7
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.60	2.42	3.45	4.49	5.81	6.95	7.84	8.91	9.98	10.7	11.3	11.7
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.88	1.55	2.14	3.24	4.34	5.04	5.91	6.95	7.54	7.99	8.55
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.62	1.61	2.34	2.86	3.78	4.49	4.74	5.18	5.65
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.60	1.06	1.30	1.69	2.14	2.33	2.48	2.75
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-07-03

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.9V I:0.2854A P:61.42W PF:0.9743 Lamp Flux:4112.58x1 lm		
NAME: 8.01.017.0086 20° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2		UNIT: ×10cd																	
H(°)	V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	1.75	1.70	1.69	1.70	1.56	1.38	1.33	1.17	0.89	0.73	0.56	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	3.48	3.37	3.42	3.34	2.95	2.71	2.58	2.13	1.62	1.40	0.88	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	6.06	5.93	5.85	5.76	5.35	4.87	4.57	4.07	3.40	2.93	2.40	1.33	0.63	0.32	0.00	0.00	0.00	0.00	0.00
-60	8.60	8.39	8.26	7.95	7.33	6.79	6.25	5.46	4.75	4.16	3.13	1.76	0.97	0.38	0.00	0.00	0.00	0.00	0.00
-55	12.0	12.0	11.7	11.2	10.5	9.62	8.81	7.85	6.82	5.88	4.83	3.39	2.10	1.20	0.26	0.00	0.00	0.00	0.00
-50	15.5	15.4	14.8	14.0	13.0	11.8	10.6	9.42	8.12	6.84	5.41	3.84	2.47	1.30	0.11	0.00	0.00	0.00	0.00
-45	21.9	21.8	21.1	19.8	18.3	16.3	14.3	12.3	10.5	8.81	7.15	5.51	3.90	2.26	0.74	0.00	0.00	0.00	0.00
-40	28.3	27.9	26.4	24.6	22.1	19.2	16.4	13.7	11.5	9.49	7.58	5.94	4.02	1.97	0.46	0.00	0.00	0.00	0.00
-35	44.6	44.5	41.6	36.8	31.3	25.9	21.6	18.0	14.7	11.9	9.50	7.47	5.52	3.41	1.35	0.04	0.00	0.00	0.00
-30	61.4	59.3	53.2	44.7	36.2	29.0	23.9	19.5	15.5	12.3	9.71	7.51	5.33	3.04	0.92	0.00	0.00	0.00	0.00
-25	126	123	108	86.0	64.1	45.8	33.2	25.1	19.8	15.4	11.8	9.11	6.70	4.41	2.22	0.34	0.00	0.00	0.00
-20	191	177	146	109	76.2	51.2	35.0	26.1	20.3	15.3	11.6	8.77	6.19	3.91	1.94	0.00	0.00	0.00	0.00
-15	489	453	321	206	134	85.0	52.9	34.5	24.9	18.9	14.0	10.5	7.66	5.13	2.98	0.88	0.00	0.00	0.00
-10	796	631	393	237	148	89.5	53.2	33.8	24.2	18.1	13.3	9.83	7.04	4.55	2.46	0.28	0.00	0.00	0.00
-5	1518	1311	788	389	214	126	73.2	43.2	28.5	21.1	15.3	11.2	8.13	5.44	3.09	0.88	0.00	0.00	0.00
0	2226	1584	808	365	198	114	64.3	38.1	26.1	19.2	13.7	9.92	7.04	4.33	2.04	0.00	0.00	0.00	0.00
5	1851	1569	915	434	230	133	77.2	44.9	29.1	21.4	15.4	11.2	8.10	5.36	2.90	0.58	0.00	0.00	0.00
10	1436	1041	557	294	170	101	59.2	36.1	25.2	18.6	13.5	9.83	6.97	4.27	1.97	0.00	0.00	0.00	0.00
15	873	756	479	270	162	99.5	60.6	38.0	26.5	19.8	14.5	10.7	7.66	4.99	2.62	0.38	0.00	0.00	0.00
20	291	255	198	141	95.4	62.0	40.6	28.7	22.0	16.4	12.2	8.92	6.18	3.71	1.57	0.00	0.00	0.00	0.00
25	188	179	148	112	80.4	55.8	38.7	28.2	21.8	16.8	12.6	9.49	6.79	4.27	2.10	0.10	0.00	0.00	0.00
30	85.8	80.0	68.9	56.0	43.8	34.2	27.1	22.1	17.4	13.5	10.5	7.83	5.31	3.01	1.04	0.00	0.00	0.00	0.00
35	60.1	58.5	52.8	45.3	37.6	30.6	25.0	20.6	16.6	13.2	10.4	7.97	5.66	3.40	1.45	0.00	0.00	0.00	0.00
40	34.5	33.1	30.9	28.3	25.4	22.4	19.2	15.7	12.9	10.5	8.28	6.32	4.14	2.16	0.30	0.00	0.00	0.00	0.00
45	27.4	26.9	25.5	23.7	21.7	19.3	16.9	14.4	12.0	9.93	7.88	6.02	4.23	2.40	0.62	0.00	0.00	0.00	0.00
50	20.2	19.8	18.8	17.6	16.0	14.3	12.7	11.0	9.39	7.70	5.95	4.31	2.84	1.22	0.00	0.00	0.00	0.00	0.00
55	16.0	15.8	15.3	14.6	13.5	12.3	11.0	9.59	8.20	6.87	5.34	3.82	2.55	1.13	0.09	0.00	0.00	0.00	0.00
60	11.8	11.5	11.3	10.8	10.0	9.30	8.27	7.03	5.96	4.84	3.50	2.25	1.19	0.00	0.00	0.00	0.00	0.00	0.00
65	8.74	8.56	8.47	8.24	7.63	7.03	6.46	5.53	4.54	3.71	2.73	1.59	0.82	0.19	0.00	0.00	0.00	0.00	0.00
70	5.59	5.47	5.53	5.29	4.70	4.36	3.98	3.20	2.44	1.84	1.05	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	2.84	2.74	2.76	2.72	2.46	2.23	2.09	1.77	1.35	1.04	0.71	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: