

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5558.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	41.1V x 41.6H
	At 50% of Imax	20.5V x 18.2H
	At 90% of Imax	5.7V x 6.4H
Beam Flux	Total	999.5 lumens per klm.
	To 10% of Imax	731.1 lumens per klm.
	To 50% of Imax	317.9 lumens per klm.
	To 90% of Imax	31.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.1V I:0.1132A P:22.15W PF:0.8850 Lamp Flux:1648.71x1 lm		
NAME: 8.01.017.0086 20° LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700011
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

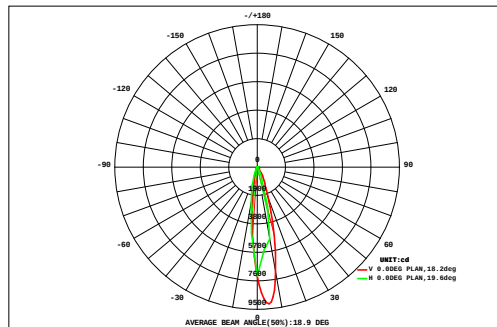

DATA OF LAMP		Eff:74.43lm/W	
MODEL:W-WZB-W55-L12-RDM-W		Imax(cd)	9163
NOMINAL POWER(W)	22	AVAILABILITY(%)	74.4
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	1227
NOMINAL FLUX(lm)	1648.71	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1649
TEST VOLTAGE(V)	221.1	θ @50%(H,V)	18,21DEG

		AREA FLUX DIAGRAM															UNIT:lm				Φ t	Φ a
VERTICAL (DEG)	27	0.24	0.28	0.33	0.41	0.51	0.65	0.82	1.02	1.23	1.44	1.58	1.64	1.62	1.53	1.38	1.20	1.01	0.83	17.7	0.00	
	24	0.25	0.31	0.39	0.51	0.69	0.95	1.28	1.66	2.05	2.43	2.72	2.84	2.76	2.57	2.31	2.00	1.68	1.36	28.8	11.3	
	21	0.29	0.37	0.48	0.65	0.90	1.26	1.72	2.22	2.72	3.18	3.50	3.57	3.41	3.12	2.77	2.37	1.96	1.56	36.0	23.2	
	18	0.33	0.43	0.57	0.79	1.13	1.59	2.18	2.79	3.40	3.95	4.28	4.30	4.05	3.67	3.22	2.72	2.23	1.75	43.4	33.2	
	15	0.32	0.42	0.59	0.87	1.33	2.02	3.09	4.91	7.46	10.1	11.8	11.8	10.1	7.95	5.84	4.26	3.19	2.45	88.5	82.2	
	12	0.35	0.48	0.69	1.05	1.66	2.55	4.04	6.63	10.2	13.8	15.9	15.4	12.9	9.81	6.98	4.94	3.64	2.78	114	109	
	9	0.42	0.60	0.89	1.41	2.26	3.46	5.65	9.34	14.1	18.4	20.2	18.5	14.9	10.8	7.42	5.13	3.76	2.84	140	135	
	6	0.39	0.55	0.81	1.27	2.04	3.19	5.28	9.08	14.1	18.9	21.8	21.0	17.3	12.8	8.87	5.97	4.19	3.09	151	146	
	3	0.35	0.48	0.70	1.08	1.75	2.81	4.72	8.55	13.7	19.0	23.1	23.5	19.7	14.9	10.4	6.85	4.63	3.33	160	154	
	0	0.43	0.61	0.94	1.51	2.47	3.95	7.24	12.7	18.6	23.8	26.4	24.1	18.7	13.5	9.00	5.84	4.00	2.92	177	172	
	-3	0.41	0.59	0.90	1.43	2.32	3.70	6.73	11.7	17.1	21.9	24.3	22.3	17.5	12.6	8.51	5.60	3.87	2.84	164	159	
	-6	0.31	0.41	0.56	0.80	1.23	1.87	2.69	4.29	6.82	9.68	12.2	13.1	11.7	9.24	6.88	4.94	3.60	2.70	92.9	86.7	
	-9	0.32	0.42	0.57	0.80	1.19	1.76	2.33	3.15	4.61	6.29	7.61	8.04	7.32	6.00	4.72	3.68	2.87	2.24	63.9	56.5	
	-12	0.33	0.44	0.60	0.84	1.21	1.74	2.12	2.25	2.65	3.12	3.13	2.89	2.77	2.55	2.39	2.30	2.08	1.74	35.1	16.7	
	-15	0.25	0.31	0.40	0.53	0.72	1.02	1.43	1.93	2.61	3.45	4.14	4.42	4.19	3.65	3.02	2.45	1.99	1.59	38.1	26.2	
	-18	0.23	0.27	0.33	0.40	0.51	0.66	0.89	1.12	1.40	1.78	2.19	2.50	2.58	2.44	2.16	1.84	1.53	1.24	24.0	7.54	
	-21	0.23	0.27	0.32	0.38	0.45	0.53	0.65	0.74	0.73	0.59	0.51	0.53	0.63	0.84	0.96	0.95	0.85	0.69	10.9	0.00	
	-24	0.20	0.23	0.27	0.32	0.37	0.42	0.50	0.57	0.59	0.67	0.74	0.79	0.79	0.78	0.82	0.81	0.73	0.61	10.2	0.00	
	-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27	
Φ t	5.63	7.46	10.3	15.1	22.7	34.1	53.3	84.6	124	162	186	181	153	119	87.6	63.8	47.8	36.6	1394	---		
Φ a	0.00	0.00	0.00	0.00	4.01	16.9	40.0	73.5	116	156	181	177	149	114	80.6	53.6	34.8	23.6	---	1219		

one-half-peak spread: U:7.3,D:13.4 , L:9.1,R:9.3


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.1V I:0.1132A P:22.15W PF:0.8850 Lamp Flux:1648.71x1 lm		
NAME: 8.01.017.0086 20° LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700011
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

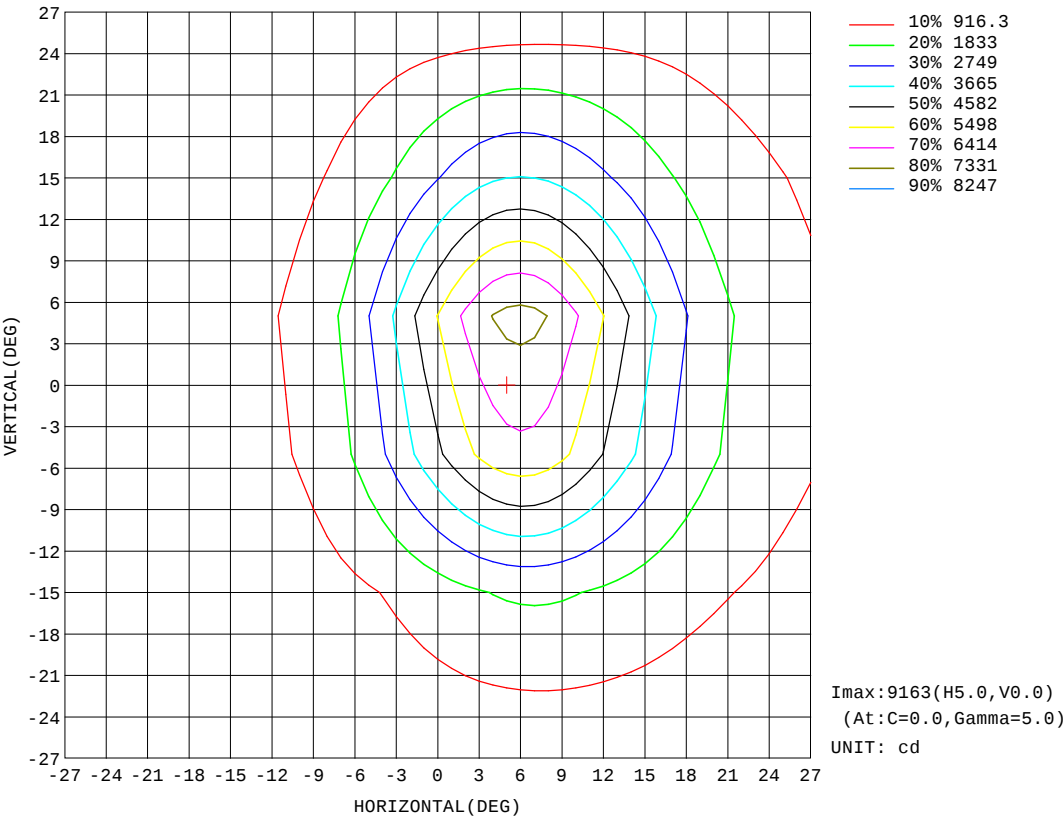


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.1V I:0.1132A P:22.15W PF:0.8850 Lamp Flux:1648.71x1 lm		
NAME: 8.01.017.0086 20° LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700011
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

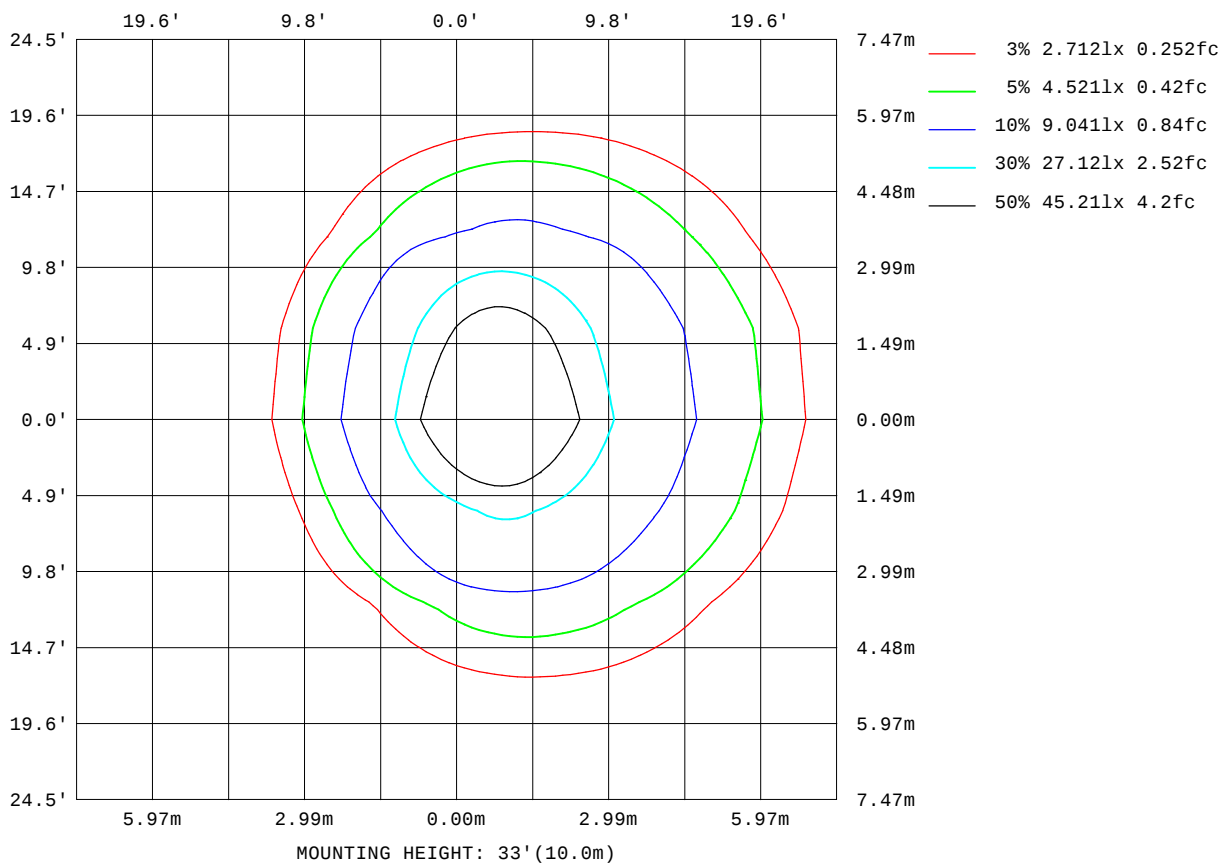


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.1V I:0.1132A P:22.15W PF:0.8850 Lamp Flux:1648.7lx1 lm		
NAME: 8.01.017.0086 20° LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700011
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

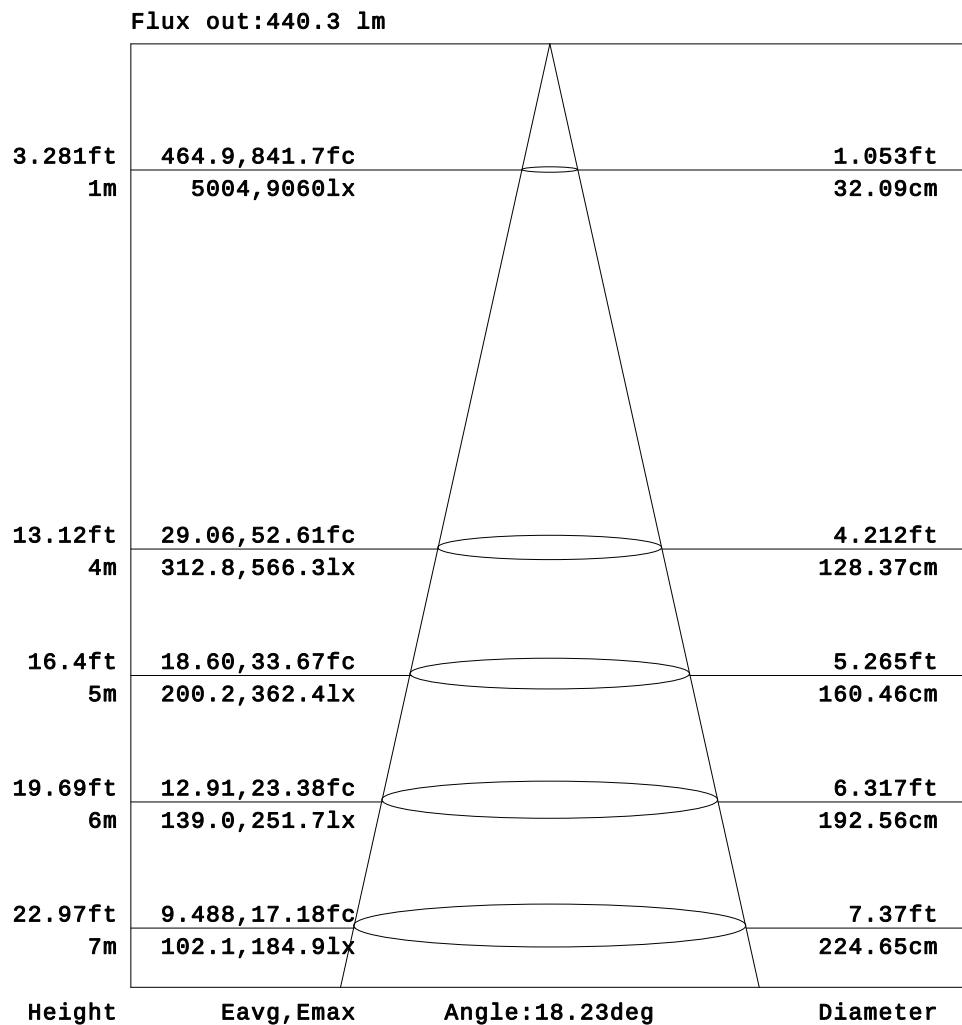


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

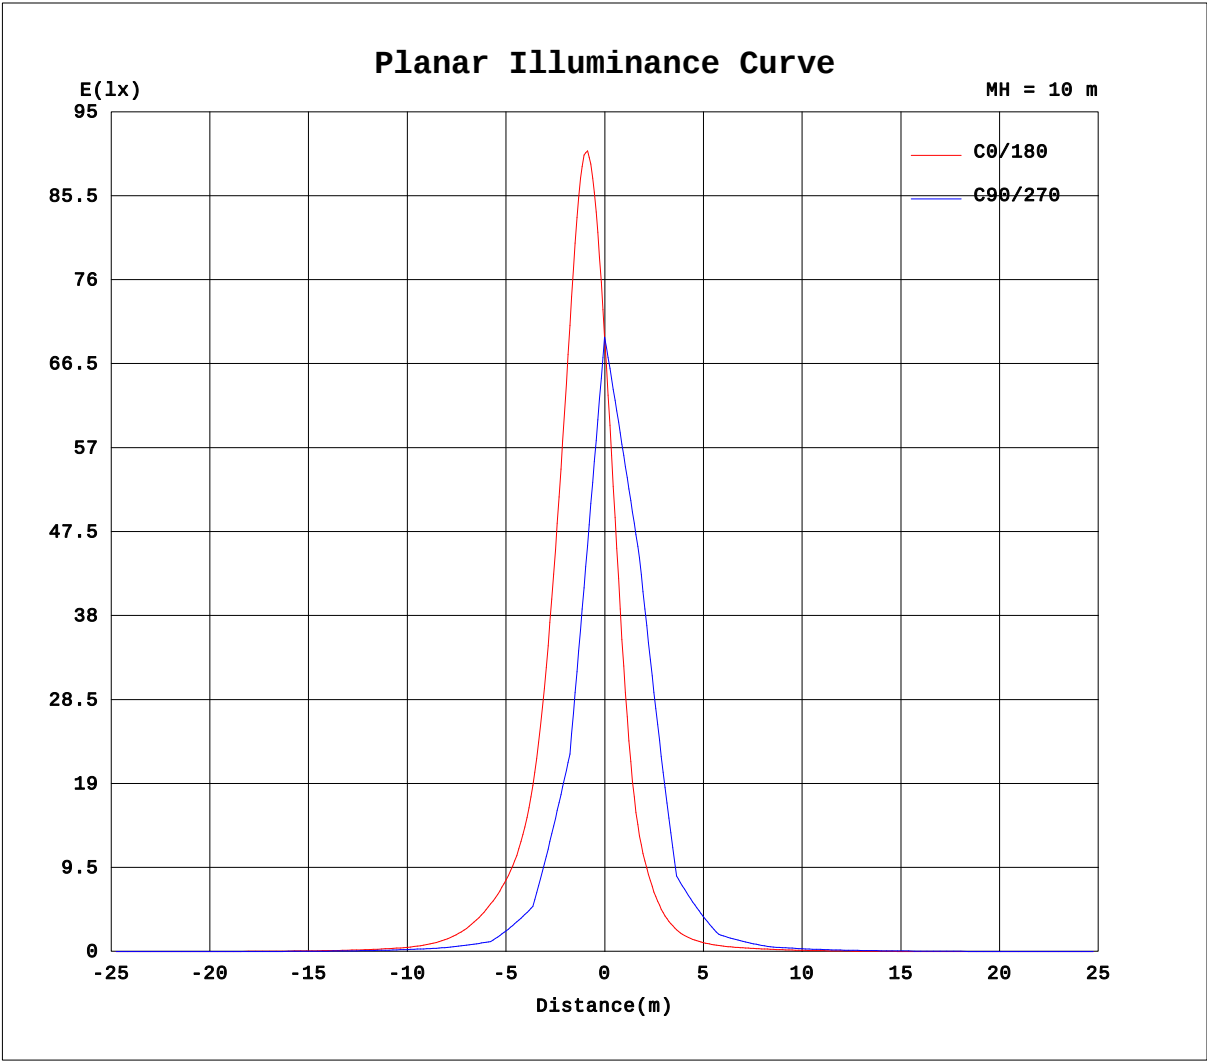

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.1V I:0.1132A P:22.15W PF:0.8850 Lamp Flux:1648.71x1 lm																	
NAME: 8.01.017.0086 20° LWW-WZB-W55-L12-RDM-W									TYPE:LED			WEIGHT:					
DIM.:									SPEC.:			SERIAL No.:20240700011					
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:			PROTECTION ANGLE:					

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.58	2.76	4.44	5.72	7.17	8.64	9.39	10.1
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.02	6.33	9.40	12.0	15.0	17.7	19.0	20.6
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.46	5.36	8.90	13.9	18.1	21.6	25.2	28.8	31.5	33.7
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	6.11	12.0	17.8	23.2	28.3	32.7	37.0	41.1	44.9	47.6
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.83	4.02	9.94	16.9	23.5	30.3	37.2	44.8	52.2	58.1	64.2	69.0
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.92	9.36	16.5	24.5	31.8	40.0	49.1	60.1	70.0	77.5	85.7	91.9
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.38	5.06	12.4	20.0	28.6	37.4	48.0	59.2	71.0	84.0	97.5	114	133
-30	0.00	0.00	0.00	0.00	0.00	0.00	2.43	10.2	18.6	26.8	36.1	46.8	60.5	73.8	87.0	103	124	151	181
-25	0.00	0.00	0.00	0.00	0.00	0.00	3.07	11.7	20.5	29.8	40.1	52.9	67.2	83.4	106	141	197	285	388
-20	0.00	0.00	0.00	0.00	0.00	0.00	7.37	16.8	26.2	36.6	49.0	64.4	79.9	101	136	197	300	459	634
-15	0.00	0.00	0.00	0.00	0.00	0.20	7.30	16.9	26.8	37.6	51.0	67.2	84.8	113	167	275	493	843	1413
-10	0.00	0.00	0.00	0.00	0.00	1.75	11.1	20.9	31.4	43.2	59.2	76.5	98.5	141	230	420	805	1413	2449
-5	0.00	0.00	0.00	0.00	0.00	0.59	9.69	19.6	30.2	42.2	58.1	75.6	98.6	145	244	478	991	2269	4426
0	0.00	0.00	0.00	0.00	0.00	2.56	12.2	22.4	33.4	46.5	64.0	82.1	112	176	323	688	1501	3913	7265
5	0.00	0.00	0.00	0.00	0.00	0.40	9.46	19.7	30.4	42.7	59.2	77.0	102	154	266	542	1145	2740	5527
10	0.00	0.00	0.00	0.00	0.00	1.01	10.8	21.1	32.0	44.6	61.4	79.7	107	164	285	576	1168	2589	4887
15	0.00	0.00	0.00	0.00	0.00	0.01	7.52	17.6	28.2	39.8	54.6	71.9	92.7	131	208	379	731	1459	2717
20	0.00	0.00	0.00	0.00	0.00	0.00	8.25	18.4	28.9	40.1	54.7	71.3	89.6	121	179	289	492	773	1060
25	0.00	0.00	0.00	0.00	0.00	0.00	4.65	14.2	24.0	34.0	45.9	60.3	76.5	97.8	132	194	306	470	650
30	0.00	0.00	0.00	0.00	0.00	0.00	4.88	14.0	23.0	32.2	42.6	55.4	70.5	85.9	105	133	178	239	310
35	0.00	0.00	0.00	0.00	0.00	0.00	1.50	9.01	17.2	25.8	35.0	45.3	57.5	70.6	85.4	105	131	166	208
40	0.00	0.00	0.00	0.00	0.00	0.00	0.50	7.25	14.7	23.0	31.2	39.8	49.7	60.6	72.9	85.0	96.1	110	124
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.95	8.44	16.1	23.7	31.1	39.2	48.0	57.3	67.0	76.0	86.0	95.8
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.17	12.3	19.1	25.4	32.2	38.9	45.7	52.5	59.7	65.8	70.3
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.88	5.64	10.9	16.4	22.6	28.3	33.5	39.2	44.8	49.1	52.6
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.15	4.74	9.77	15.4	19.7	23.4	28.2	31.9	33.7	36.1
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	1.96	4.33	7.16	9.49	11.8	16.4	19.5	20.7	23.0
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.79	6.32	7.75	8.29	11.1
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.49	2.78	3.88	4.00	5.23
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-07-03

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.1V I:0.1132A P:22.15W PF:0.8850 Lamp Flux:1648.71x1 lm																	
NAME: 8.01.017.0086 20° LW-WZB-W55-L12-RDM-W									TYPE:LED						WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:20240700011		
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:						PROTECTION ANGLE:		

Table--2																	
UNIT: cd																	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.64	0.45	0.17	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	1.34	0.71	0.36	0.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	11.6	11.2	10.4	10.3	8.97	7.68	6.80	5.42	3.69	2.41	0.86	0.00	0.00	0.00	0.00	0.00	0.00
-60	22.0	21.2	20.4	19.8	17.4	15.0	13.2	10.2	6.78	4.39	0.60	0.00	0.00	0.00	0.00	0.00	0.00
-55	35.6	35.6	34.5	33.2	30.5	27.0	23.8	19.9	15.2	11.2	6.64	2.39	0.00	0.00	0.00	0.00	0.00
-50	49.6	49.7	48.2	45.8	42.3	37.8	33.1	27.8	21.9	16.4	10.3	3.43	0.00	0.00	0.00	0.00	0.00
-45	72.7	74.3	73.3	70.5	65.3	57.9	49.6	41.1	32.4	24.7	16.9	9.43	3.31	0.00	0.00	0.00	0.00
-40	96.9	98.8	97.6	93.5	85.7	74.8	62.9	50.9	39.6	30.0	20.5	12.7	4.89	0.00	0.00	0.00	0.00
-35	150	159	158	147	129	108	88.6	70.9	54.8	41.0	29.0	19.1	10.3	2.10	0.00	0.00	0.00
-30	208	221	216	194	164	133	107	84.2	64.1	47.0	33.1	22.0	11.9	2.07	0.00	0.00	0.00
-25	467	495	470	403	317	230	160	113	83.2	60.1	41.8	28.1	16.4	5.94	0.00	0.00	0.00
-20	748	766	703	580	434	296	191	128	92.2	65.1	44.4	29.3	16.5	5.80	0.00	0.00	0.00
-15	1921	1862	1418	1010	722	489	298	175	114	79.2	53.5	35.1	21.0	9.36	0.68	0.00	0.00
-10	3174	2807	1947	1309	910	596	346	191	120	81.9	54.4	34.9	20.5	8.81	0.29	0.00	0.00
-5	6091	5337	3410	1919	1172	764	450	242	140	92.3	61.0	39.1	23.7	11.5	1.03	0.00	0.00
0	9163	7107	4162	2132	1246	794	452	237	135	88.6	57.6	36.4	21.8	9.50	0.01	0.00	0.00
5	7579	6502	4034	2168	1285	830	487	258	145	94.7	62.0	39.4	24.0	11.3	0.36	0.00	0.00
10	6129	4924	3005	1722	1110	717	410	217	130	85.9	55.9	35.4	20.9	8.19	0.00	0.00	0.00
15	3660	3267	2234	1404	937	617	368	207	127	85.5	56.5	36.2	21.4	8.91	0.01	0.00	0.00
20	1255	1229	1068	851	621	407	248	152	104	71.8	47.9	30.4	16.7	4.86	0.00	0.00	0.00
25	793	814	734	603	457	317	208	137	96.5	68.2	46.5	30.5	17.3	5.51	0.00	0.00	0.00
30	363	378	353	297	235	177	133	102	76.5	54.7	38.1	25.0	12.8	1.88	0.00	0.00	0.00
35	244	257	246	215	179	142	112	87.3	66.8	49.3	34.9	23.5	12.4	2.18	0.00	0.00	0.00
40	135	135	129	119	108	94.6	79.7	63.9	49.6	37.5	26.7	17.9	7.49	0.00	0.00	0.00	0.00
45	103	104	101	93.9	85.9	75.7	64.8	53.3	42.2	32.5	22.9	14.5	6.26	0.21	0.00	0.00	0.00
50	72.9	72.4	69.8	65.5	59.7	52.4	45.3	37.9	30.7	23.6	15.5	7.94	1.65	0.00	0.00	0.00	0.00
55	54.9	54.7	53.1	50.8	46.5	41.4	36.4	30.1	23.8	18.5	11.6	4.77	1.50	0.00	0.00	0.00	0.00
60	37.4	36.4	35.7	34.7	31.4	28.4	25.2	19.7	14.8	10.9	4.77	0.00	0.00	0.00	0.00	0.00	0.00
65	24.9	23.9	23.4	23.7	21.0	18.1	16.6	12.7	7.90	5.92	3.05	0.08	0.00	0.00	0.00	0.00	0.00
70	12.4	11.0	11.3	12.3	9.17	7.18	6.89	3.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	6.24	5.60	5.52	6.18	4.98	3.63	3.55	2.25	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: