

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5613.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	39.8V x 40.1H
	At 50% of Imax	19.1V x 18.2H
	At 90% of Imax	5.0V x 6.5H
Beam Flux	Total	999.4 lumens per klm.
	To 10% of Imax	694.6 lumens per klm.
	To 50% of Imax	292.5 lumens per klm.
	To 90% of Imax	27.1 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.5V I:0.2343A P:50.05W PF:0.9645 Lamp Flux:3524.59x1 lm		
NAME: 8.01.017.0086 20°LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408003
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

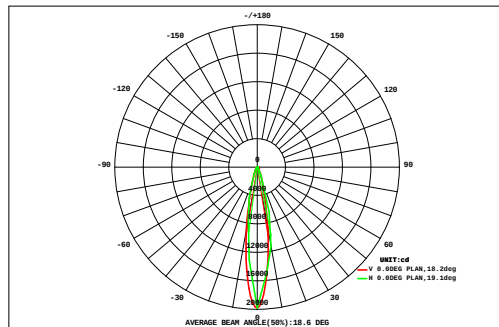

DATA OF LAMP		Eff:70.42lm/W	
MODELLWW-WZB-W55-L12-RDM	Imax(cd)	19784	
NOMINAL POWER(W)	50	AVAILABILITY(%)	71.0
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	2503
NOMINAL FLUX(lm)	3524.59	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3525
TEST VOLTAGE(V)	221.5	θ @50%(H,V)	18,19DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	27	0.82	0.99	1.20	1.44	1.71	2.00	2.29	2.53	2.69	2.74	2.67	2.48	2.22	1.92	1.62	1.35	1.11	0.91	32.7	0.00	
	24	0.94	1.21	1.55	1.97	2.48	3.06	3.68	4.25	4.69	4.90	4.85	4.51	4.00	3.40	2.80	2.26	1.79	1.39	53.7	0.00	
	21	1.24	1.64	2.13	2.72	3.42	4.21	4.98	5.65	6.08	6.18	5.91	5.33	4.59	3.81	3.07	2.42	1.88	1.43	66.7	25.3	
	18	1.57	2.10	2.74	3.51	4.42	5.42	6.34	7.10	7.50	7.46	6.94	6.10	5.13	4.15	3.28	2.54	1.93	1.44	79.6	47.0	
	15	1.45	1.98	2.72	3.81	5.33	7.63	11.3	15.9	20.1	22.3	21.2	17.7	13.2	9.26	6.43	4.61	3.36	2.46	171	149	
	12	1.74	2.42	3.40	4.88	7.04	10.5	16.0	22.4	27.7	29.6	27.2	21.8	15.7	10.7	7.32	5.18	3.73	2.71	220	200	
	9	2.48	3.46	4.97	7.16	10.5	16.3	24.3	32.4	37.3	36.5	30.5	22.4	14.9	9.66	6.62	4.65	3.32	2.38	270	252	
		2.16	3.03	4.32	6.27	9.35	14.8	23.2	32.7	40.8	43.8	39.7	31.1	21.8	14.1	8.99	6.04	4.22	2.98	309	292	
		1.74	2.47	3.48	5.10	7.74	12.7	21.2	32.2	43.7	51.1	49.4	40.5	29.4	19.0	11.6	7.58	5.22	3.65	348	331	
		2.77	3.97	5.81	8.79	14.6	24.9	37.3	49.6	57.8	55.7	45.0	32.3	20.8	12.3	7.80	5.33	3.71	2.59	391	376	
		2.66	3.81	5.56	8.37	13.8	23.3	34.8	46.3	54.0	52.5	42.7	30.9	20.1	12.1	7.72	5.31	3.72	2.61	370	354	
		1.48	2.06	2.82	3.83	4.96	6.78	10.9	16.8	23.7	29.6	30.5	26.1	19.9	13.8	9.03	6.18	4.42	3.17	216	195	
		1.75	2.40	3.28	4.44	5.64	7.17	10.0	13.6	16.9	19.0	18.5	15.5	11.9	8.78	6.28	4.55	3.36	2.44	155	132	
		2.10	2.87	3.92	5.33	6.81	8.39	10.1	11.3	10.7	8.20	5.58	3.85	2.99	3.11	3.15	2.69	2.13	1.61	94.9	65.5	
		1.09	1.46	1.93	2.55	3.36	4.27	5.49	7.17	8.99	10.3	10.4	9.36	7.66	5.89	4.54	3.49	2.66	2.01	92.7	62.8	
		0.87	1.12	1.41	1.76	2.19	2.50	2.82	3.44	4.46	5.63	6.36	6.26	5.54	4.47	3.57	2.81	2.18	1.68	59.1	21.6	
		1.05	1.32	1.64	1.96	2.24	2.42	2.31	1.85	1.28	1.03	1.00	1.10	1.37	1.55	1.46	1.26	1.03	0.82	26.7	0.00	
		0.81	0.98	1.19	1.41	1.62	1.78	1.78	1.67	1.80	1.87	1.88	1.81	1.67	1.58	1.47	1.28	1.07	0.87	26.5	0.00	
-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)						6	9	12	15	18	21	24	27	
Φ t	28.7	39.3	54.1	75.3	107	158	229	307	370	388	350	279	203	139	96.8	69.5	50.8	37.2	2983	---		
Φ a	0.00	0.57	13.5	38.7	79.8	135	209	291	356	375	337	263	182	116	69.2	32.3	3.72	0.00	---	2503		

one-half-peak spread: U:7.5,D:11.8 , L:9.3,R:9.0


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.5V I:0.2343A P:50.05W PF:0.9645 Lamp Flux:3524.59x1 lm		
NAME: 8.01.017.0086 20°LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408003
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

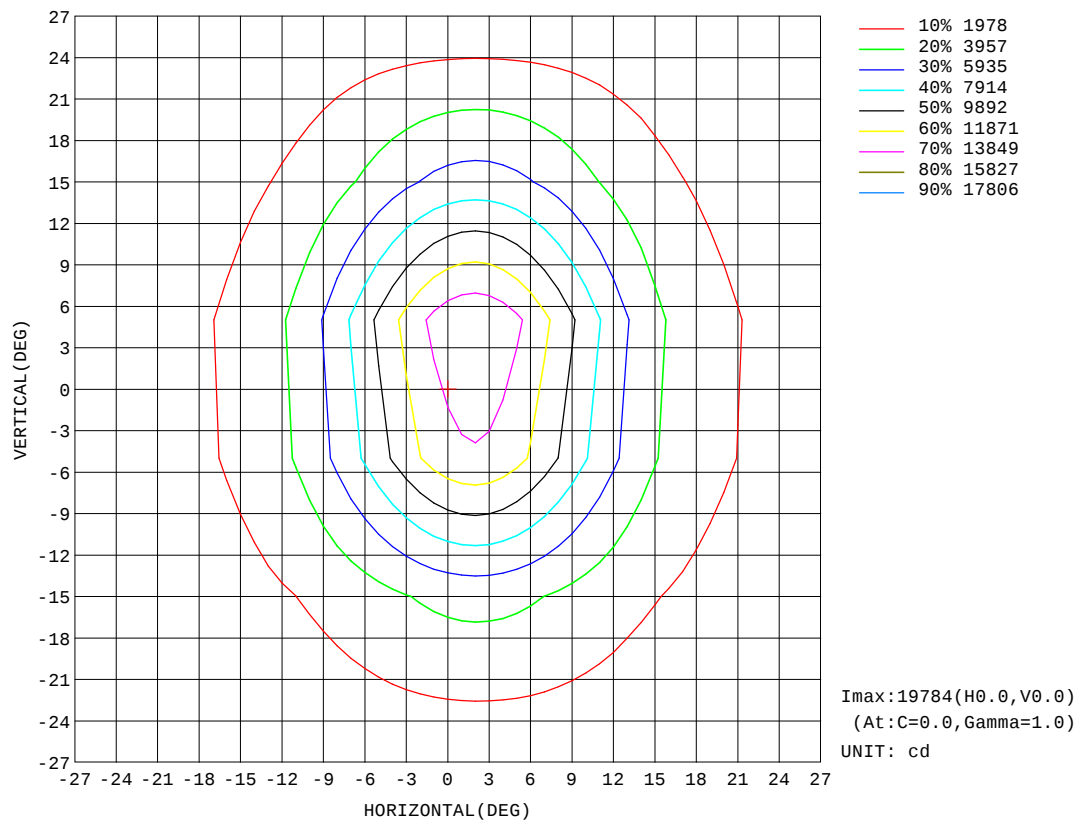


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.5V I:0.2343A P:50.05W PF:0.9645 Lamp Flux:3524.59x1 lm		
NAME: 8.01.017.0086 20°LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408003
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

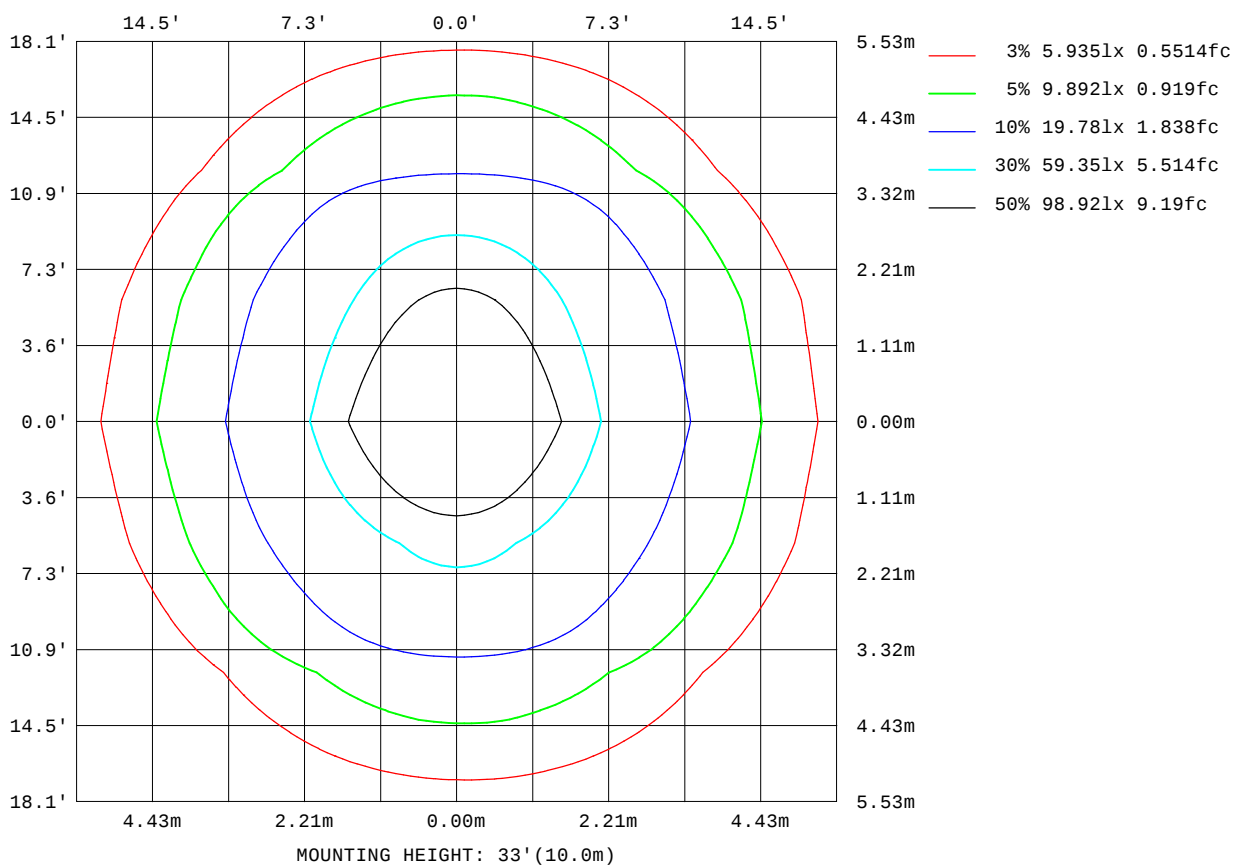


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.5V I:0.2343A P:50.05W PF:0.9645 Lamp Flux:3524.59x1 lm		
NAME: 8.01.017.0086 20°LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408003
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

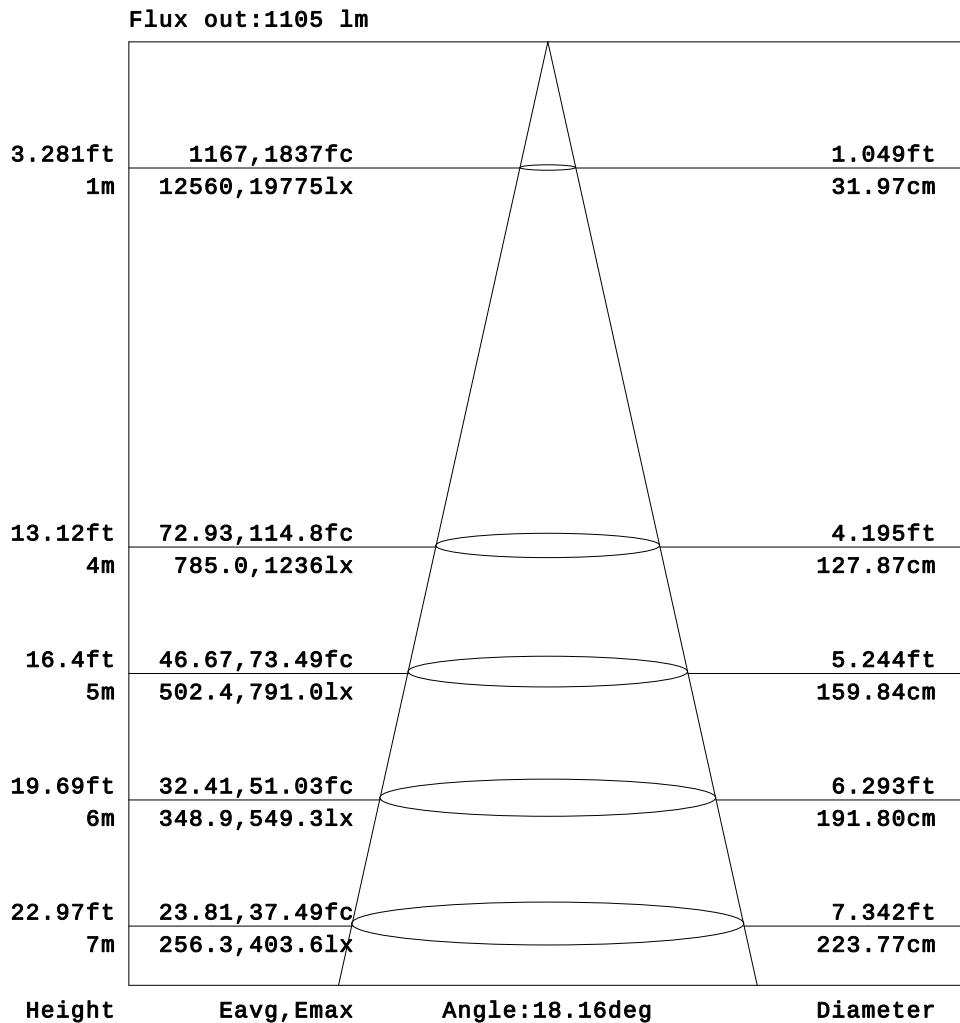


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

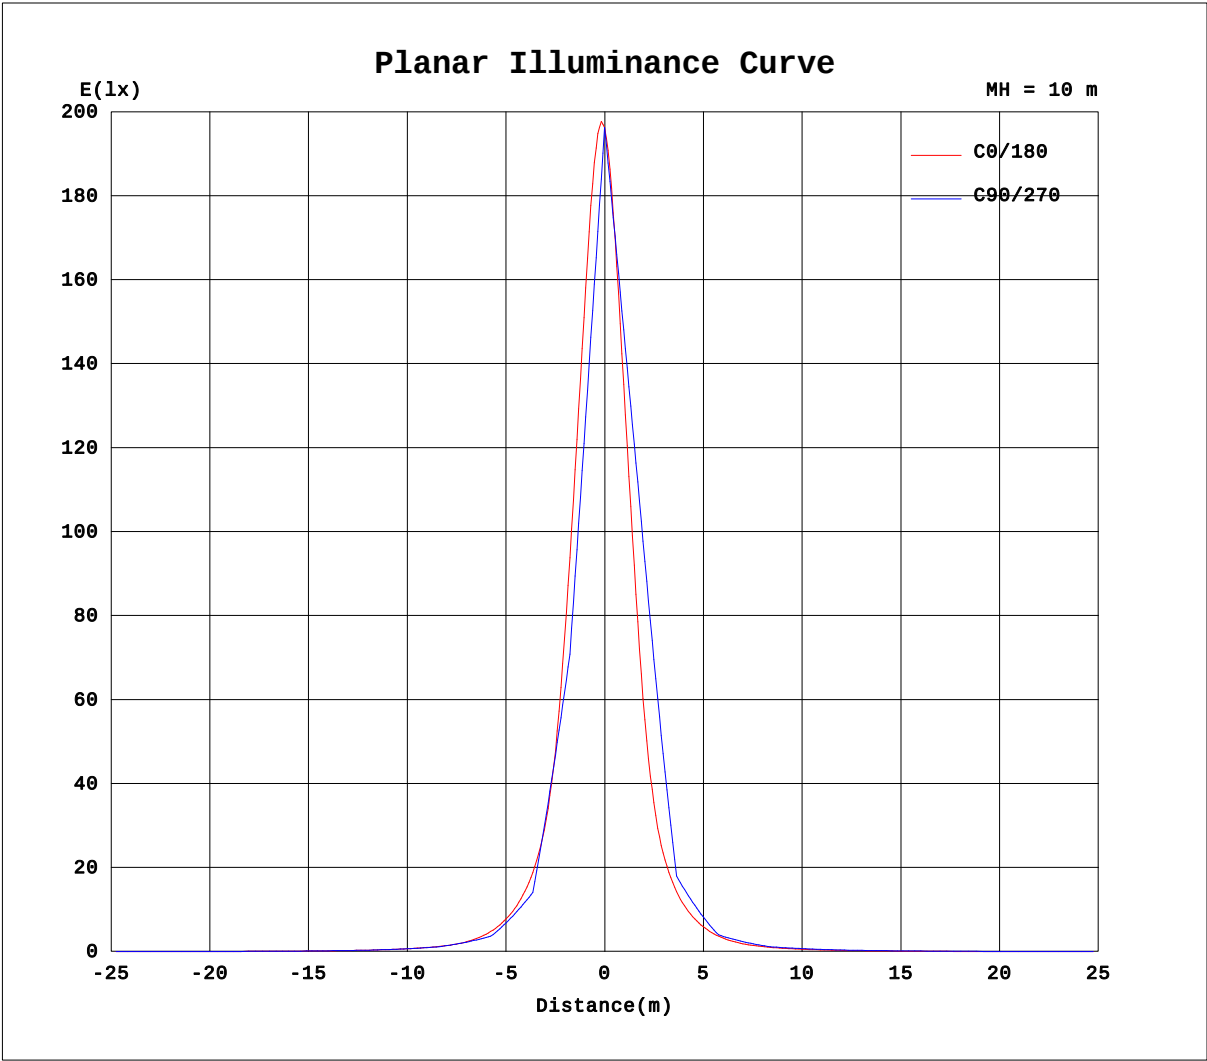

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.5V I:0.2343A P:50.05W PF:0.9645 Lamp Flux:3524.59x1 lm		
NAME: 8.01.017.0086 20°LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408003
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: ×10cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.48	0.64	0.82	1.05	1.15	1.19	1.30	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	1.11	1.40	1.81	2.22	2.32	2.44	2.68	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.63	1.17	1.50	2.09	2.86	3.33	3.78	4.34	4.61	4.73	4.99	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	1.81	2.59	3.30	4.25	5.06	5.57	6.19	6.78	6.97	7.22	7.45	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.40	1.11	2.45	3.70	4.54	5.60	6.77	7.66	8.46	9.29	9.88	10.3	10.6	
-50	0.00	0.00	0.00	0.00	0.00	0.08	1.37	2.62	4.17	5.49	6.55	7.92	9.26	10.4	11.4	12.4	13.1	13.7	13.9	
-45	0.00	0.00	0.00	0.00	0.00	0.32	1.59	3.04	4.53	6.07	7.54	9.16	11.0	12.9	14.9	16.8	18.3	19.4	20.0	
-40	0.00	0.00	0.00	0.00	0.00	1.41	3.02	4.54	6.04	7.82	9.79	11.9	14.3	17.0	20.0	22.5	24.4	25.8	26.2	
-35	0.00	0.00	0.00	0.00	0.00	1.32	3.05	4.69	6.41	8.36	10.7	13.4	16.7	20.2	24.3	29.0	34.0	38.4	41.2	
-30	0.00	0.00	0.00	0.00	0.63	2.63	4.52	6.20	8.18	10.6	13.6	17.6	21.9	26.4	32.3	39.5	47.3	53.7	57.0	
-25	0.00	0.00	0.00	0.00	0.49	2.18	4.13	6.04	8.24	10.9	14.5	18.9	24.4	32.7	45.0	61.8	81.4	100	113	
-20	0.00	0.00	0.00	0.00	1.66	3.25	5.24	7.62	10.2	13.8	18.7	24.3	33.0	47.6	70.2	99.3	132	159	171	
-15	0.00	0.00	0.00	0.00	1.20	2.83	4.93	7.16	9.73	13.3	18.5	24.9	35.5	55.0	87.4	139	215	335	446	
-10	0.00	0.00	0.00	0.25	2.23	4.10	6.20	8.63	11.8	16.7	23.0	32.4	51.2	84.9	140	233	384	616	749	
-5	0.00	0.00	0.00	0.00	1.66	3.53	5.59	7.89	10.8	15.0	21.0	29.4	46.6	78.6	134	238	475	911	1316	
0	0.00	0.00	0.00	0.49	2.56	4.54	6.73	9.27	12.8	17.9	24.8	37.6	63.3	110	195	389	884	1578	1978	
5	0.00	0.00	0.00	0.00	1.75	3.56	5.64	7.97	10.9	15.3	21.3	29.9	47.9	80.9	138	249	516	1028	1502	
10	0.00	0.00	0.00	0.32	2.26	4.16	6.32	8.83	12.1	17.2	23.5	33.8	54.5	90.4	152	271	521	917	1134	
15	0.00	0.00	0.00	0.00	1.32	3.11	5.16	7.42	10.1	13.8	19.0	25.8	37.7	59.6	95.7	158	269	471	655	
20	0.00	0.00	0.00	0.00	1.75	3.62	5.75	7.99	10.6	14.4	19.3	25.4	35.9	53.7	80.5	116	161	200	218	
25	0.00	0.00	0.00	0.00	0.75	2.55	4.54	6.55	8.66	11.4	15.0	19.7	25.7	35.4	50.0	70.0	95.4	121	138	
30	0.00	0.00	0.00	0.00	1.18	3.06	4.93	6.72	8.64	11.1	14.2	18.3	22.6	27.5	34.3	42.8	51.5	58.6	61.8	
35	0.00	0.00	0.00	0.00	0.23	1.94	3.64	5.22	6.88	8.83	11.1	14.0	17.3	20.8	25.2	30.3	35.7	40.6	43.5	
40	0.00	0.00	0.00	0.00	0.47	2.20	3.62	4.99	6.61	8.31	10.1	12.2	14.8	17.4	20.0	22.2	24.1	25.5	25.9	
45	0.00	0.00	0.00	0.00	0.00	0.95	2.31	3.54	5.00	6.51	7.92	9.54	11.4	13.4	15.4	17.2	18.8	20.1	20.8	
50	0.00	0.00	0.00	0.00	0.00	0.78	1.92	3.21	4.61	5.84	6.96	8.29	9.65	11.0	12.3	13.6	14.7	15.4	15.7	
55	0.00	0.00	0.00	0.00	0.00	0.13	0.76	1.81	3.10	4.12	5.05	6.20	7.31	8.29	9.34	10.4	11.2	11.9	12.3	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.24	1.53	2.46	3.12	4.03	5.05	5.76	6.41	7.23	7.91	8.31	8.74	8.98	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	1.08	1.43	2.08	2.98	3.62	4.12	4.82	5.47	5.78	6.11	6.46	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.85	1.52	1.85	2.34	3.01	3.34	3.47	3.80	4.02	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.65	0.86	1.05	1.38	1.63	1.71	1.82	1.99	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-02

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.5V I:0.2343A P:50.05W PF:0.9645 Lamp Flux:3524.59x1 lm		
NAME: 8.01.017.0086 20°LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408003
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																		UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	1.33	1.23	1.23	1.20	0.99	0.83	0.65	0.41	0.21	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	2.56	2.44	2.46	2.26	1.81	1.53	1.13	0.65	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	5.03	4.82	4.76	4.57	4.05	3.62	3.20	2.51	1.90	1.53	1.22	0.47	0.05	0.00	0.00	0.00	0.00	0.00	
-60	7.32	7.13	6.99	6.51	5.87	5.41	4.82	3.76	3.25	2.89	1.77	0.50	0.00	0.00	0.00	0.00	0.00	0.00	
-55	10.6	10.3	9.88	9.32	8.51	7.75	7.01	5.99	5.10	4.38	3.34	1.88	0.95	0.16	0.00	0.00	0.00	0.00	
-50	13.7	13.1	12.4	11.5	10.5	9.52	8.47	7.37	6.43	5.15	3.72	2.35	1.28	0.00	0.00	0.00	0.00	0.00	
-45	20.0	19.3	18.1	16.7	15.0	13.2	11.3	9.64	8.21	6.79	5.21	3.81	2.63	0.88	0.00	0.00	0.00	0.00	
-40	25.9	24.6	22.8	20.5	18.0	15.4	12.8	10.7	8.90	7.18	5.59	4.37	2.67	0.56	0.00	0.00	0.00	0.00	
-35	41.5	39.0	34.7	29.7	24.8	20.8	17.2	13.9	11.2	8.97	7.06	5.53	3.96	1.91	0.08	0.00	0.00	0.00	
-30	55.7	50.3	42.6	35.0	28.3	23.4	18.8	14.8	11.6	9.15	7.25	5.55	3.70	1.39	0.00	0.00	0.00	0.00	
-25	113	101	82.9	63.0	45.6	33.1	24.8	19.3	14.7	11.2	8.62	6.65	4.68	2.60	0.55	0.00	0.00	0.00	
-20	164	139	107	76.4	51.8	35.1	25.9	19.8	14.6	11.0	8.35	6.21	4.05	2.06	0.13	0.00	0.00	0.00	
-15	435	318	205	134	86.7	54.6	35.1	24.7	18.3	13.3	9.89	7.37	5.16	3.15	1.27	0.00	0.00	0.00	
-10	625	399	240	149	92.9	55.6	34.5	24.0	17.6	12.6	9.29	6.74	4.59	2.73	0.51	0.00	0.00	0.00	
-5	1246	801	408	219	128	75.7	44.5	28.5	20.7	14.8	10.7	7.86	5.58	3.62	1.73	0.00	0.00	0.00	
0	1535	855	384	203	116	66.2	38.8	25.8	18.8	13.3	9.67	7.07	4.90	3.05	0.67	0.00	0.00	0.00	
5	1421	903	443	230	132	77.7	45.5	28.8	20.9	15.0	10.9	7.99	5.71	3.69	1.82	0.00	0.00	0.00	
10	923	539	284	163	98.6	58.5	35.7	24.6	18.1	13.0	9.57	7.01	4.77	2.93	0.56	0.00	0.00	0.00	
15	633	436	250	150	93.2	58.0	36.6	25.4	19.0	13.8	10.2	7.50	5.26	3.30	1.48	0.00	0.00	0.00	
20	203	164	120	83.6	55.9	37.2	26.7	20.5	15.3	11.4	8.51	6.14	4.06	2.31	0.16	0.00	0.00	0.00	
25	137	119	92.8	68.2	48.5	34.6	25.6	19.9	15.4	11.6	8.88	6.63	4.52	2.66	0.84	0.00	0.00	0.00	
30	59.6	53.2	44.4	36.0	28.7	23.7	19.4	15.5	12.1	9.47	7.38	5.37	3.43	1.63	0.00	0.00	0.00	0.00	
35	43.5	40.5	35.7	30.4	25.2	21.2	17.7	14.5	11.6	9.22	7.22	5.51	3.81	2.00	0.24	0.00	0.00	0.00	
40	25.5	24.3	22.7	20.7	18.3	15.8	13.3	11.1	9.11	7.25	5.67	4.25	2.78	0.88	0.00	0.00	0.00	0.00	
45	20.7	20.0	18.9	17.5	15.7	13.8	11.9	10.1	8.52	6.92	5.28	3.97	2.85	1.11	0.00	0.00	0.00	0.00	
50	15.5	14.9	14.0	12.9	11.6	10.4	9.04	7.79	6.69	5.23	3.76	2.81	1.80	0.00	0.00	0.00	0.00	0.00	
55	12.3	11.9	11.5	10.7	9.75	8.86	7.85	6.62	5.66	4.77	3.41	2.18	1.23	0.28	0.00	0.00	0.00	0.00	
60	8.82	8.63	8.41	7.79	7.16	6.63	5.69	4.59	3.98	3.31	1.93	0.83	0.00	0.00	0.00	0.00	0.00	0.00	
65	6.43	6.20	6.15	5.82	5.19	4.79	4.34	3.41	2.65	2.14	1.26	0.61	0.09	0.00	0.00	0.00	0.00	0.00	
70	3.83	3.73	3.75	3.34	2.83	2.69	2.32	1.50	0.92	0.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	1.97	1.86	1.88	1.79	1.50	1.36	1.27	0.92	0.56	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: