

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		9662.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	34.5V x 27.8H
	At 50% of Imax	12.8V x 14.0H
	At 90% of Imax	4.3V x 7.0H
Beam Flux	Total	988.7 lumens per klm.
	To 10% of Imax	657.1 lumens per klm.
	To 50% of Imax	298.7 lumens per klm.
	To 90% of Imax	37.1 lumens per klm.
Upward LOR		0.0 %
Downward LOR		98.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.5V I:0.2883A P:61.90W PF:1.000 Freq:50.00Hz Lamp Flux:3878.9x1 lm		
NAME: 8.01.017.0105 10° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202410050
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

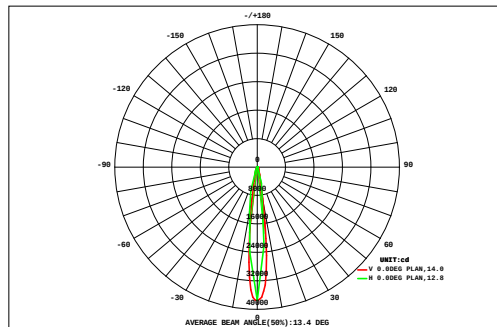

DATA OF LAMP		Eff:62.66lm/W	
MODELLWW-WZB-W55-L12-RDM	Imax(cd)	37480	
NOMINAL POWER(W)	62	AVAILABILITY(%)	68.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2650
NOMINAL FLUX(lm)	3878.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3879
TEST VOLTAGE(V)	220	θ @50%(H,V)	14,13DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	27	0.81	1.02	1.25	1.49	1.74	1.99	2.23	2.45	2.59	2.62	2.52	2.35	2.12	1.84	1.53	1.23	0.99	0.79	31.6	0.00	
	24	0.92	1.21	1.56	1.98	2.48	3.03	3.60	4.08	4.40	4.50	4.38	4.09	3.68	3.16	2.58	2.02	1.55	1.22	50.4	0.00	
	21	1.27	1.65	2.13	2.71	3.39	4.13	4.84	5.36	5.61	5.58	5.29	4.85	4.23	3.51	2.77	2.12	1.62	1.27	62.3	0.00	
	18	1.65	2.13	2.75	3.49	4.36	5.28	6.13	6.68	6.85	6.64	6.18	5.56	4.73	3.80	2.91	2.17	1.66	1.29	74.3	0.00	
	15	1.43	2.00	2.78	3.81	5.04	6.69	9.32	14.2	20.7	24.4	22.0	15.7	10.5	7.35	5.45	4.01	2.90	2.11	160	107	
	12	1.71	2.45	3.47	4.79	6.42	8.81	13.1	20.8	29.5	32.7	27.5	18.7	12.2	8.45	6.18	4.50	3.22	2.31	207	155	
	9	2.46	3.54	5.02	6.79	9.13	12.9	20.4	32.6	42.0	39.8	28.2	17.1	11.1	7.87	5.65	4.02	2.84	2.03	253	203	
	6	2.13	3.04	4.34	6.01	8.27	12.1	21.7	41.8	60.8	65.5	58.4	38.9	20.1	11.1	7.32	5.15	3.63	2.54	373	327	
	3	1.70	2.40	3.45	4.97	7.09	10.9	22.6	51.2	80.8	93.5	91.9	63.3	30.1	14.7	9.16	6.40	4.50	3.11	502	458	
	0	2.72	3.91	5.53	7.73	12.1	23.7	57.6	99.3	113	112	83.6	39.9	16.7	9.59	6.52	4.58	3.16	2.18	604	561	
	-3	2.62	3.75	5.29	7.38	11.5	22.2	53.3	92.4	106	105	79.5	39.0	16.7	9.53	6.47	4.57	3.17	2.20	571	526	
	-6	1.51	2.03	2.83	3.93	5.01	5.09	4.69	14.6	34.4	42.6	48.2	40.0	21.7	11.4	7.36	5.29	3.81	2.70	257	210	
	-9	1.76	2.37	3.26	4.47	5.68	6.38	7.59	9.58	15.3	17.2	18.5	17.3	11.6	7.52	5.36	3.95	2.87	2.07	143	86.4	
	-12	2.09	2.83	3.86	5.23	6.74	8.26	8.21	4.06	1.42	0.22	0.00	0.00	1.15	3.12	3.09	2.41	1.78	1.34	55.8	0.00	
	-15	1.08	1.41	1.84	2.44	3.22	4.10	5.03	6.45	8.89	10.9	10.5	8.48	6.50	4.97	3.85	3.00	2.28	1.71	86.7	16.5	
	-18	0.84	1.05	1.30	1.64	2.08	2.47	2.54	2.56	3.81	5.83	6.66	5.86	4.75	3.74	2.98	2.39	1.88	1.44	53.8	0.00	
	-21	0.98	1.20	1.46	1.77	2.07	2.27	2.18	1.53	0.82	0.55	0.66	0.97	1.23	1.28	1.17	1.01	0.87	0.72	22.8	0.00	
	-24	0.71	0.87	1.06	1.27	1.48	1.66	1.67	1.53	1.62	1.69	1.68	1.59	1.43	1.32	1.20	1.04	0.88	0.74	23.4	0.00	
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27		
Φ t	28.4	38.9	53.2	71.9	97.8	142	247	411	539	571	496	324	180	114	81.5	59.9	43.6	31.8	3531	---		
Φ a	0.00	0.00	0.00	0.00	25.0	77.5	197	375	505	538	463	286	138	42.6	2.37	0.00	0.00	0.00	---	2650		


one-half-peak spread: U:6.0,D:7.0 , L:7.4,R:6NEMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.5V I:0.2883A P:61.90W PF:1.000 Freq:50.00Hz Lamp Flux:3878.9x1 lm		
NAME: 8.01.017.0105 10° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202410050
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

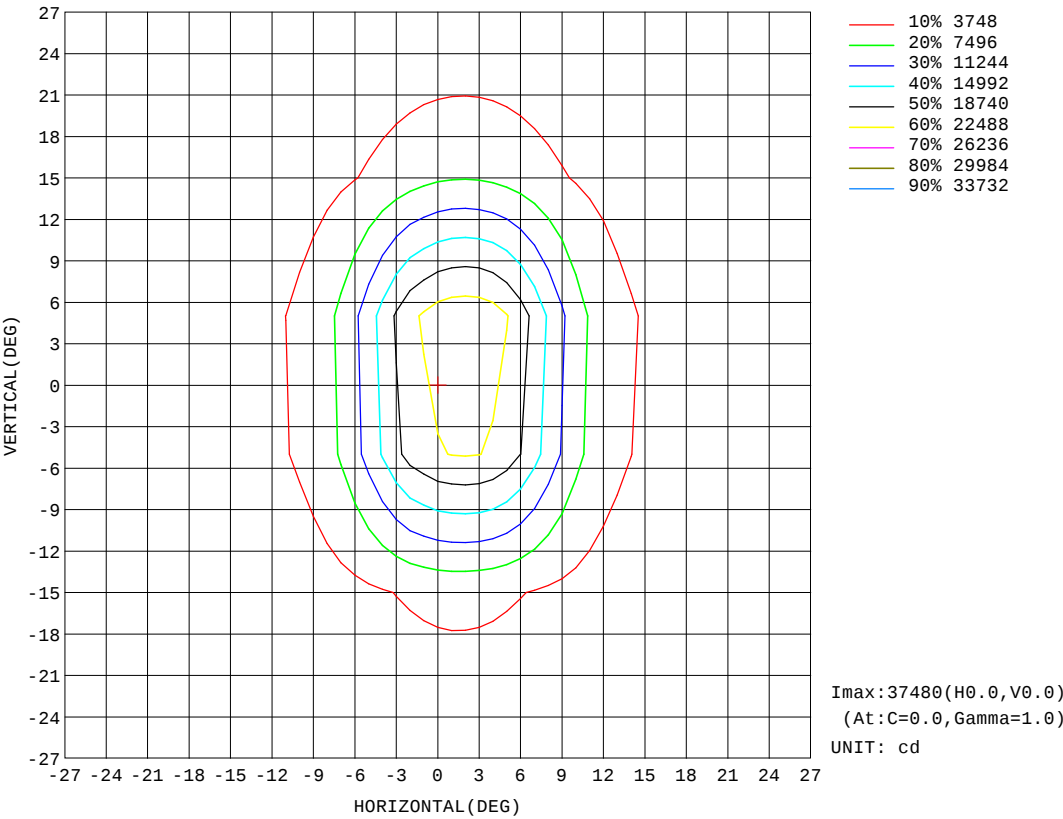


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.5V I:0.2883A P:61.90W PF:1.000 Freq:50.00Hz Lamp Flux:3878.9x1 lm		
NAME: 8.01.017.0105 10° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202410050
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

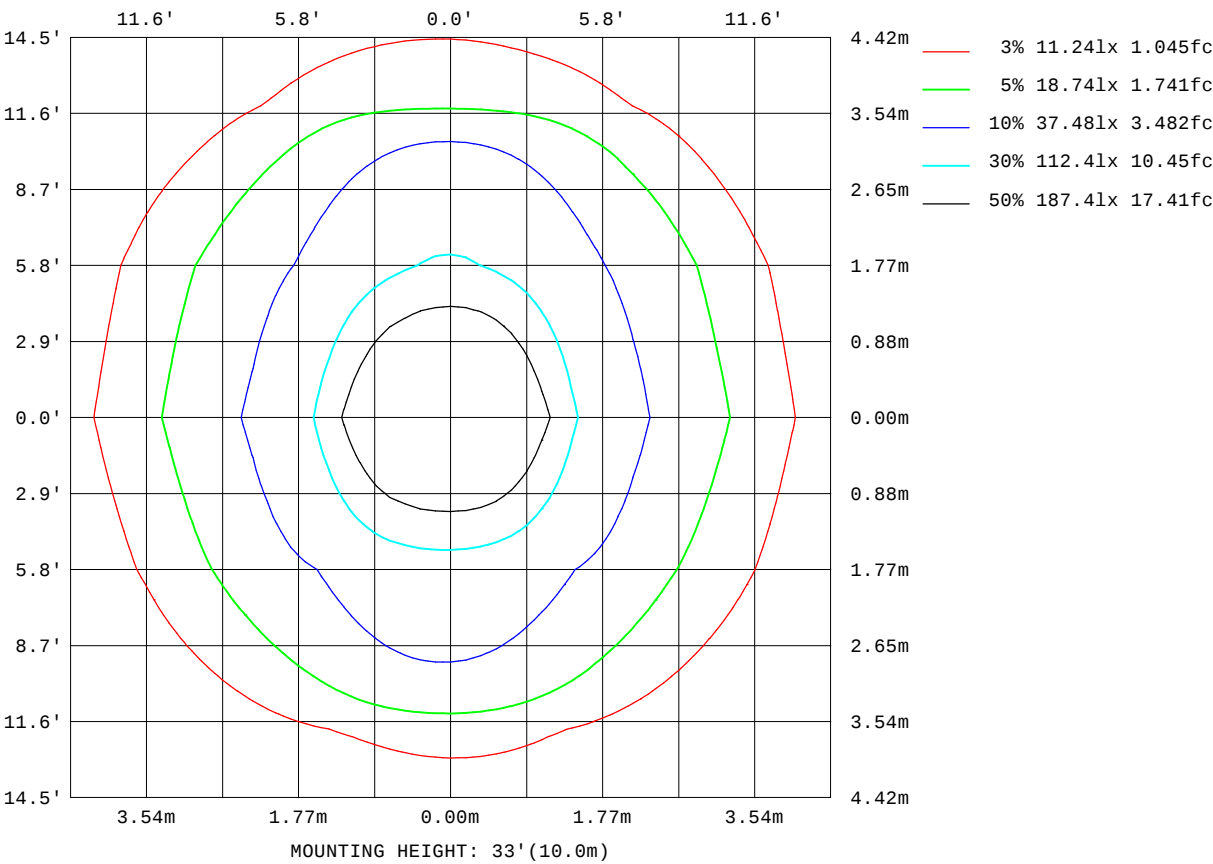

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-28

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

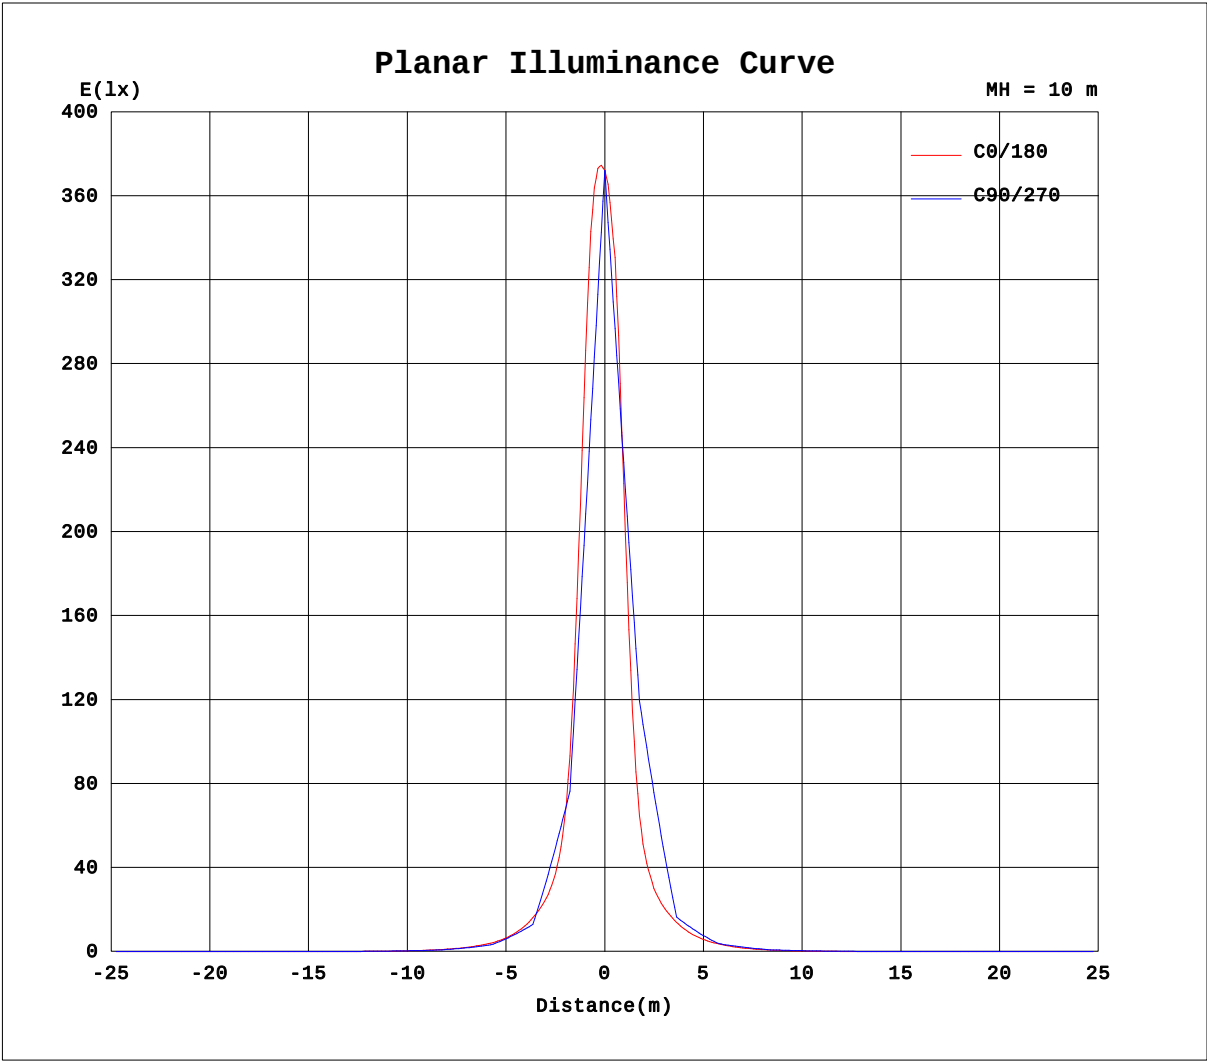


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.5V I:0.2883A P:61.90W PF:1.000 Freq:50.00Hz Lamp Flux:3878.9x1 lm		
NAME: 8.01.017.0105 10° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202410050
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

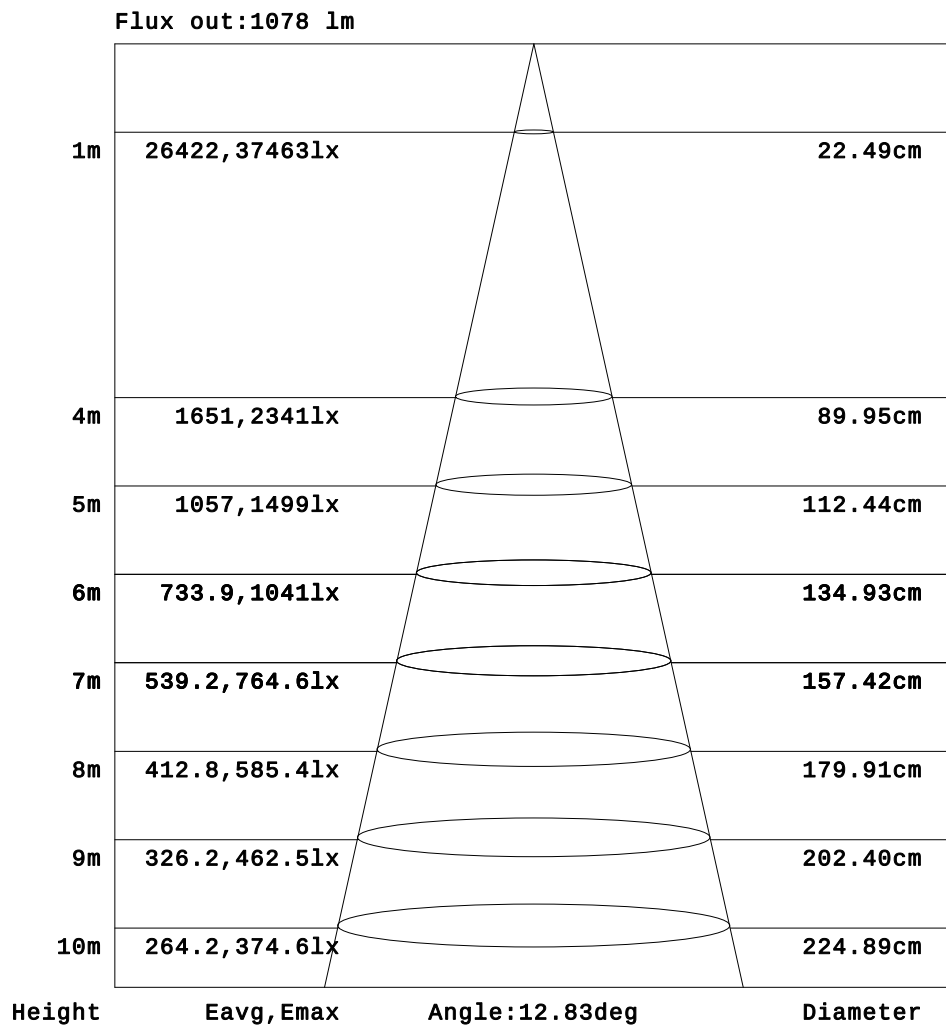

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.2883A P:61.90W PF:1.000 Freq:50.00Hz Lamp Flux:3878.9x1 lm		
NAME: 8.01.017.0105 10° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202410050
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																		UNIT: ×10cd	
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.21	0.40	0.58	0.72	0.82	0.89	0.95
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	0.56	0.95	1.29	1.53	1.71	1.83	1.92
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.25	0.61	1.10	1.67	2.23	2.81	3.24	3.70	3.92	4.10
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.76	1.56	2.42	3.24	3.97	4.73	5.29	5.96	6.13	6.37
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.58	1.35	2.30	3.32	4.68	6.11	7.68	9.15	10.6	11.6	12.1
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.58	1.52	2.68	3.81	5.23	7.28	9.44	11.9	14.2	16.3	17.6	18.1
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.69	1.77	3.06	4.68	6.81	10.0	13.9	18.3	23.2	28.0	31.6	33.6
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.46	1.58	2.93	4.71	7.00	10.7	15.7	21.8	28.5	36.1	43.0	47.8	49.2
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.38	1.54	3.05	5.14	7.88	12.5	19.5	29.2	40.9	56.9	76.2	92.5	102
-20	0.00	0.00	0.00	0.00	0.00	0.00	1.14	2.61	4.70	7.52	11.9	19.3	30.2	45.4	64.8	92.9	124	147	157
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.80	2.23	4.19	7.14	11.7	20.3	33.8	54.6	84.4	134	203	316	467
-10	0.00	0.00	0.00	0.00	0.00	0.22	1.51	3.20	5.88	9.74	17.4	30.8	52.1	84.3	138	224	355	619	799
-5	0.00	0.00	0.00	0.00	0.00	0.00	1.01	2.60	4.82	8.34	14.8	26.7	46.9	78.4	132	223	418	1257	2218
0	0.00	0.00	0.00	0.00	0.00	0.31	1.67	3.58	6.22	11.1	20.2	36.8	63.5	108	188	330	889	2958	3748
5	0.00	0.00	0.00	0.00	0.00	0.00	1.00	2.63	4.79	8.48	15.4	27.5	47.5	79.5	138	234	438	1335	2427
10	0.00	0.00	0.00	0.00	0.00	0.19	1.52	3.28	5.72	10.5	18.9	32.2	53.0	90.0	155	249	421	878	1264
15	0.00	0.00	0.00	0.00	0.00	0.00	0.83	2.33	4.20	7.40	13.1	22.2	36.4	59.5	97.3	154	237	414	698
20	0.00	0.00	0.00	0.00	0.00	0.04	1.24	2.77	4.74	8.14	13.7	22.1	35.7	55.0	80.9	116	157	190	199
25	0.00	0.00	0.00	0.00	0.00	0.00	0.50	1.79	3.30	5.59	9.08	14.4	22.3	34.5	50.1	70.2	93.8	117	129
30	0.00	0.00	0.00	0.00	0.00	0.00	0.70	1.95	3.43	5.47	8.28	12.2	18.0	25.7	34.3	42.9	50.0	56.0	59.7
35	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.97	2.14	3.62	5.46	8.05	11.5	16.1	21.6	27.6	32.7	36.7	39.5
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.90	1.94	3.12	4.52	6.45	8.53	10.9	13.7	16.6	19.0	20.1	20.2
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.94	1.87	2.89	4.13	5.57	7.11	8.88	10.7	12.4	13.5	13.9
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.66	1.41	2.18	2.95	3.78	4.73	5.59	6.18	6.88	7.30	7.50
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.55	1.08	1.69	2.26	2.89	3.51	4.03	4.50	4.83	5.04
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.47	0.88	1.23	1.55	1.93	2.23	2.44	2.55	2.64
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.37	0.55	0.71	0.89	1.06	1.19	1.25	1.31
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.2883A P:61.90W PF:1.000 Freq:50.00Hz Lamp Flux:3878.9x1 lm		
NAME: 8.01.017.0105 10° LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202410050
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																		UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.92	0.89	0.83	0.72	0.60	0.48	0.36	0.23	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	1.81	1.74	1.58	1.34	1.10	0.87	0.63	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	4.04	3.85	3.54	3.20	2.78	2.32	1.86	1.39	0.80	0.42	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	6.14	5.75	5.23	4.74	4.11	3.39	2.74	2.00	1.24	0.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	12.2	11.8	10.7	9.19	7.54	6.01	4.73	3.49	2.37	1.45	0.61	0.11	0.00	0.00	0.00	0.00	0.00	0.00	
-40	18.0	17.1	15.0	12.3	9.70	7.55	5.72	4.04	2.74	1.66	0.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	32.9	30.5	26.9	22.3	17.4	13.1	9.57	6.70	4.49	2.88	1.63	0.61	0.02	0.00	0.00	0.00	0.00	0.00	
-30	46.1	41.3	35.4	28.3	21.5	15.6	11.0	7.43	4.85	3.01	1.67	0.58	0.00	0.00	0.00	0.00	0.00	0.00	
-25	101	87.7	69.6	52.3	38.0	26.6	17.8	11.6	7.29	4.48	2.63	1.34	0.24	0.00	0.00	0.00	0.00	0.00	
-20	147	120	89.3	64.2	44.7	29.8	19.1	11.9	7.22	4.28	2.51	1.14	0.02	0.00	0.00	0.00	0.00	0.00	
-15	419	271	175	116	73.7	46.7	29.5	18.0	10.8	6.15	3.52	1.91	0.59	0.00	0.00	0.00	0.00	0.00	
-10	563	330	208	130	78.1	47.7	29.4	17.7	10.0	5.52	3.14	1.55	0.26	0.00	0.00	0.00	0.00	0.00	
-5	2069	855	328	188	109	64.3	39.1	23.1	13.1	7.25	4.09	2.21	0.77	0.00	0.00	0.00	0.00	0.00	
0	2683	748	307	174	97.9	57.3	34.0	19.5	10.7	5.93	3.40	1.63	0.32	0.00	0.00	0.00	0.00	0.00	
5	2269	919	350	196	113	66.7	39.8	23.0	12.9	7.26	4.14	2.22	0.78	0.00	0.00	0.00	0.00	0.00	
10	849	414	238	142	84.1	51.2	30.0	17.2	9.74	5.68	3.19	1.55	0.31	0.00	0.00	0.00	0.00	0.00	
15	637	352	209	130	79.9	50.8	31.1	18.2	10.6	6.31	3.65	1.95	0.63	0.00	0.00	0.00	0.00	0.00	
20	183	152	110	72.2	49.2	32.5	20.3	12.2	7.46	4.57	2.59	1.21	0.10	0.00	0.00	0.00	0.00	0.00	
25	125	110	86.2	60.7	41.9	29.2	19.1	11.9	7.49	4.76	2.85	1.48	0.34	0.00	0.00	0.00	0.00	0.00	
30	57.2	50.7	41.5	31.7	23.9	17.1	11.5	7.58	5.05	3.27	1.92	0.76	0.00	0.00	0.00	0.00	0.00	0.00	
35	39.4	36.1	31.0	24.8	19.2	14.3	10.0	6.81	4.69	3.13	1.89	0.84	0.09	0.00	0.00	0.00	0.00	0.00	
40	19.6	17.9	15.4	13.0	10.4	7.94	5.69	4.11	2.96	1.92	0.99	0.15	0.00	0.00	0.00	0.00	0.00	0.00	
45	13.7	12.9	11.5	9.81	8.15	6.42	4.82	3.54	2.52	1.61	0.83	0.23	0.00	0.00	0.00	0.00	0.00	0.00	
50	7.27	6.91	6.13	5.38	4.46	3.59	2.83	2.10	1.33	0.65	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	5.02	4.79	4.44	3.92	3.34	2.67	2.08	1.50	0.87	0.45	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	2.60	2.49	2.30	2.04	1.67	1.27	0.86	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	1.31	1.27	1.19	1.08	0.91	0.71	0.51	0.30	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: