

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	5936.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	39.6V x 38.3H
	At 50% of Imax	18.7V x 17.6H
	At 90% of Imax	6.0V x 6.4H

Beam Flux	Total	999.1 lumens per klm.
	To 10% of Imax	684.2 lumens per klm.
	To 50% of Imax	283.4 lumens per klm.
	To 90% of Imax	27.0 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.4V I:0.2911A P:62.54W PF:1.000 Freq:50.00Hz Lamp Flux:4244.18x1 lm		
NAME: 8.01.017.0114 20° LWW-WZB-W55-L12-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

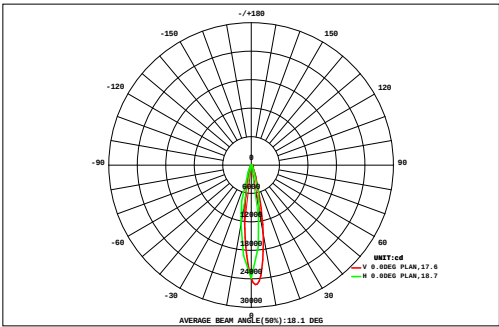

DATA OF LAMP		Eff:67.87lm/W	
MODELLWW-WZB-W55-L12-RDM	Imax(cd)	25193	
NOMINAL POWER(W)	62	AVAILABILITY(%)	69.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2961
NOMINAL FLUX(lm)	4244.18	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	4244
TEST VOLTAGE(V)	220	θ @50%(H,V)	18,19DEG


VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	1.13	1.39	1.69	2.03	2.39	2.73	3.01	3.22	3.31	3.24	3.04	2.75	2.41	2.05	1.72	1.42	1.18	0.97	39.7	0.00
27	1.35	1.76	2.26	2.86	3.51	4.20	4.85	5.38	5.67	5.65	5.33	4.80	4.17	3.49	2.84	2.27	1.78	1.39	63.6	0.00
24	1.83	2.41	3.11	3.91	4.77	5.63	6.41	6.94	7.10	6.86	6.29	5.54	4.68	3.83	3.05	2.37	1.83	1.40	78.0	14.5
21	2.35	3.11	4.01	5.02	6.10	7.12	8.02	8.53	8.53	8.04	7.20	6.21	5.12	4.10	3.19	2.44	1.84	1.39	92.3	46.0
18	2.19	3.02	4.15	5.65	7.95	11.7	16.8	22.2	25.6	25.4	21.8	16.4	11.5	7.91	5.69	4.18	3.06	2.25	197	167
15	2.66	3.73	5.18	7.27	10.8	16.5	23.8	30.7	34.4	32.9	27.0	19.6	13.2	8.97	6.37	4.62	3.36	2.44	254	226
12	3.81	5.37	7.42	10.7	16.5	25.1	35.0	42.4	43.5	37.7	28.1	18.7	11.9	8.05	5.72	4.09	2.94	2.09	309	284
9	3.33	4.67	6.59	9.56	15.1	24.2	35.8	47.0	53.2	50.6	40.8	28.9	18.5	11.4	7.51	5.24	3.71	2.63	369	345
-9	2.70	3.76	5.47	8.07	13.1	22.4	35.6	51.0	63.0	64.2	54.6	40.2	25.8	15.1	9.49	6.52	4.57	3.23	429	406
-12	4.22	6.10	9.08	14.9	26.0	41.4	58.4	72.1	73.6	62.2	45.4	29.2	16.6	9.84	6.70	4.64	3.23	2.30	486	465
-15	4.06	5.85	8.68	14.1	24.5	38.8	54.7	67.7	69.5	59.2	43.5	28.2	16.3	9.79	6.69	4.66	3.26	2.32	462	440
-18	2.33	3.14	4.26	5.47	7.27	11.5	18.4	27.2	36.0	39.1	34.8	26.7	18.5	11.7	7.79	5.50	3.95	2.84	266	237
-21	2.71	3.69	4.95	6.35	8.11	11.3	15.7	20.1	23.4	23.4	19.9	15.3	11.2	7.99	5.70	4.14	3.04	2.23	189	157
-24	3.21	4.43	5.92	7.74	9.85	12.3	14.4	14.1	10.9	6.76	3.87	2.70	2.92	3.73	3.30	2.58	2.00	1.53	112	74.6
-27	1.70	2.23	2.94	3.82	4.86	6.26	8.30	10.7	12.6	13.2	12.0	9.70	7.39	5.60	4.33	3.31	2.51	1.91	113	74.3
	1.35	1.69	2.13	2.61	2.98	3.29	3.93	5.13	6.62	7.77	7.87	6.93	5.59	4.35	3.47	2.73	2.12	1.65	72.2	25.3
	1.61	1.98	2.38	2.77	3.05	2.99	2.44	1.61	1.15	1.03	1.15	1.45	1.75	1.71	1.52	1.31	1.11	0.92	31.9	0.00
	1.20	1.45	1.73	2.01	2.23	2.27	2.07	2.17	2.27	2.28	2.19	2.02	1.86	1.76	1.55	1.35	1.15	0.96	32.5	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)	6	9	12	15	18	21	24	27			
Φ t	43.7	59.8	81.9	115	169	250	348	438	481	449	365	265	179	121	86.6	63.4	46.6	34.5	3597	---
Φ a	0.00	6.27	26.3	75.7	136	222	325	419	462	430	342	239	150	86.8	36.8	3.94	0.00	0.00	---	2961

one-half-peak spread: U:8.0,D:10.9 , L:9.2,R:8.6 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20
V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.4V I:0.2911A P:62.54W PF:1.000 Freq:50.00Hz Lamp Flux:4244.18x1 lm		
NAME: 8.01.017.0114 20° LWW-WZB-W55-L12-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

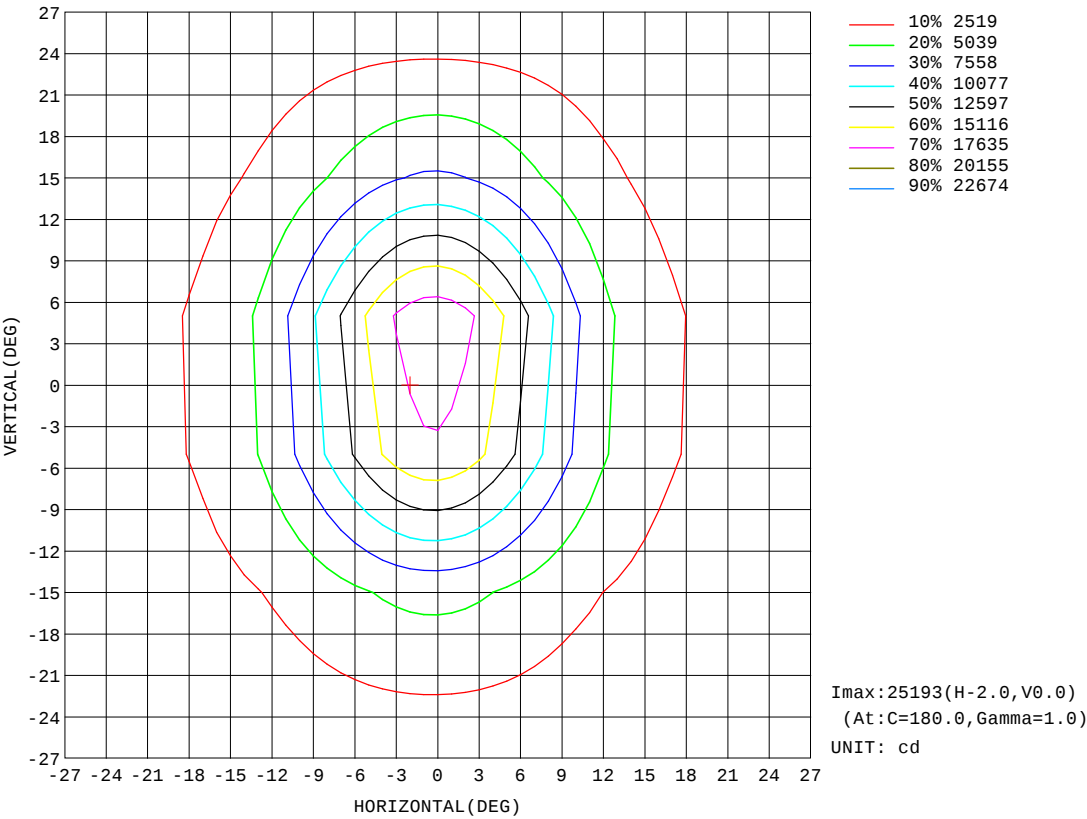


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.4V I:0.2911A P:62.54W PF:1.000 Freq:50.00Hz Lamp Flux:4244.18x1 lm		
NAME: 8.01.017.0114 20° LWW-WZB-W55-L12-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

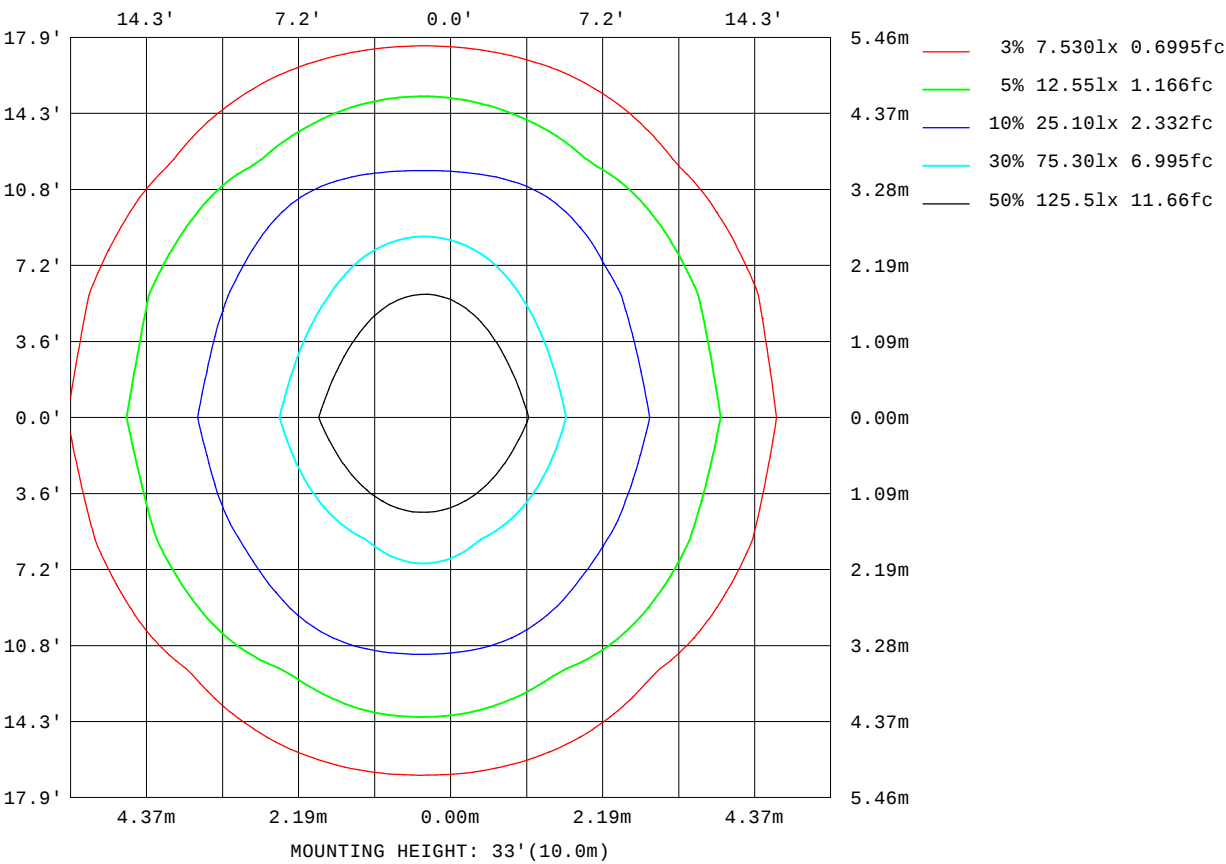

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

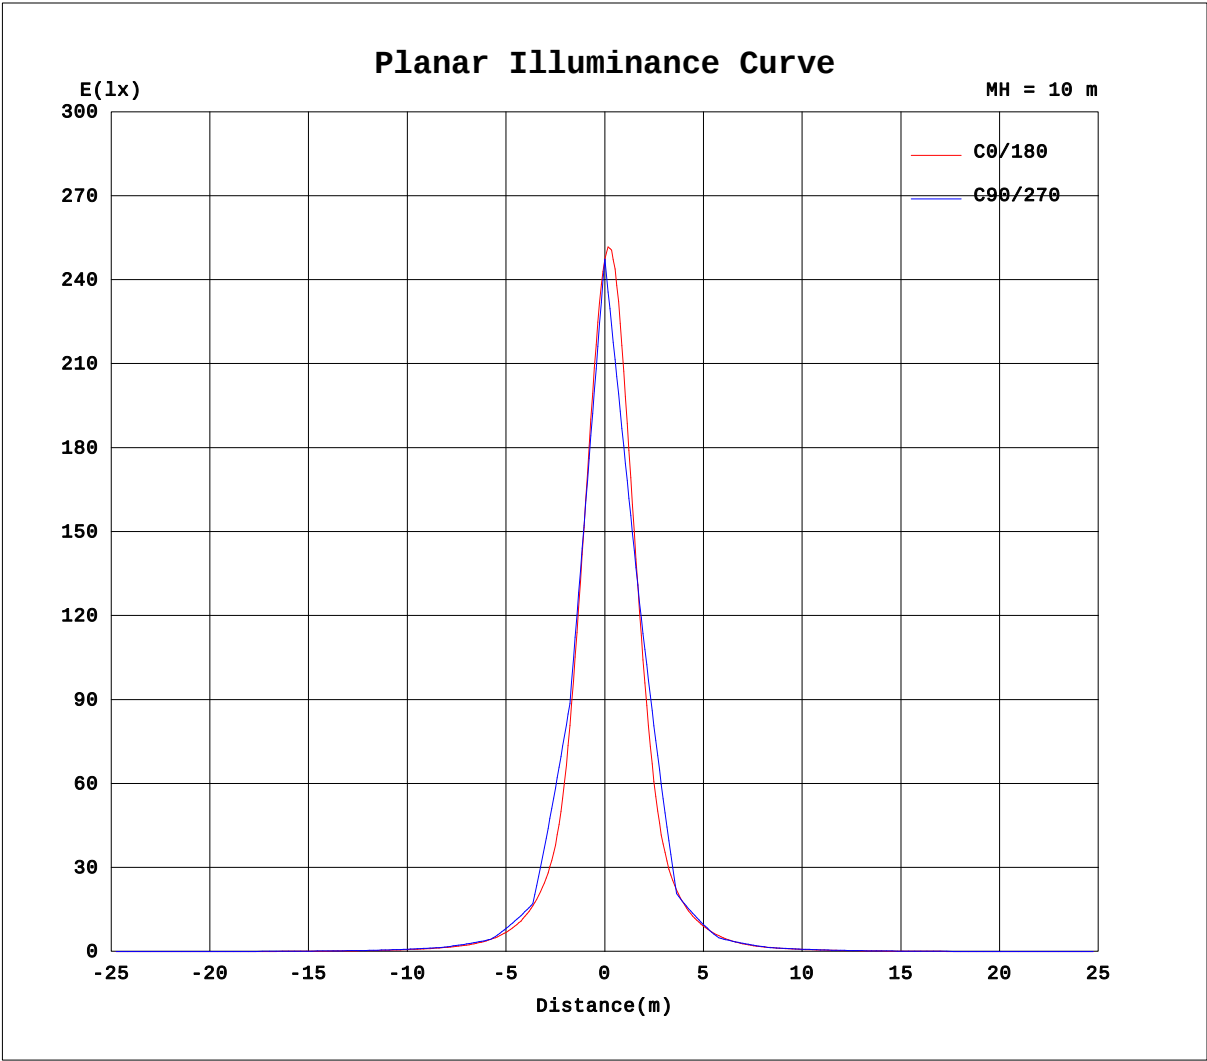


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.4V I:0.2911A P:62.54W PF:1.000 Freq:50.00Hz Lamp Flux:4244.18x1 lm		
NAME: 8.01.017.0114 20° LWW-WZB-W55-L12-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

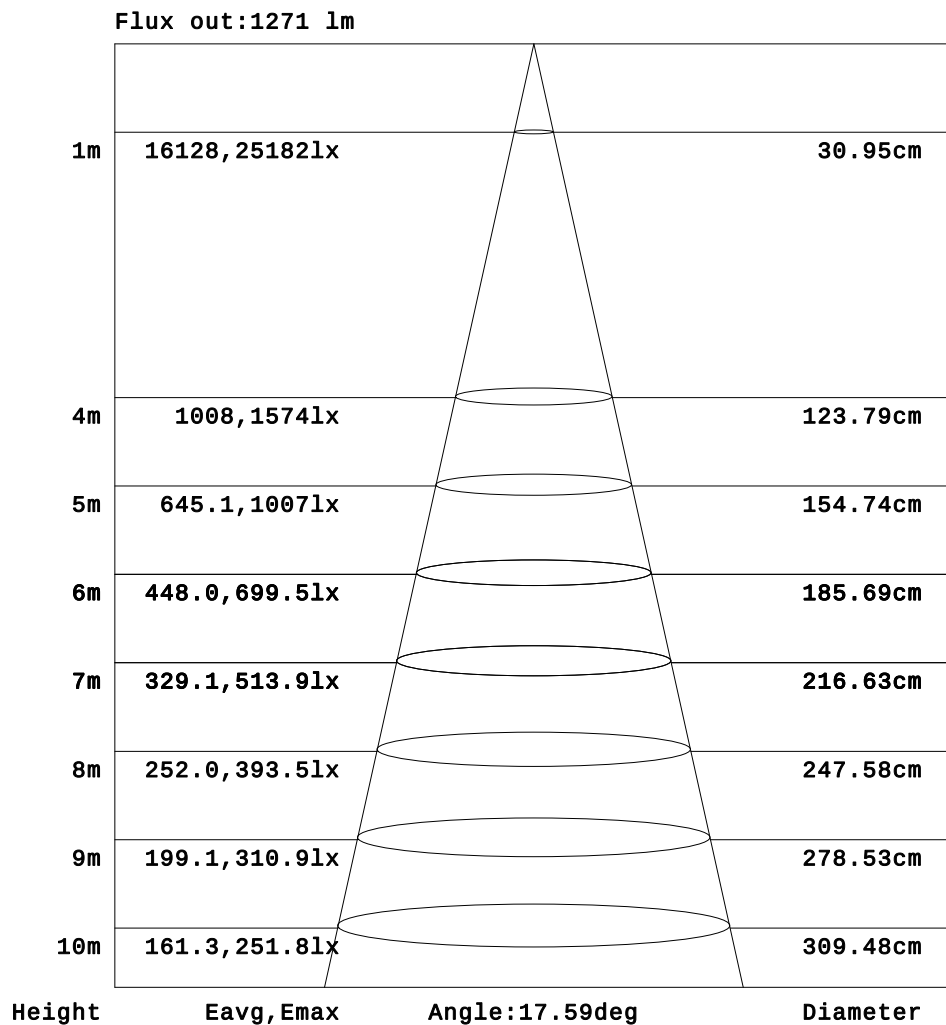

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.2911A P:62.54W PF:1.000 Freq:50.00Hz Lamp Flux:4244.18x1 lm		
NAME: 8.01.017.0114 20° LWW-WZB-W55-L12-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: ×10cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.25	0.57	0.74	0.91	0.82	1.35	1.43	1.49	1.52
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	0.76	1.34	1.71	1.93	1.86	2.77	2.91	3.03	3.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	1.04	1.75	2.46	3.17	3.47	4.46	4.78	5.70	5.91	6.09	6.23
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.04	1.31	2.75	3.80	4.65	5.57	6.10	7.45	8.27	8.85	9.03	9.34	9.41
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.78	1.93	3.49	5.03	5.92	7.72	8.69	10.2	11.3	12.3	13.0	13.4	13.7
-50	0.00	0.00	0.00	0.00	0.00	0.60	2.06	3.79	5.67	6.92	8.27	11.0	12.5	13.9	15.2	16.4	17.3	17.9	17.9
-45	0.00	0.00	0.00	0.00	0.00	0.66	2.44	4.32	6.17	8.34	10.0	12.9	15.3	17.7	20.3	22.3	23.8	24.9	25.3
-40	0.00	0.00	0.00	0.00	0.16	2.08	4.63	5.80	8.52	11.0	13.7	16.8	20.0	23.6	27.1	29.4	31.4	32.5	32.6
-35	0.00	0.00	0.00	0.00	0.26	2.27	4.28	6.93	9.06	11.9	15.4	19.4	23.7	28.2	34.0	39.8	45.1	49.0	50.4
-30	0.00	0.00	0.00	0.00	1.47	3.78	6.39	8.96	11.5	15.4	20.1	25.3	30.9	37.1	45.5	54.5	62.5	67.4	67.6
-25	0.00	0.00	0.00	0.00	1.14	3.70	5.92	9.16	12.0	15.9	21.1	27.2	35.8	48.5	66.4	88.9	113	133	138
-20	0.00	0.00	0.00	0.40	2.74	4.73	8.17	11.3	15.0	20.3	26.7	35.3	49.8	73.0	104	142	181	206	206
-15	0.00	0.00	0.00	0.00	2.00	4.45	7.15	10.5	14.3	19.8	26.5	36.1	54.2	85.0	133	207	326	495	575
-10	0.00	0.00	0.00	0.75	3.17	5.83	8.97	12.4	17.5	24.3	32.9	49.1	79.9	130	214	349	605	888	901
-5	0.00	0.00	0.00	0.00	2.31	4.80	7.86	11.1	15.5	21.9	29.9	44.0	72.1	122	206	378	794	1403	1731
0	0.00	0.00	0.00	0.88	3.31	6.04	9.25	12.9	18.3	25.4	35.7	57.4	98.7	167	301	665	1456	2340	2384
5	0.00	0.00	0.00	0.00	2.27	4.72	7.75	11.0	15.4	21.7	29.7	43.9	72.9	124	212	393	859	1547	1921
10	0.00	0.00	0.00	0.67	3.07	5.69	8.72	12.1	17.3	23.9	32.5	49.3	82.6	138	231	408	796	1232	1268
15	0.00	0.00	0.00	0.00	1.92	4.25	7.06	10.1	13.9	19.4	26.3	36.0	55.4	89.8	145	232	405	657	787
20	0.00	0.00	0.00	0.30	2.59	4.97	7.81	10.8	14.7	20.1	26.5	35.3	51.6	79.1	117	164	212	246	246
25	0.00	0.00	0.00	0.00	1.29	3.48	5.98	8.74	11.7	15.6	20.8	26.8	35.9	50.3	71.9	99.6	130	155	164
30	0.00	0.00	0.00	0.00	1.78	3.89	6.34	8.88	11.5	15.0	19.7	24.7	30.2	37.2	47.3	58.8	69.3	75.8	76.2
35	0.00	0.00	0.00	0.00	0.44	2.46	4.52	6.79	9.01	11.6	15.0	18.8	23.0	27.7	33.8	40.8	47.8	52.7	54.5
40	0.00	0.00	0.00	0.00	0.69	2.64	4.47	6.45	8.50	10.6	13.2	16.2	19.5	22.8	25.9	28.6	30.8	32.0	32.2
45	0.00	0.00	0.00	0.00	0.00	1.11	2.84	4.52	6.27	8.09	10.0	12.2	14.7	17.1	19.5	21.7	23.6	24.9	25.3
50	0.00	0.00	0.00	0.00	0.00	0.96	2.56	3.94	5.52	7.02	8.54	10.2	11.8	13.4	15.0	16.4	17.6	18.3	18.3
55	0.00	0.00	0.00	0.00	0.00	0.16	0.98	2.23	3.56	4.80	6.04	7.37	8.66	9.83	11.1	12.2	13.0	13.7	13.9
60	0.00	0.00	0.00	0.00	0.00	0.00	0.41	1.56	2.64	3.56	4.57	5.64	6.49	7.26	8.08	8.69	9.01	9.36	9.40
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	1.12	1.59	2.27	3.07	3.79	4.38	4.99	5.52	5.82	6.08	6.21
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.61	1.11	1.57	1.98	2.37	2.64	2.83	2.98	2.96
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.46	0.70	0.91	1.11	1.27	1.38	1.47	1.50
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.2911A P:62.54W PF:1.000 Freq:50.00Hz Lamp Flux:4244.18x1 lm		
NAME: 8.01.017.0114 20° LWW-WZB-W55-L12-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2		UNIT: ×10cd																	
H(°)	V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	1.44	1.31	1.18	0.97	0.73	0.50	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	2.78	2.52	2.21	1.75	1.27	0.79	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	6.02	5.65	5.33	4.74	4.06	3.46	2.66	1.87	1.38	0.86	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	8.93	8.56	8.04	7.18	6.37	5.57	4.40	3.34	2.37	1.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	13.4	12.8	12.0	10.9	9.70	8.64	7.36	5.92	4.62	3.25	1.70	0.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	17.3	16.4	15.1	13.6	12.2	10.8	9.16	7.44	5.85	4.07	2.42	0.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	24.9	23.8	22.0	19.8	17.2	14.7	12.3	10.2	8.19	6.17	4.26	2.35	0.66	0.00	0.00	0.00	0.00	0.00	0.00
-40	31.8	29.9	27.3	24.1	20.2	16.6	13.8	11.3	8.97	6.67	4.69	2.69	0.48	0.00	0.00	0.00	0.00	0.00	0.00
-35	48.8	44.8	39.4	33.7	28.1	23.1	18.8	14.9	11.8	9.01	6.65	4.40	2.10	0.34	0.00	0.00	0.00	0.00	0.00
-30	63.3	55.8	47.0	38.8	31.7	26.0	20.6	15.9	12.2	9.35	6.88	4.28	1.98	0.00	0.00	0.00	0.00	0.00	0.00
-25	129	109	85.3	64.0	47.5	35.5	27.3	20.9	15.6	11.7	8.74	6.02	3.36	1.07	0.00	0.00	0.00	0.00	0.00
-20	182	144	105	75.0	52.6	37.7	28.6	21.3	15.4	11.5	8.48	5.52	2.87	0.55	0.00	0.00	0.00	0.00	0.00
-15	472	304	195	126	81.5	53.6	36.9	26.9	19.6	14.1	10.3	7.20	4.27	1.76	0.00	0.00	0.00	0.00	0.00
-10	622	358	221	136	85.0	53.8	36.3	26.3	18.7	13.4	9.64	6.49	3.55	1.08	0.00	0.00	0.00	0.00	0.00
-5	1333	725	343	194	115	69.7	44.3	30.9	22.3	15.7	11.2	7.90	4.83	2.14	0.00	0.00	0.00	0.00	0.00
0	1541	705	318	177	102	61.6	39.5	28.1	20.1	13.9	10.0	6.86	3.73	1.21	0.00	0.00	0.00	0.00	0.00
5	1482	794	361	200	117	70.4	44.4	30.8	22.3	15.7	11.2	7.92	4.83	2.15	0.00	0.00	0.00	0.00	0.00
10	857	445	244	145	88.1	54.4	36.3	26.2	18.7	13.3	9.60	6.52	3.55	1.09	0.00	0.00	0.00	0.00	0.00
15	639	387	221	137	86.1	54.8	37.2	27.1	19.8	14.2	10.3	7.19	4.29	1.81	0.00	0.00	0.00	0.00	0.00
20	214	167	120	81.7	54.8	38.3	28.9	21.8	15.8	11.6	8.41	5.52	2.92	0.62	0.00	0.00	0.00	0.00	0.00
25	152	126	96.1	69.6	49.6	36.2	27.7	21.3	16.0	11.9	8.87	6.07	3.46	1.19	0.00	0.00	0.00	0.00	0.00
30	70.4	60.5	49.4	39.6	32.0	26.3	21.0	16.2	12.5	9.61	7.12	4.41	2.15	0.00	0.00	0.00	0.00	0.00	0.00
35	52.6	47.5	40.8	34.1	28.3	23.4	19.1	15.2	11.9	9.24	6.91	4.55	2.38	0.42	0.00	0.00	0.00	0.00	0.00
40	31.3	29.2	26.7	23.7	20.4	17.0	14.0	11.4	9.10	6.93	4.85	2.89	0.95	0.00	0.00	0.00	0.00	0.00	0.00
45	25.0	23.8	22.0	19.8	17.4	14.9	12.5	10.3	8.36	6.35	4.45	2.67	0.93	0.00	0.00	0.00	0.00	0.00	0.00
50	17.9	16.9	15.5	14.0	12.4	10.8	9.14	7.67	6.01	4.19	2.61	1.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	13.7	13.1	12.3	11.2	10.0	8.84	7.48	6.11	4.84	3.39	1.94	0.86	0.06	0.00	0.00	0.00	0.00	0.00	0.00
60	9.08	8.81	8.29	7.47	6.70	5.80	4.68	3.57	2.56	1.39	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	6.04	5.80	5.50	4.94	4.30	3.66	2.88	2.04	1.48	0.94	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	2.79	2.61	2.32	1.89	1.41	0.92	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	1.43	1.34	1.23	1.04	0.80	0.56	0.30	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: