

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2734.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	84.5V x 43.8H
	At 50% of Imax	55.0V x 18.6H
	At 90% of Imax	17.9V x 7.6H
Beam Flux	Total	998.3 lumens per klm.
	To 10% of Imax	854.6 lumens per klm.
	To 50% of Imax	461.0 lumens per klm.
	To 90% of Imax	84.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:241.5V I:0.1205A P:19.32W PF:0.6638 Lamp Flux:262.558x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500077
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

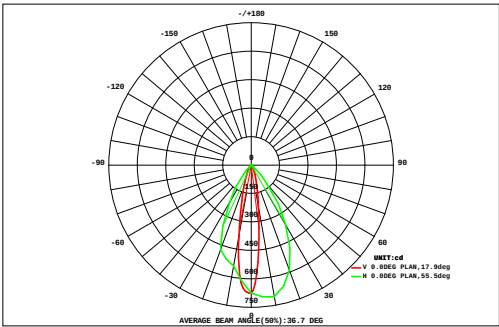

DATA OF LAMP		Eff:13.59lm/W	
MODELLWW-WZB-W55-L12-RDM		Imax(cd)	717.9
NOMINAL POWER(W)	20	AVAILABILITY(%)	86.3
RATED VOLTAGE(V)	242	Avai. FLUX(lm)	226.7
NOMINAL FLUX(lm)	262.558	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	262.6
TEST VOLTAGE(V)	241.5	θ @50%(H,V)	19,55DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.08	0.07	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.00
56	0.00	0.00	0.00	0.00	0.00	0.03	0.10	0.20	0.29	0.27	0.16	0.07	0.01	0.00	0.00	0.00	0.00	1.13	0.00
48	0.00	0.00	0.00	0.00	0.03	0.14	0.33	0.72	1.33	1.21	0.57	0.25	0.09	0.02	0.00	0.00	0.00	4.69	2.01
40	0.00	0.00	0.00	0.02	0.12	0.34	0.76	1.85	3.70	3.18	1.27	0.54	0.23	0.06	0.01	0.00	0.00	12.1	9.04
32	0.00	0.00	0.00	0.07	0.22	0.52	1.22	3.46	7.42	6.06	2.12	0.84	0.38	0.15	0.02	0.00	0.00	22.5	19.5
24	0.00	0.00	0.01	0.11	0.29	0.66	1.68	4.94	10.8	8.80	3.15	1.13	0.48	0.21	0.06	0.00	0.00	32.3	29.4
	0.00	0.00	0.02	0.13	0.32	0.74	1.96	5.66	12.3	10.8	4.05	1.42	0.57	0.25	0.09	0.00	0.00	38.4	35.6
	0.00	0.00	0.02	0.15	0.35	0.78	2.05	5.75	12.5	11.1	4.10	1.48	0.59	0.26	0.10	0.01	0.00	39.2	36.4
	0.00	0.00	0.03	0.16	0.35	0.78	1.92	5.20	11.3	9.38	3.25	1.25	0.52	0.24	0.08	0.00	0.00	34.5	31.6
	0.00	0.00	0.02	0.13	0.31	0.65	1.43	3.79	9.12	7.79	2.68	1.06	0.45	0.20	0.06	0.00	0.00	27.7	24.6
	0.00	0.00	0.01	0.09	0.24	0.50	1.08	3.14	8.15	7.38	2.41	0.85	0.38	0.16	0.04	0.00	0.00	24.4	21.3
-24	0.00	0.00	0.00	0.05	0.17	0.35	0.73	2.01	4.97	4.76	1.71	0.61	0.27	0.10	0.01	0.00	0.00	15.7	12.7
-32	0.00	0.00	0.00	0.02	0.09	0.22	0.45	1.10	2.18	2.00	0.84	0.34	0.15	0.04	0.00	0.00	0.00	7.41	4.47
-40	0.00	0.00	0.00	0.00	0.03	0.10	0.21	0.36	0.46	0.38	0.22	0.11	0.03	0.00	0.00	0.00	0.00	1.91	0.00
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.08	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.27	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.05	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72		
Φ t	0.00	0.00	0.12	0.91	2.54	5.80	14.0	38.3	84.7	73.3	26.6	9.97	4.16	1.72	0.48	0.02	0.00	263	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.08	8.63	35.8	83.3	72.0	23.4	3.43	0.00	0.00	0.00	0.00	0.00	---	227


one-half-peak spread: U:34.7,D:20.5 , L:9.3,R:5.1 Beam Type: Type 3 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:241.5V I:0.1205A P:19.32W PF:0.6638 Lamp Flux:262.558x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500077
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

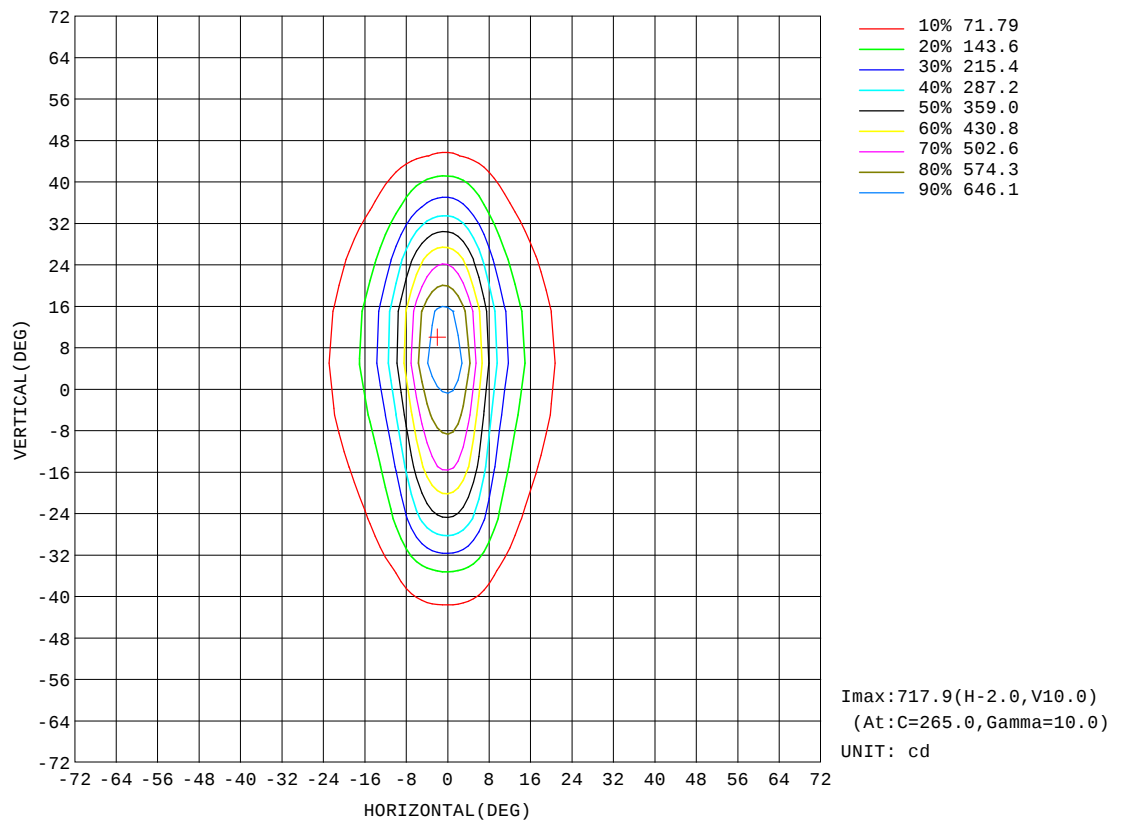


H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-05-20

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:241.5V I:0.1205A P:19.32W PF:0.6638 Lamp Flux:262.558x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500077
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

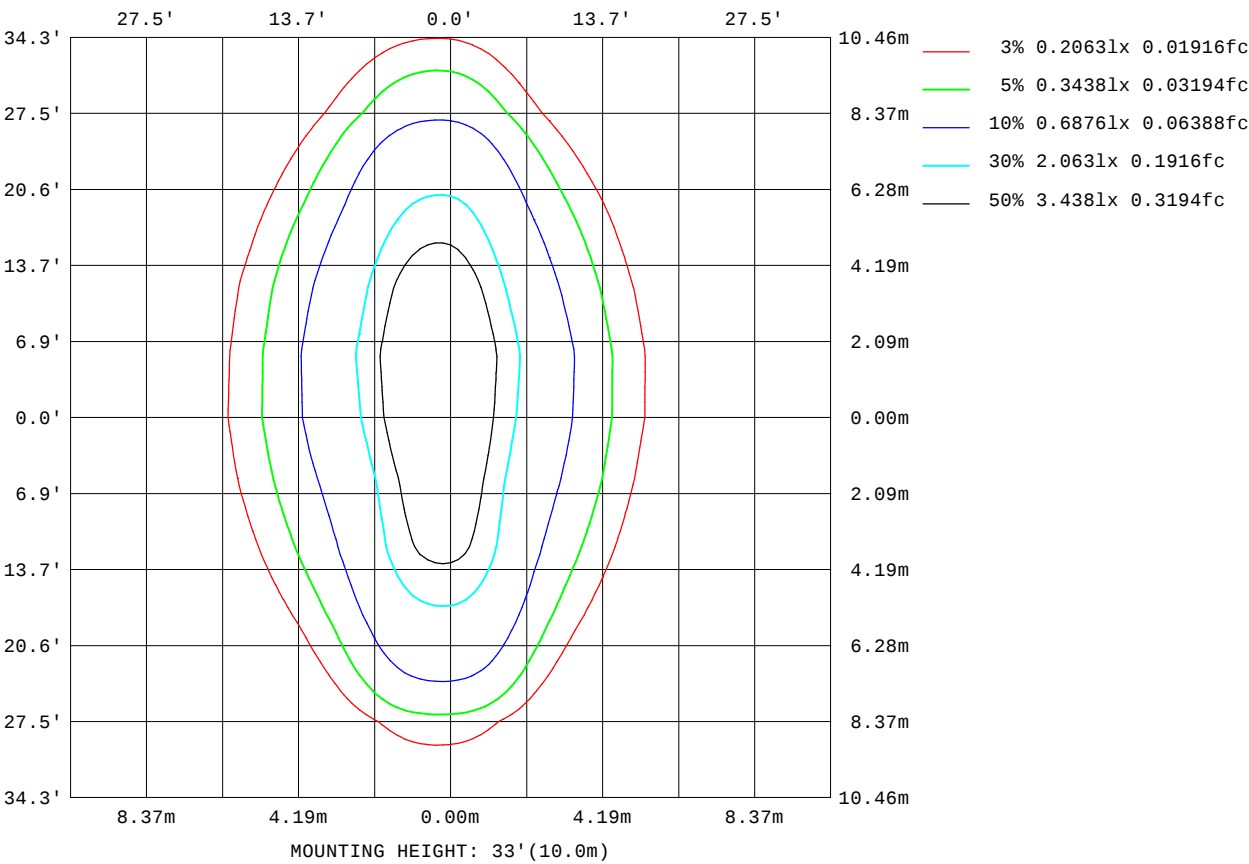


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:241.5V I:0.1205A P:19.32W PF:0.6638 Lamp Flux:262.558x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500077
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

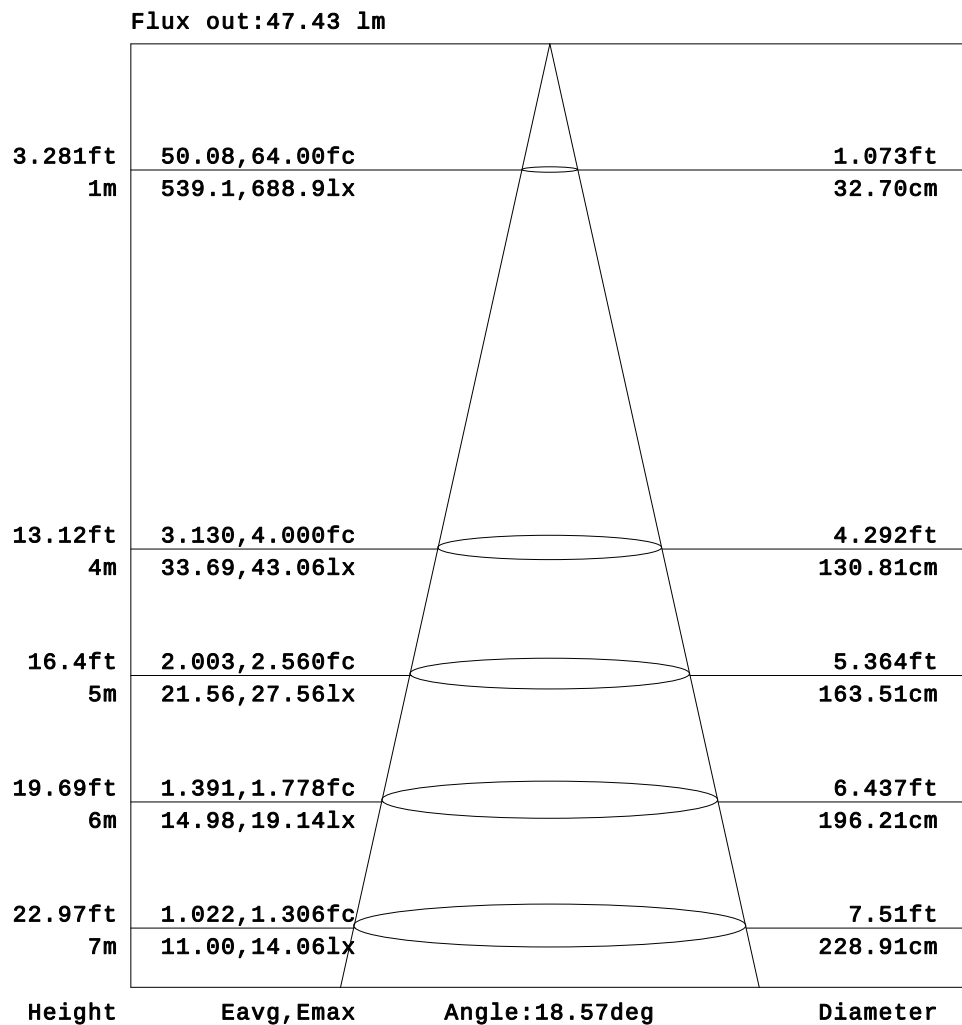


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

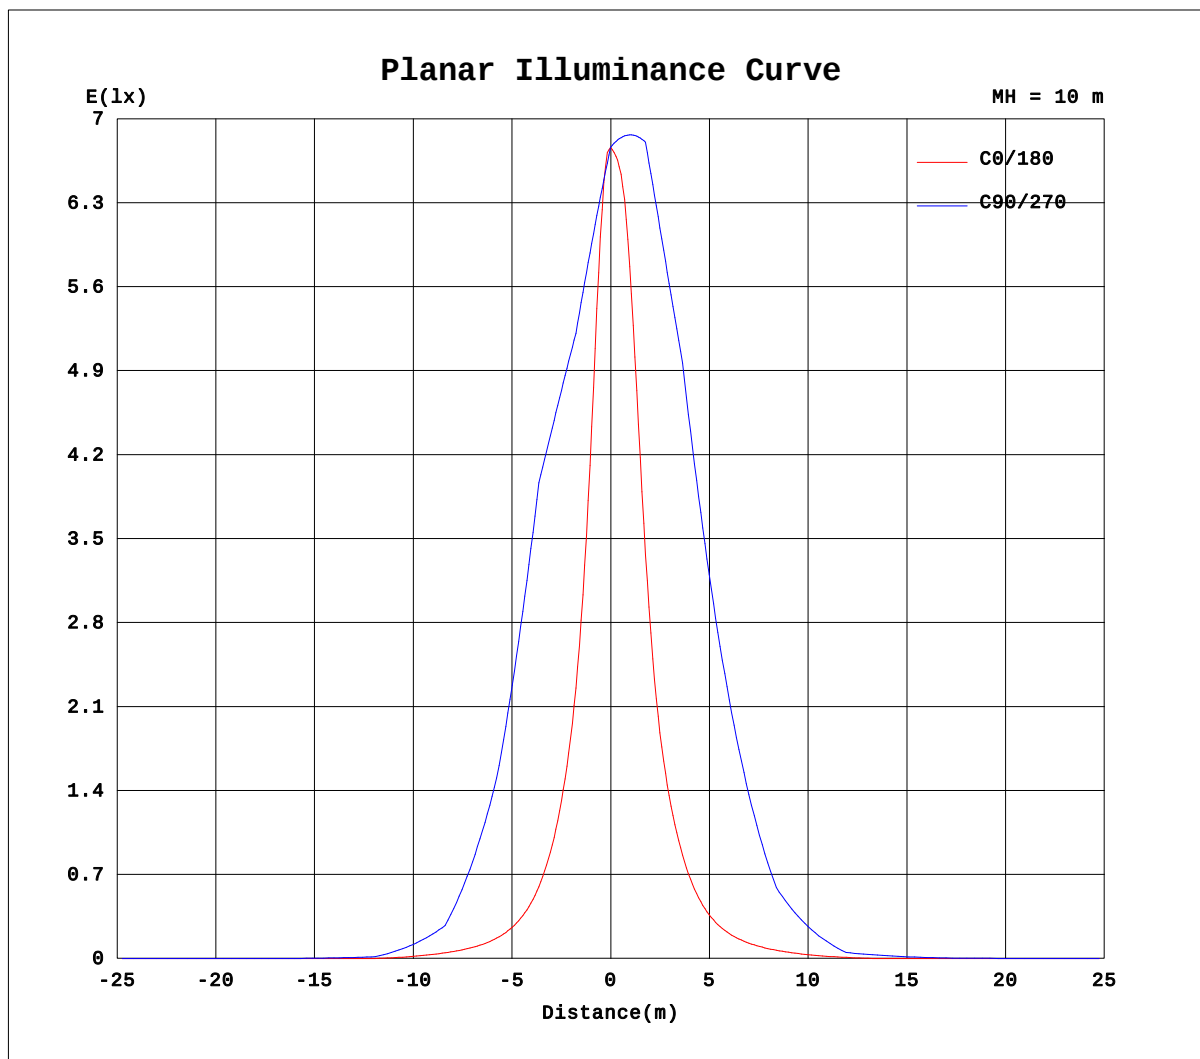

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.5V I:0.1205A P:19.32W PF:0.6638 Lamp Flux:262.558x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500077
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.62	1.32	1.96	2.55	3.00	3.10	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	1.52	2.90	4.17	5.31	6.11	6.12	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	1.80	3.42	6.08	9.47	13.9	21.4	31.0	34.0	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.88	4.23	7.54	11.9	17.6	25.9	41.4	58.5	61.2	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.75	2.88	6.85	11.1	16.7	25.1	40.0	74.7	128	147	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.19	6.32	11.1	16.5	24.3	37.1	63.7	129	213	231	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.39	3.23	7.79	13.0	19.4	28.9	44.6	75.4	156	297	356	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.64	5.88	11.2	17.2	25.4	38.5	60.9	108	234	425	473	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.78	6.44	11.9	18.1	26.9	41.2	65.6	110	220	423	513	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.73	8.99	14.9	22.0	33.0	51.7	83.4	140	279	489	540	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.16	8.38	14.3	21.5	32.5	51.9	87.2	149	286	519	611	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	4.55	10.0	16.3	24.6	38.1	63.2	110	194	378	622	674	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.12	8.44	14.6	22.3	34.3	56.5	101	183	350	605	695	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.69	9.15	15.5	23.9	37.3	63.1	116	220	420	663	705	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.96	7.00	12.9	20.5	31.8	52.1	92.8	173	337	575	660	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.10	7.03	13.0	20.8	32.5	53.1	93.2	174	348	560	588	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.61	4.09	9.26	15.9	25.3	40.7	68.6	123	245	422	485	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.04	7.95	14.2	23.1	36.8	60.1	106	211	338	362	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.10	4.14	9.06	15.8	25.7	41.4	69.3	130	218	250	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.13	6.31	11.9	19.8	31.1	49.7	84.2	123	130	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.70	2.68	5.87	10.8	17.6	27.6	45.0	67.6	76.0	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.60	4.21	7.31	10.8	14.9	18.8	19.5	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.57	1.83	3.97	6.24	8.69	11.0	11.8	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	1.54	2.58	3.44	3.92	3.91	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.65	1.19	1.64	1.94	1.97	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.5V I:0.1205A P:19.32W PF:0.6638 Lamp Flux:262.558x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500077
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	2.71	2.02	1.24	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	5.17	3.74	2.14	0.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	29.1	18.5	11.0	6.57	3.73	1.87	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	48.9	29.5	17.8	11.2	6.66	3.05	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	123	66.9	34.4	20.7	12.9	7.64	3.43	1.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	176	86.4	43.7	26.4	16.8	10.4	5.41	1.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	281	136	65.0	37.7	23.5	15.0	9.07	4.30	0.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	326	147	71.6	42.1	26.2	16.9	10.7	5.53	1.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	392	187	93.7	54.9	33.4	21.0	13.6	8.07	3.26	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	367	174	95.8	57.1	34.4	21.7	14.2	8.60	3.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	464	228	121	70.0	41.4	25.7	16.7	10.6	5.28	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	450	222	121	68.6	40.5	25.3	16.5	10.3	4.91	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	532	270	142	78.3	45.0	27.8	18.1	11.4	5.82	0.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	490	248	131	70.8	40.8	25.6	16.6	10.1	4.64	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	494	254	131	71.6	41.5	26.0	16.8	10.1	4.64	0.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	388	193	100	56.7	34.3	22.0	14.0	7.81	2.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	357	180	92.8	53.4	32.6	20.7	12.8	6.93	2.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	245	119	65.0	39.6	25.0	15.8	9.13	3.98	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	190	98.7	54.0	33.0	20.6	12.6	6.80	2.47	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	94.5	53.2	32.3	20.5	12.5	6.81	2.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	60.6	35.8	21.8	13.7	8.12	3.99	1.64	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	15.9	11.2	7.54	4.47	1.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	10.1	7.31	4.83	2.56	1.17	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	3.31	2.39	1.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	1.73	1.29	0.72	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: