

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2548.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	85.5V x 47.8H
	At 50% of Imax	54.1V x 17.4H
	At 90% of Imax	15.1V x 6.3H
Beam Flux	Total	999.3 lumens per klm.
	To 10% of Imax	774.2 lumens per klm.
	To 50% of Imax	376.6 lumens per klm.
	To 90% of Imax	50.0 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:241.4V I:0.1179A P:18.68W PF:0.6562 Lamp Flux:1024.24x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500076
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

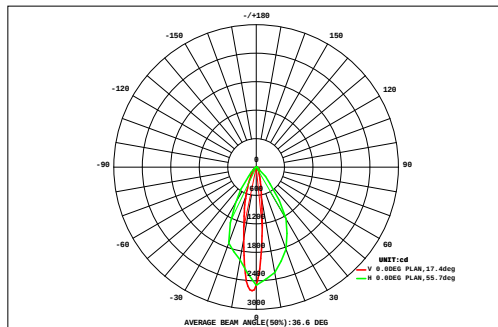

DATA OF LAMP		Eff:54.82lm/W	
MODELLWW-WZB-W55-L12-RDM		Imax(cd)	2610
NOMINAL POWER(W)	18	AVAILABILITY(%)	78.1
RATED VOLTAGE(V)	242	Avai. FLUX(lm)	799.7
NOMINAL FLUX(lm)	1024.24	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1024
TEST VOLTAGE(V)	241.4	θ @50%(H,V)	17,54DEG

		AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
VERTICAL (DEG)	72	0.00	0.00	0.00	0.02	0.03	0.11	0.20	0.28	0.33	0.30	0.23	0.13	0.04	0.02	0.01	0.00	0.00	0.00	1.70	0.00		
	64	0.00	0.00	0.05	0.23	0.45	0.64	0.79	0.88	0.93	0.89	0.78	0.63	0.44	0.25	0.08	0.00	0.00	0.00	7.05	0.00		
	56	0.00	0.04	0.21	0.42	0.63	0.86	1.10	1.38	1.64	1.53	1.18	0.92	0.69	0.48	0.27	0.09	0.00	0.00	11.4	0.00		
	48	0.00	0.11	0.34	0.58	0.87	1.30	1.85	3.02	5.01	4.28	2.15	1.37	0.97	0.68	0.43	0.20	0.03	0.00	23.2	7.02		
	40	0.01	0.18	0.41	0.73	1.26	2.09	3.22	6.35	12.8	10.4	3.90	2.01	1.31	0.87	0.55	0.30	0.09	0.00	46.5	29.3		
	32	0.04	0.23	0.51	0.96	1.72	3.01	4.86	11.0	24.9	19.7	6.03	2.66	1.64	1.09	0.68	0.38	0.14	0.01	79.5	62.7		
	24	0.05	0.27	0.61	1.17	2.16	3.96	7.17	16.0	34.2	24.7	7.65	3.29	1.89	1.24	0.78	0.43	0.18	0.02	106	90.4		
		0.07	0.30	0.67	1.31	2.46	4.84	10.2	21.9	41.7	29.7	9.29	3.84	2.09	1.34	0.86	0.48	0.20	0.03	131	117		
		0.07	0.31	0.71	1.39	2.62	5.35	12.0	25.2	46.4	32.6	10.1	4.14	2.20	1.39	0.89	0.50	0.22	0.03	146	132		
		0.07	0.32	0.71	1.39	2.60	5.21	11.2	23.3	44.9	32.0	9.88	4.07	2.16	1.36	0.88	0.49	0.21	0.03	141	126		
		0.06	0.29	0.66	1.28	2.37	4.31	7.55	15.6	33.9	27.1	8.81	3.61	1.98	1.28	0.82	0.46	0.19	0.02	110	95.2		
	-24	0.05	0.25	0.58	1.10	1.96	3.39	5.38	11.8	29.2	24.6	7.56	3.10	1.78	1.16	0.72	0.40	0.16	0.01	93.1	76.6		
	-32	0.03	0.21	0.48	0.90	1.55	2.53	3.82	7.85	18.3	16.2	5.50	2.47	1.51	0.98	0.61	0.33	0.11	0.00	63.4	46.0		
	-40	0.01	0.15	0.38	0.69	1.15	1.75	2.54	4.40	8.36	7.79	3.35	1.80	1.19	0.78	0.48	0.25	0.06	0.00	35.1	17.5		
	-48	0.00	0.07	0.29	0.51	0.80	1.13	1.50	1.91	2.25	2.10	1.60	1.18	0.85	0.58	0.34	0.15	0.01	0.00	15.3	0.00		
	-56	0.00	0.01	0.15	0.37	0.57	0.73	0.83	0.85	0.78	0.76	0.82	0.73	0.55	0.39	0.20	0.04	0.00	0.00	7.76	0.00		
-64	0.00	0.00	0.02	0.10	0.26	0.42	0.55	0.63	0.68	0.64	0.53	0.37	0.24	0.11	0.03	0.01	0.00	0.00	4.58	0.00			
-72	0.00	0.00	0.00	0.02	0.05	0.09	0.13	0.16	0.19	0.17	0.12	0.08	0.04	0.02	0.00	0.00	0.00	0.00	1.07	0.00			
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72			
Φ t	0.46	2.72	6.78	13.2	23.5	41.7	74.9	153	306	235	79.5	36.4	21.6	14.0	8.63	4.47	1.60	0.14	1024	---			
Φ a	0.00	0.00	0.00	0.00	0.00	14.5	55.2	140	298	227	61.8	3.55	0.00	0.00	0.00	0.00	0.00	0.00	---	800			


one-half-peak spread: U:24.9,D:29.6 , L:9.9,RNEMA Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:241.4V I:0.1179A P:18.68W PF:0.6562 Lamp Flux:1024.24x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500076
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

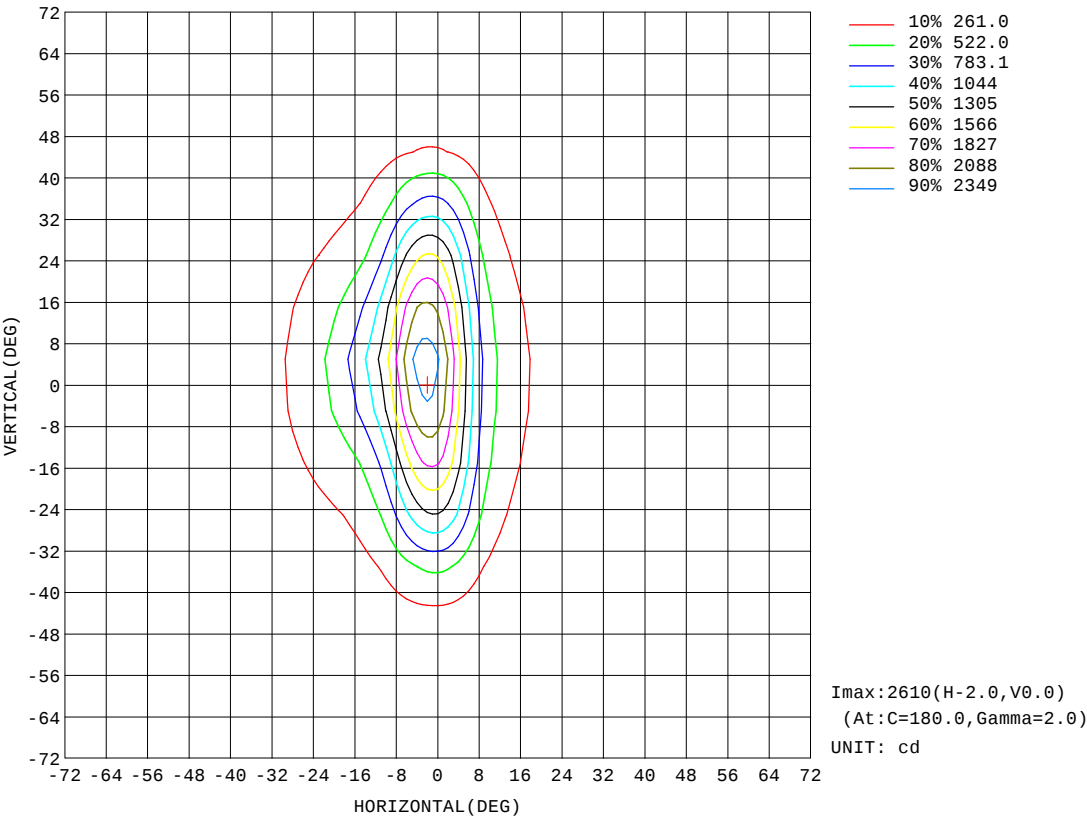


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:241.4V I:0.1179A P:18.68W PF:0.6562 Lamp Flux:1024.24x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500076
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

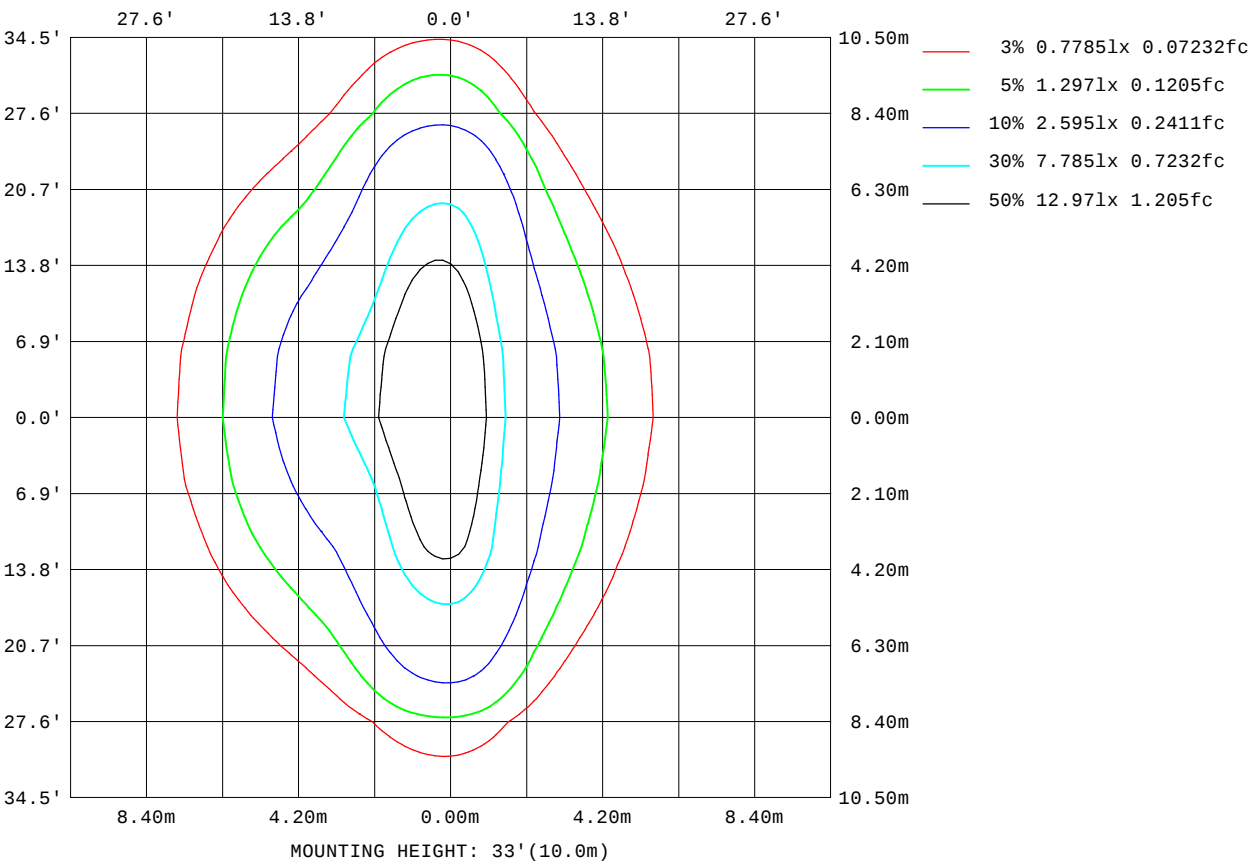


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:241.4V I:0.1179A P:18.68W PF:0.6562 Lamp Flux:1024.24x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500076
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

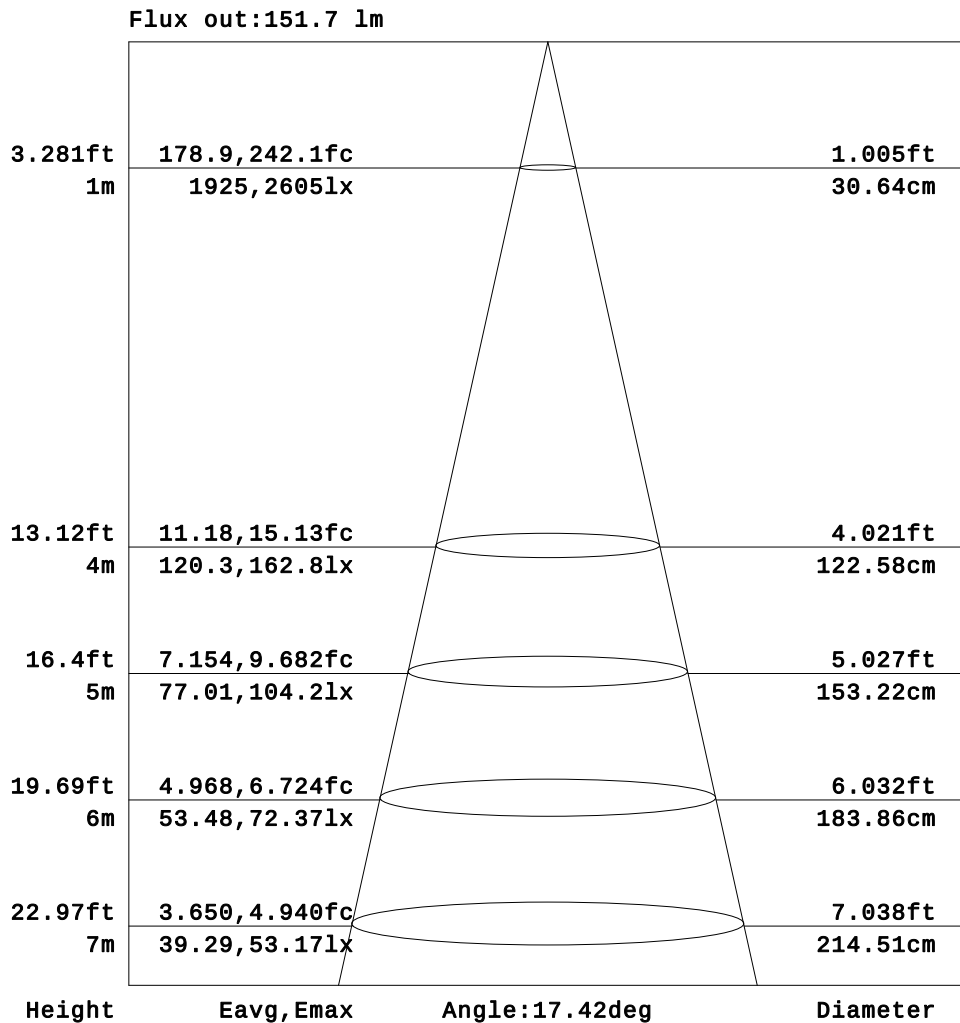


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

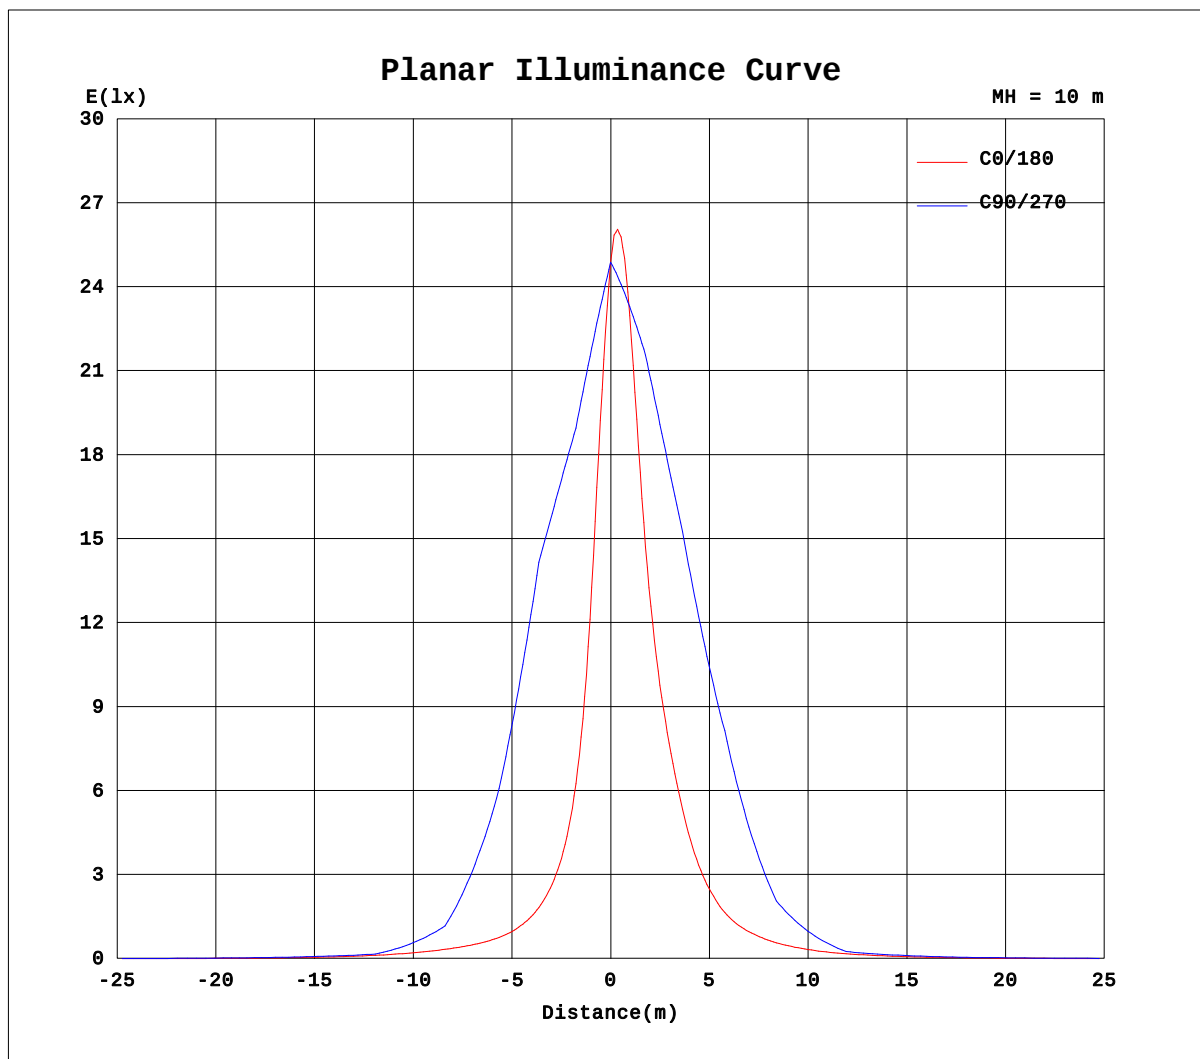

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-05-20

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.4V I:0.1179A P:18.68W PF:0.6562 Lamp Flux:1024.24x1 lm																	
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-G									TYPE:LED			WEIGHT:					
DIM.:									SPEC.:			SERIAL No.:20240500076					
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:			PROTECTION ANGLE:					

Table--1																		UNIT: cd	
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.90	1.39	1.45
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	1.81	2.78	2.90
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.85	6.15	8.92	11.3	13.3	15.0	16.3	17.9	18.9	18.8
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.70	12.3	17.8	22.6	26.7	30.0	32.2	34.0	35.0	34.6
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.12	9.82	17.2	23.6	29.9	34.7	38.6	42.0	44.7	47.2	48.9	48.7
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.23	19.6	28.7	34.9	42.0	46.9	50.5	54.0	57.3	60.4	62.8	62.7
-45	0.00	0.00	0.00	0.00	0.00	0.00	4.99	15.7	25.8	35.0	42.4	52.4	61.2	70.9	81.0	93.6	117	150	162
-40	0.00	0.00	0.00	0.00	0.00	0.00	9.99	23.1	31.9	41.4	49.9	62.7	75.6	91.3	108	130	174	236	261
-35	0.00	0.00	0.00	0.00	0.00	4.22	15.2	26.9	36.6	49.0	61.6	79.1	98.6	123	148	192	306	492	572
-30	0.00	0.00	0.00	0.00	0.00	8.43	20.4	30.7	41.4	56.6	73.3	95.4	122	154	189	255	439	747	883
-25	0.00	0.00	0.00	0.00	0.25	10.8	22.8	35.2	48.0	64.5	85.2	113	149	191	239	332	606	1095	1295
-20	0.00	0.00	0.00	0.00	0.50	13.2	25.2	39.7	54.7	72.4	97.2	130	175	229	290	410	774	1443	1707
-15	0.00	0.00	0.00	0.00	1.69	14.6	27.5	42.2	59.1	79.5	107	146	200	273	366	528	924	1625	1846
-10	0.00	0.00	0.00	0.00	2.88	16.1	29.8	44.8	63.5	86.7	118	162	224	317	442	646	1075	1807	1985
-5	0.00	0.00	0.00	0.00	3.70	16.7	31.1	46.4	65.3	89.7	122	169	240	359	543	816	1308	2108	2237
0	0.00	0.00	0.00	0.00	4.52	17.4	32.4	48.0	67.1	92.7	127	176	255	400	643	986	1541	2409	2488
5	0.00	0.00	0.00	0.00	3.95	17.0	31.3	46.7	65.4	90.4	124	172	249	386	617	953	1497	2329	2373
10	0.00	0.00	0.00	0.00	3.39	16.6	30.3	45.4	63.8	88.1	121	169	243	373	591	921	1454	2248	2258
15	0.00	0.00	0.00	0.00	2.43	15.4	28.7	43.0	60.3	82.9	113	156	221	325	487	748	1243	1993	2048
20	0.00	0.00	0.00	0.00	1.48	14.3	27.1	40.6	56.8	77.7	105	144	199	276	384	575	1033	1738	1838
25	0.00	0.00	0.00	0.00	0.74	12.1	24.4	36.8	50.9	68.9	92.8	126	172	232	311	459	841	1428	1546
30	0.00	0.00	0.00	0.00	0.00	9.84	21.6	32.9	45.0	60.1	80.1	107	144	188	237	343	649	1117	1254
35	0.00	0.00	0.00	0.00	0.00	6.57	18.6	29.2	39.5	51.7	67.4	88.5	117	150	187	262	465	769	857
40	0.00	0.00	0.00	0.00	0.00	3.31	15.5	25.5	34.0	43.2	54.7	70.0	89.6	112	137	181	280	421	460
45	0.00	0.00	0.00	0.00	0.00	1.65	9.85	20.7	29.6	37.7	46.0	56.3	69.1	83.8	100	126	182	258	278
50	0.00	0.00	0.00	0.00	0.00	0.00	4.21	15.8	25.3	32.1	37.2	42.6	48.6	55.5	62.9	71.7	82.9	94.3	96.3
55	0.00	0.00	0.00	0.00	0.00	0.00	2.10	7.91	15.9	23.6	30.1	36.3	42.1	47.7	53.1	58.6	65.0	71.1	71.8
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.56	15.0	22.9	30.0	35.6	39.9	43.2	45.4	47.0	47.8	47.3
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.28	7.51	11.5	15.0	19.0	22.5	25.4	27.7	29.4	30.3	29.9
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.38	5.06	7.69	9.96	11.8	12.7	12.5
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.19	2.53	3.84	4.98	5.89	6.37	6.25
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.4V I:0.1179A P:18.68W PF:0.6562 Lamp Flux:1024.24x1 lm																	
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-G									TYPE:LED						WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:20240500076		
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:						PROTECTION ANGLE:		

Table--2																		UNIT: cd	
H(°)\V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	1.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	17.2	14.7	12.8	9.80	8.09	6.04	3.75	1.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	32.4	29.4	25.6	19.6	16.2	12.1	7.50	3.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	46.0	42.3	38.2	32.8	28.0	23.1	18.5	12.9	7.82	3.42	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	59.5	55.3	50.8	46.0	39.8	34.2	29.5	22.7	15.6	6.85	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	135	96.3	75.0	62.5	52.6	44.3	37.2	28.9	21.7	13.3	5.67	0.87	0.00	0.00	0.00	0.00	0.00	0.00	
-40	210	137	99.3	79.1	65.4	54.4	44.9	35.2	27.9	19.8	11.2	1.74	0.00	0.00	0.00	0.00	0.00	0.00	
-35	428	228	138	101	80.2	65.2	53.1	42.2	33.6	24.8	15.3	5.59	0.00	0.00	0.00	0.00	0.00	0.00	
-30	646	319	177	123	94.9	76.0	61.3	49.2	39.4	29.8	19.4	9.44	0.00	0.00	0.00	0.00	0.00	0.00	
-25	888	407	218	144	107	84.7	68.8	55.5	44.0	33.5	22.9	12.7	2.43	0.00	0.00	0.00	0.00	0.00	
-20	1130	496	258	165	118	93.3	76.3	61.9	48.6	37.2	26.4	15.9	4.87	0.00	0.00	0.00	0.00	0.00	
-15	1202	541	288	181	128	99.1	80.7	66.1	52.4	40.2	28.9	18.0	6.63	0.00	0.00	0.00	0.00	0.00	
-10	1274	587	318	197	138	105	85.0	70.3	56.3	43.2	31.5	20.0	8.38	0.00	0.00	0.00	0.00	0.00	
-5	1366	620	335	209	144	109	87.7	72.5	58.2	44.6	32.5	20.8	8.98	0.00	0.00	0.00	0.00	0.00	
0	1458	654	353	220	151	113	90.4	74.7	60.1	46.0	33.4	21.6	9.58	0.00	0.00	0.00	0.00	0.00	
5	1422	642	346	216	148	112	89.8	74.2	59.7	45.5	33.1	21.3	9.36	0.00	0.00	0.00	0.00	0.00	
10	1386	630	340	211	146	111	89.1	73.7	59.2	45.1	32.8	21.0	9.14	0.00	0.00	0.00	0.00	0.00	
15	1242	562	306	193	136	105	85.2	70.2	56.0	42.7	30.9	19.4	7.80	0.00	0.00	0.00	0.00	0.00	
20	1097	494	271	175	126	99.0	81.3	66.7	52.8	40.3	28.9	17.8	6.46	0.00	0.00	0.00	0.00	0.00	
25	955	427	233	155	114	91.2	75.0	61.2	48.3	36.9	26.2	15.5	4.55	0.00	0.00	0.00	0.00	0.00	
30	812	361	196	134	103	83.3	68.6	55.6	43.9	33.5	23.5	13.1	2.65	0.00	0.00	0.00	0.00	0.00	
35	571	273	158	113	88.5	72.3	59.5	48.4	38.3	28.9	19.4	9.52	1.32	0.00	0.00	0.00	0.00	0.00	
40	330	185	120	92.0	74.4	61.2	50.3	41.1	32.7	24.3	15.4	5.91	0.00	0.00	0.00	0.00	0.00	0.00	
45	208	128	90.7	72.7	60.7	51.2	42.8	35.1	27.1	18.7	10.1	2.95	0.00	0.00	0.00	0.00	0.00	0.00	
50	85.3	70.9	61.0	53.5	47.0	41.1	35.3	29.0	21.6	13.1	4.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	65.2	56.6	49.9	43.8	38.1	32.2	26.1	19.9	13.1	6.56	2.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	45.1	42.3	38.7	34.2	29.3	23.4	17.0	10.8	4.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	28.2	25.8	22.9	19.4	15.6	11.7	8.49	5.39	2.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	11.3	9.40	7.11	4.59	1.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	5.65	4.70	3.55	2.30	0.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: