

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3154.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	82.4V x 42.3H
	At 50% of Imax	52.8V x 15.5H
	At 90% of Imax	10.3V x 5.5H
Beam Flux	Total	999.2 lumens per klm.
	To 10% of Imax	802.0 lumens per klm.
	To 50% of Imax	371.2 lumens per klm.
	To 90% of Imax	34.2 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:241.6V I:0.1061A P:15.15W PF:0.5905 Lamp Flux:447.483x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500075
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

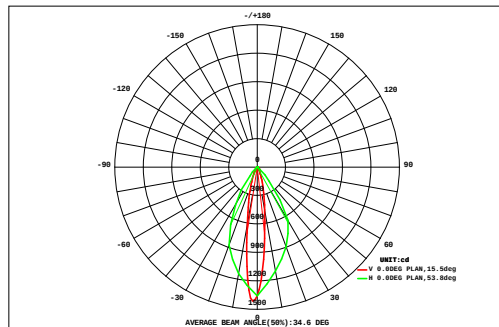

DATA OF LAMP		Eff:29.55lm/W	
MODELLWW-WZB-W55-L12-RDM		Imax(cd)	1411
NOMINAL POWER(W)	16	AVAILABILITY(%)	80.8
RATED VOLTAGE(V)	242	Avai. FLUX(lm)	361.8
NOMINAL FLUX(lm)	447.483	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	447.5
TEST VOLTAGE(V)	241.6	θ @50%(H,V)	15,53DEG

		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	72	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00		
	64	0.00	0.00	0.00	0.00	0.00	0.04	0.10	0.14	0.17	0.16	0.12	0.07	0.01	0.00	0.00	0.00	0.80	0.00		
	56	0.00	0.00	0.00	0.02	0.07	0.14	0.24	0.36	0.50	0.46	0.31	0.20	0.11	0.05	0.00	0.00	2.46	0.00		
	48	0.00	0.00	0.01	0.06	0.17	0.30	0.53	1.03	2.05	1.69	0.78	0.44	0.26	0.13	0.03	0.00	7.46	1.51		
	40	0.00	0.00	0.03	0.13	0.28	0.53	0.98	2.33	5.91	4.62	1.61	0.79	0.44	0.23	0.09	0.01	18.0	11.3		
	32	0.00	0.00	0.07	0.20	0.41	0.76	1.51	4.14	12.6	9.47	2.71	1.20	0.64	0.35	0.16	0.03	34.3	27.3		
	24	0.00	0.01	0.11	0.27	0.52	1.00	2.13	5.45	15.6	11.6	3.69	1.65	0.82	0.44	0.21	0.06	43.6	36.6		
		0.00	0.02	0.13	0.32	0.60	1.20	2.80	6.96	18.5	14.4	5.12	2.15	0.97	0.51	0.25	0.08	54.0	47.5		
		0.00	0.03	0.15	0.35	0.66	1.34	3.37	8.67	21.8	17.4	6.51	2.52	1.07	0.55	0.27	0.09	64.8	58.6		
		0.00	0.03	0.15	0.35	0.68	1.38	3.55	9.57	23.5	19.0	7.14	2.61	1.07	0.55	0.27	0.09	69.9	63.8		
		0.00	0.02	0.13	0.33	0.64	1.25	2.91	7.51	18.3	15.9	5.89	2.23	0.99	0.50	0.24	0.08	56.9	50.5		
	-24	0.00	0.01	0.11	0.28	0.55	1.05	2.15	5.21	14.3	12.4	4.16	1.74	0.84	0.43	0.19	0.05	43.5	36.4		
	-32	0.00	0.00	0.07	0.21	0.44	0.81	1.52	3.34	8.99	7.97	2.79	1.28	0.65	0.32	0.14	0.03	28.6	21.2		
	-40	0.00	0.00	0.04	0.15	0.31	0.55	0.97	1.79	4.11	3.78	1.56	0.81	0.44	0.21	0.09	0.01	14.8	7.15		
	-48	0.00	0.00	0.02	0.09	0.20	0.33	0.52	0.71	0.92	0.87	0.61	0.40	0.24	0.12	0.04	0.00	5.09	0.00		
	-56	0.00	0.00	0.00	0.05	0.13	0.19	0.23	0.24	0.24	0.23	0.22	0.20	0.14	0.09	0.01	0.00	1.98	0.00		
-64	0.00	0.00	0.00	0.01	0.02	0.06	0.13	0.19	0.22	0.21	0.15	0.05	0.02	0.01	0.00	0.00	1.06	0.00			
-72	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.05	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.22	0.00			
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)				16	24	32	40	48	56	64	72	
Φ t	0.00	0.12	1.02	2.82	5.68	11.0	23.7	57.7	148	120	43.4	18.4	8.70	4.49	2.01	0.55	0.01	0.00	447	---	
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	10.9	50.8	144	116	35.3	4.45	0.00	0.00	0.00	0.00	0.00	0.00	---	362	


one-half-peak spread: U:24.1,D:29.1 , L:7.1,RNEMA Beam Type: Type 3 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:241.6V I:0.1061A P:15.15W PF:0.5905 Lamp Flux:447.483x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500075
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

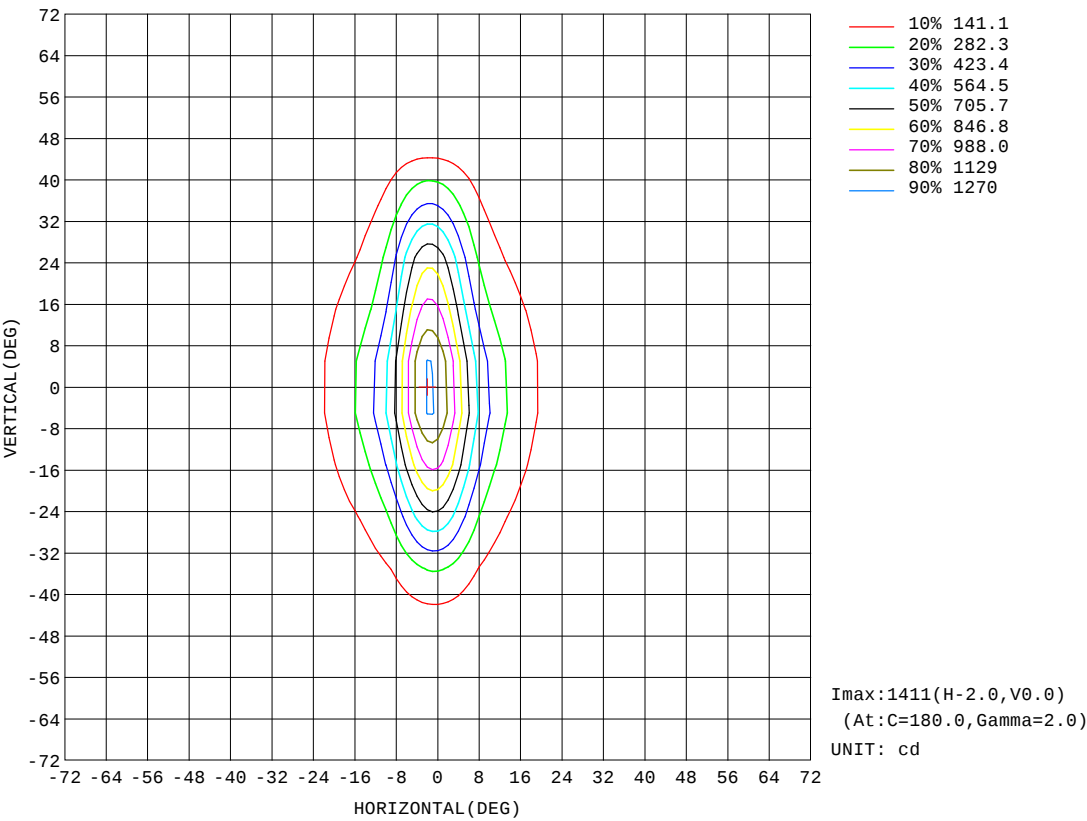


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:241.6V I:0.1061A P:15.15W PF:0.5905 Lamp Flux:447.483x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500075
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

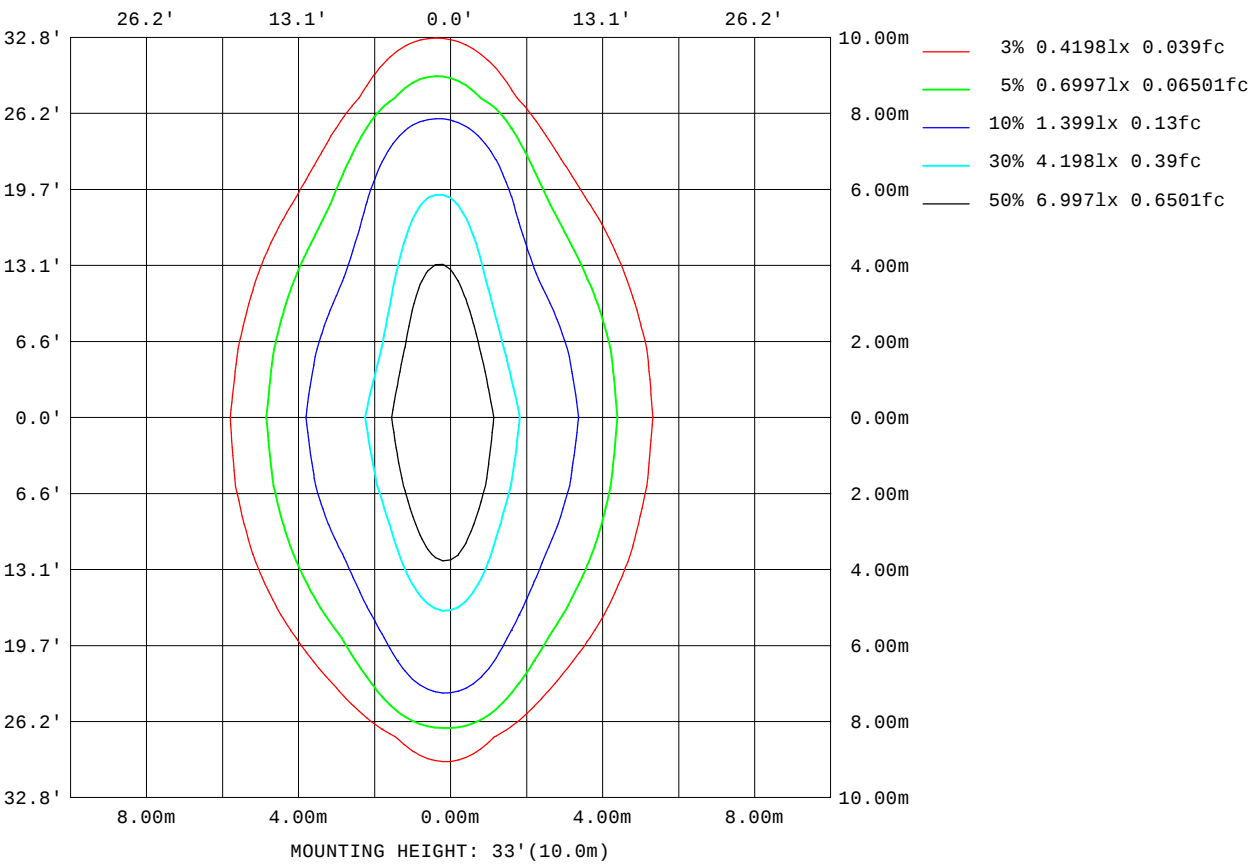


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:241.6V I:0.1061A P:15.15W PF:0.5905 Lamp Flux:447.483x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500075
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

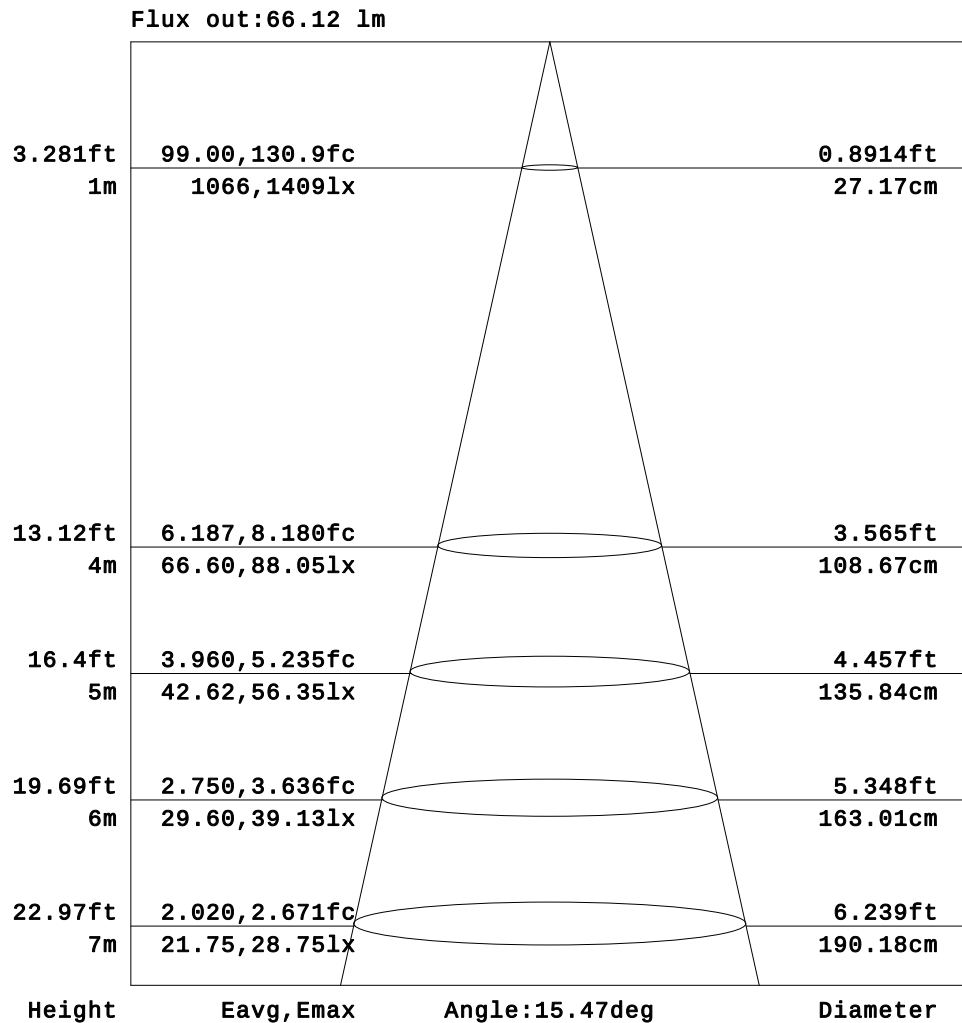


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

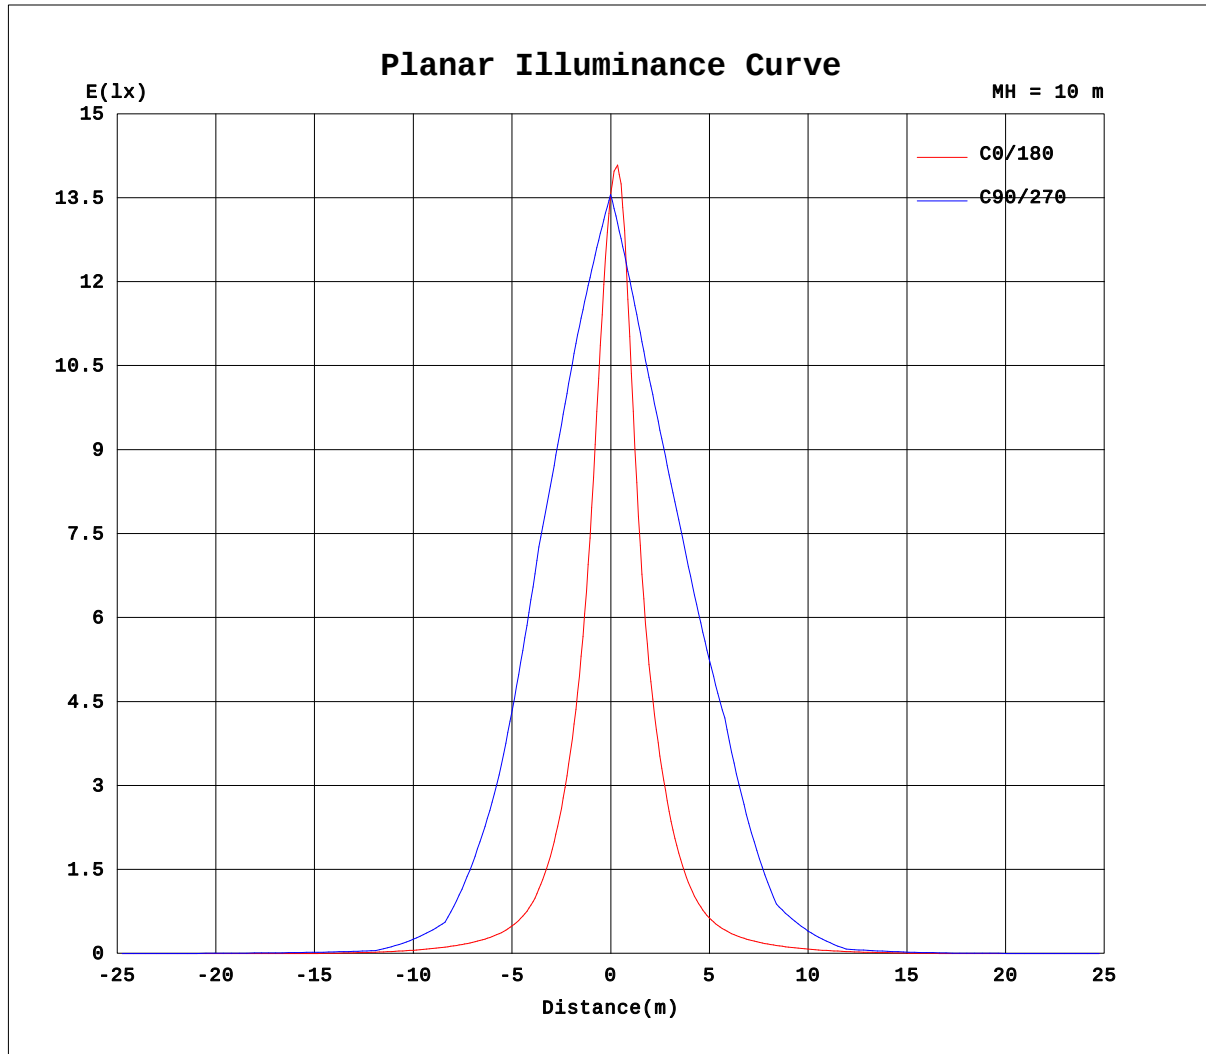

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-05-20

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.6V I:0.1061A P:15.15W PF:0.5905 Lamp Flux:447.483x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500075
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.12	2.49	3.70	4.63	5.23	5.60	5.72	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.23	4.99	7.41	9.26	10.5	11.2	11.4	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.84	3.63	5.28	7.48	9.70	11.7	13.4	14.8	15.9	16.1	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	3.68	7.27	10.6	12.7	14.4	16.0	17.6	19.2	20.5	20.8	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.95	5.73	9.13	13.5	17.3	22.0	27.7	34.1	44.5	63.2	73.1	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	3.89	7.79	11.0	16.4	21.9	29.5	39.4	50.7	69.9	106	125	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.25	5.26	10.2	14.9	21.8	29.6	40.8	56.7	79.3	127	234	294	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.49	6.63	12.5	18.8	27.2	37.4	52.1	74.1	108	184	362	464	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.07	4.05	8.93	15.1	22.5	32.0	44.6	63.7	94.3	145	262	527	669	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.14	5.61	11.2	17.7	26.2	36.8	51.9	75.3	115	183	339	691	875	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.85	6.48	12.7	19.9	28.9	40.2	56.8	84.8	138	233	424	816	1008	
-10	0.00	0.00	0.00	0.00	0.00	0.00	1.55	7.35	14.2	22.1	31.5	43.6	61.7	94.3	161	282	510	940	1142	
-5	0.00	0.00	0.00	0.00	0.00	0.00	1.97	7.83	14.6	22.6	32.1	44.3	63.5	99.5	175	313	564	1062	1249	
0	0.00	0.00	0.00	0.00	0.00	0.00	2.38	8.30	15.0	23.2	32.7	45.1	65.3	105	189	344	618	1183	1356	
5	0.00	0.00	0.00	0.00	0.00	0.00	1.99	7.78	14.3	22.3	31.4	43.1	62.3	99.1	174	305	545	1064	1233	
10	0.00	0.00	0.00	0.00	0.00	0.00	1.60	7.26	13.7	21.3	30.1	41.2	59.4	93.4	159	265	473	945	1110	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.90	6.30	12.3	19.5	27.7	37.9	54.0	83.3	136	224	417	860	1003	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.20	5.34	11.0	17.8	25.4	34.6	48.6	73.1	114	183	361	775	896	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.10	3.84	8.90	14.9	21.8	30.0	41.8	61.3	93.8	150	308	668	772	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.35	6.84	12.0	18.1	25.4	34.9	49.5	73.3	118	254	560	648	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.17	4.76	9.08	14.1	20.2	28.0	39.3	56.9	89.0	179	370	423	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.68	6.19	10.1	15.0	21.1	29.2	40.5	59.7	104	180	198	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.34	3.77	7.01	10.6	14.9	20.4	27.8	39.5	64.2	105	115	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.35	3.88	6.25	8.76	11.7	15.2	19.3	24.5	30.5	31.9	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.68	1.94	3.13	5.15	7.64	10.3	13.0	16.2	19.6	20.3	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.53	3.59	5.37	6.76	7.89	8.64	8.74	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.76	1.79	2.69	3.38	3.94	4.32	4.37	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.6V I:0.1061A P:15.15W PF:0.5905 Lamp Flux:447.483x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500075
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	5.19	4.31	3.13	1.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	10.4	8.62	6.26	2.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	15.0	13.2	11.0	8.17	5.67	4.61	3.73	1.95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	19.6	17.8	15.8	13.9	11.3	9.22	7.45	3.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	57.3	38.9	29.0	22.5	16.9	12.6	9.17	5.30	2.16	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	95.0	60.1	42.3	31.0	22.5	16.0	10.9	6.71	4.32	0.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	204	108	67.4	46.7	32.7	22.7	15.4	9.67	5.96	2.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	312	155	92.6	62.4	42.8	29.5	19.9	12.6	7.61	3.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	439	211	121	77.5	51.7	35.4	24.3	16.0	9.79	4.73	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	565	268	150	92.7	60.6	41.4	28.8	19.5	12.0	6.12	1.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	662	333	183	107	67.2	45.2	31.6	21.8	13.9	7.47	2.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	760	399	216	121	73.7	49.0	34.4	24.2	15.8	8.83	3.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	810	428	235	130	76.7	50.5	35.6	25.2	16.7	9.51	3.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	861	457	253	139	79.7	52.0	36.9	26.3	17.6	10.2	4.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	770	404	228	130	76.7	50.5	35.9	25.7	17.2	9.89	3.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	679	350	203	121	73.7	49.1	35.0	25.2	16.9	9.60	3.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	593	292	170	105	66.0	44.8	32.3	23.1	15.2	8.42	2.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	507	233	137	88.5	58.2	40.5	29.5	21.0	13.5	7.23	1.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	442	196	113	73.7	49.8	35.3	25.7	17.9	11.2	5.60	0.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	376	158	88.3	59.0	41.3	30.2	21.8	14.7	8.88	3.98	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	255	115	67.2	46.0	32.8	23.8	16.9	11.1	6.28	1.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	134	72.3	46.0	33.0	24.2	17.4	12.0	7.53	3.67	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	80.5	46.7	31.3	23.1	17.1	12.4	8.35	4.74	1.84	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	27.1	21.0	16.6	13.2	10.1	7.35	4.70	1.95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	17.6	14.0	11.0	8.39	5.80	3.67	2.35	0.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	8.06	6.91	5.44	3.63	1.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	4.03	3.45	2.72	1.81	0.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: