

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2643.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	85.1V x 47.8H
	At 50% of Imax	53.5V x 17.3H
	At 90% of Imax	16.3V x 6.0H
Beam Flux	Total	999.3 lumens per klm.
	To 10% of Imax	778.2 lumens per klm.
	To 50% of Imax	368.4 lumens per klm.
	To 90% of Imax	54.5 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:241.5V I:0.1219A P:19.87W PF:0.6751 Lamp Flux:848.759x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500078
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

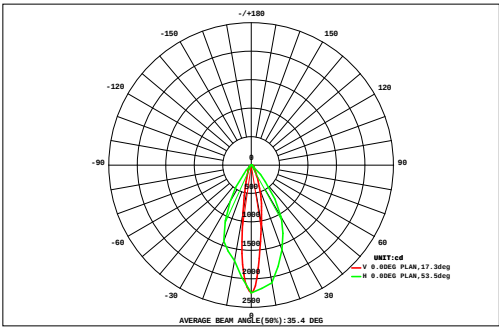

DATA OF LAMP		Eff:42.71lm/W	
MODELLWW-WZB-W55-L12-RDM		Imax(cd)	2244
NOMINAL POWER(W)	20	AVAILABILITY(%)	78.5
RATED VOLTAGE(V)	242	Avai. FLUX(lm)	666.0
NOMINAL FLUX(lm)	848.759	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	848.8
TEST VOLTAGE(V)	241.5	θ @50%(H,V)	17,53DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a	
	72	0.00	0.00	0.00	0.01	0.02	0.04	0.10	0.16	0.20	0.19	0.13	0.05	0.03	0.02	0.00	0.00	0.00	0.94	0.00	
	64	0.00	0.00	0.01	0.11	0.26	0.41	0.55	0.66	0.73	0.74	0.68	0.57	0.42	0.22	0.04	0.00	0.00	0.00	5.41	0.00
	56	0.00	0.01	0.11	0.26	0.42	0.59	0.79	1.03	1.31	1.26	1.01	0.81	0.60	0.42	0.23	0.07	0.00	0.00	8.90	0.00
	48	0.00	0.04	0.20	0.38	0.58	0.83	1.24	2.19	4.14	3.54	1.94	1.34	0.93	0.61	0.38	0.16	0.02	0.00	18.5	5.28
	40	0.00	0.10	0.27	0.47	0.76	1.18	1.98	4.50	10.7	8.71	3.74	2.33	1.48	0.86	0.48	0.25	0.05	0.00	37.8	23.3
	32	0.01	0.14	0.33	0.59	0.95	1.48	2.75	7.52	20.8	16.7	6.14	3.55	2.18	1.21	0.64	0.31	0.10	0.00	65.4	51.3
	24	0.02	0.17	0.39	0.70	1.09	1.79	3.57	9.89	27.1	22.9	9.51	5.16	2.82	1.49	0.78	0.37	0.12	0.00	87.9	75.5
		0.03	0.19	0.43	0.76	1.20	2.03	4.24	11.8	32.8	30.8	14.8	7.21	3.35	1.69	0.88	0.41	0.15	0.01	113	101
		0.04	0.21	0.45	0.80	1.26	2.18	4.62	12.8	36.0	35.1	17.6	8.27	3.61	1.78	0.92	0.44	0.16	0.01	126	115
		0.04	0.21	0.46	0.81	1.28	2.17	4.52	12.2	34.3	33.1	15.9	7.60	3.48	1.73	0.90	0.43	0.15	0.01	119	108
		0.03	0.19	0.43	0.77	1.22	1.97	3.83	9.61	26.5	24.5	10.2	5.37	2.93	1.55	0.81	0.39	0.14	0.01	90.4	77.6
	-24	0.02	0.16	0.39	0.69	1.09	1.71	3.09	7.94	23.3	20.5	7.22	3.89	2.37	1.29	0.68	0.33	0.11	0.00	74.8	60.6
	-32	0.01	0.13	0.32	0.58	0.94	1.42	2.36	5.45	15.0	13.3	4.92	2.73	1.75	0.99	0.54	0.27	0.08	0.00	50.8	36.0
	-40	0.00	0.08	0.25	0.47	0.76	1.11	1.68	3.12	7.03	6.36	2.91	1.74	1.16	0.70	0.40	0.21	0.04	0.00	28.0	13.2
	-48	0.00	0.02	0.17	0.35	0.57	0.81	1.10	1.42	1.79	1.68	1.30	0.97	0.70	0.47	0.29	0.13	0.01	0.00	11.8	0.00
-56	0.00	0.00	0.06	0.22	0.40	0.54	0.63	0.66	0.59	0.59	0.63	0.57	0.45	0.35	0.18	0.02	0.00	0.00	5.89	0.00	
-64	0.00	0.00	0.01	0.04	0.13	0.25	0.36	0.45	0.50	0.49	0.42	0.29	0.17	0.06	0.02	0.00	0.00	0.00	3.20	0.00	
-72	0.00	0.00	0.00	0.00	0.02	0.05	0.08	0.10	0.12	0.11	0.10	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.68	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)					16	24	32	40	48	56	64	72
Φ t	0.21	1.65	4.28	8.02	12.9	20.6	37.5	91.5	243	220	99.1	52.5	28.5	15.4	8.19	3.77	1.13	0.05	849	---	
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	12.2	79.1	236	213	85.7	35.2	4.36	0.00	0.00	0.00	0.00	0.00	---	666	


one-half-peak spread: U:24.6,D:29.2 , L:8.3,RNEM Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:241.5V I:0.1219A P:19.87W PF:0.6751 Lamp Flux:848.759x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500078
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

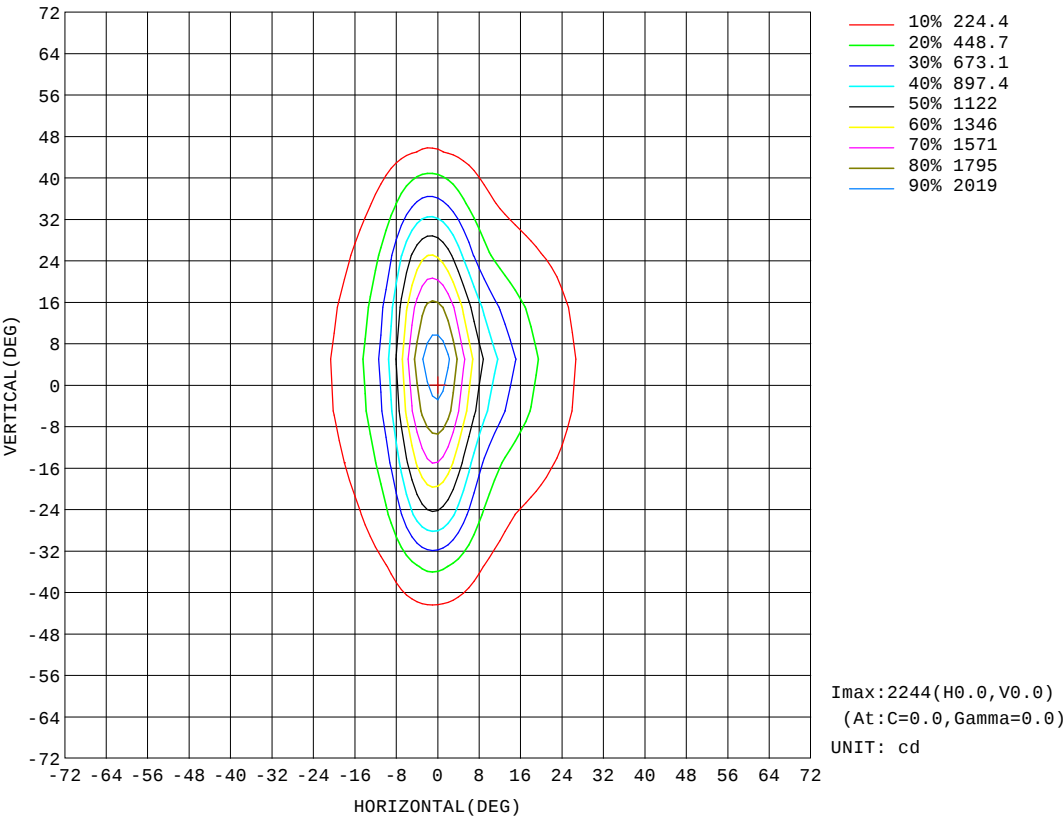


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:241.5V I:0.1219A P:19.87W PF:0.6751 Lamp Flux:848.759x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500078
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

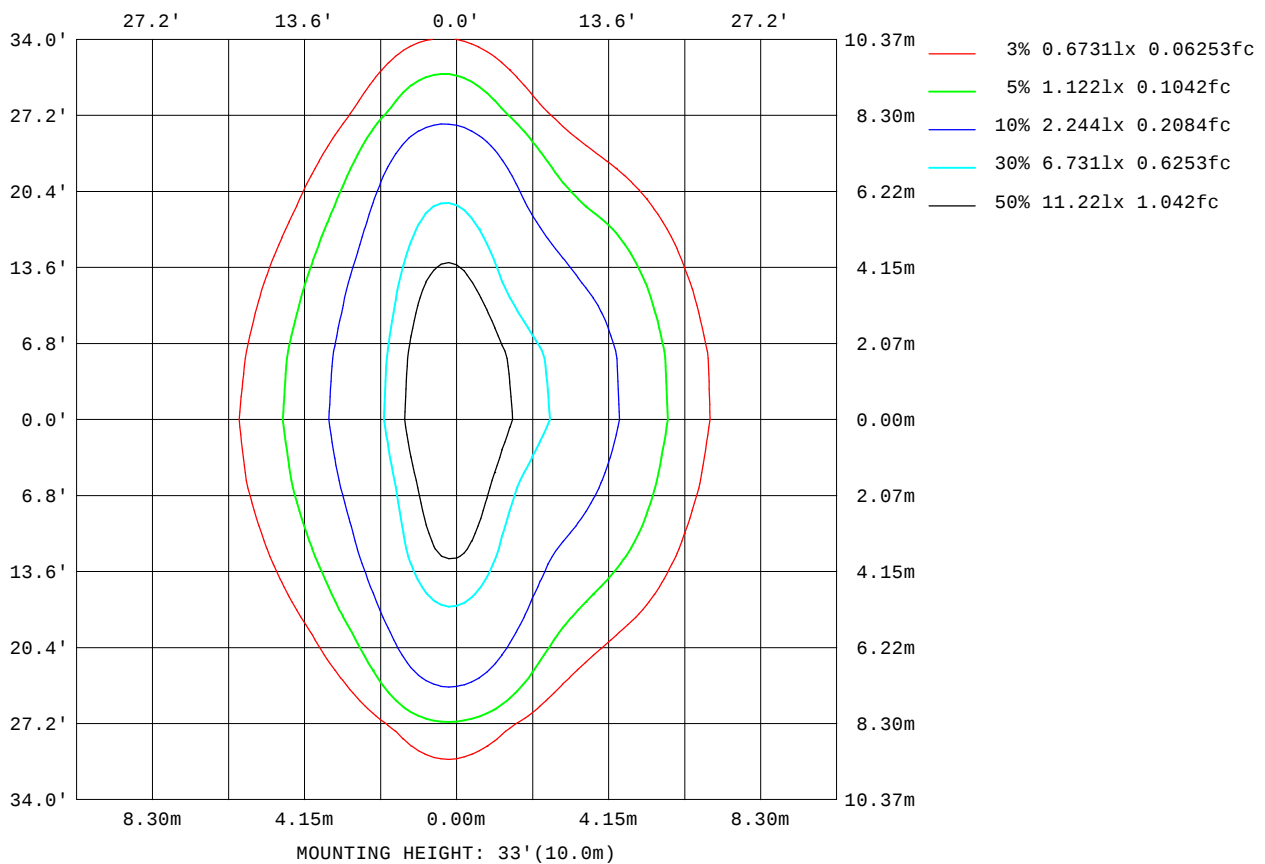


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:241.5V I:0.1219A P:19.87W PF:0.6751 Lamp Flux:848.759x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500078
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

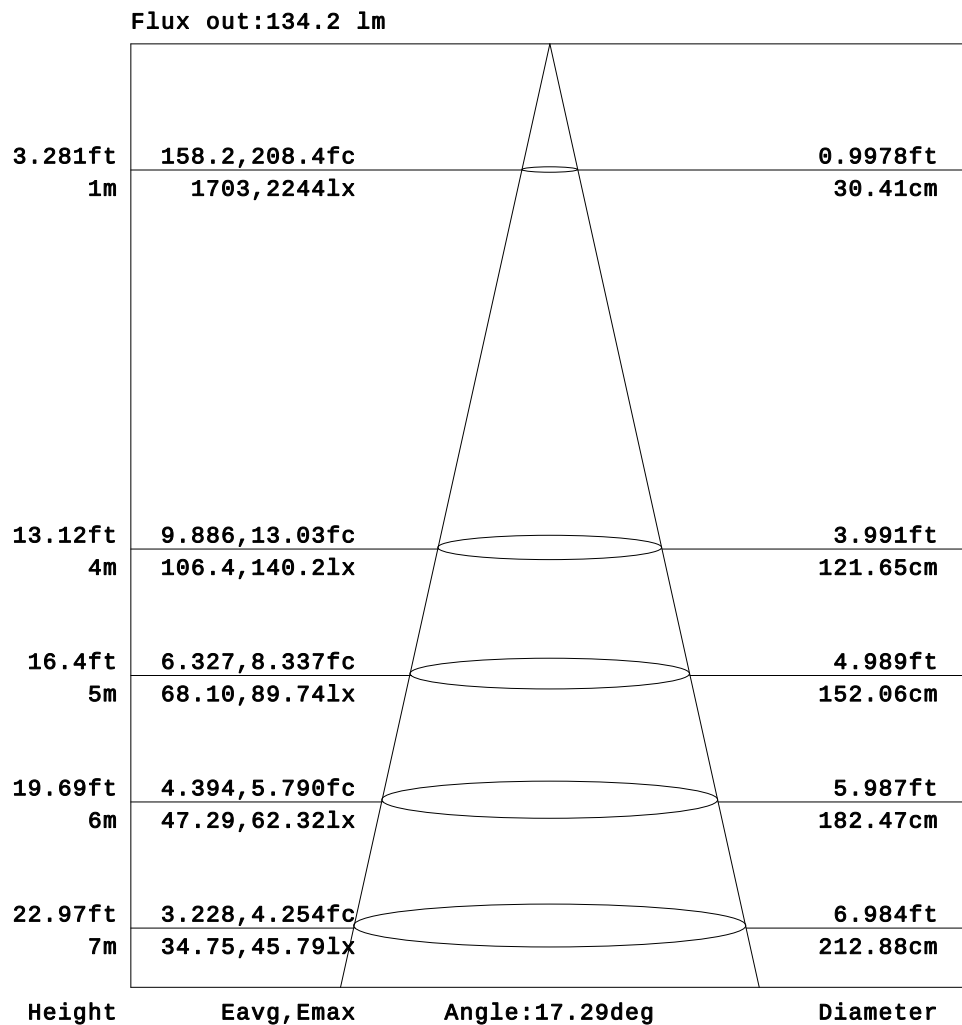


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

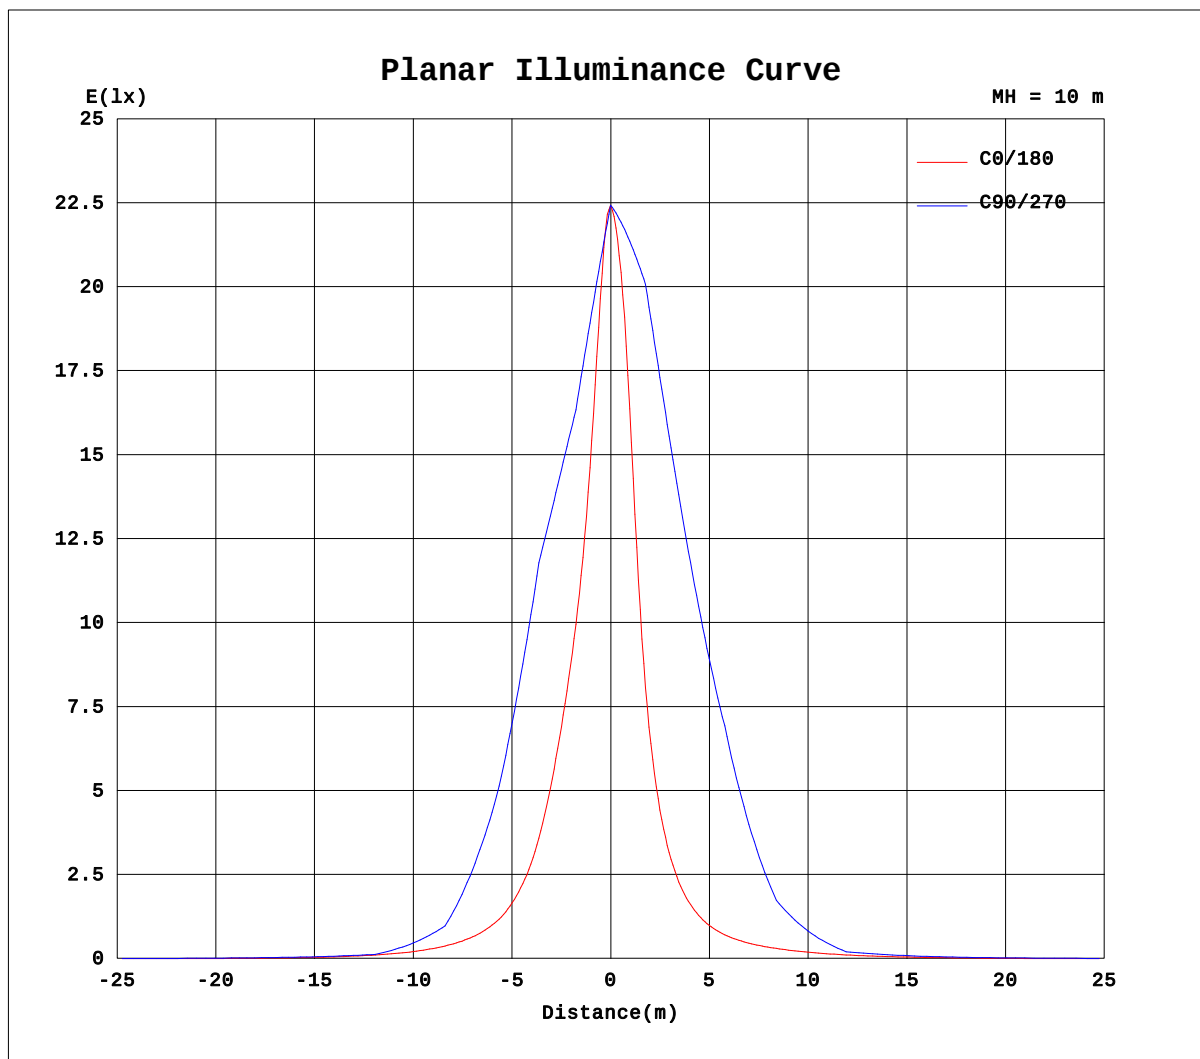

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.5V I:0.1219A P:19.87W PF:0.6751 Lamp Flux:848.759x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500078
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	2.73	4.63	6.70	8.40	9.93	11.2	12.2	12.8	13.0
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.05	5.46	9.27	13.4	16.8	19.9	22.4	24.3	25.6	26.0
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.81	5.02	9.07	14.3	19.4	23.7	27.2	30.2	32.8	35.1	36.8	37.4
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.62	10.0	17.1	23.2	29.6	34.1	37.5	40.5	43.2	45.8	48.0	48.8
-45	0.00	0.00	0.00	0.00	0.00	0.00	1.67	7.53	15.4	22.7	28.9	36.4	42.7	49.5	57.6	67.8	86.3	119	133
-40	0.00	0.00	0.00	0.00	0.00	0.00	3.33	13.4	20.7	28.4	34.7	43.2	51.2	61.6	74.6	92.3	127	191	217
-35	0.00	0.00	0.00	0.00	0.00	1.35	7.75	16.7	24.3	33.0	41.0	51.1	61.3	75.0	95.3	132	217	403	481
-30	0.00	0.00	0.00	0.00	0.00	2.70	12.2	20.0	27.8	37.7	47.3	59.0	71.3	88.5	116	171	307	615	746
-25	0.00	0.00	0.00	0.00	0.00	4.83	14.1	23.2	31.9	41.8	52.8	65.4	80.2	102	140	217	416	873	1083
-20	0.00	0.00	0.00	0.00	0.00	6.95	16.0	26.4	36.1	45.8	58.4	71.7	89.1	116	164	264	526	1132	1420
-15	0.00	0.00	0.00	0.00	0.01	8.32	17.8	28.2	38.5	49.5	62.2	76.3	96.0	128	187	306	594	1242	1565
-10	0.00	0.00	0.00	0.00	0.01	9.68	19.5	30.0	41.0	53.2	66.0	80.9	103	140	211	348	662	1353	1711
-5	0.00	0.00	0.00	0.00	0.34	10.1	20.5	30.7	41.8	54.1	66.9	82.5	106	148	228	388	754	1555	1977
0	0.00	0.00	0.00	0.00	0.67	10.5	21.4	31.5	42.5	55.1	67.9	84.2	110	156	245	428	846	1757	2244
5	0.00	0.00	0.00	0.00	0.34	10.2	20.6	30.6	41.5	53.7	66.3	82.0	107	153	238	416	827	1707	2173
10	0.00	0.00	0.00	0.00	0.02	9.89	19.9	29.7	40.4	52.3	64.7	79.8	104	149	232	404	807	1657	2103
15	0.00	0.00	0.00	0.00	0.01	8.90	18.7	28.2	38.3	49.8	61.7	75.8	97.5	137	210	364	732	1498	1843
20	0.00	0.00	0.00	0.00	0.00	7.92	17.5	26.7	36.2	47.3	58.7	71.7	91.0	124	189	325	657	1339	1583
25	0.00	0.00	0.00	0.00	0.00	5.94	15.3	24.0	32.8	42.6	53.5	65.5	82.1	110	162	274	558	1136	1325
30	0.00	0.00	0.00	0.00	0.00	3.97	13.1	21.4	29.4	38.0	48.2	59.2	73.2	94.9	135	223	459	933	1067
35	0.00	0.00	0.00	0.00	0.00	1.99	10.3	18.4	25.8	33.2	41.8	51.5	63.6	81.2	111	174	333	642	727
40	0.00	0.00	0.00	0.00	0.00	0.00	7.48	15.5	22.1	28.5	35.4	43.7	54.0	67.4	87.4	124	208	351	387
45	0.00	0.00	0.00	0.00	0.00	0.00	3.75	11.3	18.2	24.4	30.2	36.5	43.9	53.2	66.3	88.5	135	213	233
50	0.00	0.00	0.00	0.00	0.00	0.00	0.01	7.07	14.2	20.2	25.0	29.3	33.8	39.0	45.1	52.6	62.4	74.3	78.8
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.54	7.74	13.4	18.5	23.4	28.0	32.7	37.6	42.9	49.1	55.9	58.6
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.23	6.60	12.0	17.4	22.3	26.4	30.1	33.3	35.8	37.6	38.4
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.62	3.30	6.00	8.72	11.1	13.8	16.6	19.1	21.1	22.5	22.9
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.20	3.22	4.97	6.42	7.36	7.41
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.60	1.61	2.49	3.21	3.68	3.70
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-05-20

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.5V I:0.1219A P:19.87W PF:0.6751 Lamp Flux:848.759x1 lm		
NAME: 8.01.017.0075 LWW-WZB-W55-L12-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500078
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	12.5	11.6	10.2	7.59	6.05	4.00	1.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	25.1	23.2	20.3	15.2	12.1	8.00	3.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	36.0	33.5	30.4	26.2	22.5	18.5	14.7	10.2	6.90	2.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	47.0	43.8	40.5	37.3	32.9	29.1	25.9	20.4	13.8	4.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	108	79.5	63.6	54.2	45.8	38.2	31.7	24.7	18.7	10.8	4.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	169	115	86.8	71.1	58.7	47.2	37.4	29.1	23.5	17.5	9.38	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-35	348	195	129	103	83.2	64.5	48.9	36.7	28.5	21.0	12.6	3.42	0.00	0.00	0.00	0.00	0.00	0.00
-30	526	275	172	134	108	81.9	60.4	44.4	33.4	24.6	15.8	6.84	0.00	0.00	0.00	0.00	0.00	0.00
-25	736	365	223	172	136	101	73.3	53.4	39.0	28.0	18.2	9.14	0.67	0.00	0.00	0.00	0.00	0.00
-20	945	455	274	211	164	119	86.1	62.3	44.7	31.3	20.7	11.4	1.34	0.00	0.00	0.00	0.00	0.00
-15	1084	573	361	262	191	135	96.1	69.4	49.8	34.8	22.9	12.9	2.75	0.00	0.00	0.00	0.00	0.00
-10	1222	691	447	314	218	151	106	76.5	54.9	38.3	25.2	14.3	4.15	0.00	0.00	0.00	0.00	0.00
-5	1432	867	571	373	243	161	112	80.4	57.5	40.0	26.2	14.9	4.56	0.00	0.00	0.00	0.00	0.00
0	1642	1042	696	432	267	172	118	84.3	60.1	41.8	27.2	15.4	4.97	0.00	0.00	0.00	0.00	0.00
5	1600	1016	678	423	262	169	117	83.6	59.6	41.3	26.9	15.2	4.74	0.00	0.00	0.00	0.00	0.00
10	1558	990	661	414	257	167	116	82.9	59.1	40.8	26.6	15.0	4.50	0.00	0.00	0.00	0.00	0.00
15	1306	785	522	347	228	153	108	77.1	54.9	38.0	24.7	13.7	3.37	0.00	0.00	0.00	0.00	0.00
20	1053	581	383	280	200	139	99.2	71.3	50.8	35.2	22.8	12.4	2.23	0.00	0.00	0.00	0.00	0.00
25	868	461	301	228	169	121	87.2	63.1	45.3	31.5	20.5	10.7	1.12	0.00	0.00	0.00	0.00	0.00
30	682	341	220	176	138	103	75.2	54.8	39.7	27.9	18.1	8.92	0.00	0.00	0.00	0.00	0.00	0.00
35	477	254	170	138	109	82.5	61.3	45.5	33.7	24.1	15.3	5.80	0.00	0.00	0.00	0.00	0.00	0.00
40	272	167	121	99.7	80.6	62.2	47.5	36.2	27.7	20.3	12.4	2.67	0.00	0.00	0.00	0.00	0.00	0.00
45	171	113	86.4	72.8	60.4	48.6	38.9	31.0	23.8	16.0	7.27	1.33	0.00	0.00	0.00	0.00	0.00	0.00
50	70.0	59.3	51.9	46.0	40.2	34.9	30.3	25.9	19.9	11.6	2.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	53.9	47.8	43.1	38.7	33.8	28.5	22.8	17.1	10.7	5.79	1.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	37.9	36.4	34.4	31.5	27.4	22.1	15.4	8.40	1.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	22.2	20.6	18.5	15.9	13.7	11.0	7.68	4.20	0.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	6.48	4.78	2.60	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	3.24	2.39	1.30	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: