

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5203.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	43.1V x 40.6H
	At 50% of Imax	21.1V x 18.2H
	At 90% of Imax	6.0V x 6.7H
Beam Flux	Total	999.7 lumens per klm.
	To 10% of Imax	701.9 lumens per klm.
	To 50% of Imax	320.6 lumens per klm.
	To 90% of Imax	33.8 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.2DEG
Operators:QC1
Test Date:2024-04-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:76%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.0V I:0.2950A P:63.28W PF:0.9748 Lamp Flux:2707.23x1 lm		
NAME: 8.01.017.0047 20°LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240300011
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

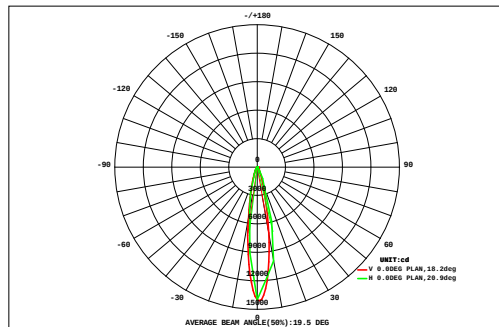

DATA OF LAMP		Eff:42.78lm/W	
MODELLWW-WZB-W55-L12-RDM	Imax(cd)	14088	
NOMINAL POWER(W)	64	AVAILABILITY(%)	71.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1935
NOMINAL FLUX(lm)	2707.23	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2707
TEST VOLTAGE(V)	220.0	θ @50%(H,V)	18,21DEG

AREA FLUX DIAGRAM																	UNIT:lm		Φ t	Φ a
27	0.73	0.90	1.11	1.37	1.65	1.96	2.25	2.51	2.70	2.76	2.68	2.47	2.19	1.88	1.57	1.28	1.03	0.82	31.9	2.63
24	0.87	1.13	1.47	1.89	2.39	2.95	3.54	4.10	4.57	4.79	4.67	4.24	3.69	3.09	2.50	1.99	1.55	1.19	50.6	22.9
21	1.08	1.43	1.88	2.43	3.09	3.82	4.57	5.28	5.84	6.01	5.73	5.11	4.37	3.59	2.86	2.24	1.72	1.29	62.4	40.1
18	1.30	1.75	2.31	3.00	3.82	4.72	5.63	6.49	7.12	7.24	6.78	5.95	5.02	4.06	3.19	2.46	1.86	1.39	74.1	54.9
15	1.29	1.78	2.44	3.38	4.72	6.85	10.2	14.3	18.1	20.0	19.0	15.7	11.6	7.86	5.26	3.72	2.68	1.94	151	137
12	1.48	2.07	2.88	4.07	5.85	8.86	13.6	19.4	24.4	26.6	24.7	19.9	14.3	9.31	6.08	4.23	3.00	2.15	193	180
9	1.86	2.62	3.67	5.28	7.71	12.1	18.7	26.0	31.8	33.1	29.3	22.5	15.3	9.51	6.16	4.25	2.97	2.10	235	224
	1.70	2.39	3.36	4.82	7.09	11.3	17.8	25.6	32.4	35.3	32.6	25.8	18.1	11.4	7.10	4.75	3.29	2.31	247	236
	1.48	2.10	2.96	4.20	6.21	10.1	16.4	24.3	32.2	36.9	35.5	29.0	20.9	13.4	8.07	5.28	3.61	2.52	255	244
	1.87	2.65	3.78	5.47	8.62	14.5	22.7	31.5	38.6	40.1	34.9	26.3	17.7	10.7	6.55	4.39	3.00	2.11	275	265
	1.78	2.52	3.58	5.16	8.06	13.4	20.8	28.8	35.3	36.7	32.0	24.1	16.3	10.0	6.23	4.22	2.91	2.05	254	243
	1.21	1.67	2.30	3.13	4.19	5.92	8.78	12.6	16.6	19.4	19.3	16.4	12.4	8.65	5.78	4.02	2.89	2.07	147	133
	1.22	1.67	2.26	3.01	3.90	4.96	6.55	8.59	10.5	11.6	11.4	9.71	7.61	5.76	4.26	3.15	2.33	1.71	100	82.8
	1.26	1.71	2.27	2.97	3.77	4.26	4.66	4.97	4.72	3.93	3.18	2.67	2.49	2.61	2.59	2.20	1.72	1.30	53.3	23.3
	0.87	1.14	1.49	1.93	2.49	3.15	3.99	5.00	5.98	6.57	6.49	5.78	4.72	3.72	2.90	2.26	1.74	1.32	61.5	38.8
	0.73	0.91	1.15	1.44	1.76	2.09	2.42	2.80	3.25	3.64	3.83	3.69	3.23	2.70	2.20	1.77	1.40	1.09	40.1	9.19
	0.72	0.87	1.05	1.24	1.41	1.53	1.50	1.27	0.96	0.81	0.81	0.92	1.12	1.18	1.12	0.98	0.82	0.68	19.0	0.00
	0.60	0.71	0.85	0.99	1.12	1.23	1.24	1.19	1.25	1.29	1.28	1.22	1.13	1.12	1.04	0.92	0.78	0.66	18.6	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)	6	9	12	15	18	21	24	27			
Φ t	22.0	30.0	40.8	55.8	77.9	114	165	225	276	297	274	221	162	111	75.5	54.1	39.3	28.7	2269	---
Φ a	0.00	0.00	8.11	28.0	58.5	98.0	152	215	269	290	268	215	151	92.5	54.0	33.1	3.01	0.00	---	1935

one-half-peak spread: U:7.2,D:14.0 , L:9.3,R:9.1


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.2DEG
Operators:QC1
Test Date:2024-04-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:76%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.0V I:0.2950A P:63.28W PF:0.9748 Lamp Flux:2707.23x1 lm		
NAME: 8.01.017.0047 20°LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240300011
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

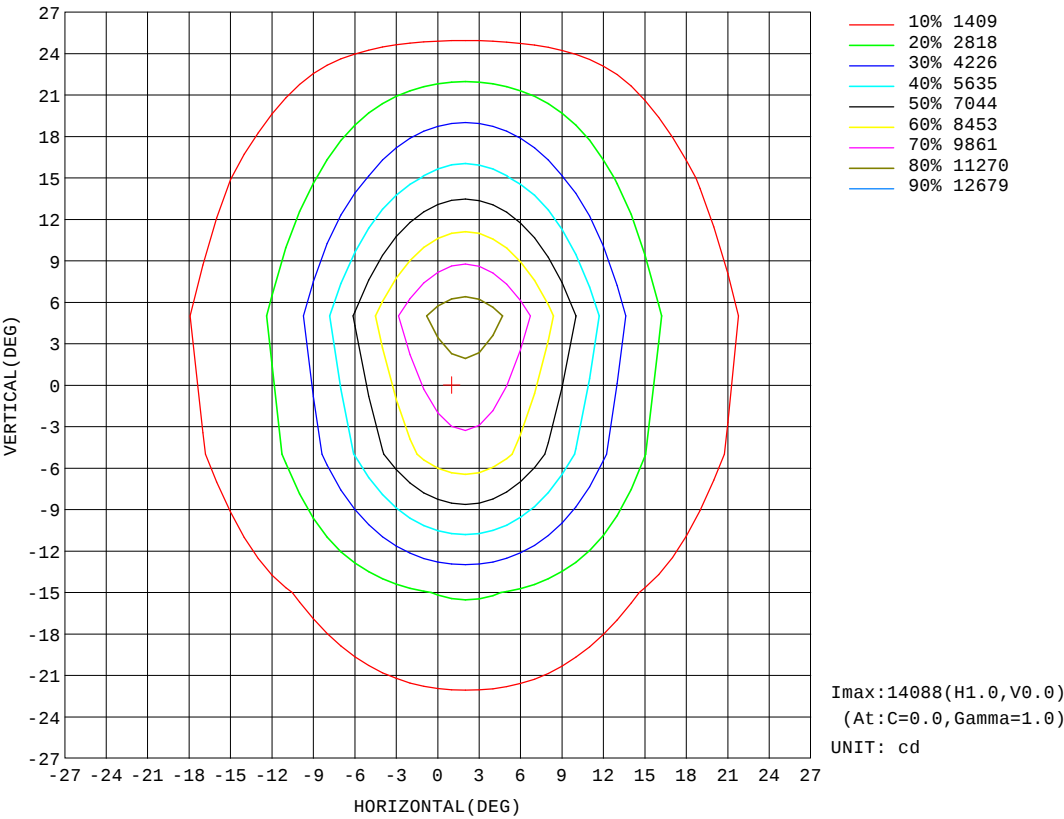


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.2DEG
Operators:QC1
Test Date:2024-04-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:76%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.0V I:0.2950A P:63.28W PF:0.9748 Lamp Flux:2707.23x1 lm		
NAME: 8.01.017.0047 20°LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240300011
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

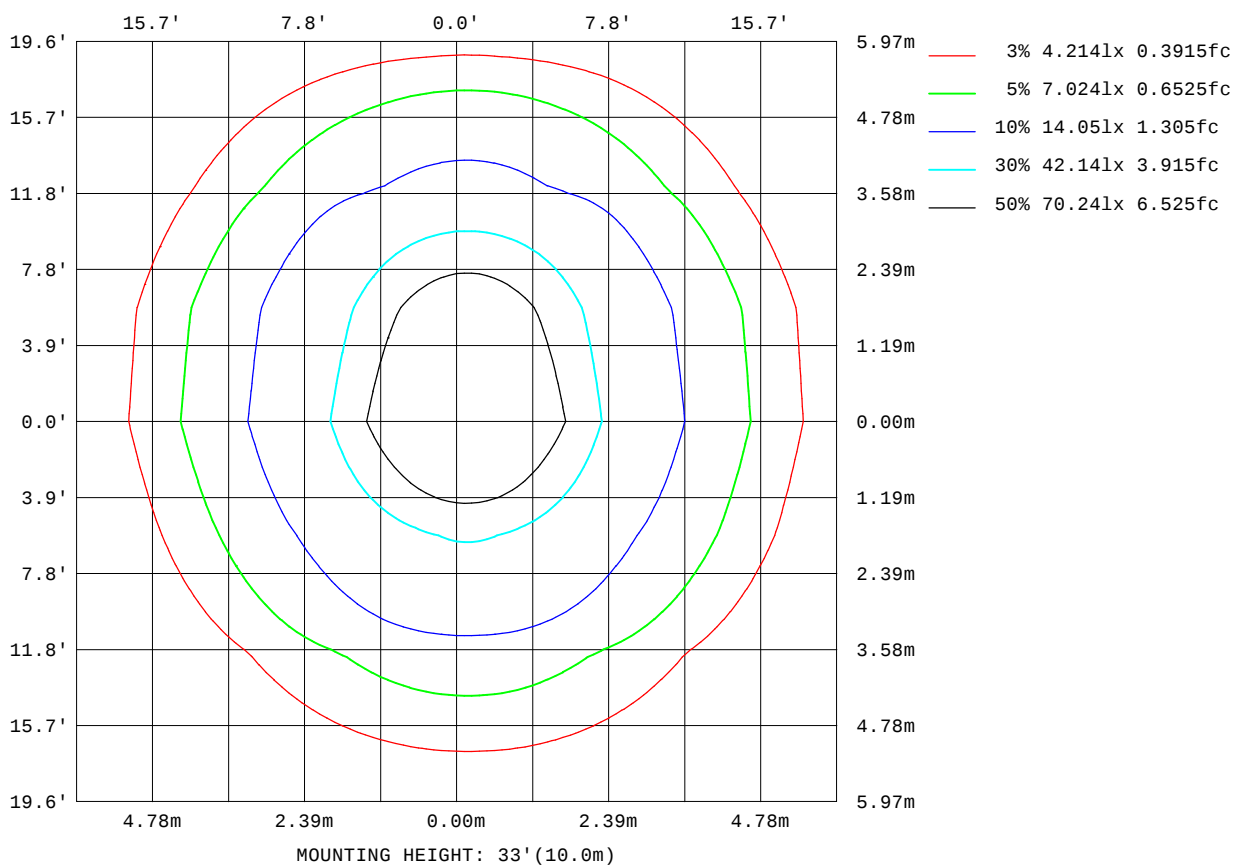


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.2DEG
Operators:QC1
Test Date:2024-04-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:76%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.0V I:0.2950A P:63.28W PF:0.9748 Lamp Flux:2707.23x1 lm		
NAME: 8.01.017.0047 20°LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240300011
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

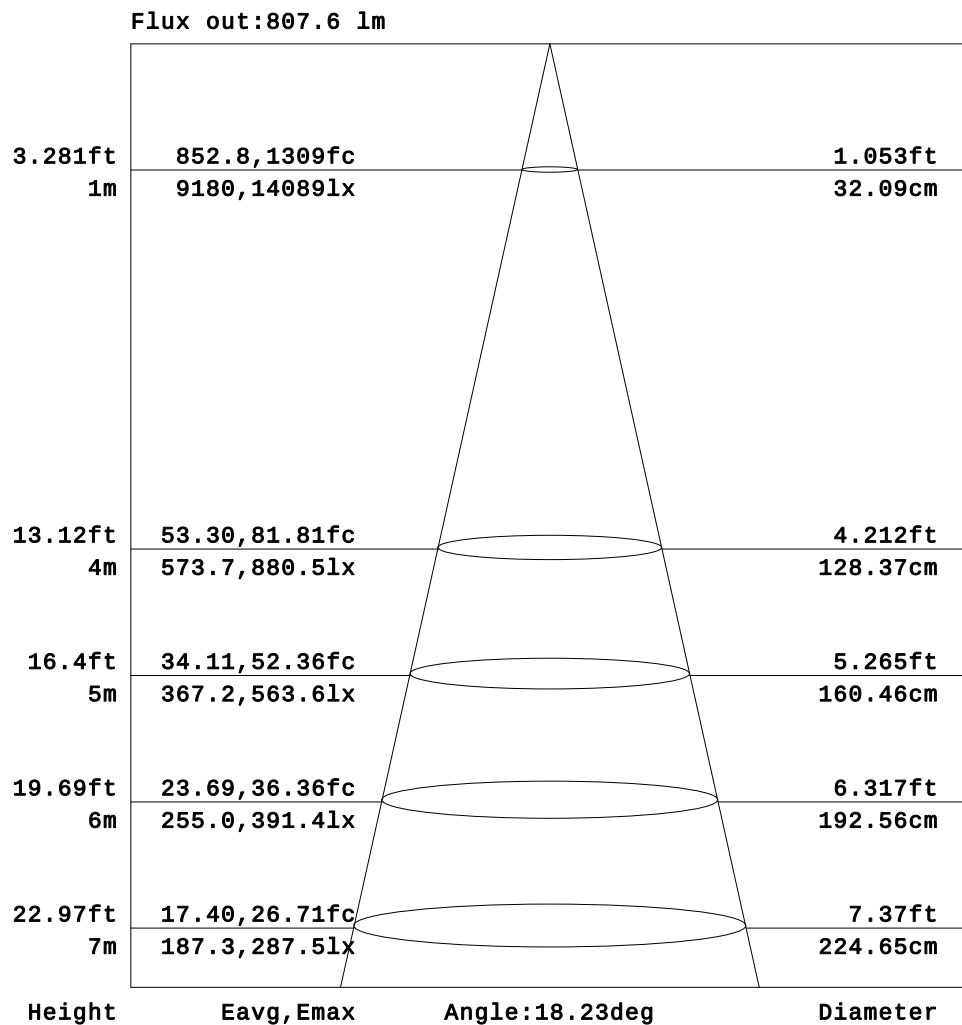


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.2DEG
Operators:QC1
Test Date:2024-04-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:76%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

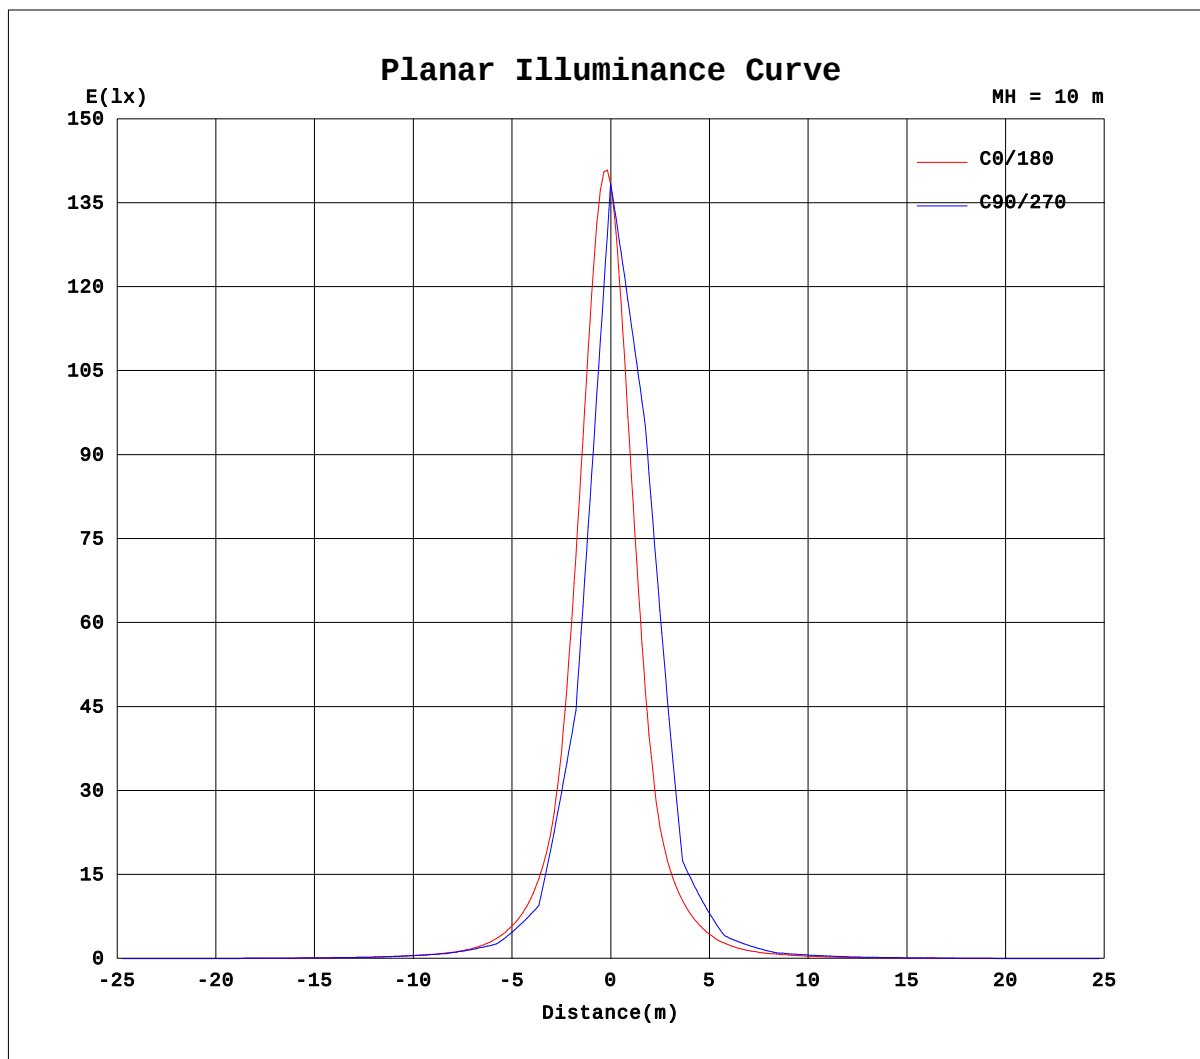

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.2DEG
Operators: QC1
Test Date: 2024-04-09

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 76%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.0V I:0.2950A P:63.28W PF:0.9748 Lamp Flux:2707.23x1 lm		
NAME: 8.01.017.0047 20°LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240300011
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.25	0.39	0.61	0.82	0.89	0.98	1.13
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.57	0.86	1.32	1.69	1.79	2.02	2.27
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.39	0.82	1.14	1.55	2.11	2.46	2.94	3.44	3.65	3.88	4.19
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.98	1.75	2.42	3.22	3.80	4.22	4.79	5.32	5.58	5.88	6.15
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.67	1.73	2.71	3.55	4.48	5.29	5.92	6.60	7.30	7.82	8.25	8.59
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.40	1.55	2.93	3.99	5.06	6.10	7.05	7.86	8.71	9.52	10.2	10.8	11.1
-45	0.00	0.00	0.00	0.00	0.00	0.14	0.88	2.17	3.49	4.79	6.04	7.29	8.69	10.2	11.6	12.9	14.1	15.0	15.6
-40	0.00	0.00	0.00	0.00	0.00	0.56	1.92	3.24	4.60	6.11	7.51	9.00	10.9	13.1	15.0	16.8	18.4	19.6	20.1
-35	0.00	0.00	0.00	0.00	0.00	0.77	2.19	3.69	5.08	6.74	8.47	10.5	13.2	16.2	19.2	22.4	25.7	28.6	30.4
-30	0.00	0.00	0.00	0.00	0.05	1.63	3.11	4.68	6.23	8.03	10.2	13.0	16.6	20.5	24.6	29.3	34.3	38.6	40.9
-25	0.00	0.00	0.00	0.00	0.19	1.61	3.22	4.86	6.55	8.67	11.4	15.0	19.4	25.6	34.0	45.2	58.0	70.2	77.5
-20	0.00	0.00	0.00	0.00	0.71	2.26	3.97	5.73	7.67	10.3	13.9	18.5	24.3	33.6	47.5	66.1	87.0	106	115
-15	0.00	0.00	0.00	0.00	0.58	2.15	3.87	5.67	7.74	10.5	14.6	19.7	27.5	41.2	63.5	97.3	147	221	286
-10	0.00	0.00	0.00	0.00	1.08	2.71	4.47	6.40	8.76	12.2	17.0	23.5	35.1	56.1	90.9	146	233	367	468
-5	0.00	0.00	0.00	0.00	0.91	2.54	4.30	6.18	8.52	11.9	16.8	23.6	36.3	59.8	101	172	336	633	908
0	0.00	0.00	0.00	0.00	1.36	3.07	4.86	6.80	9.41	13.4	18.8	27.5	44.7	76.7	132	242	542	1030	1397
5	0.00	0.00	0.00	0.00	0.98	2.63	4.37	6.24	8.63	12.2	17.4	24.7	39.2	66.1	112	198	404	802	1168
10	0.00	0.00	0.00	0.00	1.22	2.86	4.61	6.51	9.03	12.9	18.4	26.3	42.1	70.6	118	207	403	749	1003
15	0.00	0.00	0.00	0.00	0.75	2.31	3.99	5.82	8.05	11.2	15.9	22.0	32.9	52.7	85.4	140	242	427	593
20	0.00	0.00	0.00	0.00	0.88	2.40	4.08	5.92	8.13	11.2	15.5	21.1	30.1	45.7	69.8	103	144	185	211
25	0.00	0.00	0.00	0.00	0.35	1.77	3.38	5.11	6.97	9.36	12.7	17.0	23.0	32.5	47.1	67.3	92.2	117	136
30	0.00	0.00	0.00	0.00	0.35	1.75	3.37	5.00	6.64	8.68	11.4	15.0	19.1	24.2	31.5	40.8	50.7	58.9	62.9
35	0.00	0.00	0.00	0.00	0.05	1.15	2.58	4.08	5.56	7.23	9.27	11.9	15.0	18.6	23.2	28.9	34.9	40.1	43.1
40	0.00	0.00	0.00	0.00	0.00	1.09	2.40	3.76	5.09	6.52	8.07	9.94	12.2	14.6	17.0	19.4	21.5	23.0	23.7
45	0.00	0.00	0.00	0.00	0.00	0.42	1.53	2.70	3.93	5.21	6.48	7.88	9.54	11.3	13.1	14.9	16.5	17.8	18.4
50	0.00	0.00	0.00	0.00	0.00	0.10	1.11	2.14	3.28	4.41	5.40	6.44	7.58	8.75	9.97	11.2	12.2	12.9	13.3
55	0.00	0.00	0.00	0.00	0.00	0.00	0.47	1.17	2.19	3.12	3.98	4.92	5.87	6.71	7.62	8.53	9.25	9.80	10.2
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.62	1.48	2.17	2.92	3.79	4.50	5.02	5.64	6.24	6.54	6.87	7.11
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.66	1.02	1.50	2.19	2.77	3.18	3.67	4.17	4.44	4.68	4.95
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	0.86	1.22	1.52	1.92	2.25	2.42	2.63	2.83
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.38	0.58	0.72	0.92	1.10	1.19	1.29	1.40
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:QC1
 Test Date:2024-04-09

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:76%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.0V I:0.2950A P:63.28W PF:0.9748 Lamp Flux:2707.23x1 lm		
NAME: 8.01.017.0047 20°LWW-WZB-W55-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240300011
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: ×10cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	1.10	1.00	1.02	0.95	0.74	0.63	0.56	0.33	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	2.15	2.00	2.05	1.83	1.41	1.25	1.04	0.55	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	4.14	3.91	3.87	3.63	3.15	2.85	2.56	1.98	1.45	1.14	0.67	0.12	0.00	0.00	0.00	0.00	0.00	0.00	
-60	6.02	5.79	5.65	5.25	4.72	4.37	3.88	3.16	2.61	2.17	1.09	0.09	0.00	0.00	0.00	0.00	0.00	0.00	
-55	8.57	8.29	7.93	7.42	6.75	6.16	5.52	4.69	3.96	3.24	2.21	1.02	0.39	0.00	0.00	0.00	0.00	0.00	
-50	11.0	10.6	10.0	9.33	8.54	7.73	6.85	5.90	5.05	3.96	2.84	1.57	0.61	0.00	0.00	0.00	0.00	0.00	
-45	15.6	15.0	14.1	12.9	11.6	10.3	8.85	7.45	6.29	5.08	3.82	2.57	1.37	0.24	0.00	0.00	0.00	0.00	
-40	19.9	19.1	17.7	16.0	14.1	12.2	10.3	8.49	7.09	5.68	4.31	3.09	1.66	0.19	0.00	0.00	0.00	0.00	
-35	30.3	28.5	25.5	22.0	18.7	15.9	13.2	10.6	8.57	6.86	5.33	3.99	2.53	0.94	0.00	0.00	0.00	0.00	
-30	40.2	36.9	32.0	26.6	22.1	18.4	15.0	11.9	9.34	7.39	5.81	4.32	2.80	1.04	0.00	0.00	0.00	0.00	
-25	76.9	68.4	55.9	43.1	32.1	24.1	18.7	14.7	11.3	8.67	6.67	4.98	3.32	1.66	0.19	0.00	0.00	0.00	
-20	111	95.4	74.7	54.8	38.5	27.3	20.6	16.0	12.1	9.07	6.84	4.96	3.20	1.61	0.10	0.00	0.00	0.00	
-15	278	205	136	90.3	58.8	37.9	25.5	18.6	13.9	10.3	7.66	5.60	3.77	2.14	0.58	0.00	0.00	0.00	
-10	422	284	176	111	69.2	42.4	26.8	19.2	14.2	10.3	7.59	5.48	3.65	2.05	0.44	0.00	0.00	0.00	
-5	865	558	284	153	89.3	53.0	32.2	21.5	15.8	11.4	8.27	6.02	4.16	2.48	0.87	0.00	0.00	0.00	
0	1204	705	319	163	91.8	53.2	31.8	21.2	15.4	11.0	7.95	5.79	3.95	2.29	0.59	0.00	0.00	0.00	
5	1111	705	337	172	98.3	57.5	34.4	22.3	16.2	11.7	8.41	6.13	4.26	2.57	0.94	0.00	0.00	0.00	
10	882	535	261	144	84.9	50.2	30.7	20.6	15.1	10.8	7.85	5.69	3.86	2.24	0.57	0.00	0.00	0.00	
15	570	387	212	123	75.3	46.2	29.2	20.2	14.9	10.8	7.91	5.75	3.93	2.30	0.75	0.00	0.00	0.00	
20	198	159	115	78.8	51.8	33.8	23.2	17.4	12.9	9.47	7.03	5.05	3.31	1.78	0.21	0.00	0.00	0.00	
25	133	111	85.0	60.9	42.1	29.2	21.0	16.0	12.1	9.13	6.91	5.06	3.35	1.80	0.34	0.00	0.00	0.00	
30	61.0	54.0	44.4	34.7	26.2	20.7	16.5	13.1	10.1	7.82	6.02	4.36	2.74	1.24	0.00	0.00	0.00	0.00	
35	42.7	39.0	33.5	27.5	21.9	17.8	14.5	11.6	9.19	7.21	5.59	4.14	2.67	1.19	0.06	0.00	0.00	0.00	
40	23.3	22.0	20.2	18.1	15.8	13.5	11.2	9.15	7.45	5.91	4.59	3.33	2.00	0.57	0.00	0.00	0.00	0.00	
45	18.3	17.5	16.2	14.7	13.0	11.4	9.63	8.00	6.67	5.34	4.05	2.92	1.79	0.47	0.00	0.00	0.00	0.00	
50	13.1	12.6	11.7	10.7	9.62	8.52	7.37	6.29	5.38	4.24	3.04	2.08	1.08	0.00	0.00	0.00	0.00	0.00	
55	10.1	9.80	9.32	8.63	7.81	7.07	6.17	5.17	4.36	3.49	2.41	1.49	0.65	0.05	0.00	0.00	0.00	0.00	
60	7.02	6.84	6.65	6.20	5.69	5.30	4.57	3.69	3.04	2.32	1.37	0.58	0.00	0.00	0.00	0.00	0.00	0.00	
65	4.93	4.77	4.69	4.40	3.95	3.64	3.20	2.52	1.95	1.39	0.78	0.36	0.00	0.00	0.00	0.00	0.00	0.00	
70	2.78	2.67	2.65	2.41	2.07	1.86	1.58	1.09	0.67	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	1.41	1.34	1.33	1.24	1.06	0.95	0.83	0.59	0.37	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.2DEG
Operators:QC1
Test Date:2024-04-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:76%
Test Distance:8.300m [K=1.0000]
Remarks: