

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3429.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	54.6V x 50.3H
	At 50% of Imax	25.4V x 23.9H
	At 90% of Imax	6.9V x 9.4H
Beam Flux	Total	999.7 lumens per klm.
	To 10% of Imax	725.4 lumens per klm.
	To 50% of Imax	334.5 lumens per klm.
	To 90% of Imax	37.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.1V I:0.2292A P:61.26W PF:0.9643 Lamp Flux:953.563x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

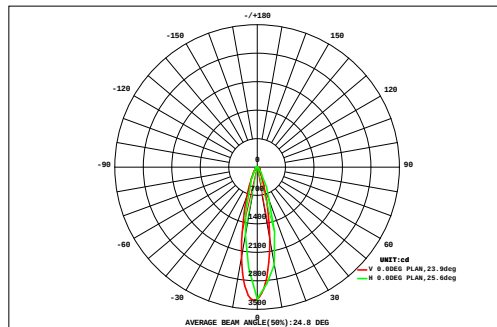

DATA OF LAMP		Eff:15.57lm/W	
MODELLWW-WZB-W55-L12-RDM	Imax(cd)	3270	
NOMINAL POWER(W)	62	AVAILABILITY(%)	72.5
RATED VOLTAGE(V)	278	Avai. FLUX(lm)	691.5
NOMINAL FLUX(lm)	953.563	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	953.6
TEST VOLTAGE(V)	277.1	θ @50%(H,V)	24, 25DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	45	0.23	0.29	0.37	0.45	0.53	0.61	0.68	0.73	0.75	0.73	0.69	0.63	0.56	0.48	0.40	0.32	0.25	0.19	8.88	0.00	
	40	0.29	0.37	0.46	0.56	0.67	0.77	0.86	0.91	0.93	0.90	0.84	0.75	0.65	0.54	0.45	0.36	0.28	0.21	10.8	0.00	
	35	0.31	0.41	0.54	0.71	0.91	1.12	1.35	1.54	1.63	1.60	1.44	1.22	0.98	0.77	0.60	0.46	0.35	0.26	16.2	0.00	
	30	0.38	0.51	0.69	0.92	1.19	1.50	1.81	2.06	2.16	2.07	1.80	1.47	1.15	0.88	0.66	0.50	0.37	0.27	20.4	0.00	
	25	0.39	0.55	0.78	1.12	1.62	2.37	3.34	4.41	5.14	5.08	4.22	3.02	2.02	1.35	0.92	0.64	0.46	0.33	37.7	26.3	
	20	0.47	0.69	1.02	1.50	2.26	3.43	4.95	6.52	7.41	7.00	5.45	3.67	2.33	1.49	0.97	0.66	0.46	0.32	50.6	40.7	
	15	0.44	0.66	1.01	1.59	2.63	4.53	7.70	11.8	15.0	15.1	12.1	7.67	4.21	2.30	1.33	0.84	0.56	0.38	89.9	81.3	
	10	0.53	0.82	1.30	2.15	3.76	6.79	11.8	17.8	21.4	20.3	15.0	8.78	4.50	2.34	1.32	0.81	0.54	0.36	120	112	
	5	0.47	0.71	1.11	1.81	3.16	5.83	10.7	17.3	22.5	22.6	17.9	11.1	5.75	2.90	1.58	0.94	0.60	0.41	127	120	
	0	0.54	0.84	1.34	2.30	4.17	7.96	14.5	22.2	26.3	24.3	17.4	9.87	4.87	2.46	1.36	0.83	0.54	0.37	142	135	
	-5	0.45	0.66	1.01	1.57	2.56	4.33	7.35	11.6	15.2	15.7	12.9	8.39	4.64	2.49	1.43	0.89	0.58	0.40	92.1	83.7	
	-10	0.49	0.73	1.11	1.70	2.69	4.24	6.37	8.56	9.80	9.25	7.02	4.52	2.73	1.67	1.07	0.72	0.50	0.35	63.5	54.2	
	-15	0.40	0.56	0.80	1.15	1.65	2.42	3.49	4.81	5.93	6.19	5.36	3.88	2.53	1.61	1.06	0.72	0.51	0.36	43.4	32.7	
	-20	0.41	0.57	0.79	1.07	1.40	1.77	2.01	2.03	1.86	1.64	1.45	1.33	1.17	0.97	0.73	0.55	0.41	0.30	20.5	4.83	
	-25	0.33	0.44	0.59	0.78	1.02	1.30	1.61	1.90	2.10	2.13	1.94	1.61	1.26	0.97	0.73	0.55	0.41	0.30	20.0	1.13	
	-30	0.32	0.42	0.53	0.67	0.81	0.91	0.96	0.96	0.92	0.87	0.84	0.81	0.74	0.64	0.53	0.42	0.33	0.25	11.9	0.00	
	-35	0.25	0.33	0.42	0.53	0.64	0.75	0.84	0.92	0.96	0.95	0.90	0.81	0.71	0.60	0.50	0.40	0.31	0.24	11.1	0.00	
-40	0.24	0.30	0.37	0.44	0.50	0.54	0.57	0.59	0.58	0.57	0.54	0.51	0.47	0.42	0.37	0.31	0.24	0.18	7.77	0.00		
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)						10	15	20	25	30	35	40	45	
Φ t	6.93	9.86	14.2	21.0	32.2	51.2	80.8	117	141	137	108	70.0	41.3	24.9	16.0	10.9	7.70	5.48	894	---		
Φ a	0.00	0.00	0.00	2.45	18.5	39.6	70.7	106	130	127	97.9	60.7	29.3	8.56	0.00	0.00	0.00	0.00	---	691		

one-half-peak spread: U:10.6,D:15.1 , L:12.3,R:11.8


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.1V I:0.2292A P:61.26W PF:0.9643 Lamp Flux:953.563x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

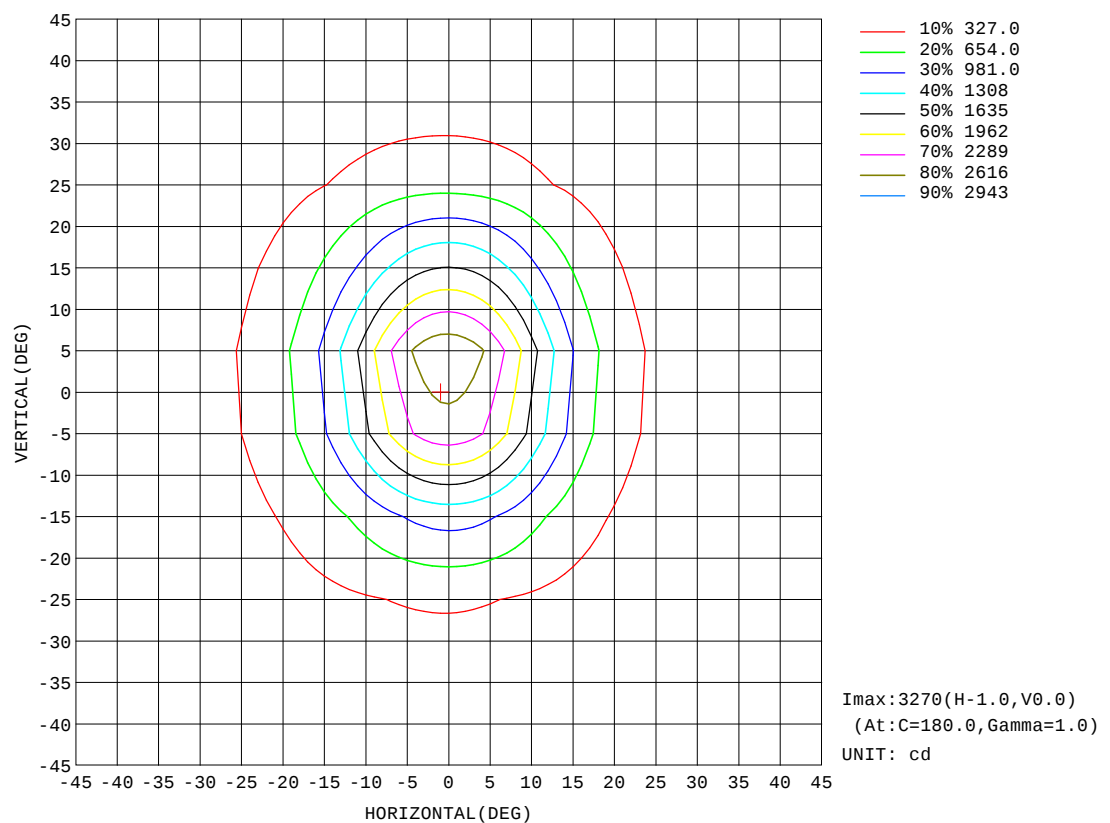


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:277.1V I:0.2292A P:61.26W PF:0.9643 Lamp Flux:953.563x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

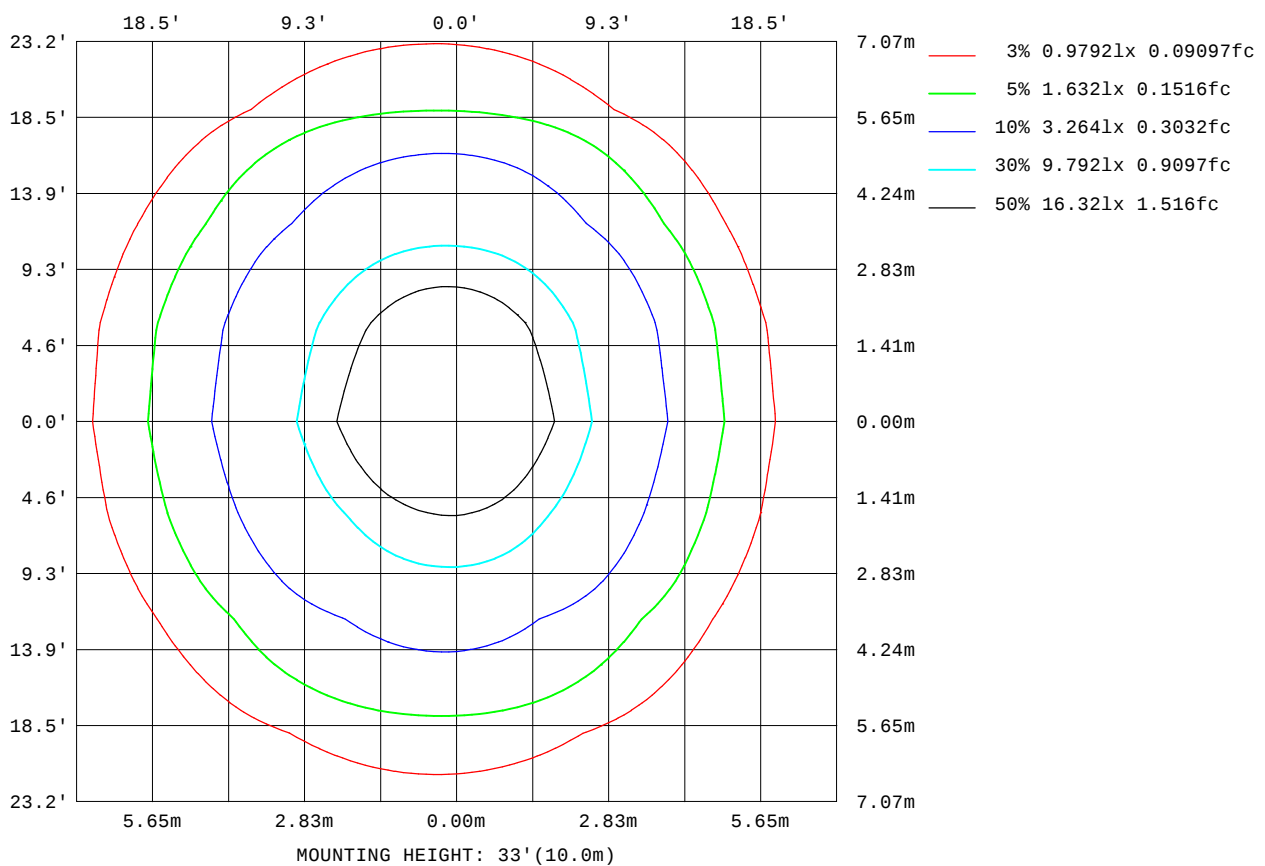


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.1V I:0.2292A P:61.26W PF:0.9643 Lamp Flux:953.563x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

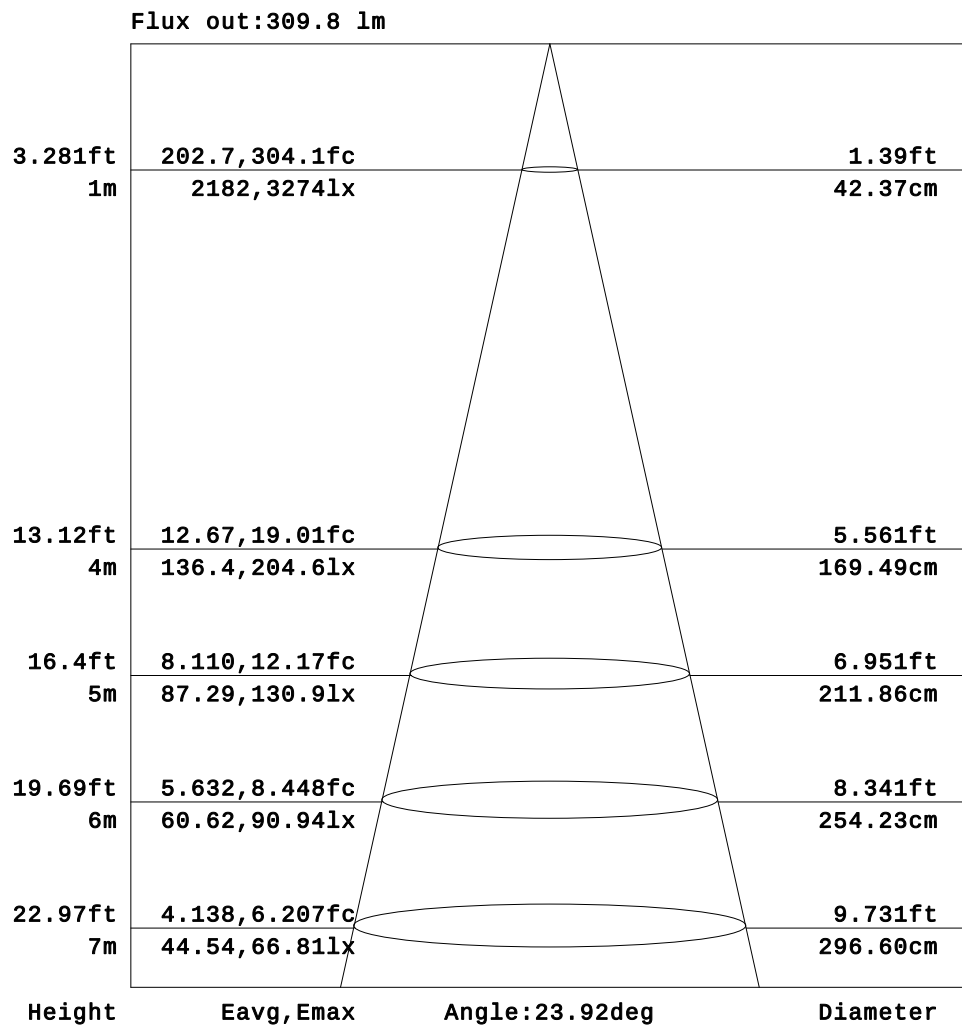


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

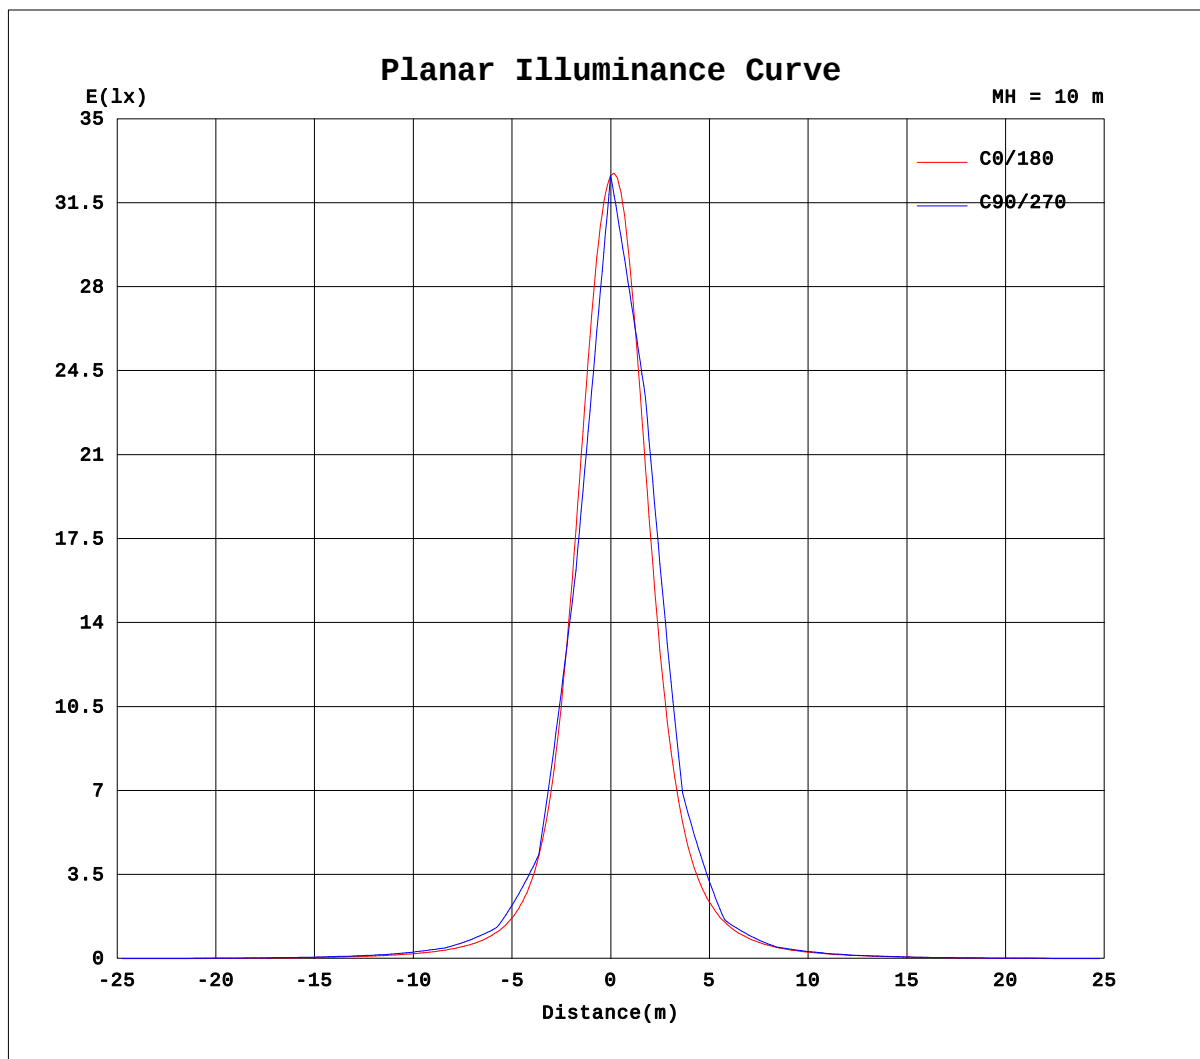

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.1V I:0.2292A P:61.26W PF:0.9643 Lamp Flux:953.563x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.64	1.43	2.02	2.39	2.48
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.69	3.12	4.23	4.87	4.93
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.43	3.23	4.99	6.96	9.66	11.3	13.3	15.2	16.5	17.3	17.4
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.08	7.25	10.6	15.1	20.1	23.2	25.8	27.8	29.2	29.8	29.8
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.01	7.59	13.8	20.1	25.5	30.8	34.7	38.0	40.6	42.5	43.5	43.5
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.38	7.56	15.7	22.9	31.9	38.2	43.3	47.7	51.5	54.4	56.3	57.2	56.9
-45	0.00	0.00	0.00	0.00	0.00	0.00	3.33	11.5	21.4	29.8	38.8	46.9	54.3	61.5	67.9	73.1	77.1	79.1	79.1
-40	0.00	0.00	0.00	0.00	0.00	0.39	8.79	19.6	30.8	40.3	49.2	58.5	68.2	78.0	86.5	93.7	99.0	101	101
-35	0.00	0.00	0.00	0.00	0.00	2.56	11.6	23.0	34.2	44.6	55.0	67.0	80.8	96.7	113	128	141	149	151
-30	0.00	0.00	0.00	0.00	0.00	7.17	19.2	31.2	42.0	53.0	65.3	80.5	99.5	122	146	169	187	199	199
-25	0.00	0.00	0.00	0.00	0.11	8.65	20.5	32.7	44.2	56.3	71.2	91.0	118	152	195	249	302	347	362
-20	0.00	0.00	0.00	0.00	1.85	14.7	26.8	38.8	50.9	65.0	84.0	111	149	198	264	350	438	506	522
-15	0.00	0.00	0.00	0.00	1.51	13.7	26.1	38.5	51.1	66.0	87.1	118	166	237	351	528	765	1001	1108
-10	0.00	0.00	0.00	0.00	5.20	17.7	30.5	43.1	56.7	74.3	101	142	207	314	497	793	1195	1567	1688
-5	0.00	0.00	0.00	0.00	3.33	15.8	28.7	41.4	54.9	72.2	98.5	140	208	327	550	954	1578	2221	2481
0	0.00	0.00	0.00	0.00	6.31	19.1	32.0	44.9	59.2	79.0	110	160	246	409	730	1330	2239	3063	3245
5	0.00	0.00	0.00	0.00	3.34	15.8	28.7	41.5	55.1	72.9	100	144	216	347	597	1063	1794	2554	2859
10	0.00	0.00	0.00	0.00	5.24	17.7	30.5	43.3	57.2	75.8	105	152	227	362	610	1047	1677	2269	2438
15	0.00	0.00	0.00	0.00	2.01	14.0	26.5	39.1	52.1	68.1	91.3	127	183	273	431	696	1080	1473	1641
20	0.00	0.00	0.00	0.00	3.40	15.2	27.5	39.9	52.8	68.2	89.8	122	168	235	340	482	654	796	830
25	0.00	0.00	0.00	0.00	0.60	10.4	22.1	34.0	46.0	59.0	75.5	98.6	131	175	238	322	421	510	542
30	0.00	0.00	0.00	0.00	0.36	10.2	21.5	32.9	44.2	55.7	69.1	86.5	109	136	167	199	229	247	248
35	0.00	0.00	0.00	0.00	0.00	5.22	15.5	26.3	36.8	46.9	57.8	70.6	86.1	104	125	146	165	177	179
40	0.00	0.00	0.00	0.00	0.00	4.19	13.8	23.9	33.4	42.3	51.2	60.4	70.3	80.7	91.1	100	107	110	109
45	0.00	0.00	0.00	0.00	0.00	1.19	7.20	16.2	24.9	33.0	40.9	48.6	56.5	64.3	71.7	78.3	83.1	85.6	85.6
50	0.00	0.00	0.00	0.00	0.00	0.00	4.15	12.2	19.7	26.9	33.6	40.0	45.8	50.9	55.2	58.5	60.8	61.7	61.5
55	0.00	0.00	0.00	0.00	0.00	0.00	1.30	5.27	11.3	17.5	23.5	28.8	33.7	38.0	41.5	44.3	46.1	47.1	47.1
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	5.39	10.6	15.5	19.7	23.4	26.5	29.0	30.9	32.1	32.6	32.5
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.16	4.80	7.28	9.47	11.9	14.5	16.6	18.3	19.5	20.1	20.2
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.43	3.37	5.00	6.29	7.21	7.75	7.78
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.50	1.50	2.35	3.03	3.53	3.84	3.91
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-27

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.1V I:0.2292A P:61.26W PF:0.9643 Lamp Flux:953.563x1 lm																	
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-B									TYPE:LED			WEIGHT:					
DIM.:									SPEC.:			SERIAL No.:2023120038					
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:			PROTECTION ANGLE:					

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	2.29	1.89	1.32	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	4.45	3.57	2.39	0.98	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	16.9	15.8	14.3	12.6	10.6	9.05	7.30	5.34	3.22	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	29.0	27.5	25.6	23.3	20.6	17.4	13.9	9.85	5.56	1.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	42.5	40.7	38.3	35.5	32.1	28.3	24.0	19.3	14.2	8.58	4.21	0.40	0.00	0.00	0.00	0.00	0.00	0.00
-50	55.4	53.0	50.0	46.4	42.2	37.5	32.3	26.7	20.6	13.8	7.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00
-45	76.9	73.0	68.0	62.2	56.0	49.4	42.4	35.2	27.9	20.4	12.9	5.02	0.23	0.00	0.00	0.00	0.00	0.00
-40	97.0	91.2	83.8	75.6	67.2	58.6	49.6	40.8	32.3	24.0	15.8	7.61	0.00	0.00	0.00	0.00	0.00	0.00
-35	144	133	117	101	86.3	72.6	60.2	49.1	39.2	29.9	21.2	12.6	3.58	0.00	0.00	0.00	0.00	0.00
-30	188	168	144	121	99.7	81.5	66.2	53.3	42.2	32.3	23.2	14.1	4.87	0.00	0.00	0.00	0.00	0.00
-25	338	284	223	170	131	100	78.4	61.7	48.4	37.3	27.4	17.9	8.42	0.36	0.00	0.00	0.00	0.00
-20	469	374	278	202	148	109	83.2	64.3	49.8	38.1	27.9	18.0	8.21	0.01	0.00	0.00	0.00	0.00
-15	1009	754	490	305	197	135	97.6	73.1	55.6	42.4	31.5	21.4	11.5	1.69	0.00	0.00	0.00	0.00
-10	1464	1020	613	354	216	143	101	74.0	55.6	42.1	31.0	20.9	10.8	0.82	0.00	0.00	0.00	0.00
-5	2205	1541	887	474	267	166	112	80.6	59.9	45.1	33.4	23.2	13.1	2.85	0.00	0.00	0.00	0.00
0	2721	1775	953	485	266	163	108	77.7	57.5	43.1	31.7	21.5	11.3	1.04	0.00	0.00	0.00	0.00
5	2531	1754	987	512	281	171	114	81.1	60.0	45.1	33.3	23.1	13.0	2.70	0.00	0.00	0.00	0.00
10	2077	1397	779	417	238	151	103	74.8	55.8	41.9	30.8	20.7	10.7	0.68	0.00	0.00	0.00	0.00
15	1471	1055	636	364	219	143	101	73.8	55.6	42.1	31.2	21.2	11.4	1.55	0.00	0.00	0.00	0.00
20	723	531	357	237	162	115	85.2	64.5	49.3	37.6	27.5	17.9	8.19	0.01	0.00	0.00	0.00	0.00
25	494	387	278	196	141	104	79.3	61.3	47.6	36.5	26.9	17.7	8.35	0.37	0.00	0.00	0.00	0.00
30	228	196	161	129	103	82.2	65.4	52.1	41.0	31.4	22.6	13.8	4.75	0.00	0.00	0.00	0.00	0.00
35	170	151	129	107	88.1	72.5	58.8	47.5	37.7	28.8	20.5	12.2	3.79	0.00	0.00	0.00	0.00	0.00
40	104	96.6	87.2	76.8	66.6	56.8	47.5	38.8	30.7	22.9	15.1	7.32	0.17	0.00	0.00	0.00	0.00	0.00
45	82.9	78.0	71.6	64.3	56.6	48.9	41.2	33.7	26.5	19.4	12.3	5.15	0.51	0.00	0.00	0.00	0.00	0.00
50	59.8	57.0	53.4	48.8	43.5	37.9	31.8	25.7	19.4	13.0	6.59	0.41	0.00	0.00	0.00	0.00	0.00	0.00
55	46.1	44.2	41.5	38.1	34.1	29.7	24.7	19.4	13.9	8.33	3.94	0.73	0.00	0.00	0.00	0.00	0.00	0.00
60	31.8	30.4	28.4	26.0	23.0	19.5	15.5	11.0	6.18	1.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	19.7	18.7	17.2	15.3	13.0	10.3	8.18	5.94	3.57	1.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	7.35	6.49	5.28	3.76	1.95	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	3.74	3.35	2.78	2.04	1.16	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: