

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3463.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	54.7V x 48.4H
	At 50% of Imax	25.8V x 22.7H
	At 90% of Imax	6.4V x 8.3H
Beam Flux	Total	999.8 lumens per klm.
	To 10% of Imax	688.8 lumens per klm.
	To 50% of Imax	309.2 lumens per klm.
	To 90% of Imax	30.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-26

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.8V I:0.5448A P:64.76W PF:0.9925 Lamp Flux:3535.52x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

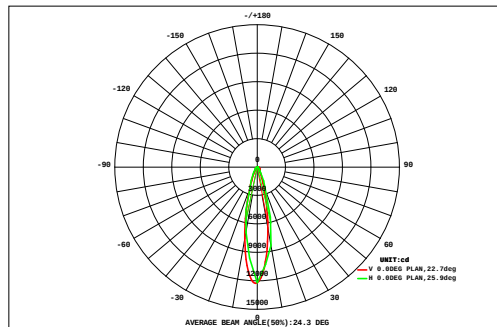

DATA OF LAMP		Eff:54.59lm/W	
MODELLWW-WZB-W55-L12-RDM		Imax(cd)	12247
NOMINAL POWER(W)	64	AVAILABILITY(%)	69.0
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	2439
NOMINAL FLUX(lm)	3535.52	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3536
TEST VOLTAGE(V)	119.8	θ @50%(H,V)	23,26DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.90	1.12	1.36	1.61	1.86	2.11	2.32	2.49	2.58	2.58	2.50	2.34	2.12	1.88	1.63	1.38	1.14	0.91	32.8	0.00
45	0.90	1.12	1.36	1.61	1.86	2.11	2.32	2.49	2.58	2.58	2.50	2.34	2.12	1.88	1.63	1.38	1.14	0.91	32.8	0.00
40	1.08	1.34	1.62	1.92	2.24	2.55	2.81	3.00	3.10	3.07	2.93	2.70	2.42	2.11	1.80	1.51	1.23	0.98	38.4	0.00
35	1.13	1.45	1.82	2.27	2.79	3.39	4.03	4.62	4.99	5.01	4.68	4.11	3.47	2.86	2.32	1.86	1.47	1.15	53.4	0.00
30	1.33	1.72	2.20	2.79	3.51	4.34	5.25	6.06	6.49	6.39	5.78	4.92	4.02	3.21	2.54	1.98	1.54	1.19	65.2	0.00
25	1.34	1.80	2.42	3.29	4.57	6.55	9.40	12.8	15.3	15.4	13.0	9.68	6.79	4.75	3.40	2.50	1.85	1.39	116	69.0
20	1.56	2.16	2.99	4.23	6.21	9.37	13.9	19.0	22.2	21.2	16.9	11.8	7.85	5.25	3.63	2.59	1.89	1.40	154	113
15	1.52	2.11	3.03	4.56	7.44	13.2	23.5	37.8	50.0	51.1	40.2	25.6	14.4	8.17	4.97	3.27	2.27	1.62	295	261
10	1.76	2.53	3.78	6.05	10.8	20.4	37.1	58.6	73.5	69.8	50.7	29.8	15.7	8.50	5.03	3.24	2.23	1.56	401	370
5	1.61	2.30	3.40	5.38	9.39	18.1	34.9	59.2	80.8	83.4	64.6	39.9	21.1	10.9	6.10	3.78	2.52	1.75	449	418
0	1.84	2.69	4.12	6.90	12.8	25.7	49.2	78.9	99.0	92.0	64.9	37.2	18.8	9.68	5.47	3.44	2.31	1.61	517	486
-5	1.59	2.25	3.27	4.99	8.19	14.5	26.0	43.0	59.0	62.6	50.4	32.6	18.3	10.1	5.88	3.73	2.51	1.75	350	318
-10	1.75	2.49	3.66	5.62	9.18	15.4	24.9	36.1	43.1	40.2	30.2	19.2	11.6	7.17	4.64	3.14	2.19	1.55	262	227
-15	1.46	2.01	2.80	3.98	5.75	8.68	13.1	19.0	24.6	26.3	22.7	16.5	10.7	6.93	4.61	3.17	2.24	1.61	176	135
-20	1.53	2.09	2.87	3.93	5.29	6.95	8.36	8.95	8.60	7.85	7.24	6.60	5.53	4.39	3.35	2.49	1.85	1.38	89.2	26.0
-25	1.28	1.68	2.20	2.91	3.83	5.01	6.38	7.84	9.03	9.37	8.65	7.25	5.70	4.34	3.27	2.46	1.85	1.39	84.5	15.6
-30	1.29	1.65	2.09	2.63	3.27	3.79	4.13	4.26	4.19	4.05	3.93	3.73	3.41	2.91	2.39	1.92	1.50	1.17	52.3	0.00
-35	1.07	1.37	1.71	2.12	2.59	3.07	3.53	3.93	4.21	4.26	4.08	3.72	3.26	2.76	2.29	1.86	1.48	1.15	48.5	0.00
-40	1.03	1.30	1.58	1.89	2.17	2.38	2.55	2.64	2.64	2.59	2.50	2.36	2.18	1.98	1.74	1.47	1.21	0.96	35.2	0.00
-45	0.90	1.12	1.36	1.61	1.86	2.11	2.32	2.49	2.58	2.58	2.50	2.34	2.12	1.88	1.63	1.38	1.14	0.91	32.8	0.00
HORIZONTAL (DEG)																				
Φ t	25.1	34.0	46.9	67.1	102	165	271	408	513	507	396	260	158	97.9	65.1	45.8	33.3	24.5	3220	---
Φ a	0.00	0.00	0.00	1.06	40.0	118	232	371	478	473	361	221	111	33.6	0.00	0.00	0.00	0.00	---	2439

one-half-peak spread: U:12.0,D:14.0 , L:11.2,R:11.7


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-26

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.8V I:0.5448A P:64.76W PF:0.9925 Lamp Flux:3535.52x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

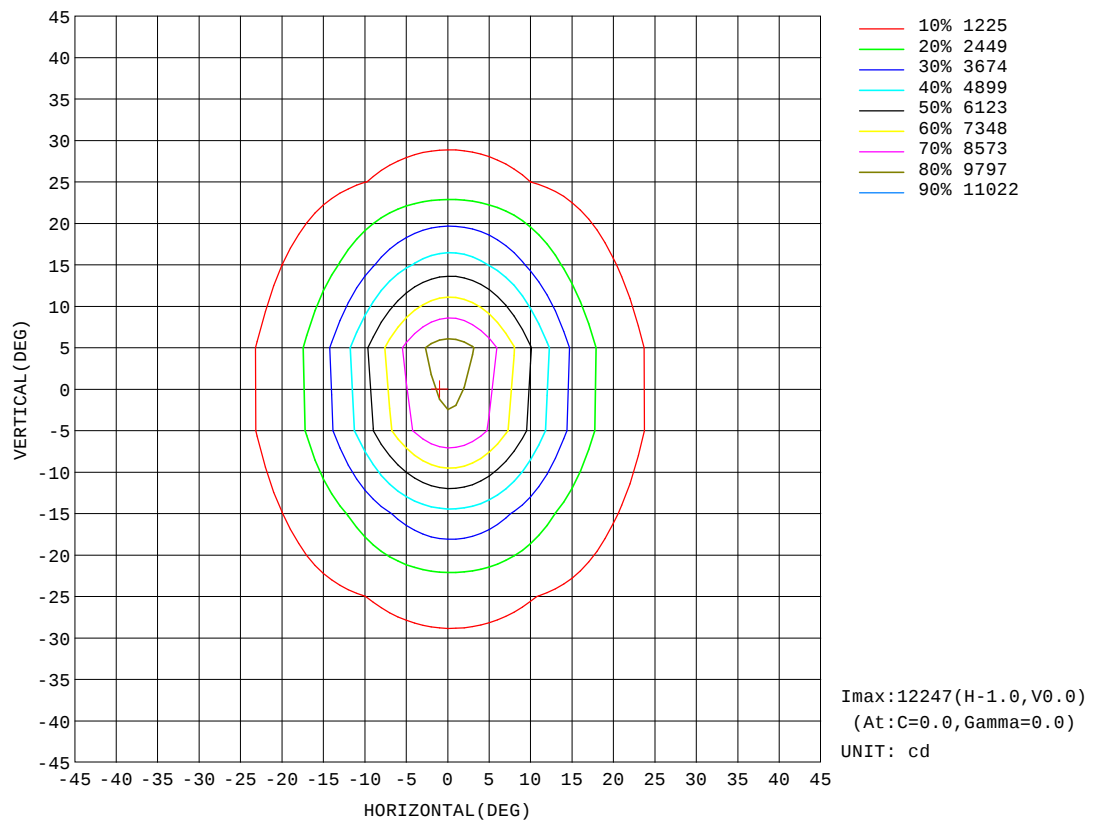


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-26

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.8V I:0.5448A P:64.76W PF:0.9925 Lamp Flux:3535.52x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

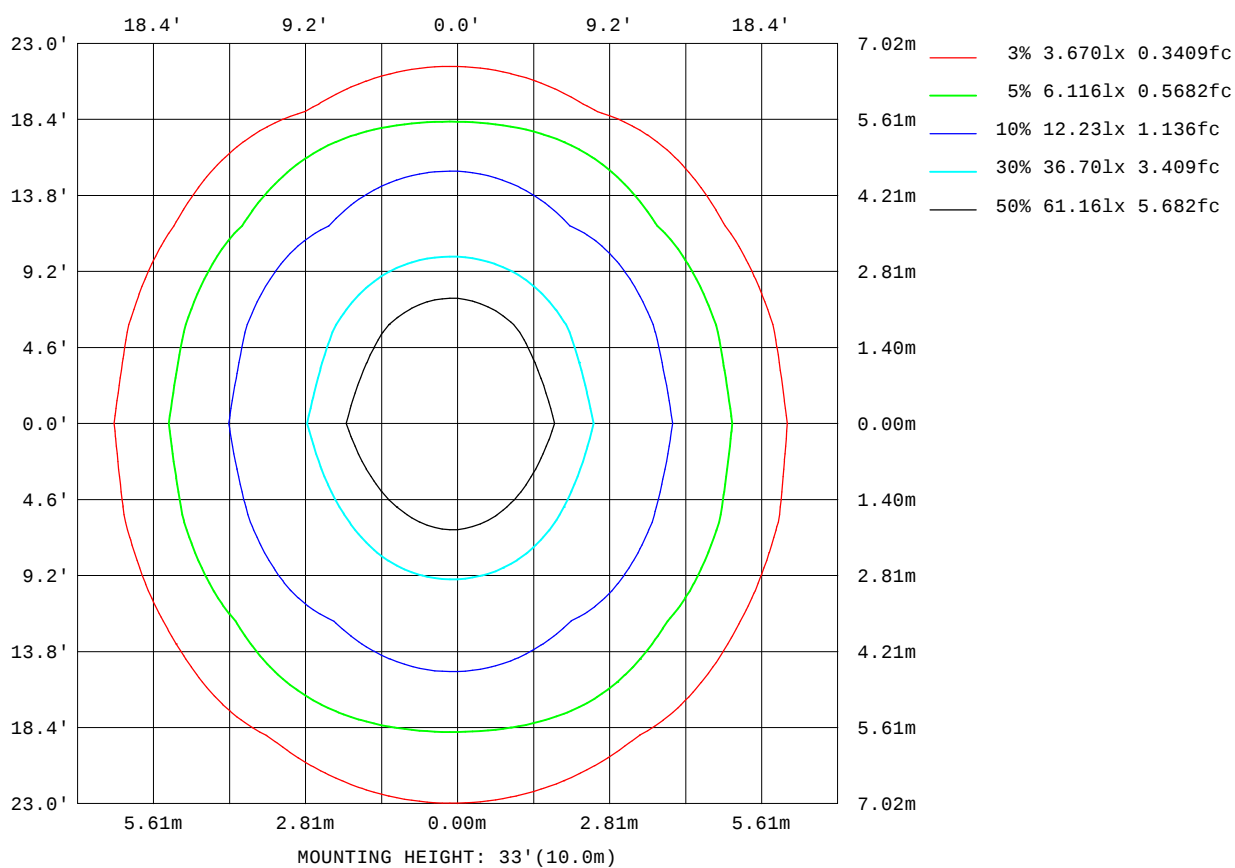


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-26

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:119.8V I:0.5448A P:64.76W PF:0.9925 Lamp Flux:3535.52x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

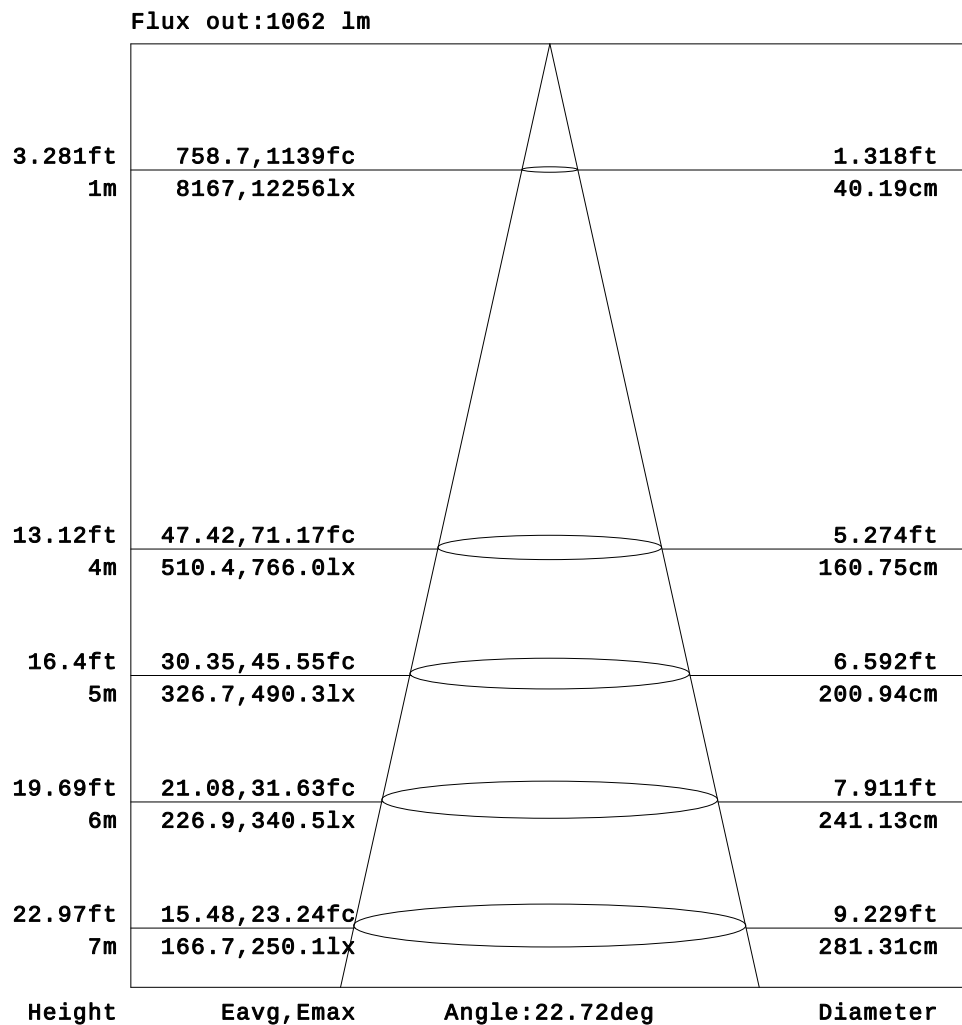


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-26

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

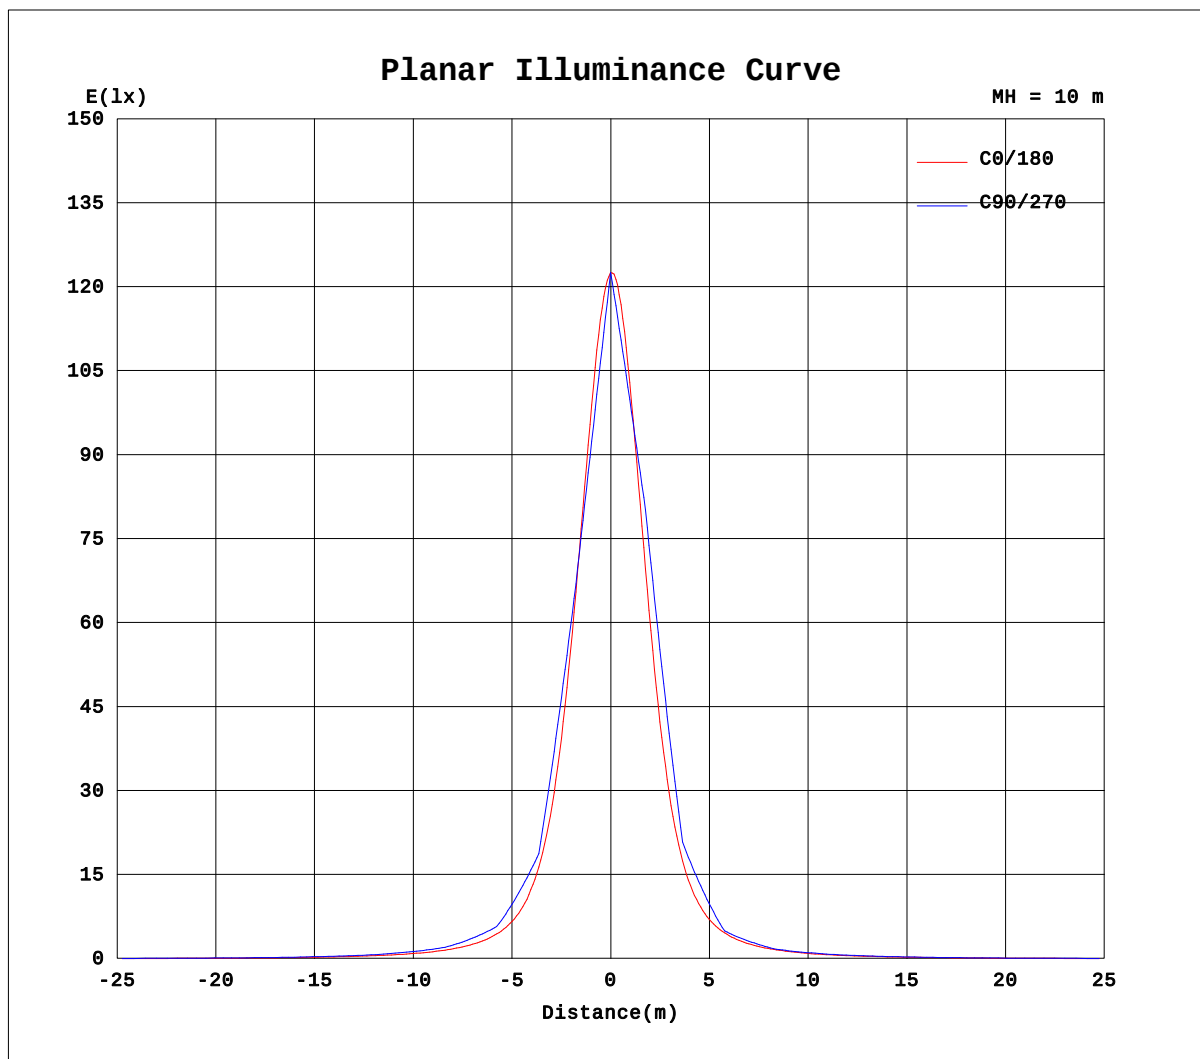

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2023-12-26

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.8V I:0.5448A P:64.76W PF:0.9925 Lamp Flux:3535.52x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.10
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	0.78	1.20	1.60	1.97	2.33	2.80	3.10	3.34	3.53	3.61
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.79	1.73	2.56	3.37	4.05	4.89	5.72	6.30	6.77	7.06	7.11
-65	0.00	0.00	0.00	0.00	0.00	0.01	0.62	1.42	2.68	4.08	5.20	6.67	7.90	8.94	10.0	10.8	11.5	11.9	12.0
-60	0.00	0.00	0.00	0.00	0.00	0.13	1.51	3.23	5.20	6.91	8.33	10.6	12.1	13.5	14.7	15.6	16.4	16.8	16.8
-55	0.00	0.00	0.00	0.00	0.02	0.83	2.53	4.56	6.79	9.31	11.5	13.8	15.8	17.5	19.0	20.3	21.3	21.9	22.0
-50	0.00	0.00	0.00	0.00	0.25	2.07	4.30	6.76	9.35	12.7	15.5	18.0	20.2	22.2	23.9	25.3	26.4	27.1	27.2
-45	0.00	0.00	0.00	0.00	0.62	2.63	5.05	8.14	11.2	14.4	17.5	20.5	23.5	26.7	29.6	32.2	34.3	35.8	36.2
-40	0.00	0.00	0.00	0.00	1.65	4.19	6.91	10.8	14.2	17.4	20.7	24.3	28.1	32.5	36.4	40.0	42.9	44.8	45.3
-35	0.00	0.00	0.00	0.07	1.85	4.69	7.85	11.5	15.1	18.6	22.4	26.7	31.9	38.4	45.6	52.7	59.4	64.7	66.9
-30	0.00	0.00	0.00	0.52	3.12	6.41	10.2	13.7	17.4	21.3	25.6	31.1	38.0	47.0	57.5	68.1	78.2	86.0	88.5
-25	0.00	0.00	0.00	0.60	3.23	6.77	10.4	14.0	17.8	21.9	27.0	33.8	43.0	55.8	73.3	96.1	122	146	157
-20	0.00	0.00	0.00	1.58	4.73	8.48	12.1	15.8	19.7	24.3	30.8	39.7	52.5	70.6	97.3	134	176	213	226
-15	0.00	0.00	0.00	1.34	4.44	8.15	11.8	15.6	19.6	24.4	31.1	40.9	55.8	79.9	122	191	294	405	463
-10	0.00	0.00	0.00	2.28	5.64	9.28	13.0	17.0	21.2	26.8	34.8	47.1	66.9	102	169	285	457	634	699
-5	0.00	0.00	0.00	1.76	5.08	8.71	12.4	16.3	20.5	25.8	33.6	45.4	65.0	101	175	321	557	824	962
0	0.00	0.00	0.00	2.52	5.94	9.62	13.3	17.2	21.5	27.4	36.3	49.9	74.2	122	226	436	766	1101	1219
5	0.00	0.00	0.00	1.80	5.07	8.68	12.3	16.2	20.3	25.5	33.2	44.8	64.2	101	178	334	590	882	1031
10	0.00	0.00	0.00	2.31	5.61	9.21	12.8	16.7	20.9	26.3	34.0	45.7	65.3	102	177	318	535	757	836
15	0.00	0.00	0.00	1.55	4.66	8.12	11.7	15.3	19.2	23.8	30.1	39.3	53.4	77.1	122	204	332	473	545
20	0.00	0.00	0.00	1.95	5.05	8.46	11.9	15.4	19.2	23.6	29.4	37.5	49.0	66.0	93.0	134	187	235	250
25	0.00	0.00	0.00	1.08	3.90	7.09	10.4	13.8	17.3	21.1	25.7	31.9	39.9	51.0	67.1	90.5	121	150	164
30	0.00	0.00	0.00	1.25	3.98	7.05	10.3	13.5	16.9	20.3	24.2	29.0	34.7	41.4	49.3	58.4	67.4	74.1	76.1
35	0.00	0.00	0.00	0.45	2.81	5.59	8.58	11.7	14.7	17.8	21.0	24.7	28.9	33.6	39.0	44.8	50.5	55.0	56.8
40	0.00	0.00	0.00	0.46	2.71	5.31	8.12	11.0	13.8	16.5	19.2	22.0	24.9	27.8	30.9	33.6	35.7	37.1	37.4
45	0.00	0.00	0.00	0.06	1.51	3.75	6.24	8.88	11.4	13.8	16.2	18.7	21.0	23.4	25.7	27.6	29.2	30.3	30.7
50	0.00	0.00	0.00	0.00	1.15	3.16	5.40	7.78	10.0	12.2	14.3	16.3	18.1	19.8	21.3	22.4	23.3	23.8	24.0
55	0.00	0.00	0.00	0.00	0.40	1.72	3.55	5.59	7.59	9.52	11.4	13.1	14.7	16.1	17.3	18.3	19.0	19.5	19.7
60	0.00	0.00	0.00	0.00	0.00	0.97	2.49	4.21	5.91	7.59	9.16	10.6	11.8	12.9	13.8	14.5	15.0	15.3	15.4
65	0.00	0.00	0.00	0.00	0.00	0.35	1.09	2.19	3.52	4.81	6.06	7.20	8.23	9.14	9.90	10.5	11.0	11.3	11.4
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.71	1.64	2.55	3.42	4.27	5.04	5.73	6.33	6.81	7.18	7.42	7.48
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.73	1.18	1.63	2.05	2.45	2.80	3.12	3.48	3.77	3.96	4.04
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-26

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.8V I:0.5448A P:64.76W PF:0.9925 Lamp Flux:3535.52x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	3.50	3.31	3.07	2.78	2.45	2.09	1.71	1.30	0.88	0.46	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	6.92	6.54	6.03	5.43	4.77	4.04	3.26	2.43	1.59	0.75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	11.8	11.3	10.7	9.94	9.02	8.00	6.88	5.68	4.43	3.17	1.83	0.86	0.20	0.00	0.00	0.00	0.00	0.00
-60	16.5	15.9	15.1	14.1	12.9	11.5	10.0	8.43	6.77	5.08	3.20	1.43	0.16	0.00	0.00	0.00	0.00	0.00
-55	21.7	21.0	20.1	18.9	17.4	15.7	13.9	12.0	9.93	7.76	5.59	3.30	1.40	0.30	0.00	0.00	0.00	0.00
-50	26.7	25.8	24.6	23.0	21.2	19.2	17.1	14.7	12.2	9.58	7.09	4.31	2.00	0.28	0.00	0.00	0.00	0.00
-45	35.7	34.2	32.0	29.5	26.7	23.9	20.9	18.0	15.1	12.0	9.22	6.37	3.54	1.23	0.02	0.00	0.00	0.00
-40	44.1	41.8	38.5	34.9	31.1	27.3	23.6	20.0	16.7	13.3	10.3	7.27	4.06	1.43	0.00	0.00	0.00	0.00
-35	65.2	60.3	53.7	46.4	39.3	33.1	27.7	23.1	19.2	15.5	12.2	9.04	5.79	2.74	0.39	0.00	0.00	0.00
-30	84.7	76.4	65.9	55.0	44.9	36.6	29.9	24.4	20.1	16.4	12.9	9.54	6.24	2.97	0.28	0.00	0.00	0.00
-25	149	126	99.8	76.0	58.1	44.9	35.2	27.9	22.6	18.3	14.5	10.9	7.49	4.18	1.20	0.00	0.00	0.00
-20	206	166	123	89.0	65.3	48.8	37.2	29.0	23.1	18.6	14.6	11.0	7.44	4.06	1.10	0.00	0.00	0.00
-15	420	313	204	129	84.4	58.6	42.8	32.5	25.2	20.1	16.0	12.2	8.58	5.11	1.93	0.00	0.00	0.00
-10	596	413	248	146	90.9	61.0	43.6	32.6	25.0	19.8	15.7	12.0	8.34	4.80	1.60	0.00	0.00	0.00
-5	847	586	341	187	107	68.4	47.5	34.9	26.6	20.9	16.6	12.8	9.12	5.56	2.24	0.00	0.00	0.00
0	1003	651	357	186	104	65.4	45.3	33.3	25.4	20.0	15.9	12.1	8.50	4.89	1.68	0.00	0.00	0.00
5	905	619	353	188	106	67.0	46.5	34.3	26.2	20.6	16.4	12.7	9.09	5.55	2.25	0.00	0.00	0.00
10	703	468	265	148	88.4	58.4	41.8	31.5	24.3	19.3	15.4	11.8	8.28	4.80	1.62	0.00	0.00	0.00
15	487	347	213	127	79.9	54.8	40.2	30.8	24.2	19.4	15.5	12.0	8.52	5.12	1.98	0.00	0.00	0.00
20	221	167	118	82.1	58.9	44.2	34.2	27.2	21.9	17.7	14.1	10.8	7.41	4.12	1.18	0.00	0.00	0.00
25	151	122	92.1	68.2	51.5	40.1	31.8	25.8	21.1	17.3	13.9	10.7	7.45	4.31	1.45	0.00	0.00	0.00
30	72.4	64.7	55.5	46.6	38.8	32.4	26.8	22.4	18.7	15.4	12.4	9.34	6.25	3.29	0.68	0.00	0.00	0.00
35	55.2	50.9	45.2	39.3	33.8	28.9	24.5	20.8	17.6	14.6	11.7	8.84	5.94	3.17	0.72	0.00	0.00	0.00
40	36.6	34.9	32.4	29.6	26.7	23.7	20.8	18.0	15.2	12.5	9.87	7.16	4.52	2.01	0.04	0.00	0.00	0.00
45	30.3	29.2	27.6	25.6	23.3	20.9	18.5	16.1	13.8	11.3	8.87	6.44	4.02	1.76	0.14	0.00	0.00	0.00
50	23.7	23.0	22.0	20.6	19.1	17.3	15.4	13.4	11.3	9.13	6.92	4.73	2.60	0.68	0.00	0.00	0.00	0.00
55	19.5	19.0	18.3	17.3	16.1	14.6	13.0	11.3	9.44	7.53	5.61	3.72	1.91	0.52	0.00	0.00	0.00	0.00
60	15.2	14.8	14.3	13.5	12.5	11.4	10.0	8.46	6.82	5.15	3.52	1.99	0.55	0.00	0.00	0.00	0.00	0.00
65	11.3	11.0	10.6	9.96	9.19	8.29	7.24	6.05	4.80	3.50	2.22	1.14	0.40	0.00	0.00	0.00	0.00	0.00
70	7.37	7.10	6.69	6.16	5.53	4.81	4.01	3.16	2.26	1.32	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	3.98	3.81	3.53	3.17	2.83	2.48	2.09	1.67	1.22	0.75	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.54	0.42	0.23	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-26

$V(\beta)$ Range:-80 - 80DEG
 $V(\beta)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks: