

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3458.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	54.8V x 48.4H
	At 50% of Imax	25.8V x 22.7H
	At 90% of Imax	6.5V x 8.3H
Beam Flux	Total	999.8 lumens per klm.
	To 10% of Imax	690.2 lumens per klm.
	To 50% of Imax	309.8 lumens per klm.
	To 90% of Imax	31.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.1V I:0.2388A P:63.93W PF:0.9661 Lamp Flux:3520.97x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

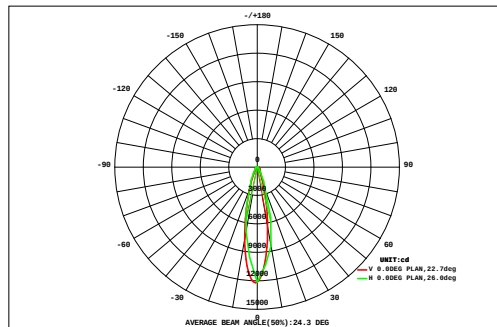

DATA OF LAMP		Eff:55.07lm/W	
MODELLWW-WZB-W55-L12-RDM	Imax(cd)	12178	
NOMINAL POWER(W)	64	AVAILABILITY(%)	69.1
RATED VOLTAGE(V)	278	Avai. FLUX(lm)	2432
NOMINAL FLUX(lm)	3520.97	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3521
TEST VOLTAGE(V)	277.1	θ @50%(H,V)	23,26DEG

		AREA FLUX DIAGRAM															UNIT:lm				Φ t	Φ a				
		0.90	1.12	1.36	1.62	1.87	2.12	2.34	2.50	2.59	2.59	2.50	2.34	2.12	1.87	1.62	1.37	1.13	0.90	32.9	0.00					
VERTICAL (DEG)	45	1.08	1.34	1.63	1.93	2.25	2.56	2.83	3.03	3.12	3.09	2.94	2.71	2.41	2.10	1.79	1.49	1.22	0.97	38.5	0.00					
	40	1.13	1.45	1.83	2.29	2.82	3.43	4.08	4.69	5.06	5.07	4.72	4.12	3.47	2.85	2.30	1.85	1.45	1.14	53.7	0.00					
	35	1.33	1.73	2.21	2.81	3.55	4.40	5.34	6.16	6.60	6.47	5.83	4.93	4.02	3.20	2.52	1.97	1.52	1.17	65.8	0.00					
	30	1.34	1.81	2.43	3.32	4.64	6.68	9.64	13.1	15.7	15.7	13.2	9.73	6.79	4.74	3.38	2.48	1.84	1.38	118	71.1					
	25	1.57	2.17	3.02	4.29	6.32	9.60	14.3	19.6	22.7	21.6	17.0	11.9	7.84	5.22	3.60	2.57	1.88	1.38	157	116					
	20	1.51	2.12	3.04	4.60	7.54	13.4	23.9	38.5	50.7	51.5	40.3	25.5	14.3	8.10	4.92	3.23	2.24	1.59	297	264					
	15	1.76	2.52	3.79	6.10	10.9	20.7	37.8	59.6	74.3	70.1	50.6	29.6	15.6	8.42	4.98	3.21	2.20	1.54	404	372					
	-15	1.61	2.30	3.40	5.40	9.45	18.2	35.2	59.5	80.9	82.9	64.0	39.3	20.8	10.7	6.01	3.73	2.48	1.72	448	417					
		1.83	2.68	4.13	6.92	12.9	25.9	49.4	78.9	98.4	90.8	63.7	36.4	18.4	9.47	5.37	3.39	2.28	1.59	512	482					
		1.58	2.24	3.26	4.98	8.18	14.4	25.9	42.8	58.5	61.7	49.5	31.9	17.9	9.88	5.79	3.68	2.48	1.72	347	315					
		1.74	2.48	3.64	5.59	9.12	15.3	24.6	35.5	42.2	39.3	29.5	18.8	11.4	7.05	4.57	3.09	2.16	1.52	257	222					
		1.46	2.00	2.79	3.96	5.72	8.62	13.0	18.8	24.3	25.9	22.3	16.2	10.6	6.82	4.54	3.12	2.21	1.59	174	133					
		1.52	2.08	2.86	3.91	5.25	6.88	8.27	8.84	8.49	7.76	7.17	6.51	5.46	4.34	3.30	2.46	1.83	1.36	88.3	25.6					
		1.27	1.67	2.19	2.89	3.81	4.97	6.34	7.78	8.95	9.27	8.54	7.16	5.63	4.28	3.23	2.43	1.82	1.37	83.6	14.7					
		1.28	1.64	2.07	2.61	3.24	3.78	4.11	4.24	4.18	4.04	3.91	3.72	3.39	2.89	2.37	1.90	1.48	1.16	52.0	0.00					
	-30	1.06	1.36	1.70	2.10	2.56	3.04	3.50	3.89	4.16	4.21	4.03	3.67	3.21	2.73	2.26	1.84	1.46	1.14	47.9	0.00					
-35	1.02	1.29	1.57	1.88	2.14	2.34	2.51	2.59	2.60	2.54	2.45	2.32	2.15	1.94	1.71	1.46	1.20	0.94	34.6	0.00						
-40	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)										10	15	20	25	30	35	40	45
Φ t	25.0	34.0	46.9	67.2	102	166	273	410	513	505	392	257	155	96.6	64.3	45.3	32.9	24.2	3211	---						
Φ a	0.00	0.00	0.00	1.07	40.3	119	233	373	477	470	358	218	109	33.0	0.00	0.00	0.00	0.00	---	2432						

one-half-peak spread: U:11.9,D:14.2 , L:11.3,R:11.6


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-27

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:277.1V I:0.2388A P:63.93W PF:0.9661 Lamp Flux:3520.97x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

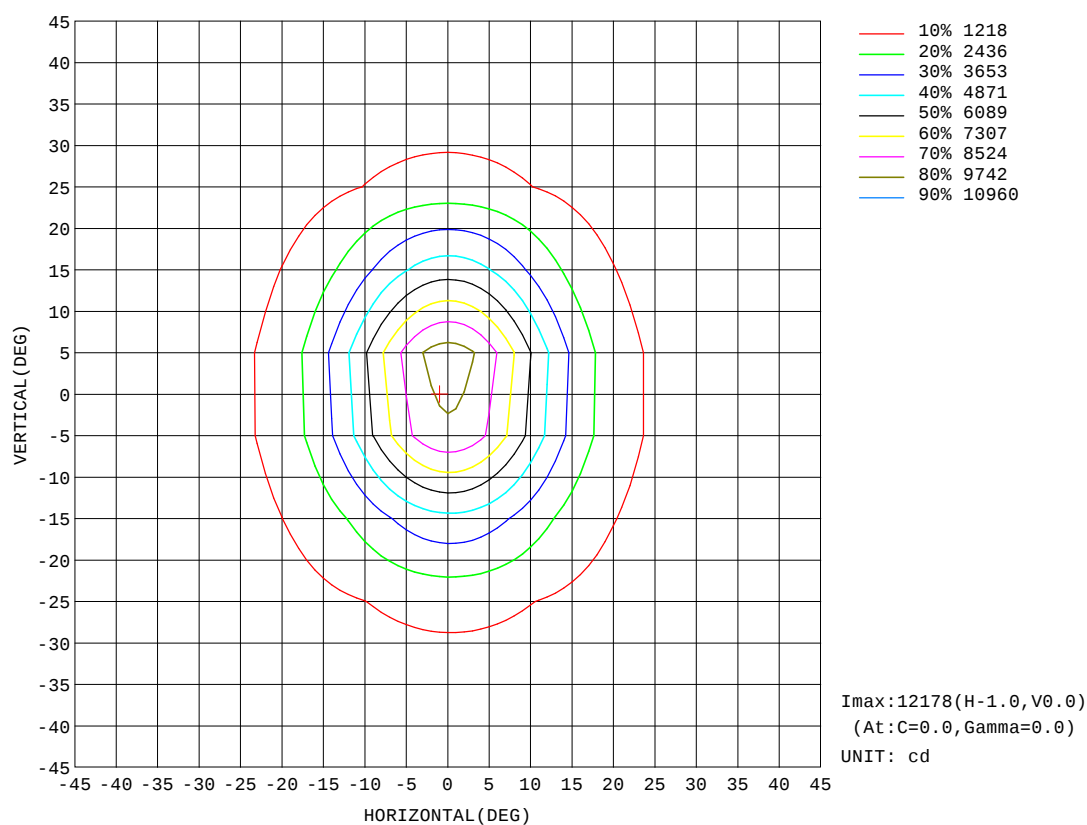


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:277.1V I:0.2388A P:63.93W PF:0.9661 Lamp Flux:3520.97x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

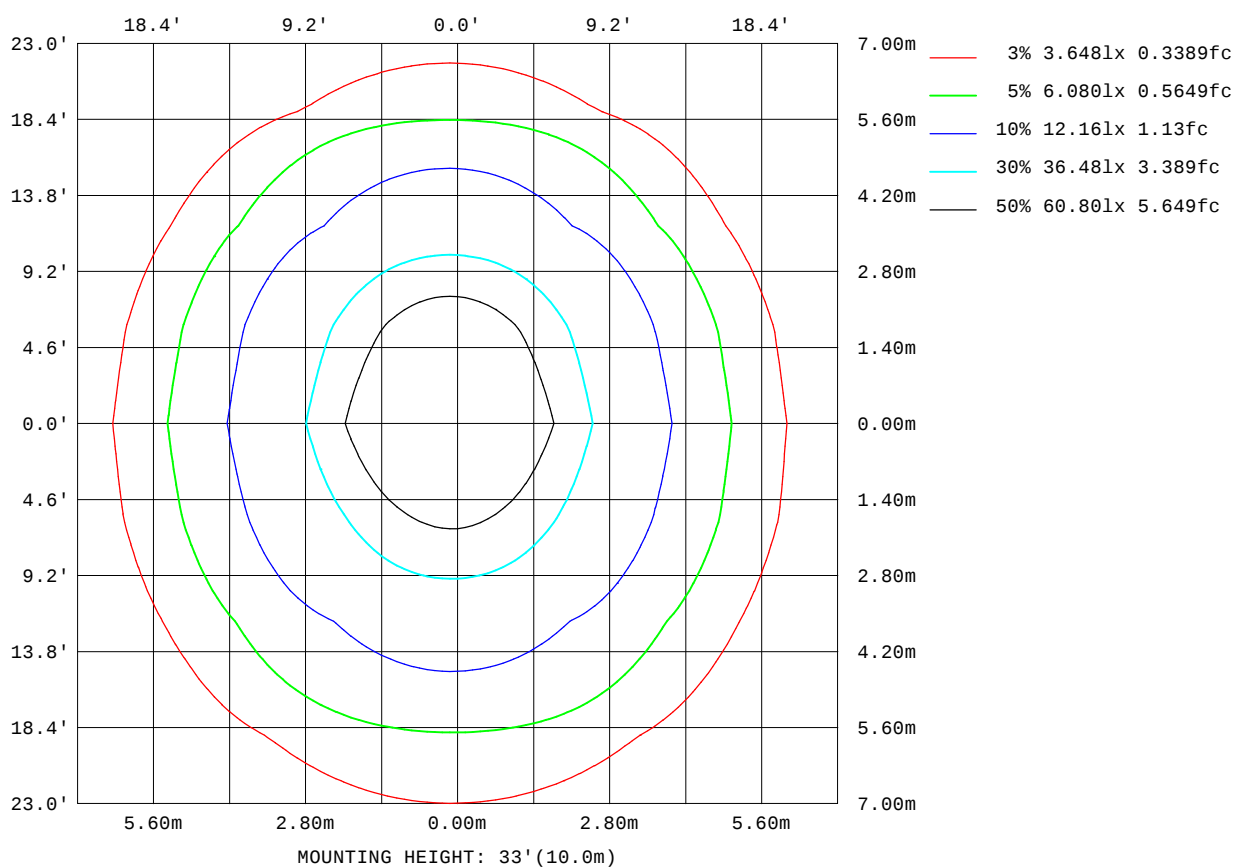


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.1V I:0.2388A P:63.93W PF:0.9661 Lamp Flux:3520.97x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

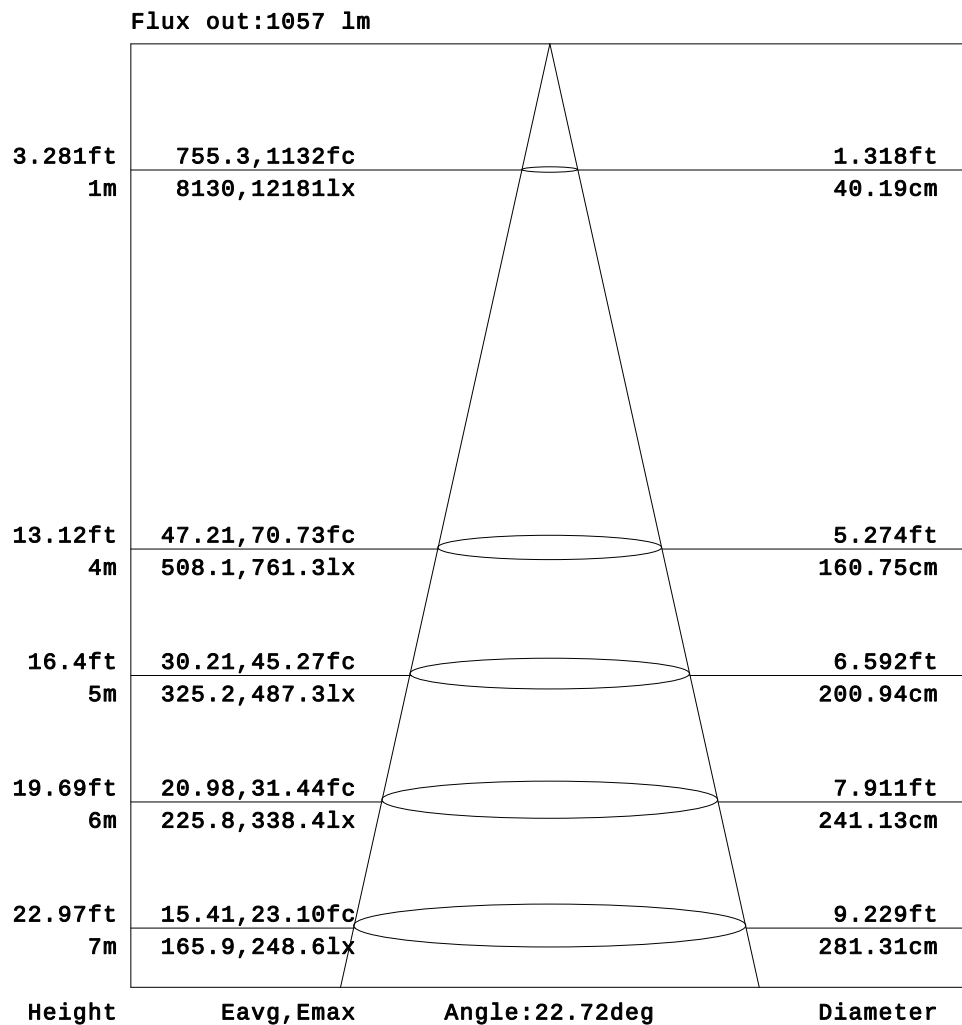


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

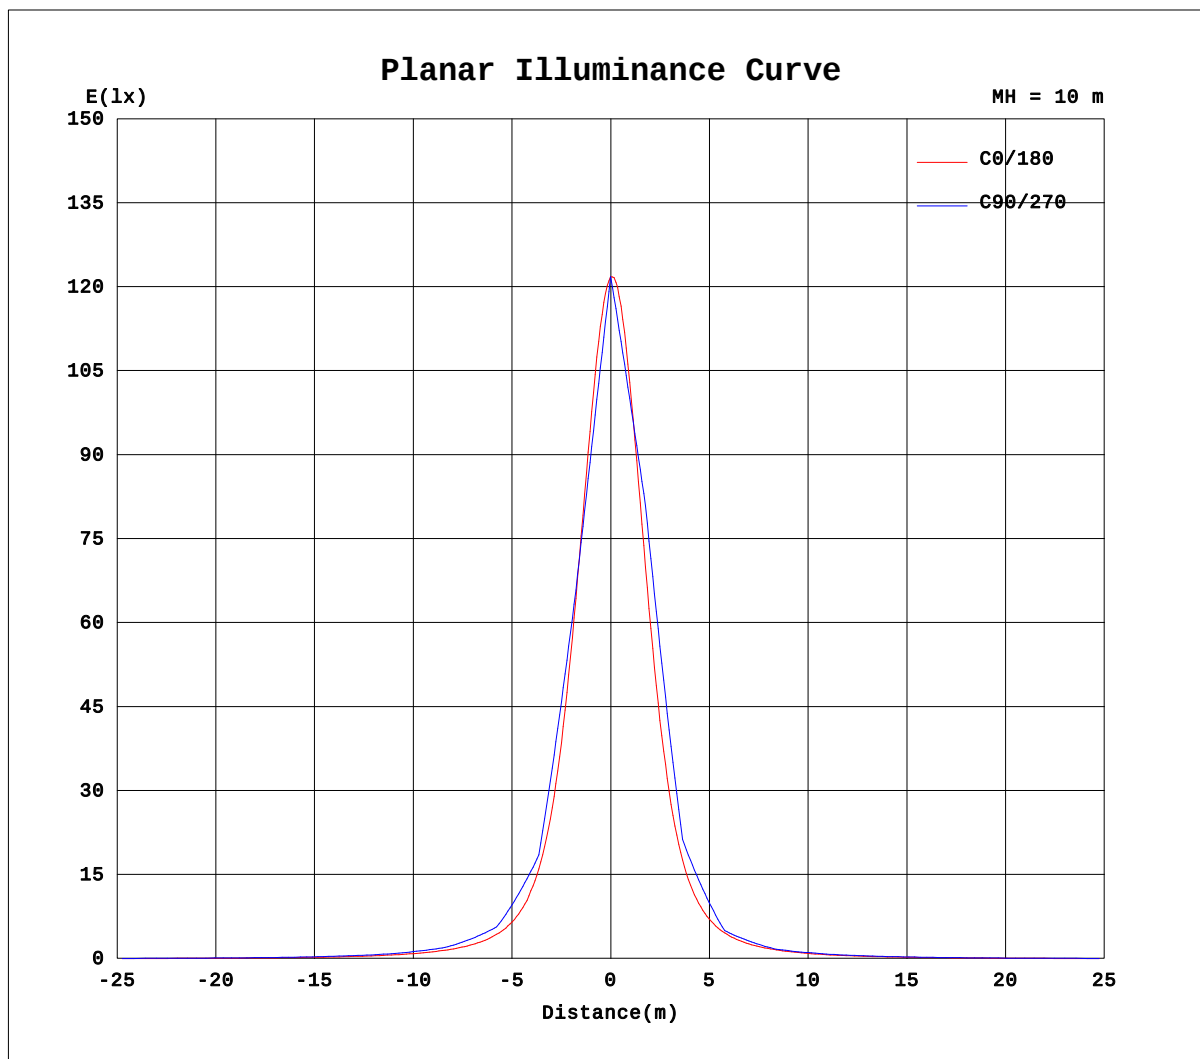

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2023-12-27

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.1V I:0.2388A P:63.93W PF:0.9661 Lamp Flux:3520.97x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	0.69	1.11	1.48	1.93	2.19	2.68	3.00	3.24	3.41	3.50
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.65	1.56	2.38	3.12	4.01	4.49	5.53	6.11	6.57	6.86	6.92
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.57	1.37	2.58	4.00	5.08	6.19	7.71	8.67	9.77	10.6	11.2	11.6	11.7
-60	0.00	0.00	0.00	0.00	0.00	0.09	1.43	3.10	5.09	6.92	8.19	9.86	11.9	13.2	14.4	15.3	16.1	16.5	16.5
-55	0.00	0.00	0.00	0.00	0.01	0.77	2.41	4.44	6.79	8.93	11.2	13.3	15.5	17.2	18.7	19.9	20.9	21.5	21.6
-50	0.00	0.00	0.00	0.00	0.18	1.94	4.18	6.65	9.35	11.8	15.1	17.7	19.8	21.8	23.5	24.9	26.0	26.6	26.7
-45	0.00	0.00	0.00	0.00	0.57	2.51	4.92	7.80	11.1	13.9	17.2	20.3	23.2	26.4	29.2	31.7	33.9	35.2	35.7
-40	0.00	0.00	0.00	0.00	1.58	4.04	6.82	10.3	13.9	17.3	20.6	24.1	27.9	32.2	36.0	39.5	42.4	44.2	44.6
-35	0.00	0.00	0.00	0.06	1.76	4.52	7.63	11.2	14.9	18.5	22.2	26.5	31.7	38.0	45.2	52.3	58.9	64.1	66.2
-30	0.00	0.00	0.00	0.46	3.02	6.18	9.85	13.6	17.3	21.1	25.5	30.9	37.8	46.7	57.2	67.8	77.7	85.4	87.8
-25	0.00	0.00	0.00	0.57	3.18	6.62	10.2	13.9	17.7	21.8	26.8	33.6	42.8	55.5	72.8	95.4	121	144	155
-20	0.00	0.00	0.00	1.55	4.68	8.39	12.0	15.6	19.6	24.2	30.7	39.5	52.3	70.2	96.5	133	174	211	223
-15	0.00	0.00	0.00	1.29	4.41	8.06	11.7	15.5	19.5	24.3	31.0	40.7	55.6	79.6	121	190	291	400	456
-10	0.00	0.00	0.00	2.21	5.56	9.18	12.9	16.9	21.1	26.7	34.6	46.8	66.7	102	168	283	453	626	687
-5	0.00	0.00	0.00	1.72	5.01	8.61	12.3	16.2	20.3	25.6	33.5	45.3	65.0	102	176	321	557	820	953
0	0.00	0.00	0.00	2.48	5.87	9.52	13.2	17.0	21.4	27.2	36.2	49.9	74.4	123	227	439	769	1101	1211
5	0.00	0.00	0.00	1.77	5.01	8.58	12.2	16.0	20.1	25.4	33.1	44.8	64.4	102	180	338	597	887	1032
10	0.00	0.00	0.00	2.27	5.55	9.10	12.7	16.6	20.7	26.2	33.9	45.8	65.7	103	180	324	544	768	844
15	0.00	0.00	0.00	1.53	4.61	8.04	11.6	15.2	19.1	23.8	30.2	39.5	53.7	77.9	124	208	339	482	552
20	0.00	0.00	0.00	1.95	5.02	8.39	11.8	15.4	19.1	23.6	29.7	37.8	49.5	66.9	94.9	137	193	242	256
25	0.00	0.00	0.00	1.08	3.88	7.04	10.3	13.7	17.3	21.1	25.9	32.1	40.2	51.5	68.2	92.5	124	154	167
30	0.00	0.00	0.00	1.26	3.97	7.01	10.2	13.4	16.9	20.4	24.3	29.1	34.9	41.8	49.9	59.2	68.5	75.3	77.2
35	0.00	0.00	0.00	0.45	2.81	5.58	8.53	11.6	14.7	17.8	21.0	24.8	29.0	33.8	39.3	45.3	51.1	55.7	57.4
40	0.00	0.00	0.00	0.47	2.72	5.31	8.09	11.0	13.8	16.5	19.2	22.1	25.0	27.9	31.1	33.8	35.9	37.3	37.6
45	0.00	0.00	0.00	0.07	1.53	3.77	6.23	8.87	11.4	13.9	16.3	18.7	21.1	23.4	25.8	27.7	29.4	30.4	30.8
50	0.00	0.00	0.00	0.00	1.18	3.18	5.40	7.79	10.1	12.2	14.3	16.3	18.2	19.8	21.3	22.4	23.3	23.8	23.9
55	0.00	0.00	0.00	0.00	0.41	1.75	3.58	5.61	7.63	9.55	11.4	13.1	14.7	16.1	17.3	18.3	19.0	19.4	19.6
60	0.00	0.00	0.00	0.00	0.00	1.02	2.54	4.26	5.97	7.63	9.18	10.6	11.8	12.8	13.7	14.4	14.9	15.2	15.3
65	0.00	0.00	0.00	0.00	0.00	0.37	1.11	2.23	3.58	4.87	6.10	7.22	8.24	9.14	9.89	10.5	11.0	11.3	11.4
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.75	1.71	2.61	3.48	4.31	5.08	5.76	6.34	6.81	7.17	7.40	7.45
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	0.76	1.21	1.65	2.08	2.46	2.81	3.16	3.51	3.78	3.96	4.02
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.32	0.47	0.56
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.1V I:0.2388A P:63.93W PF:0.9661 Lamp Flux:3520.97x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	3.39	3.22	2.98	2.69	2.37	2.01	1.63	1.23	0.81	0.41	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	6.73	6.35	5.84	5.26	4.60	3.87	3.10	2.29	1.46	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	11.5	11.1	10.5	9.71	8.80	7.77	6.67	5.48	4.26	3.01	1.70	0.79	0.15	0.00	0.00	0.00	0.00	0.00
-60	16.2	15.6	14.8	13.8	12.6	11.3	9.77	8.19	6.54	4.85	2.98	1.31	0.10	0.00	0.00	0.00	0.00	0.00
-55	21.3	20.7	19.7	18.5	17.0	15.4	13.6	11.7	9.67	7.53	5.37	3.13	1.28	0.25	0.00	0.00	0.00	0.00
-50	26.2	25.3	24.1	22.6	20.8	18.8	16.7	14.4	11.9	9.37	6.90	4.13	1.88	0.19	0.00	0.00	0.00	0.00
-45	35.1	33.6	31.5	29.0	26.3	23.5	20.6	17.7	14.8	11.8	9.00	6.16	3.36	1.12	0.00	0.00	0.00	0.00
-40	43.5	41.1	37.9	34.4	30.6	27.0	23.3	19.8	16.5	13.1	10.0	7.06	3.88	1.30	0.00	0.00	0.00	0.00
-35	64.5	59.6	53.0	45.8	38.8	32.7	27.4	22.8	18.9	15.3	12.0	8.81	5.58	2.59	0.31	0.00	0.00	0.00
-30	84.0	75.6	65.3	54.4	44.4	36.2	29.4	24.2	19.9	16.2	12.7	9.30	6.04	2.80	0.19	0.00	0.00	0.00
-25	147	125	98.3	74.9	57.3	44.3	34.7	27.6	22.3	18.0	14.2	10.7	7.29	3.98	1.03	0.00	0.00	0.00
-20	203	163	121	87.6	64.4	48.0	36.7	28.6	22.8	18.3	14.4	10.7	7.18	3.87	0.93	0.00	0.00	0.00
-15	412	307	200	126	83.0	57.8	42.2	32.0	24.9	19.8	15.7	11.9	8.34	4.88	1.73	0.00	0.00	0.00
-10	585	405	243	143	89.4	60.0	43.0	32.1	24.6	19.5	15.4	11.7	8.06	4.56	1.42	0.00	0.00	0.00
-5	834	576	334	183	105	67.3	46.8	34.4	26.2	20.6	16.3	12.5	8.85	5.31	2.05	0.00	0.00	0.00
0	990	640	349	182	102	64.4	44.7	32.9	25.2	19.8	15.7	11.8	8.23	4.68	1.49	0.00	0.00	0.00
5	900	612	347	185	105	66.2	45.9	33.8	25.8	20.4	16.2	12.4	8.82	5.30	2.06	0.00	0.00	0.00
10	705	467	263	146	87.6	57.8	41.3	31.1	24.0	19.1	15.1	11.5	8.01	4.56	1.43	0.00	0.00	0.00
15	490	347	212	126	79.3	54.4	39.8	30.5	23.9	19.1	15.2	11.7	8.25	4.87	1.77	0.00	0.00	0.00
20	224	169	118	81.8	58.5	43.9	33.9	26.9	21.6	17.5	13.8	10.5	7.13	3.88	1.00	0.00	0.00	0.00
25	154	123	92.2	68.1	51.2	39.8	31.6	25.5	20.8	17.0	13.7	10.4	7.19	4.07	1.25	0.00	0.00	0.00
30	73.2	65.1	55.5	46.5	38.5	32.2	26.5	22.1	18.4	15.2	12.1	9.07	5.99	3.05	0.50	0.00	0.00	0.00
35	55.7	51.1	45.2	39.2	33.6	28.7	24.3	20.6	17.4	14.3	11.4	8.59	5.70	2.95	0.55	0.00	0.00	0.00
40	36.8	35.0	32.4	29.5	26.5	23.5	20.6	17.8	15.0	12.3	9.61	6.92	4.27	1.80	0.00	0.00	0.00	0.00
45	30.4	29.2	27.5	25.5	23.2	20.8	18.4	15.9	13.6	11.1	8.64	6.21	3.79	1.56	0.07	0.00	0.00	0.00
50	23.6	22.9	21.9	20.5	18.9	17.1	15.2	13.2	11.1	8.91	6.71	4.51	2.39	0.51	0.00	0.00	0.00	0.00
55	19.4	18.9	18.2	17.1	15.9	14.5	12.8	11.1	9.25	7.34	5.43	3.54	1.73	0.43	0.00	0.00	0.00	0.00
60	15.1	14.7	14.1	13.3	12.3	11.2	9.82	8.26	6.65	5.00	3.39	1.83	0.39	0.00	0.00	0.00	0.00	0.00
65	11.3	10.9	10.5	9.82	9.04	8.13	7.08	5.89	4.64	3.35	2.07	1.07	0.33	0.00	0.00	0.00	0.00	0.00
70	7.32	7.03	6.60	6.06	5.41	4.68	3.88	3.03	2.12	1.18	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	3.95	3.75	3.46	3.09	2.77	2.42	2.02	1.60	1.16	0.68	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.51	0.37	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-27

$V(\beta)$ Range:-80 - 80DEG
 $V(\beta)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks: