

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	3477.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	53.1V x 49.2H
	At 50% of Imax	24.6V x 23.4H
	At 90% of Imax	6.8V x 9.1H

Beam Flux	Total	999.8 lumens per klm.
	To 10% of Imax	703.1 lumens per klm.
	To 50% of Imax	325.2 lumens per klm.
	To 90% of Imax	37.9 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.9V I:0.1759A P:46.91W PF:0.9596 Lamp Flux:1841.2x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

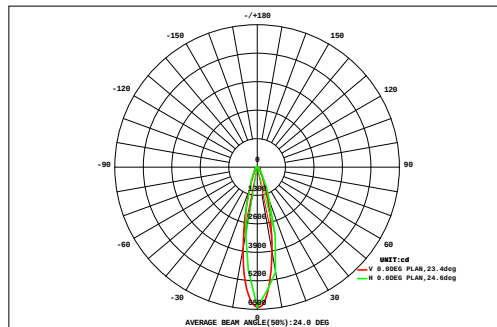

DATA OF LAMP		Eff:39.25lm/W	
MODELLWW-WZB-W55-L12-RDM	Imax(cd)	6403	
NOMINAL POWER(W)	46	AVAILABILITY(%)	70.5
RATED VOLTAGE(V)	278	Avai. FLUX(lm)	1297
NOMINAL FLUX(lm)	1841.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1841
TEST VOLTAGE(V)	277.9	θ @50%(H,V)	23, 25DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.42	0.54	0.67	0.80	0.95	1.09	1.22	1.34	1.43	1.46	1.43	1.35	1.22	1.07	0.92	0.76	0.62	0.49	17.8	0.00
45	0.52	0.65	0.80	0.97	1.15	1.33	1.51	1.66	1.76	1.79	1.74	1.61	1.43	1.23	1.03	0.85	0.68	0.54	21.3	0.00
40	0.53	0.70	0.90	1.15	1.44	1.81	2.22	2.65	2.97	3.10	2.97	2.66	2.25	1.82	1.43	1.11	0.85	0.65	31.2	0.00
35	0.63	0.83	1.10	1.42	1.84	2.36	2.96	3.57	3.98	4.07	3.80	3.29	2.69	2.10	1.60	1.21	0.91	0.68	39.1	0.00
30	0.64	0.86	1.17	1.63	2.34	3.47	5.23	7.51	9.38	9.84	8.66	6.67	4.78	3.31	2.30	1.62	1.14	0.82	71.4	49.2
25	0.75	1.03	1.44	2.11	3.20	5.01	7.90	11.4	13.8	13.8	11.4	8.32	5.63	3.73	2.50	1.70	1.17	0.82	95.6	75.5
20	0.70	0.99	1.42	2.16	3.59	6.53	12.4	21.0	28.6	30.5	25.5	17.0	10.0	5.79	3.46	2.19	1.42	0.96	174	157
15	0.81	1.17	1.76	2.85	5.11	10.1	19.7	32.5	41.9	41.9	32.2	19.9	11.0	6.03	3.49	2.14	1.37	0.92	235	219
10	0.73	1.04	1.52	2.41	4.21	8.19	16.6	29.9	42.0	45.5	37.8	24.7	13.8	7.33	4.10	2.47	1.56	1.03	245	230
5	0.82	1.19	1.81	3.02	5.61	11.5	23.2	39.0	50.1	49.6	37.3	22.6	12.0	6.29	3.55	2.16	1.39	0.93	272	257
0	0.71	1.00	1.42	2.13	3.43	6.01	11.0	19.1	27.0	29.9	25.9	18.0	10.8	6.18	3.65	2.28	1.48	0.99	171	154
-5	0.78	1.09	1.56	2.32	3.67	6.09	9.80	14.2	17.1	16.6	13.4	9.47	6.30	4.11	2.70	1.81	1.22	0.85	113	94.1
-10	0.65	0.89	1.20	1.66	2.37	3.45	5.17	7.64	10.1	11.2	10.3	8.02	5.63	3.82	2.59	1.79	1.24	0.88	78.6	56.2
-15	0.68	0.91	1.20	1.61	2.14	2.64	3.07	3.18	3.01	2.93	2.84	2.82	2.60	2.20	1.75	1.32	0.98	0.73	36.6	4.98
-20	0.57	0.74	0.96	1.24	1.60	2.03	2.53	3.10	3.60	3.84	3.73	3.30	2.74	2.18	1.69	1.29	0.97	0.73	36.8	0.00
-25	0.56	0.73	0.92	1.13	1.36	1.57	1.71	1.74	1.75	1.74	1.73	1.70	1.58	1.40	1.17	0.96	0.77	0.61	23.1	0.00
-30	0.47	0.60	0.75	0.92	1.10	1.28	1.47	1.62	1.75	1.81	1.78	1.68	1.52	1.32	1.12	0.92	0.74	0.58	21.5	0.00
-35	0.45	0.57	0.69	0.82	0.93	1.02	1.09	1.14	1.17	1.16	1.13	1.08	1.02	0.93	0.83	0.72	0.59	0.47	15.8	0.00
-40	0.45	0.57	0.69	0.82	0.93	1.02	1.09	1.14	1.17	1.16	1.13	1.08	1.02	0.93	0.83	0.72	0.59	0.47	15.8	0.00
-45	0.45	0.57	0.69	0.82	0.93	1.02	1.09	1.14	1.17	1.16	1.13	1.08	1.02	0.93	0.83	0.72	0.59	0.47	15.8	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)	10	15	20	25	30	35	40	45			
Φ t	11.4	15.5	21.3	30.4	46.0	75.5	129	202	261	271	224	154	97.0	60.8	39.9	27.3	19.1	13.7	1699	---
Φ a	0.00	0.00	0.00	0.00	11.5	51.6	108	183	241	250	204	135	77.4	33.0	2.81	0.00	0.00	0.00	---	1297

one-half-peak spread: U:9.7,D:15.1 , L:11.5,R:12.1


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-27

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:277.9V I:0.1759A P:46.91W PF:0.9596 Lamp Flux:1841.2x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

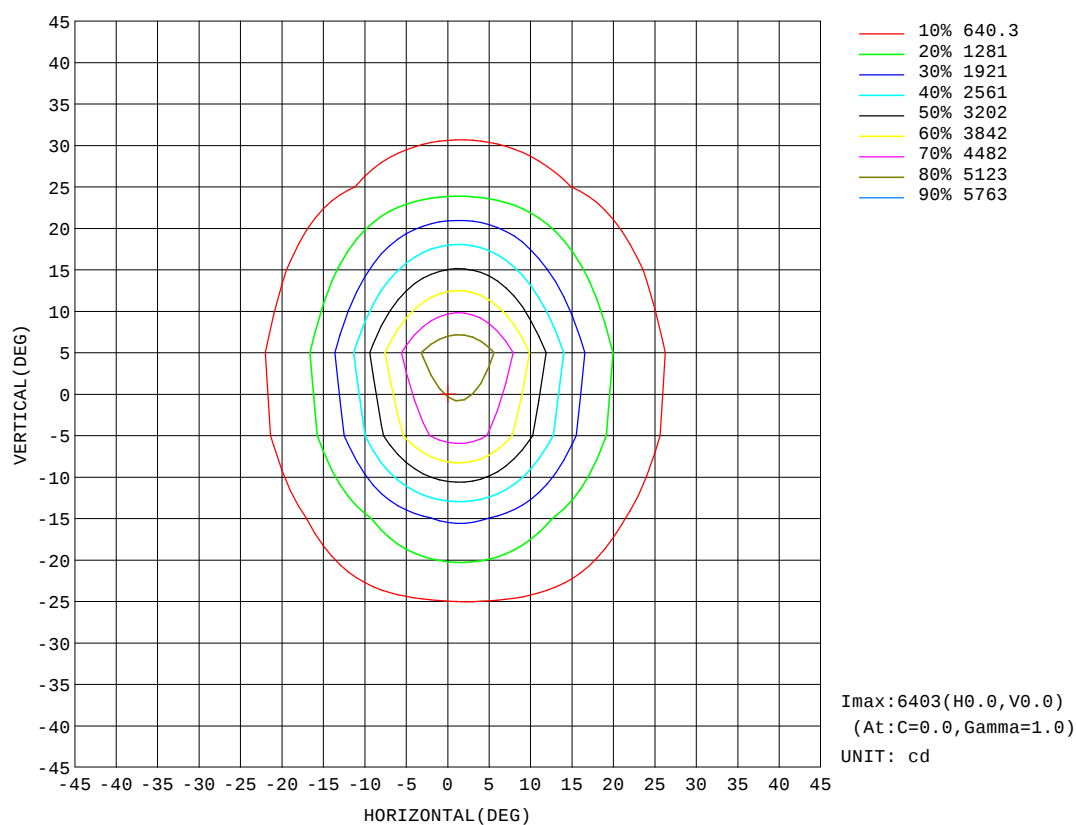


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:277.9V I:0.1759A P:46.91W PF:0.9596 Lamp Flux:1841.2x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

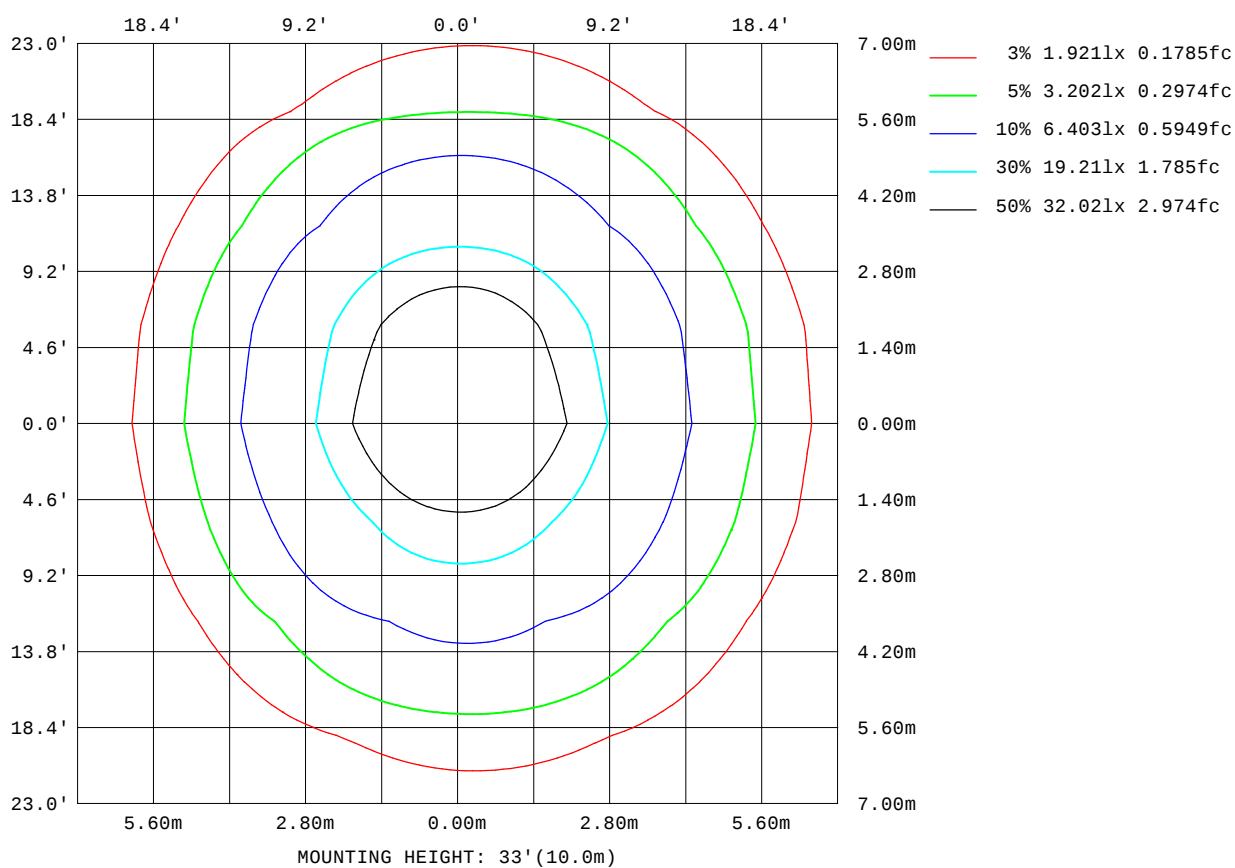


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.9V I:0.1759A P:46.91W PF:0.9596 Lamp Flux:1841.2x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

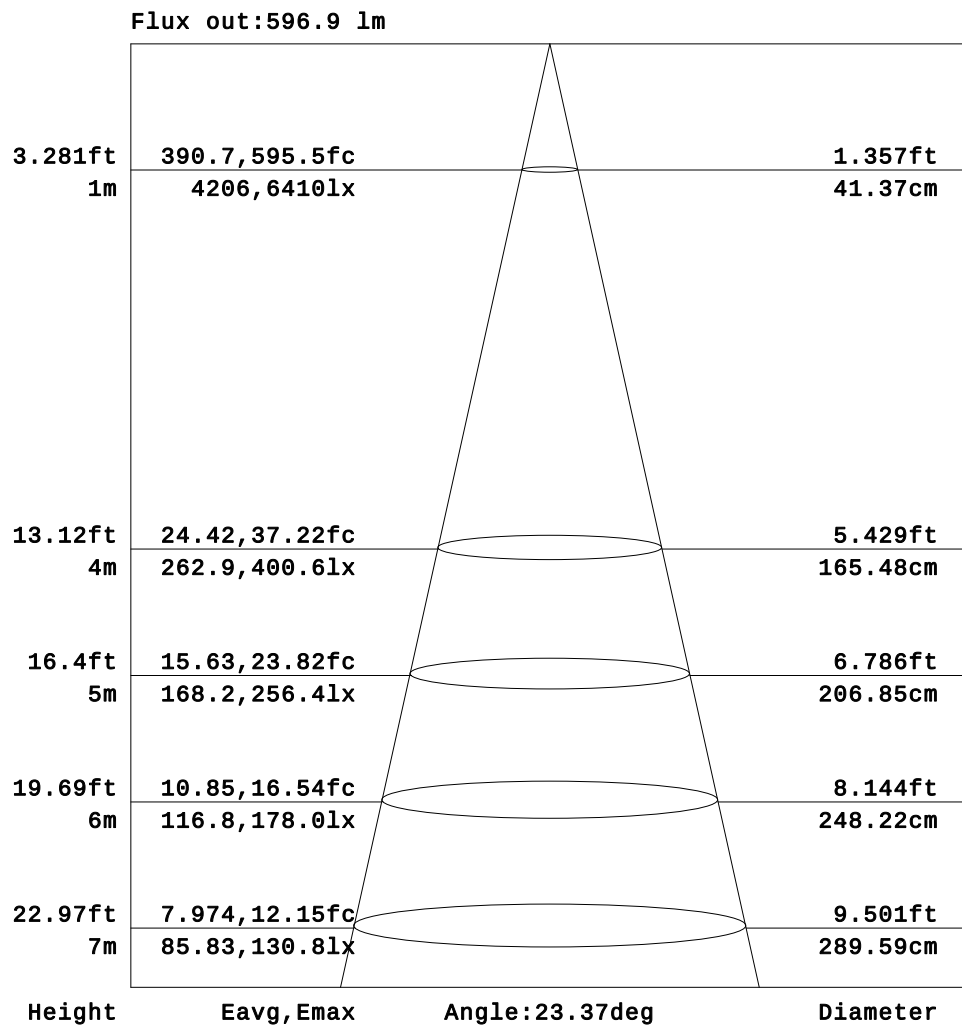


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

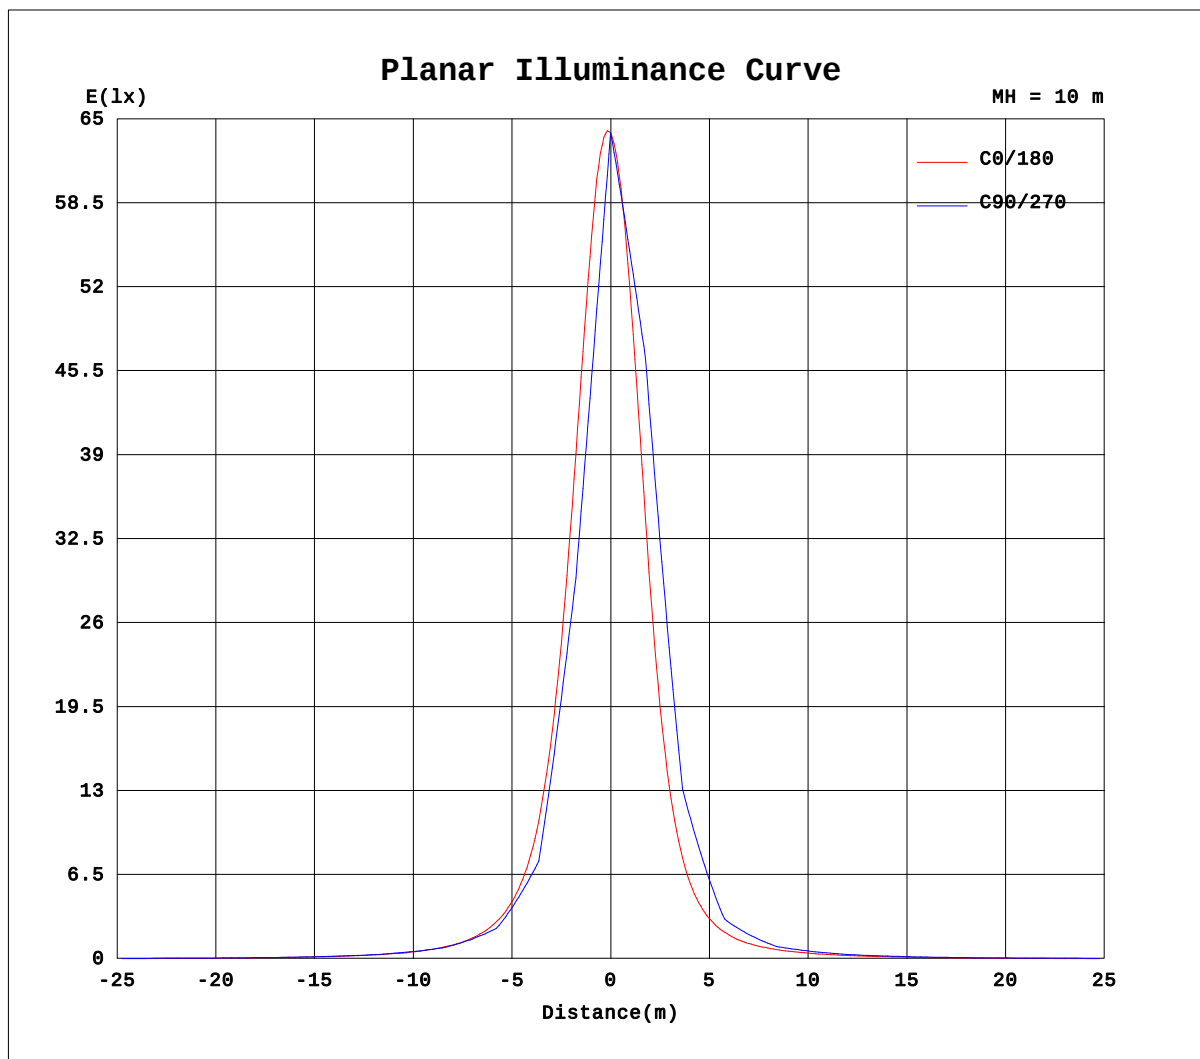

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.9V I:0.1759A P:46.91W PF:0.9596 Lamp Flux:1841.2x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.57	3.37	5.51	6.69	8.97	10.5	11.6	12.5	13.0
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	3.92	7.47	11.7	13.8	18.8	21.5	23.7	25.3	25.9
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.01	7.94	12.8	17.3	22.3	29.5	33.7	38.5	42.1	45.0	47.2	48.4
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.88	18.2	26.9	32.5	39.9	49.3	55.0	59.9	64.0	67.4	69.8	71.0
-55	0.00	0.00	0.00	0.00	0.00	0.18	5.44	14.7	26.4	36.5	47.2	56.2	66.0	73.2	79.3	84.7	89.2	92.7	94.6
-50	0.00	0.00	0.00	0.00	0.00	1.84	13.5	25.9	38.9	50.2	65.7	76.6	85.8	94.0	101	107	113	117	119
-45	0.00	0.00	0.00	0.00	0.00	5.10	17.3	31.7	47.3	60.4	75.3	88.9	102	114	126	136	145	152	156
-40	0.00	0.00	0.00	0.00	0.49	12.8	26.7	43.6	61.2	76.3	90.8	106	123	139	155	168	180	190	195
-35	0.00	0.00	0.00	0.00	2.19	15.7	31.4	48.5	65.6	81.8	98.3	117	139	163	190	217	242	264	278
-30	0.00	0.00	0.00	0.00	7.58	24.6	42.9	60.3	76.5	93.8	113	136	165	197	236	277	313	346	365
-25	0.00	0.00	0.00	0.00	8.60	26.8	44.2	61.8	78.9	97.4	119	147	183	232	297	378	478	575	635
-20	0.00	0.00	0.00	0.73	16.7	35.5	52.9	70.2	88.1	109	136	171	218	291	388	517	685	836	916
-15	0.00	0.00	0.00	0.56	15.2	34.0	51.7	69.3	87.8	110	139	178	236	331	492	770	1201	1696	1988
-10	0.00	0.00	0.00	3.98	21.3	39.5	57.5	75.5	95.3	120	155	205	284	424	686	1170	1920	2722	3091
-5	0.00	0.00	0.00	1.51	18.4	36.7	54.7	72.7	92.3	117	150	200	284	437	749	1402	2558	3928	4710
0	0.00	0.00	0.00	5.14	22.8	41.1	59.1	77.3	98.0	125	162	221	330	541	1006	2011	3768	5589	6403
5	0.00	0.00	0.00	1.53	18.3	36.6	54.4	72.4	92.2	117	152	203	293	462	818	1596	2999	4654	5594
10	0.00	0.00	0.00	3.97	21.1	39.1	56.8	74.9	95.1	121	158	213	307	485	855	1642	2920	4267	4876
15	0.00	0.00	0.00	0.74	16.2	33.8	51.3	69.0	88.0	111	142	185	254	376	603	1057	1823	2703	3206
20	0.00	0.00	0.00	2.14	18.2	35.5	52.8	70.3	89.2	112	141	180	239	335	487	733	1089	1430	1584
25	0.00	0.00	0.00	0.16	12.3	28.7	45.4	62.3	79.9	99.3	123	153	197	259	351	491	693	902	1022
30	0.00	0.00	0.00	0.02	12.8	28.5	44.7	61.2	77.8	95.5	116	141	175	214	263	321	385	441	471
35	0.00	0.00	0.00	0.00	6.60	21.0	36.2	51.9	67.5	83.2	100	120	144	171	204	241	281	318	340
40	0.00	0.00	0.00	0.00	6.05	19.6	34.0	49.0	63.4	77.5	91.9	108	124	141	159	177	193	206	213
45	0.00	0.00	0.00	0.00	1.75	11.5	24.3	38.0	51.3	64.0	76.7	90.1	103	117	130	143	154	163	169
50	0.00	0.00	0.00	0.00	0.00	8.39	19.9	32.5	44.3	55.6	66.6	77.5	88.1	97.8	106	114	120	124	126
55	0.00	0.00	0.00	0.00	0.00	3.09	10.3	20.9	31.5	41.5	51.2	60.5	69.2	77.1	84.1	90.0	94.9	98.3	100
60	0.00	0.00	0.00	0.00	0.00	0.00	4.70	13.8	22.7	31.3	39.5	46.9	53.6	59.4	64.4	68.4	71.6	73.7	74.8
65	0.00	0.00	0.00	0.00	0.00	0.00	1.51	5.95	10.5	16.7	23.1	29.1	34.5	39.3	43.5	46.9	49.6	51.5	52.5
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	4.71	9.21	13.5	17.5	21.0	24.0	26.6	28.5	29.8	30.3
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.89	4.16	6.35	8.37	10.2	11.7	13.0	14.1	14.8	15.1
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-27

V(β) Range:-80 - 80DEG
 V(β) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.9V I:0.1759A P:46.91W PF:0.9596 Lamp Flux:1841.2x1 lm		
NAME: 8.01.017.0030 30°LWW-WZB-W55-L12-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	12.7	12.0	10.9	9.45	7.86	6.12	4.22	2.16	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	25.3	23.6	21.2	18.3	15.1	11.5	7.63	3.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	48.0	46.3	43.7	40.3	36.2	31.6	26.3	20.6	14.5	10.00	5.00	0.21	0.00	0.00	0.00	0.00	0.00	0.00
-60	70.2	68.1	64.9	60.7	55.6	49.6	42.8	35.2	27.0	18.2	8.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	94.4	92.4	88.9	84.2	78.4	71.3	63.4	54.4	44.5	33.4	21.6	9.24	2.05	0.00	0.00	0.00	0.00	0.00
-50	118	115	111	106	98.5	90.0	80.5	69.8	57.7	44.0	30.6	14.9	1.93	0.00	0.00	0.00	0.00	0.00
-45	157	153	146	137	126	114	101	87.6	73.4	58.2	43.0	26.9	10.6	0.64	0.00	0.00	0.00	0.00
-40	195	189	178	165	150	134	117	99.9	83.3	66.2	49.4	32.3	13.7	0.01	0.00	0.00	0.00	0.00
-35	280	269	249	222	193	165	140	118	98.2	79.6	61.4	43.1	23.9	6.33	0.00	0.00	0.00	0.00
-30	363	343	310	267	225	187	154	128	106	85.6	66.1	46.4	27.0	7.48	0.00	0.00	0.00	0.00
-25	632	569	477	383	303	238	187	149	120	96.7	75.7	55.1	34.5	14.6	0.33	0.00	0.00	0.00
-20	884	760	607	464	353	267	203	158	124	99.1	76.9	55.6	34.2	13.8	0.01	0.00	0.00	0.00
-15	1910	1524	1072	718	484	338	242	180	138	109	85.6	63.5	41.3	20.2	1.69	0.00	0.00	0.00
-10	2818	2102	1375	860	545	365	253	184	139	109	85.3	62.6	40.0	18.4	0.47	0.00	0.00	0.00
-5	4438	3269	2023	1162	681	429	288	203	150	116	90.6	68.0	45.2	23.0	2.89	0.00	0.00	0.00
0	5677	3908	2259	1214	689	425	282	197	145	111	87.1	64.3	41.4	19.0	0.62	0.00	0.00	0.00
5	5257	3803	2290	1274	727	448	297	207	152	116	90.8	68.0	45.2	23.0	2.85	0.00	0.00	0.00
10	4367	3041	1827	1046	622	397	267	189	141	110	85.5	62.7	40.0	18.3	0.44	0.00	0.00	0.00
15	3031	2272	1468	897	562	372	259	187	140	110	86.0	63.7	41.5	20.3	1.66	0.00	0.00	0.00
20	1459	1151	835	582	409	294	216	163	125	99.6	77.4	56.0	34.5	13.9	0.01	0.00	0.00	0.00
25	986	826	636	471	347	260	197	153	121	97.1	76.1	55.4	34.7	15.2	0.34	0.00	0.00	0.00
30	464	424	367	305	246	198	159	129	106	85.9	66.5	46.7	27.1	8.79	0.00	0.00	0.00	0.00
35	341	321	286	247	207	172	142	118	98.1	79.6	61.6	43.3	25.1	8.07	0.00	0.00	0.00	0.00
40	213	205	190	172	152	133	115	98.6	82.5	66.1	49.3	32.7	16.2	1.30	0.00	0.00	0.00	0.00
45	170	165	157	144	130	115	101	86.7	72.6	57.9	42.8	27.8	13.0	1.93	0.00	0.00	0.00	0.00
50	126	123	118	111	102	91.9	81.0	69.2	56.7	43.7	30.4	17.1	4.32	0.00	0.00	0.00	0.00	0.00
55	101	98.8	95.3	89.9	83.0	74.9	65.8	55.6	44.9	33.6	22.2	11.1	3.41	0.00	0.00	0.00	0.00	0.00
60	74.6	73.1	70.2	66.1	60.8	54.3	46.7	37.9	28.5	18.9	9.47	0.73	0.00	0.00	0.00	0.00	0.00	0.00
65	52.4	51.1	48.8	45.5	41.3	36.2	30.3	23.6	16.6	10.4	5.67	1.16	0.00	0.00	0.00	0.00	0.00	0.00
70	29.8	28.4	26.2	23.3	19.8	15.8	11.4	6.69	1.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	15.0	14.4	13.3	12.0	10.3	8.34	6.17	3.82	1.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-27

$V(\beta)$ Range:-80 - 80DEG
 $V(\beta)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks: