

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2050.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	87.9V x 54.4H
	At 50% of Imax	53.5V x 19.1H
	At 90% of Imax	15.2V x 6.7H
Beam Flux	Total	999.5 lumens per klm.
	To 10% of Imax	722.6 lumens per klm.
	To 50% of Imax	331.2 lumens per klm.
	To 90% of Imax	39.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.5DEG
Operators:QC1
Test Date:2024-04-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:66%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.7V I:0.2973A P:63.79W PF:0.9766 Lamp Flux:5334.49x1 lm		
NAME: 8.01.017.0058 15X55°LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

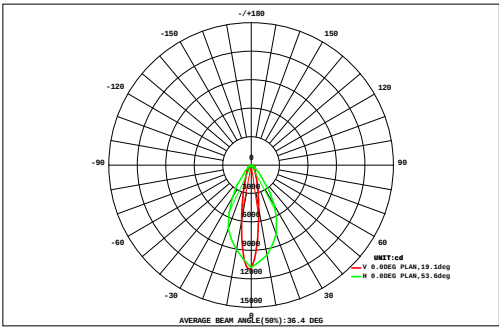

DATA OF LAMP		Eff:83.62lm/W	
MODEL	LWW-WZB-W55-L12-S	Imax(cd)	10937
NOMINAL POWER(W)	64	AVAILABILITY(%)	72.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	3879
NOMINAL FLUX(lm)	5334.49	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	5334
TEST VOLTAGE(V)	219.7	θ @50%(H,V)	19,53DEG


AREA FLUX DIAGRAM																	UNIT:lm			Φ t	Φ a
72	0.07	0.40	0.95	1.60	2.32	3.04	3.71	4.26	4.57	4.53	4.15	3.56	2.85	2.09	1.36	0.71	0.24	0.02	40.4	0.00	
64	0.28	0.86	1.71	2.74	3.85	4.91	5.89	6.63	7.05	7.01	6.54	5.77	4.79	3.64	2.47	1.44	0.66	0.17	66.4	0.00	
56	0.49	1.30	2.41	3.66	4.93	6.22	7.57	8.89	9.87	9.73	8.63	7.39	6.11	4.80	3.43	2.15	1.09	0.35	89.0	0.00	
48	0.70	1.70	3.00	4.45	6.03	7.94	10.6	15.0	21.1	20.3	14.1	10.1	7.71	5.87	4.25	2.77	1.49	0.55	138	33.6	
40	0.89	2.04	3.48	5.18	7.28	10.3	15.6	27.2	47.8	45.2	24.8	14.6	9.89	7.01	4.94	3.27	1.83	0.72	232	138	
32	1.05	2.31	3.93	5.93	8.66	13.0	21.7	45.2	93.7	86.9	39.7	20.1	12.4	8.33	5.65	3.65	2.08	0.88	375	291	
24	1.17	2.52	4.31	6.65	9.95	15.6	28.3	63.3	135	120	52.8	25.1	14.5	9.40	6.22	3.97	2.26	0.97	502	424	
VERTICAL (DEG)	1.25	2.67	4.58	7.16	10.9	17.8	34.7	79.0	163	145	65.3	29.7	16.1	10.2	6.65	4.21	2.39	1.05	602	527	
	1.30	2.77	4.75	7.49	11.6	19.3	38.9	90.4	184	161	72.9	32.5	17.0	10.5	6.85	4.33	2.46	1.08	669	595	
	1.31	2.80	4.81	7.58	11.8	19.6	39.2	92.3	187	161	72.0	32.2	16.8	10.4	6.81	4.31	2.46	1.08	674	600	
	1.27	2.73	4.69	7.36	11.3	18.1	34.4	77.9	156	134	60.7	28.3	15.7	9.99	6.59	4.20	2.38	1.04	577	500	
	1.17	2.57	4.46	6.91	10.4	16.1	28.2	62.6	128	108	46.9	23.2	13.8	9.06	6.07	3.92	2.24	0.95	474	394	
	1.01	2.36	4.09	6.24	9.12	13.6	21.8	44.0	84.5	71.9	33.9	18.4	11.8	8.01	5.49	3.59	2.03	0.82	343	255	
	0.79	2.04	3.64	5.51	7.78	10.9	15.8	26.2	42.8	37.9	21.6	13.7	9.62	6.88	4.87	3.19	1.75	0.64	216	116	
	0.54	1.62	3.12	4.76	6.50	8.44	10.7	13.0	14.3	13.9	11.9	9.58	7.55	5.77	4.19	2.70	1.39	0.42	120	4.33	
	0.32	1.12	2.47	3.92	5.40	6.51	7.32	7.63	7.36	7.46	7.53	6.88	5.94	4.81	3.41	2.07	0.94	0.25	81.3	0.00	
	0.17	0.67	1.53	2.56	3.76	4.85	5.80	6.49	6.86	6.74	6.19	5.34	4.33	3.27	2.22	1.27	0.49	0.09	62.6	0.00	
-72	0.04	0.28	0.77	1.43	2.13	2.80	3.32	4.01	4.29	4.22	3.80	3.17	2.45	1.74	1.10	0.55	0.14	0.02	36.3	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)					16	24	32	40	48	56	64	72
Φ t	13.8	32.8	58.7	91.1	134	199	333	674	1297	1145	553	290	179	122	82.6	52.3	28.3	11.1	5296	---	
Φ a	0.00	0.00	0.00	0.00	0.00	42.5	236	603	1240	1086	477	181	13.7	0.00	0.00	0.00	0.00	0.00	---	3879	

one-half-peak spread: U:25.7,D:28.1 , L:9.8,REMARK Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Temperature:25.5DEG	Humidity:66%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2024-04-11	Remarks:

ISOCANDELA DIAGRAM

Test:U:219.7V I:0.2973A P:63.79W PF:0.9766 Lamp Flux:5334.49x1 lm		
NAME: 8.01.017.0058 15X55°LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

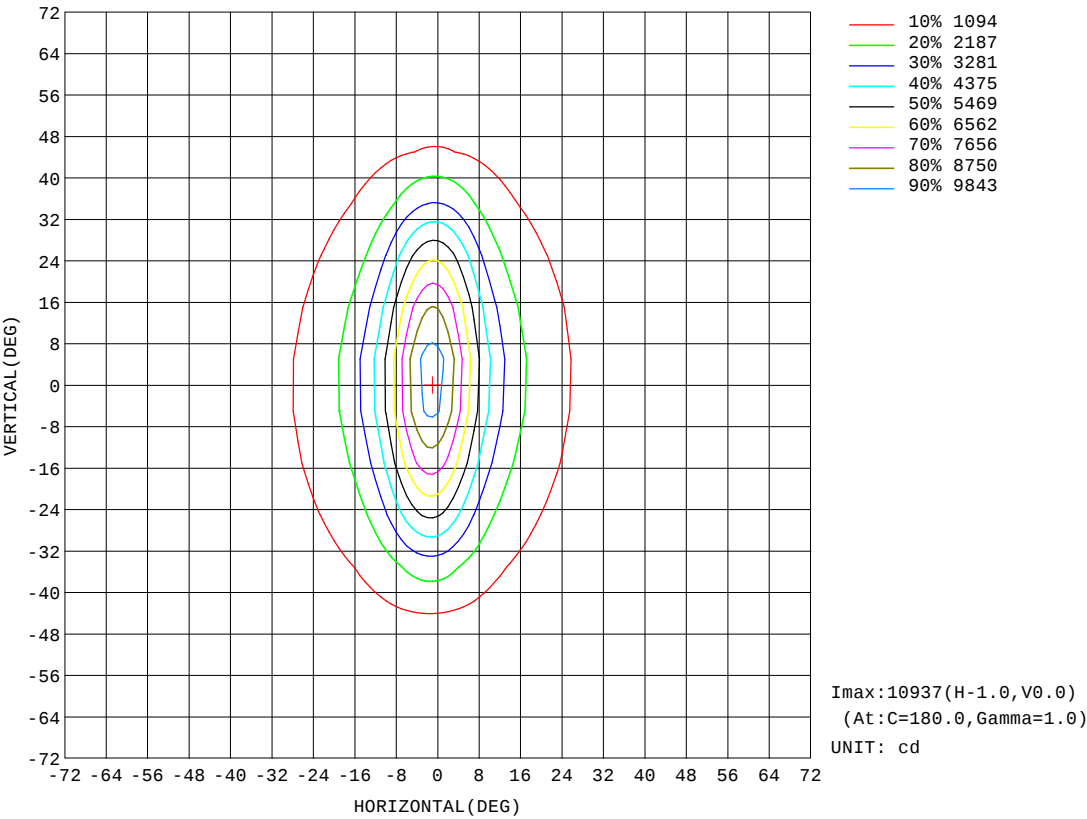


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.5DEG
Operators:QC1
Test Date:2024-04-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:66%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:219.7V I:0.2973A P:63.79W PF:0.9766 Lamp Flux:5334.49x1 lm		
NAME: 8.01.017.0058 15X55°LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

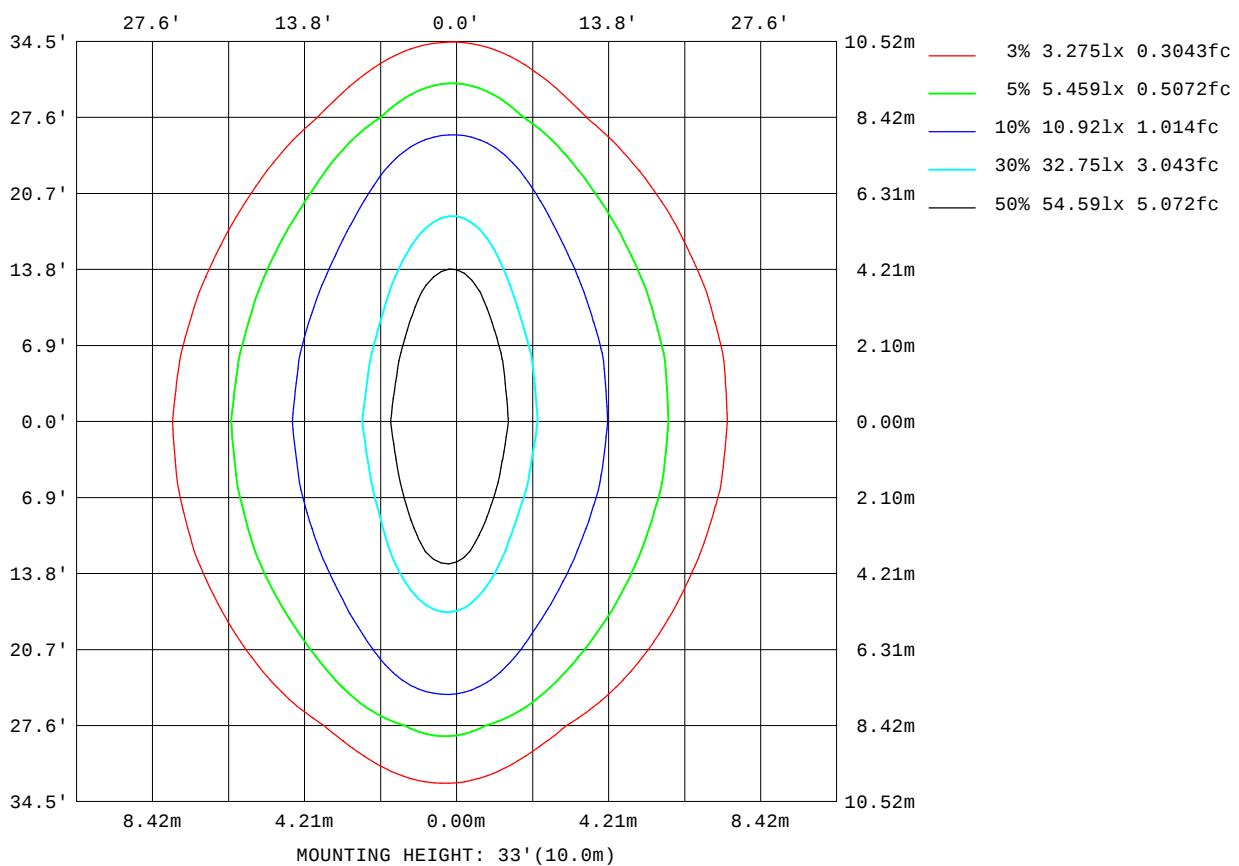


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.5DEG
Operators:QC1
Test Date:2024-04-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:66%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.7V I:0.2973A P:63.79W PF:0.9766 Lamp Flux:5334.49x1 lm		
NAME: 8.01.017.0058 15X55°LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

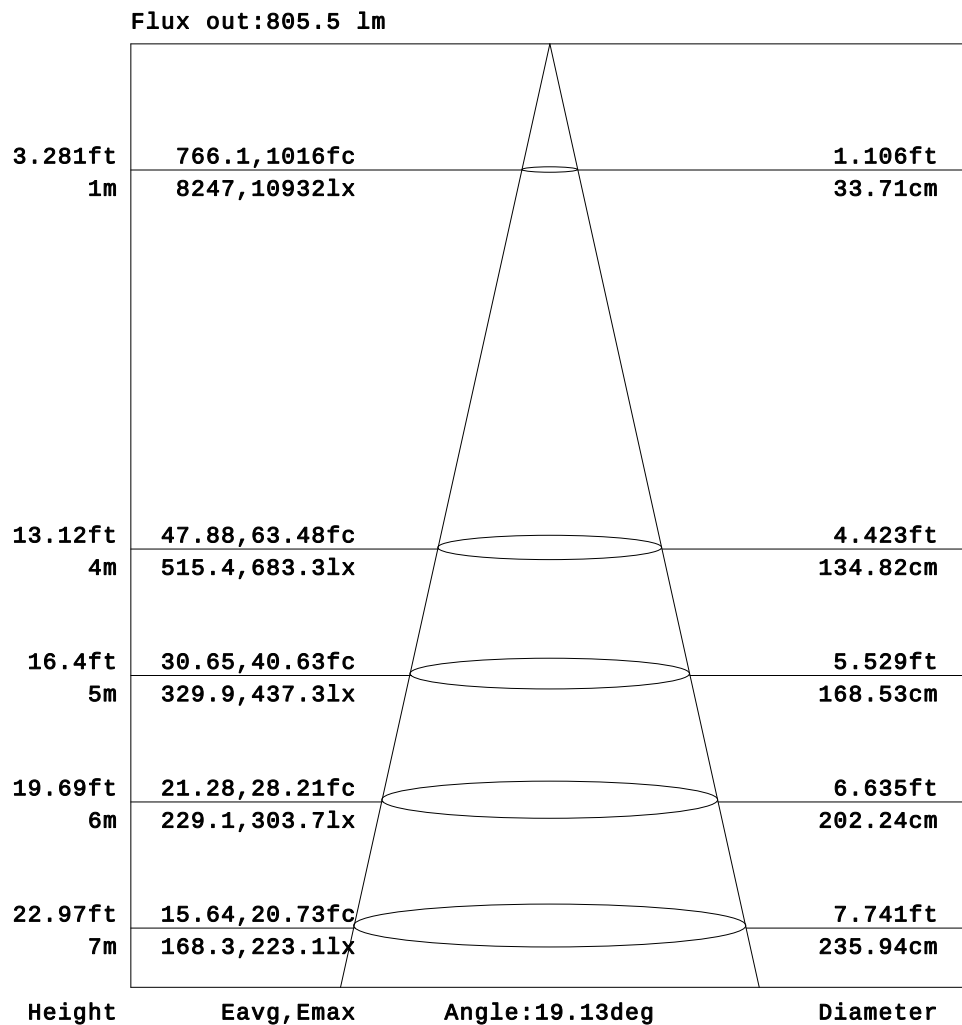


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.5DEG
Operators:QC1
Test Date:2024-04-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:66%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

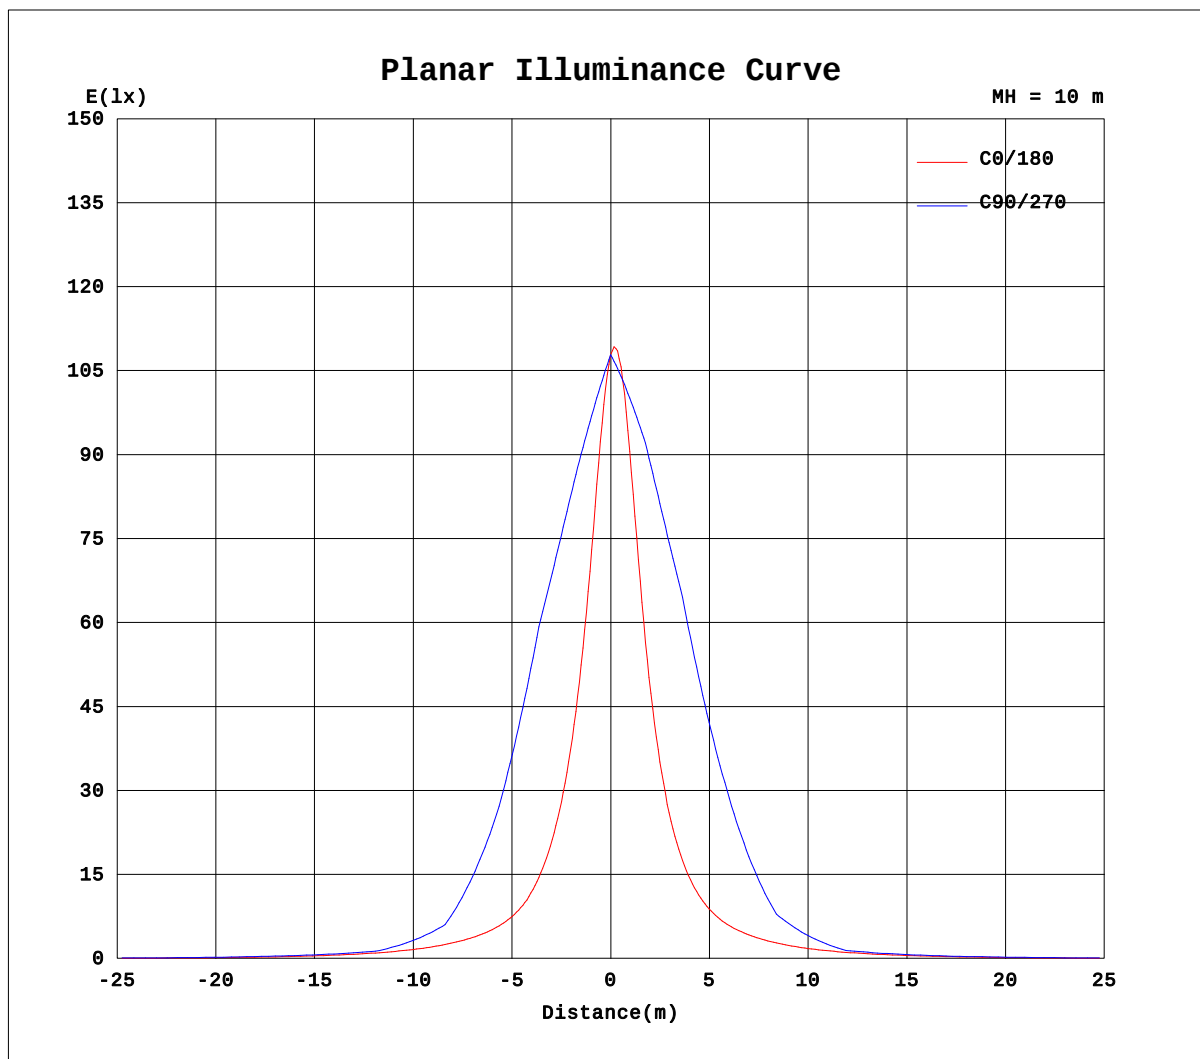

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.5DEG
Operators:QC1
Test Date:2024-04-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:66%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.7V I:0.2973A P:63.79W PF:0.9766 Lamp Flux:5334.49x1 lm		
NAME: 8.01.017.0058 15X55°LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: ×10cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.22	0.70	1.23	1.82	2.48	3.12	3.75	3.97	5.11	5.20
-75	0.00	0.00	0.00	0.00	0.00	0.23	0.93	1.82	2.89	4.10	5.12	6.21	7.22	8.15	8.44	10.4	11.0	11.9	12.0
-70	0.00	0.00	0.00	0.00	0.00	0.47	1.86	3.64	5.77	7.98	9.54	11.2	12.6	13.8	13.8	17.0	18.0	18.6	18.7
-65	0.00	0.00	0.00	0.00	0.72	2.05	4.29	6.90	10.0	12.8	15.2	17.9	19.9	21.7	22.7	25.2	26.2	26.9	27.0
-60	0.00	0.00	0.00	0.00	1.44	3.64	6.72	10.2	14.3	17.6	20.8	24.7	27.2	29.6	31.7	33.3	34.5	35.3	35.3
-55	0.00	0.00	0.00	0.53	2.42	5.48	9.57	14.3	19.2	23.2	27.0	30.8	33.4	35.8	38.0	39.9	41.3	42.4	42.5
-50	0.00	0.00	0.00	1.07	3.40	7.33	12.4	18.4	24.0	28.8	33.2	37.0	39.7	42.1	44.3	46.5	48.1	49.5	49.7
-45	0.00	0.00	0.00	1.73	4.99	9.65	15.5	21.7	27.2	32.2	36.9	41.5	46.1	51.3	57.5	65.4	76.9	89.7	92.6
-40	0.00	0.00	0.00	2.39	6.57	12.0	18.5	24.9	30.4	35.7	40.6	46.0	52.4	60.5	70.6	84.4	106	130	135
-35	0.00	0.00	0.16	3.20	8.10	14.6	21.0	27.2	32.9	38.7	44.6	51.6	60.4	72.4	89.5	119	173	246	267
-30	0.00	0.00	0.31	4.00	9.62	17.2	23.4	29.6	35.4	41.7	48.7	57.1	68.5	84.3	108	154	240	363	398
-25	0.00	0.00	0.68	5.45	11.5	18.5	24.8	31.3	37.6	44.5	52.5	62.5	76.2	96.5	130	192	320	504	556
-20	0.00	0.00	1.04	6.89	13.3	19.8	26.2	33.0	39.7	47.3	56.4	67.8	83.9	109	151	230	399	645	714
-15	0.00	0.00	1.53	7.28	13.9	20.6	27.1	33.9	40.9	49.0	58.7	71.2	89.1	118	170	265	455	728	810
-10	0.00	0.00	2.02	7.68	14.4	21.3	28.0	34.8	42.1	50.6	61.0	74.5	94.4	128	189	300	511	812	906
-5	0.00	0.00	2.22	7.97	14.7	21.5	28.2	35.1	42.5	51.2	61.8	75.9	96.8	133	200	324	552	883	992
0	0.00	0.00	2.41	8.25	14.9	21.7	28.3	35.4	42.9	51.7	62.5	77.3	99.2	138	211	347	592	955	1079
5	0.00	0.00	2.28	8.03	14.6	21.4	27.9	34.8	42.1	50.7	61.1	75.3	96.0	133	202	328	557	898	1021
10	0.00	0.00	2.16	7.81	14.3	21.0	27.6	34.2	41.3	49.6	59.7	73.2	92.9	128	193	308	522	840	964
15	0.00	0.00	2.00	7.43	13.8	20.3	26.6	33.1	39.8	47.6	57.0	69.1	86.8	117	172	271	463	754	871
20	0.00	0.00	1.84	7.05	13.2	19.5	25.6	32.0	38.4	45.6	54.2	65.0	80.8	107	151	233	403	668	778
25	0.00	0.00	1.46	6.34	12.2	18.3	24.3	30.3	36.1	42.6	50.2	59.6	73.0	94.1	130	195	330	540	632
30	0.00	0.00	1.08	5.62	11.1	17.1	22.9	28.5	33.9	39.5	46.2	54.3	65.3	81.6	108	157	256	413	486
35	0.00	0.00	0.74	4.81	9.92	15.5	21.0	26.3	31.3	36.4	42.0	48.7	57.4	69.9	89.2	123	188	286	332
40	0.00	0.00	0.40	4.01	8.68	13.9	19.2	24.2	28.7	33.3	37.8	43.1	49.6	58.2	70.5	89.2	120	160	178
45	0.00	0.00	0.20	3.05	7.14	11.8	16.7	21.5	25.9	30.1	34.0	38.2	43.0	49.0	56.9	68.3	85.6	107	117
50	0.00	0.00	0.00	2.09	5.60	9.73	14.3	18.9	23.1	26.9	30.2	33.3	36.4	39.8	43.4	47.3	51.2	54.4	55.4
55	0.00	0.00	0.00	1.24	4.11	7.59	11.5	15.6	19.3	22.9	26.1	29.1	32.0	34.9	37.8	40.6	43.2	45.3	46.0
60	0.00	0.00	0.00	0.39	2.63	5.44	8.67	12.2	15.5	18.8	22.0	25.0	27.6	30.1	32.2	33.9	35.3	36.2	36.5
65	0.00	0.00	0.00	0.19	1.34	3.46	5.94	8.71	11.4	14.1	16.6	18.9	21.1	23.1	24.9	26.5	27.7	28.5	28.7
70	0.00	0.00	0.00	0.00	0.06	1.47	3.20	5.24	7.31	9.28	11.1	12.9	14.6	16.2	17.7	19.0	20.0	20.7	20.9
75	0.00	0.00	0.00	0.00	0.03	0.74	1.60	2.62	3.95	5.26	6.52	7.78	9.04	10.3	11.5	12.6	13.5	14.2	14.3
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.59	1.24	1.92	2.66	3.48	4.36	5.27	6.17	6.99	7.59	7.76
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.5DEG
Operators:QC1
Test Date:2024-04-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:66%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.7V I:0.2973A P:63.79W PF:0.9766 Lamp Flux:5334.49x1 lm		
NAME: 8.01.017.0058 15X55°LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																		UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	4.82	4.07	3.17	2.24	1.37	0.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	11.5	10.6	9.47	8.20	6.90	5.65	4.46	3.58	2.72	1.88	0.99	0.28	0.00	0.00	0.00	0.00	0.00	0.00	
-70	18.2	17.2	15.8	14.2	12.4	10.7	8.92	7.16	5.44	3.77	1.98	0.56	0.00	0.00	0.00	0.00	0.00	0.00	
-65	26.4	25.2	23.6	21.7	19.6	17.4	15.1	12.7	10.3	7.85	5.14	2.67	1.17	0.19	0.00	0.00	0.00	0.00	
-60	34.5	33.2	31.4	29.2	26.7	24.1	21.3	18.3	15.2	11.9	8.29	4.79	2.35	0.38	0.00	0.00	0.00	0.00	
-55	41.5	39.8	37.7	35.2	32.6	30.0	27.1	23.8	20.1	16.1	12.0	7.67	4.12	1.50	0.06	0.00	0.00	0.00	
-50	48.5	46.4	44.0	41.2	38.5	35.9	33.0	29.4	24.9	20.3	15.7	10.6	5.90	2.62	0.12	0.00	0.00	0.00	
-45	82.1	68.7	58.8	51.7	46.1	41.2	36.9	32.7	28.1	23.5	18.6	13.4	7.98	3.69	0.71	0.00	0.00	0.00	
-40	116	90.9	73.7	62.2	53.6	46.5	40.8	35.9	31.3	26.7	21.5	16.2	10.1	4.76	1.29	0.00	0.00	0.00	
-35	206	138	99.3	77.6	63.5	53.3	45.6	39.4	34.1	29.0	23.6	18.1	12.1	6.34	1.94	0.00	0.00	0.00	
-30	297	186	125	93.0	73.3	60.1	50.4	42.9	36.8	31.3	25.6	20.0	14.2	7.93	2.58	0.00	0.00	0.00	
-25	402	239	153	109	82.7	66.2	54.8	46.2	39.2	33.1	27.2	21.4	15.4	9.06	3.51	0.00	0.00	0.00	
-20	508	292	182	124	92.2	72.3	59.2	49.4	41.6	35.0	28.9	22.8	16.6	10.2	4.43	0.00	0.00	0.00	
-15	587	345	211	140	101	77.5	62.7	52.1	43.5	36.4	30.0	23.6	17.3	10.9	4.89	0.27	0.00	0.00	
-10	666	397	240	156	109	82.7	66.3	54.7	45.5	37.8	31.2	24.5	18.0	11.5	5.36	0.54	0.00	0.00	
-5	722	430	259	165	113	84.7	67.6	55.6	46.1	38.2	31.4	24.8	18.3	11.7	5.46	0.58	0.00	0.00	
0	778	463	278	175	117	86.7	68.8	56.5	46.7	38.7	31.7	25.1	18.6	11.8	5.57	0.62	0.00	0.00	
5	748	446	268	170	115	85.8	68.3	56.0	46.4	38.4	31.5	24.8	18.3	11.8	5.53	0.62	0.00	0.00	
10	719	430	258	164	113	84.9	67.7	55.5	46.0	38.1	31.3	24.6	18.1	11.7	5.48	0.61	0.00	0.00	
15	646	381	229	149	105	80.4	64.6	53.3	44.3	36.8	30.3	23.8	17.5	11.1	5.09	0.44	0.00	0.00	
20	574	332	201	134	97.6	75.8	61.5	51.0	42.5	35.5	29.2	23.1	16.9	10.5	4.70	0.26	0.00	0.00	
25	476	278	171	117	87.7	69.3	56.9	47.7	40.1	33.7	27.6	21.8	15.8	9.73	4.20	0.13	0.00	0.00	
30	377	225	142	101	77.8	62.9	52.4	44.3	37.7	31.8	26.0	20.5	14.8	8.94	3.70	0.00	0.00	0.00	
35	264	168	113	83.8	66.8	55.3	47.0	40.3	34.7	29.5	24.1	18.8	13.2	7.72	2.95	0.00	0.00	0.00	
40	152	111	83.3	66.7	55.8	47.8	41.6	36.4	31.7	27.1	22.2	17.0	11.6	6.49	2.20	0.00	0.00	0.00	
45	103	80.4	64.5	54.5	47.4	41.8	37.1	32.8	28.5	24.1	19.4	14.6	9.67	5.17	1.44	0.00	0.00	0.00	
50	53.3	49.5	45.7	42.3	39.0	35.8	32.7	29.2	25.3	21.1	16.6	12.1	7.78	3.85	0.68	0.00	0.00	0.00	
55	44.6	42.2	39.6	36.9	34.2	31.3	28.2	24.8	21.1	17.2	13.3	9.39	5.73	2.51	0.34	0.00	0.00	0.00	
60	36.0	34.9	33.4	31.5	29.3	26.8	23.7	20.3	16.9	13.3	9.90	6.65	3.69	1.17	0.00	0.00	0.00	0.00	
65	28.2	27.2	25.9	24.2	22.3	20.1	17.6	15.0	12.3	9.40	6.74	4.24	2.01	0.58	0.00	0.00	0.00	0.00	
70	20.4	19.5	18.3	16.8	15.2	13.4	11.6	9.65	7.63	5.52	3.58	1.83	0.32	0.00	0.00	0.00	0.00	0.00	
75	13.9	13.1	12.0	10.8	9.43	8.04	6.65	5.29	3.93	2.76	1.79	0.91	0.16	0.00	0.00	0.00	0.00	0.00	
80	7.43	6.69	5.75	4.71	3.66	2.64	1.73	0.93	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.5DEG
Operators:QC1
Test Date:2024-04-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:66%
Test Distance:8.300m [K=1.0000]
Remarks: