

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2883.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	76.0V x 45.0H
	At 50% of Imax	43.6V x 14.4H
	At 90% of Imax	23.5V x 5.0H
Beam Flux	Total	999.8 lumens per klm.
	To 10% of Imax	713.0 lumens per klm.
	To 50% of Imax	318.9 lumens per klm.
	To 90% of Imax	78.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-19

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.9V I:0.2724A P:58.32W PF:1.000 Freq:50.00Hz Lamp Flux:6843.97x1 lm		
NAME: 8.01.017.0110 15x40° LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

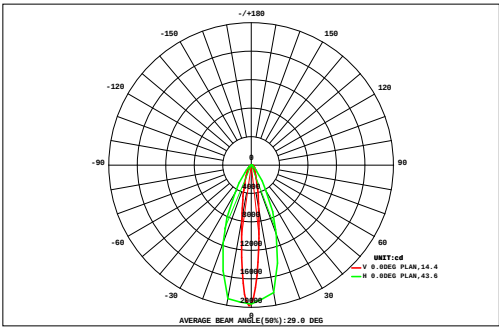

DATA OF LAMP		Eff:117.34lm/W	
MODEL	LWW-WZB-W55-L12-S	Imax(cd)	19733
NOMINAL POWER(W)	58	AVAILABILITY(%)	71.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	4884
NOMINAL FLUX(lm)	6843.97	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	6844
TEST VOLTAGE(V)	220	θ @50%(H,V)	14,44DEG


72 64 56 48 40 32 24 VERTICAL (DEG) -24 -32 -40 -48 -56 -64 -72		AREA FLUX DIAGRAM														UNIT:lm				Φ t	Φ a
		0.00	0.02	0.21	0.63	1.18	1.77	2.32	2.79	3.11	3.18	2.95	2.56	2.06	1.48	0.91	0.41	0.08	0.01	25.7	0.00
		0.02	0.32	0.95	1.78	2.73	3.70	4.57	5.31	5.83	5.93	5.54	4.90	4.08	3.11	2.09	1.18	0.49	0.08	52.6	0.00
		0.14	0.72	1.66	2.83	4.11	5.48	6.91	8.36	9.55	9.78	8.86	7.53	6.10	4.62	3.21	1.95	0.93	0.26	83.0	0.00
		0.31	1.15	2.36	3.82	5.51	7.53	10.2	13.8	18.2	19.1	15.1	11.4	8.50	6.21	4.32	2.70	1.37	0.46	132	0.00
		0.51	1.54	2.99	4.75	6.98	10.0	14.8	23.8	39.0	42.8	27.7	17.3	11.5	7.96	5.38	3.37	1.78	0.65	223	52.1
		0.66	1.87	3.54	5.67	8.55	12.9	21.2	40.8	84.0	96.4	50.5	26.0	15.3	9.86	6.42	3.94	2.11	0.83	391	254
		0.80	2.12	3.98	6.47	10.1	16.1	28.9	64.5	166	195	82.4	36.4	19.2	11.6	7.27	4.40	2.37	0.95	659	532
		0.88	2.31	4.30	7.07	11.3	18.8	35.8	83.3	237	287	110	45.7	22.8	13.1	7.95	4.75	2.54	1.04	896	776
		0.93	2.41	4.50	7.45	12.1	20.7	40.3	95.1	273	327	124	51.3	25.0	13.9	8.31	4.93	2.65	1.09	1014	897
		0.94	2.42	4.55	7.55	12.3	20.9	40.6	96.0	266	307	120	50.9	24.8	13.8	8.26	4.91	2.65	1.09	985	866
		0.89	2.35	4.40	7.27	11.6	19.1	35.9	83.3	239	279	105	44.1	22.2	12.9	7.87	4.74	2.55	1.05	884	762
		0.79	2.16	4.12	6.75	10.5	16.5	28.8	62.7	153	168	73.3	33.6	18.1	11.2	7.08	4.35	2.37	0.95	605	476
		0.64	1.89	3.67	6.01	9.11	13.7	21.9	41.3	82.9	88.4	46.3	24.5	14.6	9.48	6.24	3.87	2.10	0.82	377	237
		0.45	1.55	3.12	5.14	7.63	10.9	15.8	24.1	35.1	36.4	25.9	16.8	11.3	7.80	5.31	3.33	1.77	0.63	213	31.1
		0.23	1.14	2.47	4.17	6.15	8.37	10.9	13.6	15.0	15.0	13.8	11.1	8.42	6.20	4.32	2.72	1.38	0.39	125	0.00
		0.08	0.64	1.77	3.09	4.63	5.96	7.09	7.95	8.31	8.35	8.06	7.19	6.06	4.73	3.31	2.02	0.92	0.22	80.4	0.00
		0.01	0.25	0.95	1.90	2.91	3.92	4.81	5.53	6.03	6.05	5.60	4.93	4.09	3.14	2.17	1.23	0.44	0.07	54.0	0.00
		0.00	0.04	0.27	0.76	1.33	1.93	2.49	2.95	3.28	3.30	3.04	2.65	2.15	1.57	1.01	0.48	0.11	0.01	27.4	0.00
		-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)				16	24	32	40	48	56	64	72
Φ t		8.30	24.9	49.8	83.1	129	198	333	675	1644	1898	829	399	226	143	91.4	55.3	28.6	10.6	6827	---
Φ a		0.00	0.00	0.00	0.00	0.00	0.00	104	540	1535	1789	706	210	0.00	0.00	0.00	0.00	0.00	0.00	---	4884

one-half-peak spread: U:21.0,D:22.9 , L:7.4,RNEMA Beam Type: Type 3 x 5 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2024-11-19	Remarks:

ISOCANDELA DIAGRAM

Test:U:219.9V I:0.2724A P:58.32W PF:1.000 Freq:50.00Hz Lamp Flux:6843.97x1 lm		
NAME: 8.01.017.0110 15x40° LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

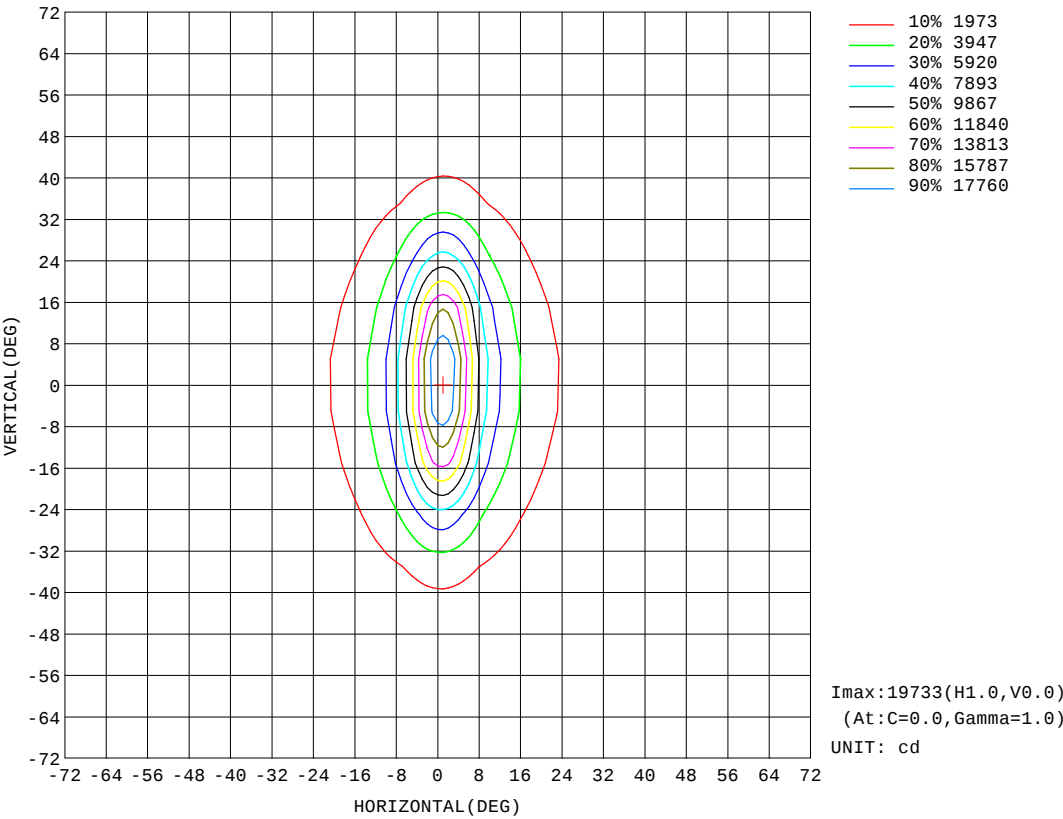


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-19

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.9V I:0.2724A P:58.32W PF:1.000 Freq:50.00Hz Lamp Flux:6843.97x1 lm		
NAME: 8.01.017.0110 15x40° LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

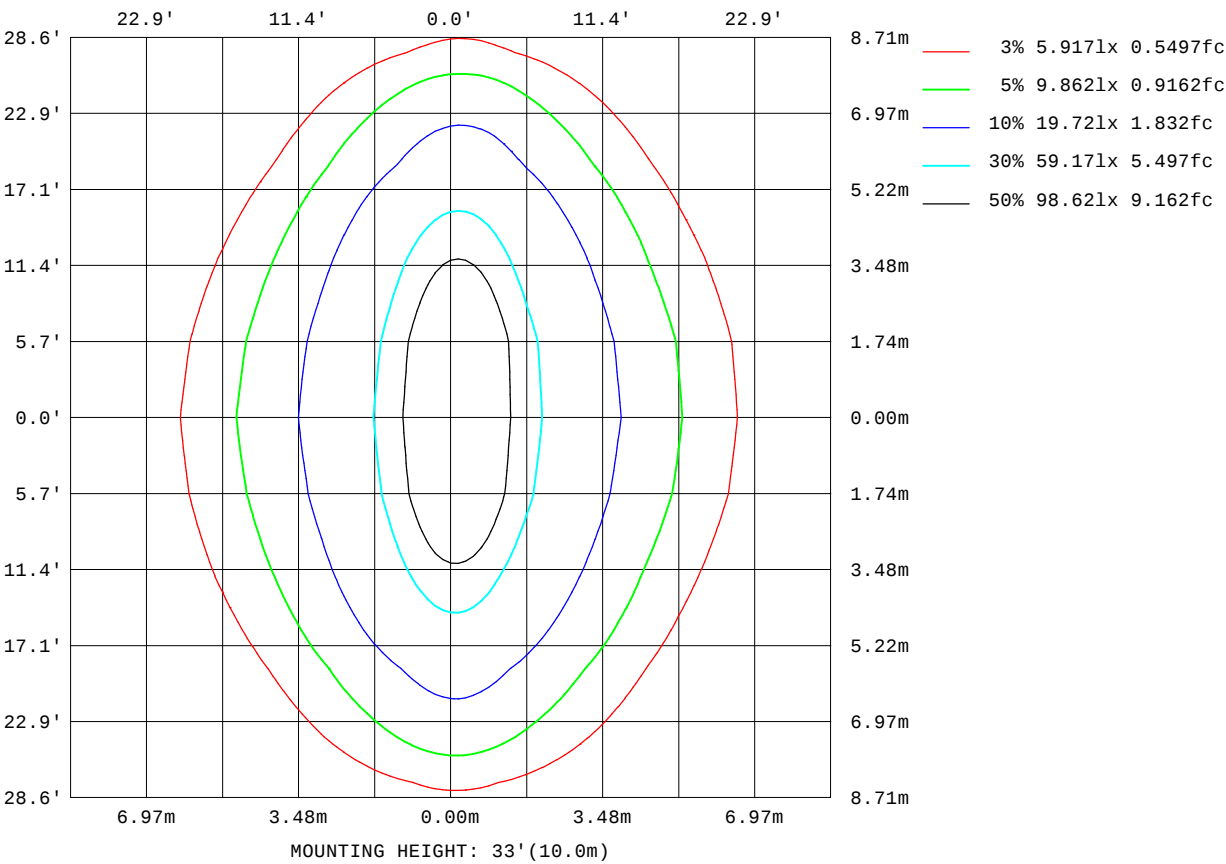

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-19

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

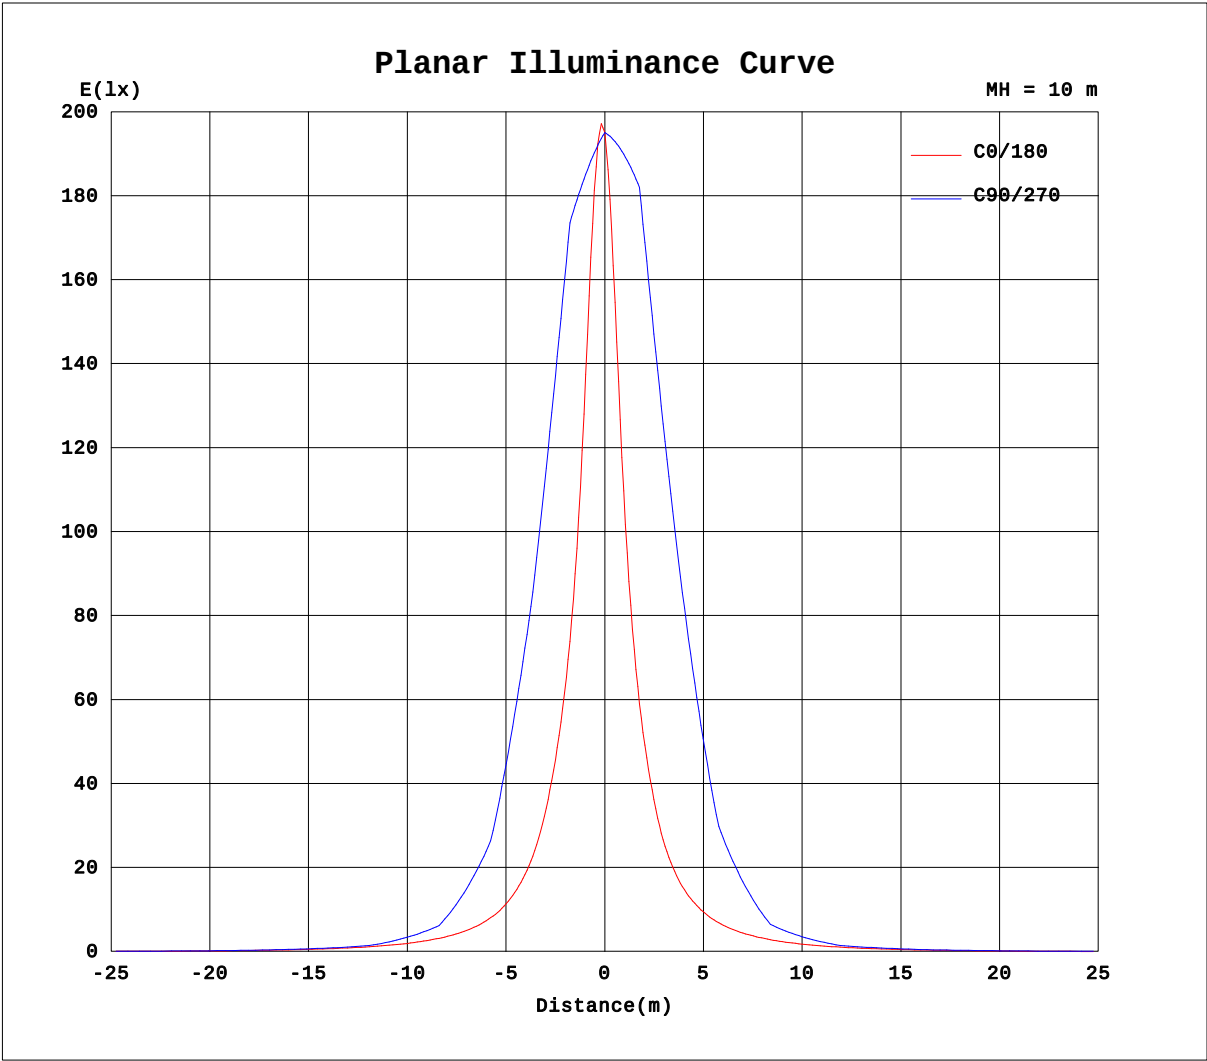


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-19

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.9V I:0.2724A P:58.32W PF:1.000 Freq:50.00Hz Lamp Flux:6843.97x1 lm		
NAME: 8.01.017.0110 15x40° LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

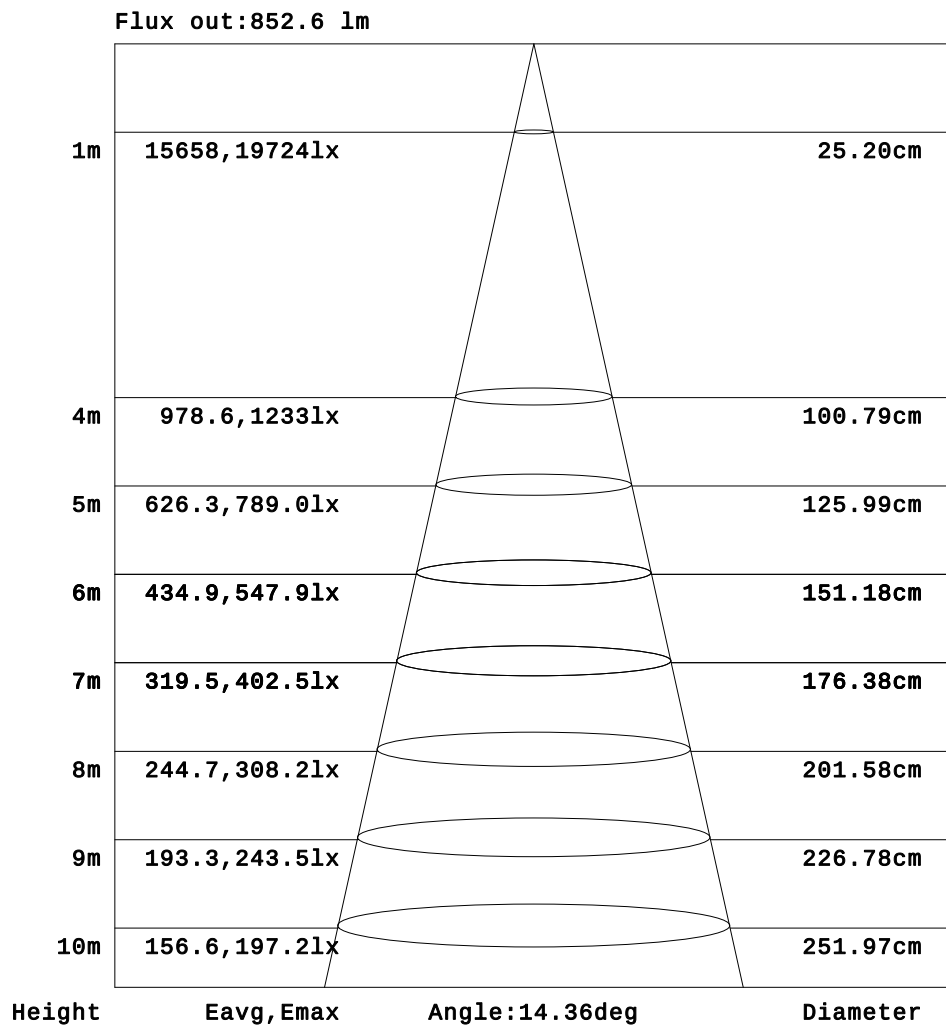

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-19

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.9V I:0.2724A P:58.32W PF:1.000 Freq:50.00Hz Lamp Flux:6843.97x1 lm		
NAME: 8.01.017.0110 15x40° LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: ×10cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	0.73	1.35	1.90	2.16
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.73	1.53	2.31	3.12	3.92	4.63	5.43	6.23	7.05	7.77	8.12
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.47	3.05	4.62	6.24	7.83	9.27	10.6	11.7	12.8	13.6	14.1
-65	0.00	0.00	0.00	0.00	0.00	0.05	1.16	2.78	5.50	7.95	10.3	12.6	14.8	16.7	18.4	19.9	21.2	22.3	22.8
-60	0.00	0.00	0.00	0.00	0.00	0.10	2.33	5.56	9.53	12.8	16.0	19.0	21.8	24.2	26.3	28.1	29.6	30.9	31.6
-55	0.00	0.00	0.00	0.00	0.06	1.63	4.83	9.26	13.9	17.9	22.1	25.9	29.2	32.2	35.0	37.7	40.2	42.3	43.5
-50	0.00	0.00	0.00	0.00	0.13	3.16	7.33	13.0	18.3	22.9	28.1	32.7	36.6	40.2	43.7	47.3	50.7	53.7	55.4
-45	0.00	0.00	0.00	0.00	1.26	5.24	10.5	16.3	22.0	27.4	33.2	38.8	44.5	50.8	58.0	66.8	77.3	89.3	97.2
-40	0.00	0.00	0.00	0.00	2.39	7.33	13.8	19.6	25.7	31.8	38.3	45.0	52.5	61.4	72.3	86.3	104	125	139
-35	0.00	0.00	0.00	0.16	3.74	9.38	16.1	22.4	29.0	35.7	43.0	51.0	60.7	73.0	90.4	117	159	221	273
-30	0.00	0.00	0.00	0.32	5.09	11.4	18.4	25.1	32.2	39.6	47.7	57.0	68.9	84.7	108	148	214	318	407
-25	0.00	0.00	0.00	1.19	6.57	12.9	20.1	27.2	34.8	42.8	51.9	63.0	77.5	98.0	131	191	306	513	719
-20	0.00	0.00	0.00	2.06	8.04	14.4	21.8	29.3	37.4	46.0	56.1	69.0	86.2	111	154	235	398	709	1032
-15	0.00	0.00	0.00	2.42	8.62	15.4	22.9	30.6	38.8	47.9	58.9	73.1	92.9	123	175	274	475	903	1425
-10	0.00	0.00	0.00	2.77	9.21	16.4	24.1	31.9	40.2	49.8	61.6	77.3	99.6	134	197	314	553	1098	1817
-5	0.00	0.00	0.00	3.04	9.49	16.7	24.3	32.2	40.7	50.5	62.7	79.1	103	141	208	333	586	1144	1884
0	0.00	0.00	0.00	3.30	9.76	17.0	24.6	32.6	41.1	51.1	63.8	80.9	106	148	218	353	619	1191	1951
5	0.00	0.00	0.00	3.11	9.46	16.6	24.2	32.0	40.3	50.0	62.1	78.5	103	141	209	336	589	1150	1928
10	0.00	0.00	0.00	2.92	9.16	16.3	23.8	31.4	39.5	48.8	60.5	76.1	98.9	135	200	319	560	1110	1906
15	0.00	0.00	0.00	2.59	8.62	15.5	22.7	30.0	37.8	46.5	57.1	71.2	91.3	122	177	279	486	931	1537
20	0.00	0.00	0.00	2.26	8.08	14.7	21.5	28.5	36.1	44.2	53.8	66.4	83.7	109	154	240	412	753	1168
25	0.00	0.00	0.00	1.68	7.04	13.3	19.9	26.5	33.4	40.7	49.2	59.9	74.2	95.0	130	194	317	546	814
30	0.00	0.00	0.00	1.10	6.00	11.9	18.2	24.5	30.8	37.3	44.6	53.4	64.7	80.5	105	148	221	340	460
35	0.00	0.00	0.00	0.55	4.81	10.2	16.0	21.8	27.5	33.4	39.7	47.0	56.1	68.1	86.0	115	162	233	303
40	0.00	0.00	0.00	0.00	3.61	8.48	13.7	19.1	24.3	29.4	34.9	40.6	47.4	55.7	66.8	82.3	102	127	145
45	0.00	0.00	0.00	0.00	2.31	6.44	11.1	15.9	20.7	25.3	30.0	34.7	40.1	46.3	53.9	63.9	76.1	90.3	101
50	0.00	0.00	0.00	0.00	1.01	4.40	8.45	12.7	17.1	21.2	25.1	28.9	32.8	36.8	41.0	45.5	49.9	53.9	56.4
55	0.00	0.00	0.00	0.00	0.51	2.59	5.81	9.38	13.1	16.6	20.1	23.4	26.7	29.8	33.0	36.2	39.2	41.9	43.5
60	0.00	0.00	0.00	0.00	0.00	0.78	3.18	6.04	9.02	12.0	15.0	17.9	20.5	22.9	25.0	26.8	28.5	29.9	30.6
65	0.00	0.00	0.00	0.00	0.00	0.39	1.59	3.20	5.33	7.57	9.82	12.0	14.1	16.0	17.7	19.2	20.5	21.6	22.2
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	1.64	3.10	4.63	6.19	7.71	9.13	10.4	11.5	12.5	13.3	13.7
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.82	1.55	2.32	3.10	3.86	4.56	5.45	6.26	6.98	7.59	7.95
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.50	0.99	1.46	1.89	2.17
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-19

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.9V I:0.2724A P:58.32W PF:1.000 Freq:50.00Hz Lamp Flux:6843.97x1 lm		
NAME: 8.01.017.0110 15x40° LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: ×10cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	1.86	1.42	1.04	0.68	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	7.84	7.32	6.75	6.11	5.34	4.60	3.90	3.15	2.39	1.59	0.71	0.08	0.00	0.00	0.00	0.00	0.00	0.00	
-70	13.8	13.2	12.5	11.5	10.5	9.20	7.80	6.30	4.77	3.18	1.43	0.16	0.00	0.00	0.00	0.00	0.00	0.00	
-65	22.4	21.6	20.5	19.3	17.8	16.0	14.1	12.0	9.82	7.38	4.71	2.25	0.92	0.00	0.00	0.00	0.00	0.00	
-60	31.1	30.0	28.6	27.0	25.0	22.8	20.4	17.7	14.9	11.6	8.00	4.34	1.84	0.00	0.00	0.00	0.00	0.00	
-55	42.8	40.9	38.5	35.7	32.9	30.0	26.8	23.3	19.7	15.8	11.7	7.32	3.63	1.04	0.00	0.00	0.00	0.00	
-50	54.5	51.8	48.4	44.5	40.8	37.2	33.2	28.9	24.5	20.0	15.5	10.3	5.42	2.09	0.00	0.00	0.00	0.00	
-45	92.1	80.5	69.6	59.8	51.7	45.1	39.4	33.9	28.8	23.7	18.7	13.2	7.70	3.23	0.38	0.00	0.00	0.00	
-40	130	109	90.8	75.1	62.6	53.1	45.5	38.9	33.1	27.5	21.9	16.2	9.98	4.37	0.76	0.00	0.00	0.00	
-35	238	174	129	97.4	76.8	62.7	52.3	44.1	37.1	30.6	24.4	18.3	12.1	6.13	1.38	0.00	0.00	0.00	
-30	347	238	166	120	90.9	72.3	59.2	49.2	41.2	33.8	27.0	20.5	14.2	7.88	1.99	0.00	0.00	0.00	
-25	579	348	222	149	107	82.8	66.4	54.2	44.7	36.5	29.2	22.3	15.5	8.92	2.93	0.00	0.00	0.00	
-20	811	458	279	179	124	93.3	73.5	59.1	48.2	39.3	31.4	24.0	16.9	9.96	3.86	0.00	0.00	0.00	
-15	1098	578	340	211	143	104	80.0	63.4	51.1	41.3	32.9	25.1	17.7	10.7	4.32	0.00	0.00	0.00	
-10	1386	698	401	243	161	115	86.6	67.7	54.0	43.3	34.5	26.2	18.6	11.4	4.78	0.00	0.00	0.00	
-5	1436	736	427	258	170	120	89.4	69.4	55.0	43.9	34.9	26.6	18.9	11.5	4.87	0.00	0.00	0.00	
0	1486	774	452	274	179	125	92.2	71.1	56.0	44.6	35.3	27.0	19.2	11.6	4.96	0.01	0.00	0.00	
5	1490	760	438	264	174	122	90.5	70.1	55.4	44.2	35.0	26.6	18.9	11.5	4.87	0.00	0.00	0.00	
10	1495	746	423	254	168	119	88.8	69.1	54.7	43.7	34.7	26.2	18.6	11.3	4.77	0.00	0.00	0.00	
15	1222	633	366	224	150	108	82.7	65.1	52.0	41.8	33.1	25.1	17.7	10.6	4.32	0.00	0.00	0.00	
20	949	520	308	193	132	98.2	76.7	61.1	49.4	39.8	31.6	24.1	16.9	9.90	3.87	0.00	0.00	0.00	
25	678	395	245	161	114	87.0	69.1	56.0	45.7	37.2	29.4	22.3	15.5	9.00	3.29	0.00	0.00	0.00	
30	408	270	182	128	95.9	75.8	61.6	50.8	42.1	34.5	27.3	20.6	14.2	8.10	2.71	0.00	0.00	0.00	
35	273	192	137	102	79.6	64.9	53.9	45.1	37.7	31.0	24.6	18.3	12.3	6.76	1.95	0.00	0.00	0.00	
40	137	114	92.6	75.8	63.3	53.9	46.1	39.4	33.3	27.6	21.9	16.1	10.5	5.42	1.19	0.00	0.00	0.00	
45	96.6	83.3	70.8	60.4	52.1	45.4	39.2	33.8	28.7	23.6	18.5	13.3	8.46	4.00	0.60	0.00	0.00	0.00	
50	55.8	52.8	48.9	44.9	40.9	36.8	32.4	28.2	24.0	19.7	15.1	10.6	6.44	2.58	0.00	0.00	0.00	0.00	
55	43.1	41.2	38.6	35.8	32.9	29.8	26.3	22.8	19.1	15.4	11.5	7.79	4.31	1.35	0.00	0.00	0.00	0.00	
60	30.5	29.6	28.3	26.8	24.9	22.8	20.3	17.4	14.2	11.1	7.93	4.94	2.18	0.12	0.00	0.00	0.00	0.00	
65	22.1	21.4	20.4	19.2	17.7	16.0	14.1	11.9	9.50	7.10	4.79	2.66	1.09	0.06	0.00	0.00	0.00	0.00	
70	13.7	13.2	12.5	11.6	10.5	9.24	7.84	6.36	4.79	3.15	1.65	0.37	0.00	0.00	0.00	0.00	0.00	0.00	
75	7.89	7.48	6.95	6.33	5.56	4.65	3.92	3.18	2.40	1.57	0.82	0.19	0.00	0.00	0.00	0.00	0.00	0.00	
80	2.11	1.80	1.44	1.08	0.61	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-19

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: