

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3143.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	73.5V x 42.9H
	At 50% of Imax	42.8V x 14.9H
	At 90% of Imax	20.0V x 6.3H
Beam Flux	Total	999.7 lumens per klm.
	To 10% of Imax	750.8 lumens per klm.
	To 50% of Imax	372.2 lumens per klm.
	To 90% of Imax	92.1 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.3V I:0.1384A P:17.99W PF:0.5876 Lamp Flux:1027.5x1 lm		
NAME: 8.01.017.0101 15x40° LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

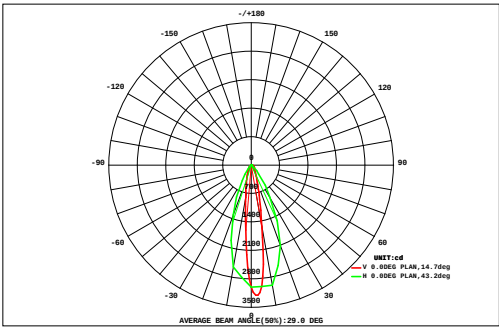

DATA OF LAMP		Eff:57.10lm/W	
MODEL LWW-WZB-W55-L3-RDM	Imax(cd)	3230	
NOMINAL POWER(W)	18	AVAILABILITY(%)	75.5
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	775.8
NOMINAL FLUX(lm)	1027.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1028
TEST VOLTAGE(V)	221.3	θ @50%(H,V)	15,43DEG


		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	72	0.00	0.00	0.00	0.00	0.01	0.02	0.06	0.14	0.21	0.24	0.22	0.17	0.11	0.04	0.01	0.00	0.00	0.00	1.25	0.00
	64	0.00	0.00	0.00	0.03	0.17	0.31	0.45	0.57	0.66	0.69	0.65	0.56	0.45	0.32	0.18	0.06	0.00	0.00	5.09	0.00
	56	0.00	0.00	0.05	0.20	0.39	0.61	0.83	1.08	1.35	1.46	1.27	1.02	0.79	0.57	0.37	0.19	0.05	0.00	10.2	0.00
	48	0.00	0.01	0.14	0.38	0.64	0.96	1.38	2.01	3.10	3.70	2.64	1.75	1.22	0.86	0.56	0.32	0.11	0.01	19.8	0.00
	40	0.00	0.05	0.27	0.55	0.91	1.40	2.15	3.61	7.08	9.31	5.47	2.90	1.78	1.18	0.75	0.43	0.19	0.02	38.1	14.8
	32	0.00	0.10	0.36	0.71	1.20	1.88	3.10	5.99	14.8	21.2	10.6	4.45	2.44	1.53	0.95	0.54	0.25	0.05	70.1	49.8
	24	0.00	0.15	0.44	0.86	1.46	2.41	4.29	9.21	27.0	40.8	17.3	6.34	3.14	1.84	1.10	0.62	0.29	0.07	117	98.2
		0.01	0.17	0.49	0.95	1.65	2.86	5.43	11.8	35.6	55.4	22.7	8.05	3.79	2.09	1.22	0.68	0.32	0.08	153	135
		0.01	0.18	0.52	1.00	1.75	3.08	6.01	13.1	39.1	60.5	24.4	8.80	4.10	2.20	1.26	0.70	0.33	0.09	167	150
		0.01	0.18	0.51	0.99	1.71	2.95	5.66	12.4	36.6	55.2	22.3	8.20	3.89	2.11	1.22	0.68	0.32	0.08	155	137
		0.01	0.15	0.46	0.89	1.50	2.47	4.43	9.62	30.6	46.1	18.9	6.54	3.18	1.85	1.11	0.63	0.29	0.07	129	110
	-24	0.00	0.12	0.39	0.76	1.26	1.97	3.24	6.71	18.0	24.5	11.6	4.58	2.42	1.50	0.94	0.54	0.25	0.05	78.8	59.4
-32	0.00	0.07	0.29	0.60	0.99	1.49	2.29	4.16	8.92	11.2	6.29	3.04	1.79	1.18	0.76	0.44	0.19	0.03	43.8	22.4	
-40	0.00	0.02	0.18	0.42	0.71	1.05	1.50	2.24	3.24	3.59	2.79	1.83	1.24	0.86	0.57	0.32	0.13	0.01	20.7	0.00	
-48	0.00	0.00	0.08	0.25	0.45	0.68	0.90	1.12	1.21	1.19	1.19	1.02	0.80	0.58	0.38	0.20	0.06	0.00	10.1	0.00	
-56	0.00	0.00	0.00	0.08	0.22	0.36	0.49	0.59	0.64	0.64	0.63	0.57	0.46	0.34	0.21	0.09	0.01	0.00	5.33	0.00	
-64	0.00	0.00	0.00	0.01	0.03	0.09	0.19	0.27	0.34	0.36	0.33	0.27	0.20	0.11	0.04	0.01	0.00	0.00	2.26	0.00	
-72	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.07	0.07	0.06	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.41	0.00	
		-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)				16	24	32	40	48	56	64	72
Φ t		0.04	1.20	4.17	8.69	15.1	24.6	42.4	84.7	229	336	149	60.2	31.8	19.2	11.6	6.43	2.77	0.57	1027	---
Φ a		0.00	0.00	0.00	0.00	0.00	0.00	9.07	63.4	214	322	133	33.9	0.09	0.00	0.00	0.00	0.00	0.00	---	776

one-half-peak spread: U:28.0,D:15.1 , L:7.9,RNEMA Beam Type: Type 3 x 5 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2024-09-06	Remarks:

ISOCANDELA DIAGRAM

Test:U:221.3V I:0.1384A P:17.99W PF:0.5876 Lamp Flux:1027.5x1 lm		
NAME: 8.01.017.0101 15x40° LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

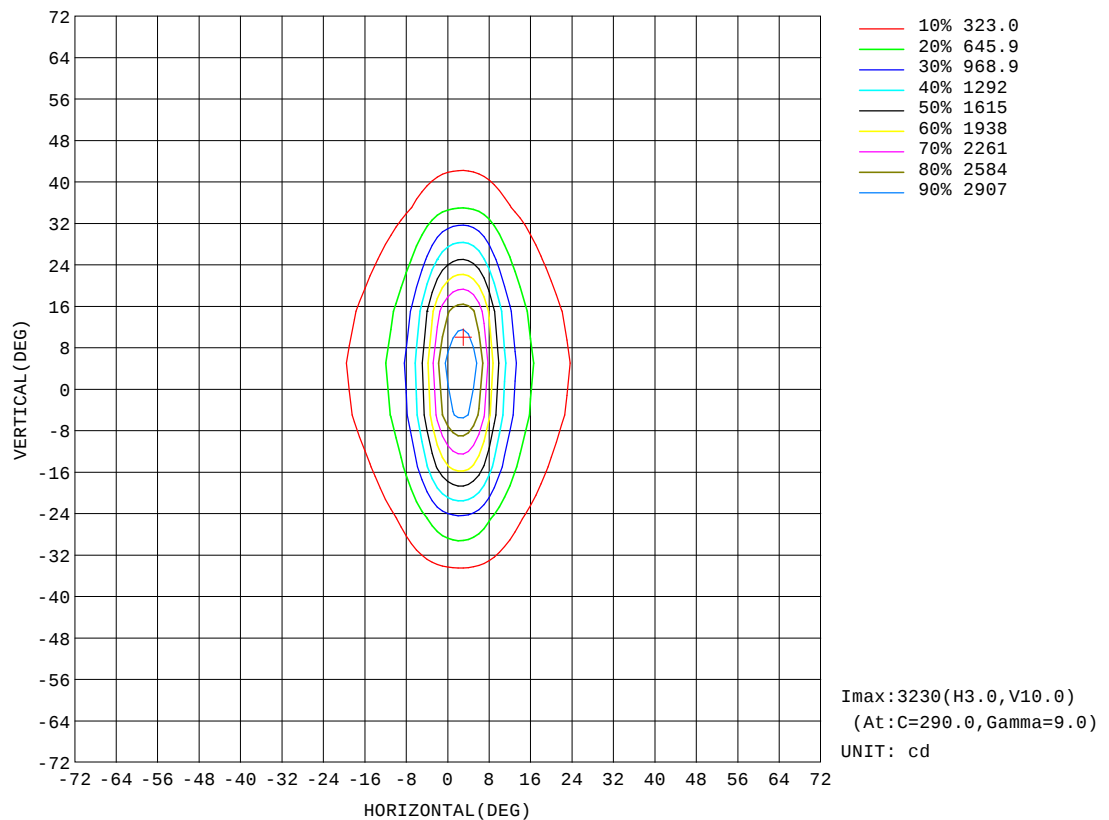


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.3V I:0.1384A P:17.99W PF:0.5876 Lamp Flux:1027.5x1 lm		
NAME: 8.01.017.0101 15x40° LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

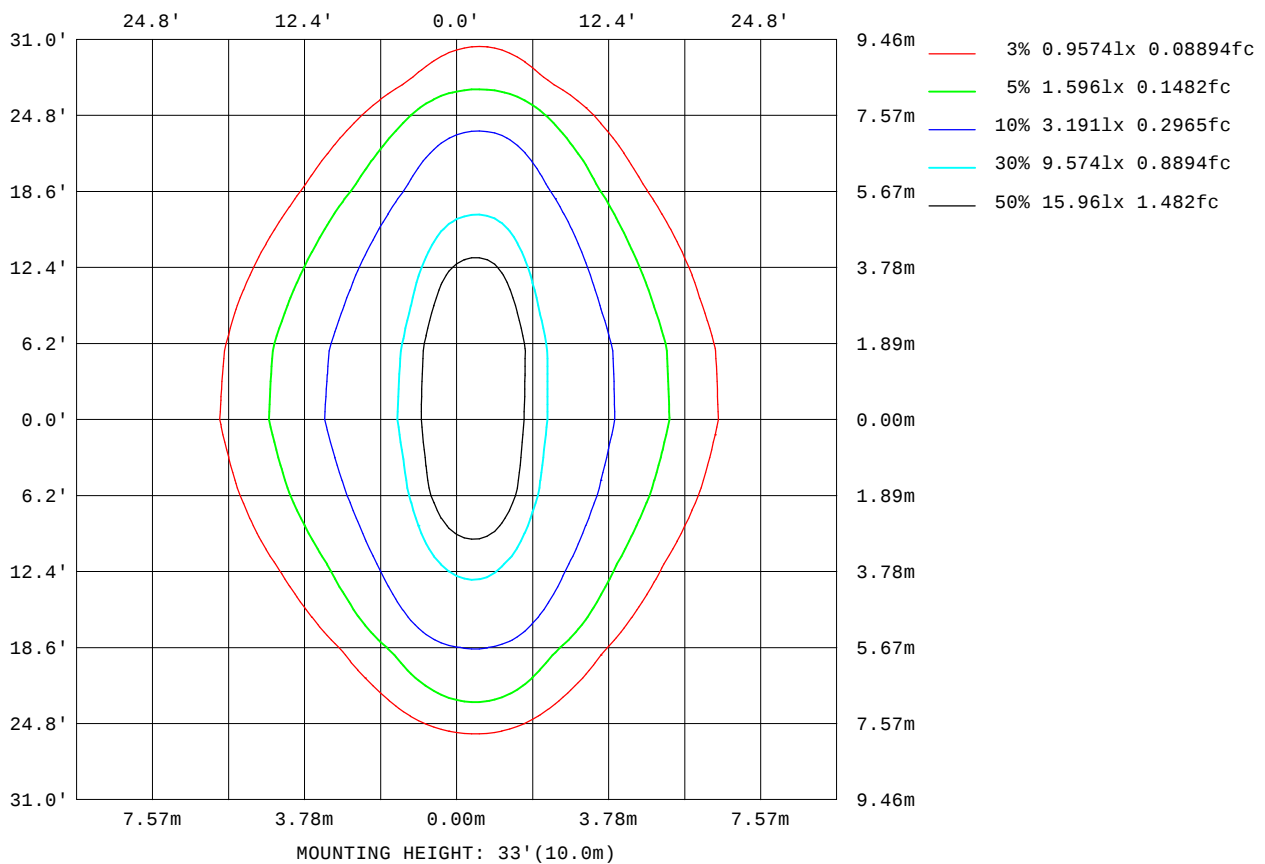


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.3V I:0.1384A P:17.99W PF:0.5876 Lamp Flux:1027.5x1 lm		
NAME: 8.01.017.0101 15x40° LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

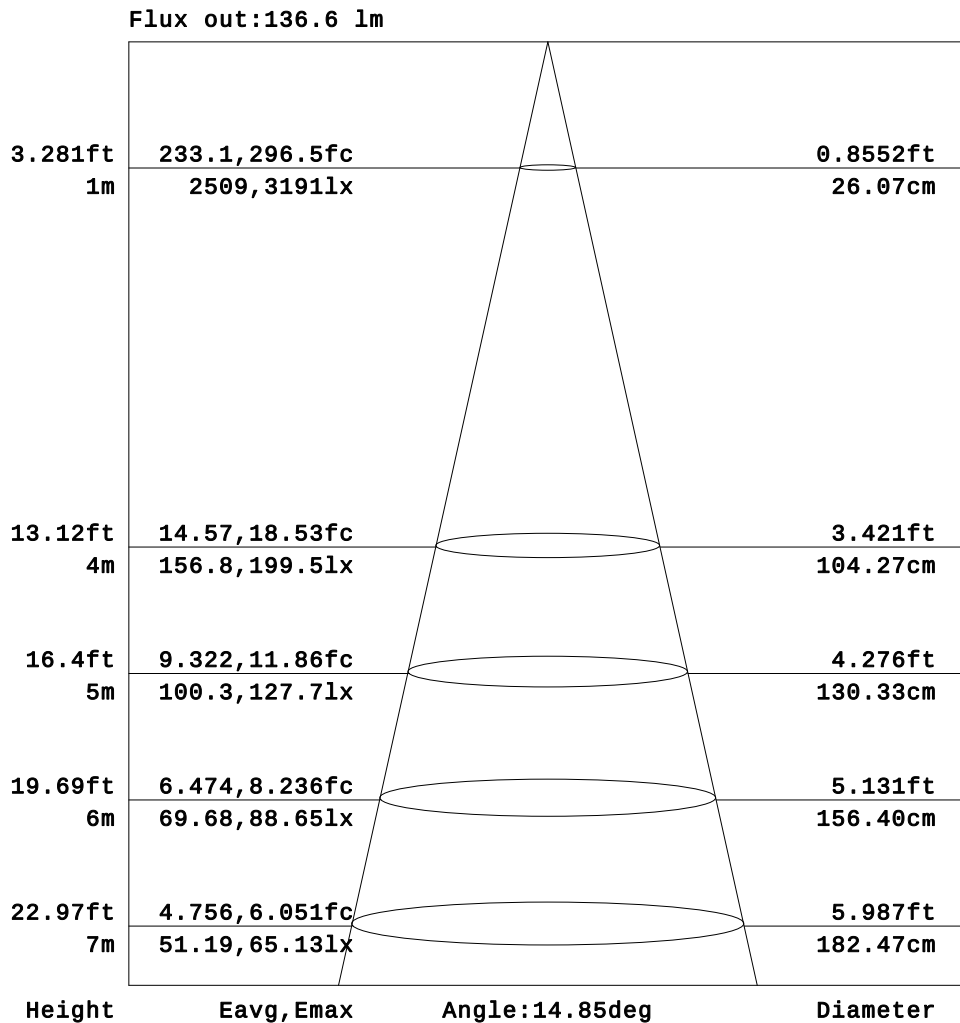


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

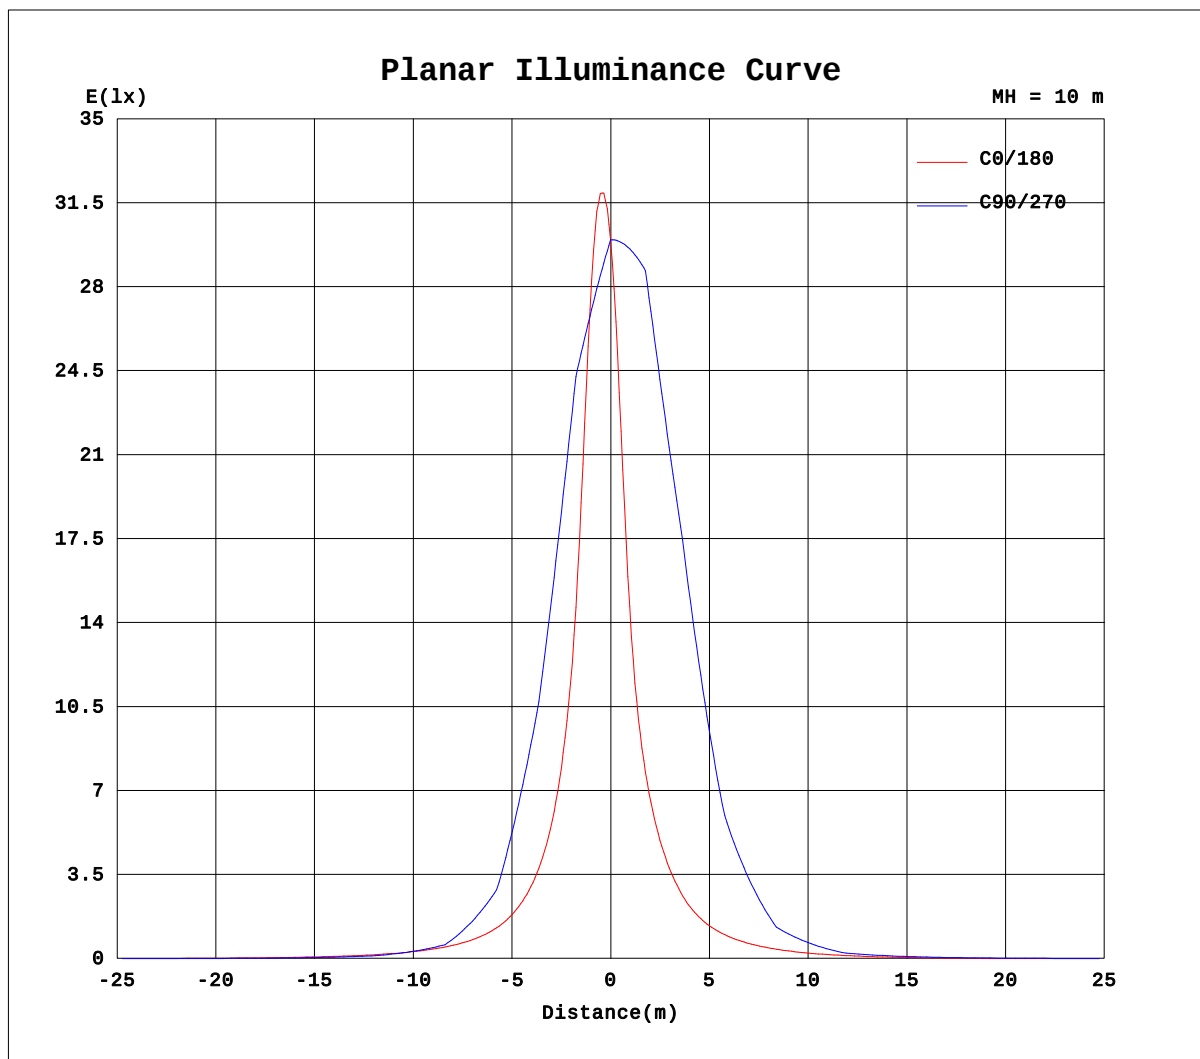

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.3V I:0.1384A P:17.99W PF:0.5876 Lamp Flux:1027.5x1 lm		
NAME: 8.01.017.0101 15x40° LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.83	3.55	5.12	6.45	7.59	8.63	9.32	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.65	7.10	10.2	12.9	15.2	17.3	18.6	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	3.41	6.53	9.33	13.7	17.8	21.4	24.7	27.7	30.4	32.3	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	6.81	13.1	18.7	23.8	28.5	32.5	36.4	40.3	43.6	45.9	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.56	7.18	14.7	21.7	28.4	35.1	41.7	48.3	56.4	66.4	78.2	87.7	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.11	14.0	22.5	30.4	38.2	46.4	54.8	64.1	76.3	92.4	113	130	
-35	0.00	0.00	0.00	0.00	0.00	0.00	2.24	10.1	20.0	29.7	39.3	49.2	59.8	72.0	88.0	112	153	220	286	
-30	0.00	0.00	0.00	0.00	0.00	0.00	4.49	15.1	26.0	36.8	48.2	60.1	73.3	89.3	112	148	213	328	443	
-25	0.00	0.00	0.00	0.00	0.00	0.00	7.98	19.6	31.6	44.1	57.2	71.7	88.5	110	143	200	318	571	867	
-20	0.00	0.00	0.00	0.00	0.00	0.00	11.5	24.0	37.2	51.3	66.3	83.2	104	131	174	253	423	814	1290	
-15	0.00	0.00	0.00	0.00	0.00	1.50	13.6	26.9	41.1	56.2	72.9	92.8	118	154	212	316	536	1099	1916	
-10	0.00	0.00	0.00	0.00	0.00	3.00	15.7	29.8	44.9	61.1	79.6	102	132	178	251	380	649	1384	2541	
-5	0.00	0.00	0.00	0.00	0.00	3.95	17.0	31.6	47.1	64.0	83.9	109	143	196	284	436	731	1497	2769	
0	0.00	0.00	0.00	0.00	0.00	4.91	18.2	33.3	49.2	67.0	88.3	116	154	214	316	493	812	1610	2997	
5	0.00	0.00	0.00	0.00	0.00	4.55	17.7	32.6	48.4	65.9	86.9	114	151	211	311	482	796	1595	2999	
10	0.00	0.00	0.00	0.00	0.00	4.19	17.3	31.9	47.6	64.9	85.6	112	149	208	306	471	780	1580	3002	
15	0.00	0.00	0.00	0.00	0.00	3.16	15.8	29.9	44.8	61.3	80.4	104	137	186	268	410	679	1369	2553	
20	0.00	0.00	0.00	0.00	0.00	2.12	14.4	27.8	42.1	57.7	75.1	96.9	125	164	230	350	579	1158	2104	
25	0.00	0.00	0.00	0.00	0.00	1.06	11.6	24.1	37.2	51.3	66.9	85.6	109	140	192	283	454	868	1510	
30	0.00	0.00	0.00	0.00	0.00	0.00	8.70	20.3	32.4	44.9	58.7	74.3	92.9	117	153	216	330	578	916	
35	0.00	0.00	0.00	0.00	0.00	0.00	5.22	16.0	26.9	37.9	49.7	62.8	78.0	96.7	124	168	244	399	605	
40	0.00	0.00	0.00	0.00	0.00	0.00	1.74	11.6	21.4	30.9	40.6	51.2	63.1	76.7	94.9	121	159	221	294	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.87	6.15	15.0	23.6	32.1	40.7	50.1	60.2	72.7	89.6	113	149	190	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.66	8.56	16.3	23.5	30.2	37.0	43.7	50.6	58.5	67.7	77.7	86.6	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	4.28	8.57	14.8	20.8	26.6	32.2	37.6	43.2	49.4	55.7	60.8	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.85	6.22	11.5	16.3	20.8	24.6	27.9	31.2	33.7	35.0	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.43	3.11	5.73	8.15	10.4	13.0	15.9	18.6	20.8	22.1	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.41	3.81	6.04	7.94	9.23	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.71	1.90	3.02	3.97	4.61	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.3V I:0.1384A P:17.99W PF:0.5876 Lamp Flux:1027.5x1 lm		
NAME: 8.01.017.0101 15x40° LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2		UNIT: cd																	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	9.35	8.84	8.21	7.46	6.46	5.24	3.87	2.35	0.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	18.7	17.7	16.4	14.9	12.9	10.5	7.75	4.70	1.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	32.2	30.8	28.7	26.2	23.5	20.4	17.0	13.3	9.20	5.86	2.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	45.8	43.9	41.0	37.5	34.0	30.4	26.3	21.9	17.1	11.7	5.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	86.9	77.1	66.2	56.7	49.1	42.6	36.5	30.5	24.5	18.2	11.5	4.58	0.54	0.00	0.00	0.00	0.00	0.00	
-40	128	110	91.4	76.0	64.1	54.9	46.8	39.1	31.9	24.7	17.1	9.15	1.07	0.00	0.00	0.00	0.00	0.00	
-35	283	211	149	110	86.3	70.9	59.3	49.2	40.0	31.2	22.5	13.5	4.56	0.00	0.00	0.00	0.00	0.00	
-30	439	311	206	144	108	86.8	71.8	59.4	48.2	37.7	27.9	17.8	8.05	0.00	0.00	0.00	0.00	0.00	
-25	852	531	305	193	137	106	85.3	69.4	55.7	43.6	32.4	21.3	10.6	1.05	0.00	0.00	0.00	0.00	
-20	1265	751	404	242	166	124	98.8	79.3	63.3	49.5	36.9	24.7	13.2	2.09	0.00	0.00	0.00	0.00	
-15	1905	1044	522	303	201	145	112	88.7	69.8	54.3	40.6	27.6	15.3	3.66	0.00	0.00	0.00	0.00	
-10	2546	1338	641	365	236	167	126	98.1	76.3	59.0	44.2	30.4	17.3	5.22	0.00	0.00	0.00	0.00	
-5	2766	1435	707	409	264	183	135	104	79.9	61.4	45.8	31.6	18.1	5.76	0.00	0.00	0.00	0.00	
0	2987	1531	774	454	291	199	144	109	83.5	63.8	47.4	32.7	19.0	6.30	0.00	0.00	0.00	0.00	
5	3037	1571	773	450	287	197	143	109	83.4	63.7	47.4	32.7	18.9	6.27	0.00	0.00	0.00	0.00	
10	3087	1611	773	446	284	194	142	108	83.4	63.6	47.4	32.7	18.9	6.24	0.00	0.00	0.00	0.00	
15	2605	1381	673	390	252	176	132	102	78.8	60.5	45.0	30.8	17.5	5.19	0.00	0.00	0.00	0.00	
20	2124	1151	573	334	221	157	121	95.0	74.2	57.3	42.6	28.9	16.2	4.15	0.00	0.00	0.00	0.00	
25	1531	873	457	275	187	138	108	85.9	67.8	52.5	38.9	26.1	14.1	2.63	0.00	0.00	0.00	0.00	
30	937	596	342	216	154	118	95.1	76.8	61.4	47.7	35.3	23.3	12.0	1.12	0.00	0.00	0.00	0.00	
35	615	409	252	170	126	99.1	80.9	65.9	52.9	41.1	30.1	19.3	8.87	0.56	0.00	0.00	0.00	0.00	
40	294	222	162	123	97.5	80.0	66.7	55.0	44.5	34.6	25.0	15.3	5.70	0.00	0.00	0.00	0.00	0.00	
45	191	151	116	92.7	76.1	64.1	54.2	45.1	36.5	28.1	19.6	10.8	2.85	0.00	0.00	0.00	0.00	0.00	
50	87.2	79.7	70.7	62.2	54.8	48.3	41.7	35.1	28.5	21.6	14.1	6.20	0.00	0.00	0.00	0.00	0.00	0.00	
55	61.3	57.2	51.7	46.3	41.3	36.5	31.3	25.9	20.3	14.2	7.75	3.10	0.00	0.00	0.00	0.00	0.00	0.00	
60	35.4	34.7	32.8	30.4	27.9	24.7	21.0	16.8	12.1	6.84	1.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	22.5	21.9	20.5	18.7	16.6	14.1	11.0	8.41	6.04	3.42	0.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	9.55	9.08	8.14	6.96	5.40	3.41	1.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	4.77	4.54	4.07	3.48	2.70	1.71	0.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: