

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		6418.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	38.8V x 38.1H
	At 50% of Imax	17.8V x 17.7H
	At 90% of Imax	5.7V x 6.5H
Beam Flux	Total	998.2 lumens per klm.
	To 10% of Imax	718.2 lumens per klm.
	To 50% of Imax	296.0 lumens per klm.
	To 90% of Imax	28.6 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.8V I:0.1365A P:17.81W PF:1.000 Freq:50.00Hz Lamp Flux:1120.17x1 lm		
NAME: 8.01.017.0115 20° LWZ-W55-L3-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

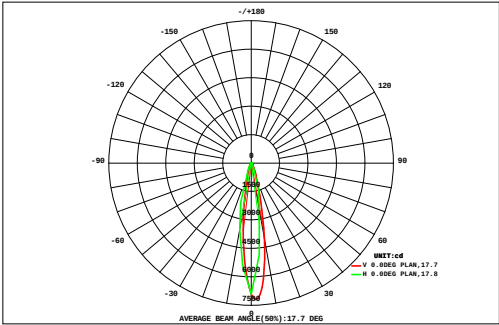

DATA OF LAMP		Eff:62.90lm/W	
MODEL LWZ-W55-L3-RDM	Imax(cd)	7190	
NOMINAL POWER(W)	17	AVAILABILITY(%)	73.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	820.3
NOMINAL FLUX(lm)	1120.17	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1120
TEST VOLTAGE(V)	220	θ @50%(H,V)	18,18DEG


		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	27	0.27	0.35	0.44	0.54	0.64	0.74	0.83	0.89	0.91	0.90	0.85	0.77	0.68	0.58	0.48	0.39	0.32	0.26	10.9	0.00
	24	0.34	0.45	0.60	0.77	0.96	1.15	1.33	1.47	1.54	1.54	1.48	1.35	1.19	1.01	0.83	0.66	0.51	0.40	17.6	0.00
	21	0.47	0.64	0.84	1.07	1.31	1.55	1.76	1.90	1.93	1.88	1.76	1.58	1.35	1.12	0.89	0.70	0.54	0.40	21.7	2.04
	18	0.62	0.85	1.11	1.39	1.69	1.96	2.21	2.33	2.33	2.22	2.04	1.78	1.49	1.21	0.95	0.73	0.55	0.40	25.8	11.8
	15	0.58	0.81	1.13	1.54	2.17	3.19	4.57	6.03	6.99	7.01	6.10	4.69	3.32	2.32	1.69	1.25	0.92	0.67	55.0	46.2
	12	0.71	1.01	1.42	1.98	2.94	4.47	6.44	8.37	9.43	9.11	7.61	5.63	3.85	2.65	1.91	1.39	1.01	0.72	70.7	62.7
	9	1.05	1.47	2.04	2.90	4.47	6.82	9.49	11.6	12.0	10.6	8.02	5.42	3.51	2.42	1.73	1.23	0.88	0.61	86.2	79.3
		0.90	1.27	1.79	2.59	4.08	6.56	9.80	13.0	14.9	14.3	11.8	8.50	5.54	3.45	2.24	1.56	1.10	0.77	104	97.7
		0.70	1.01	1.46	2.17	3.52	6.07	9.87	14.2	17.8	18.4	15.9	11.9	7.80	4.58	2.80	1.93	1.34	0.96	122	116
		1.13	1.63	2.42	4.01	7.03	11.4	16.3	20.4	21.2	18.3	13.6	8.96	5.18	2.91	1.96	1.35	0.95	0.66	139	133
		1.08	1.55	2.30	3.78	6.58	10.6	15.2	19.1	20.0	17.4	13.0	8.63	5.06	2.89	1.95	1.34	0.94	0.66	132	126
	-9	0.59	0.81	1.10	1.40	1.84	2.88	4.78	7.18	9.73	10.8	9.86	7.69	5.41	3.51	2.25	1.59	1.13	0.80	73.4	64.8
-12	0.68	0.93	1.25	1.59	2.01	2.77	3.92	5.13	6.14	6.31	5.50	4.24	3.16	2.31	1.62	1.18	0.85	0.61	50.2	41.0	
-15	0.82	1.10	1.48	1.92	2.42	3.01	3.45	3.39	2.61	1.58	0.91	0.58	0.65	0.95	0.91	0.71	0.52	0.39	27.4	17.0	
-18	0.39	0.54	0.72	0.94	1.20	1.55	2.06	2.69	3.23	3.45	3.21	2.62	1.98	1.51	1.17	0.89	0.67	0.50	29.3	17.7	
-21	0.29	0.38	0.49	0.61	0.70	0.76	0.91	1.20	1.59	1.94	2.03	1.81	1.45	1.13	0.91	0.71	0.55	0.41	17.9	5.46	
-24	0.35	0.44	0.54	0.63	0.70	0.67	0.52	0.34	0.23	0.19	0.22	0.29	0.37	0.38	0.33	0.29	0.24	0.20	6.91	0.00	
-27	0.25	0.31	0.37	0.44	0.49	0.49	0.45	0.49	0.52	0.53	0.51	0.47	0.43	0.38	0.34	0.29	0.25	0.20	7.22	0.00	
		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27
Φ t		11.2	15.6	21.5	30.3	44.7	66.7	93.9	120	133	126	104	76.9	52.4	35.3	25.0	18.2	13.3	9.63	998	---
Φ a		0.00	1.09	6.88	18.2	35.8	58.5	87.4	114	127	121	97.9	70.0	43.6	25.9	11.9	1.59	0.00	0.00	---	820

one-half-peak spread: U:7.7,D:10.3 , L:8.8,R:9.0 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-12-20
 V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.8V I:0.1365A P:17.81W PF:1.000 Freq:50.00Hz Lamp Flux:1120.17x1 lm		
NAME: 8.01.017.0115 20° LWW-WZB-W55-L3-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

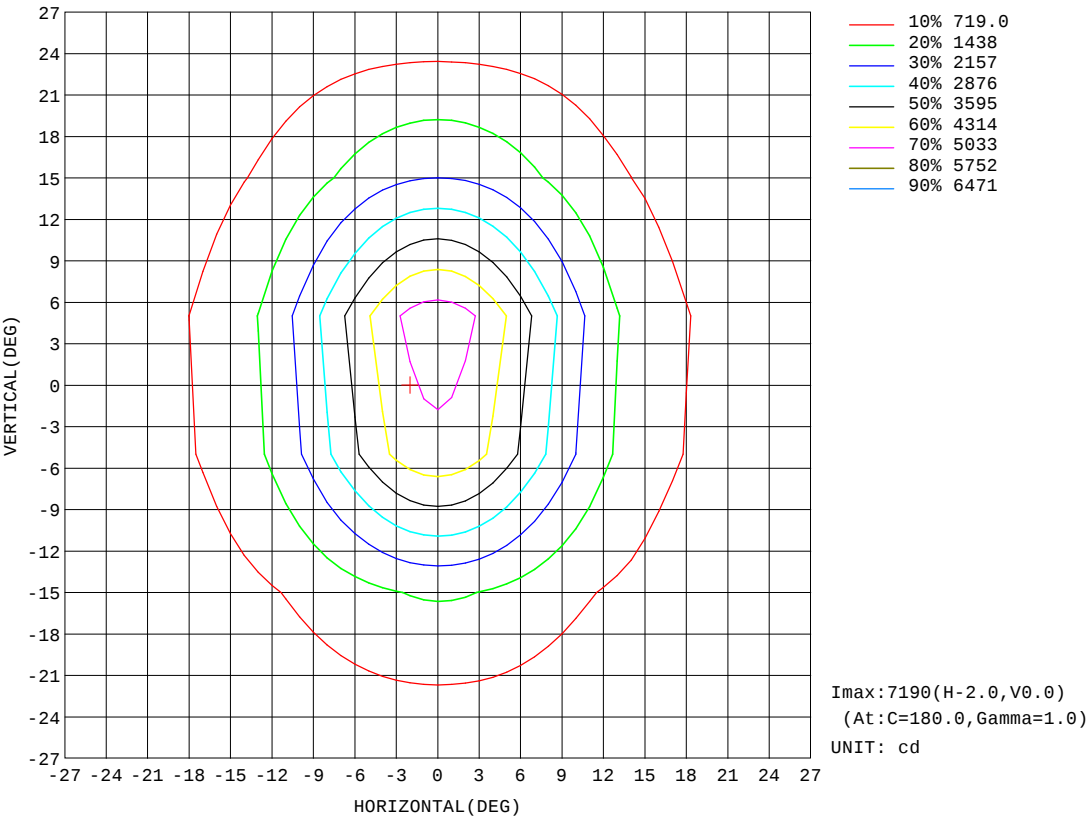


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.8V I:0.1365A P:17.81W PF:1.000 Freq:50.00Hz Lamp Flux:1120.17x1 lm		
NAME: 8.01.017.0115 20° LWW-WZB-W55-L3-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

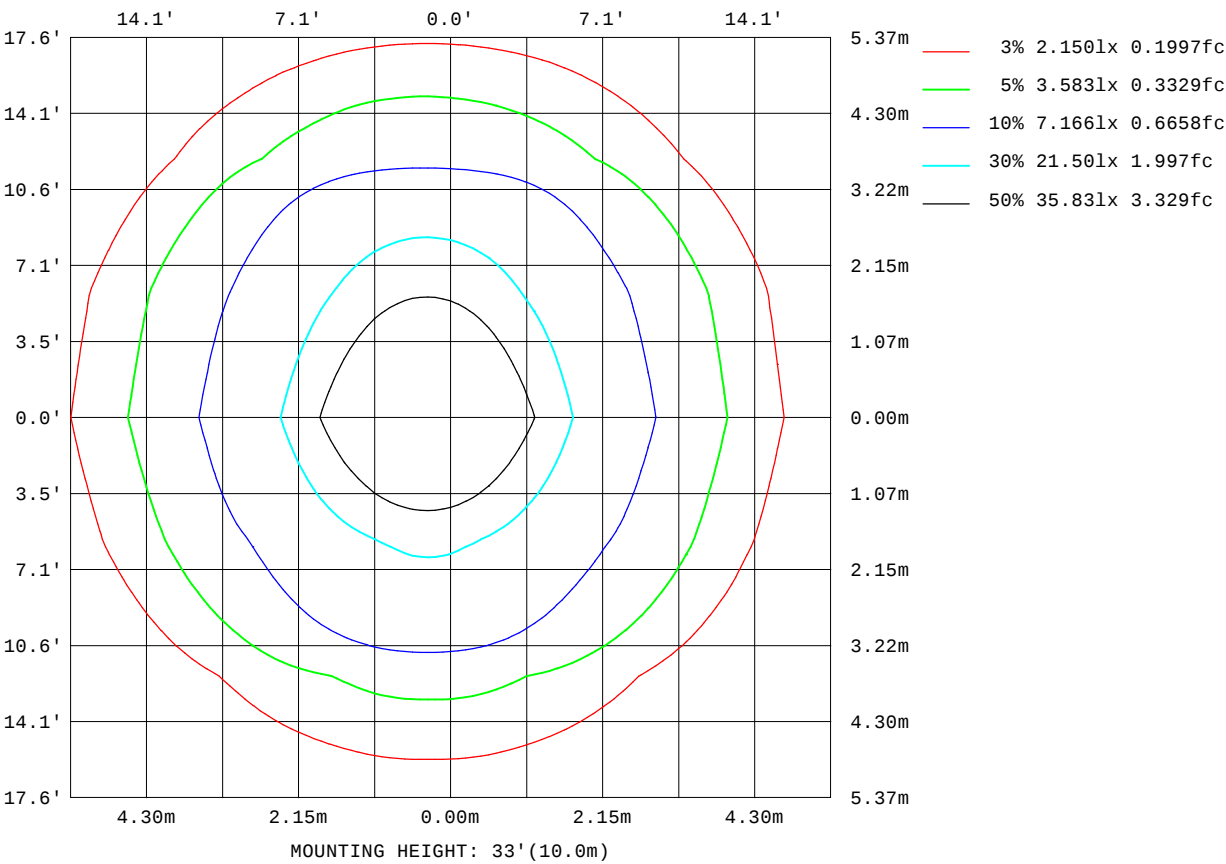

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

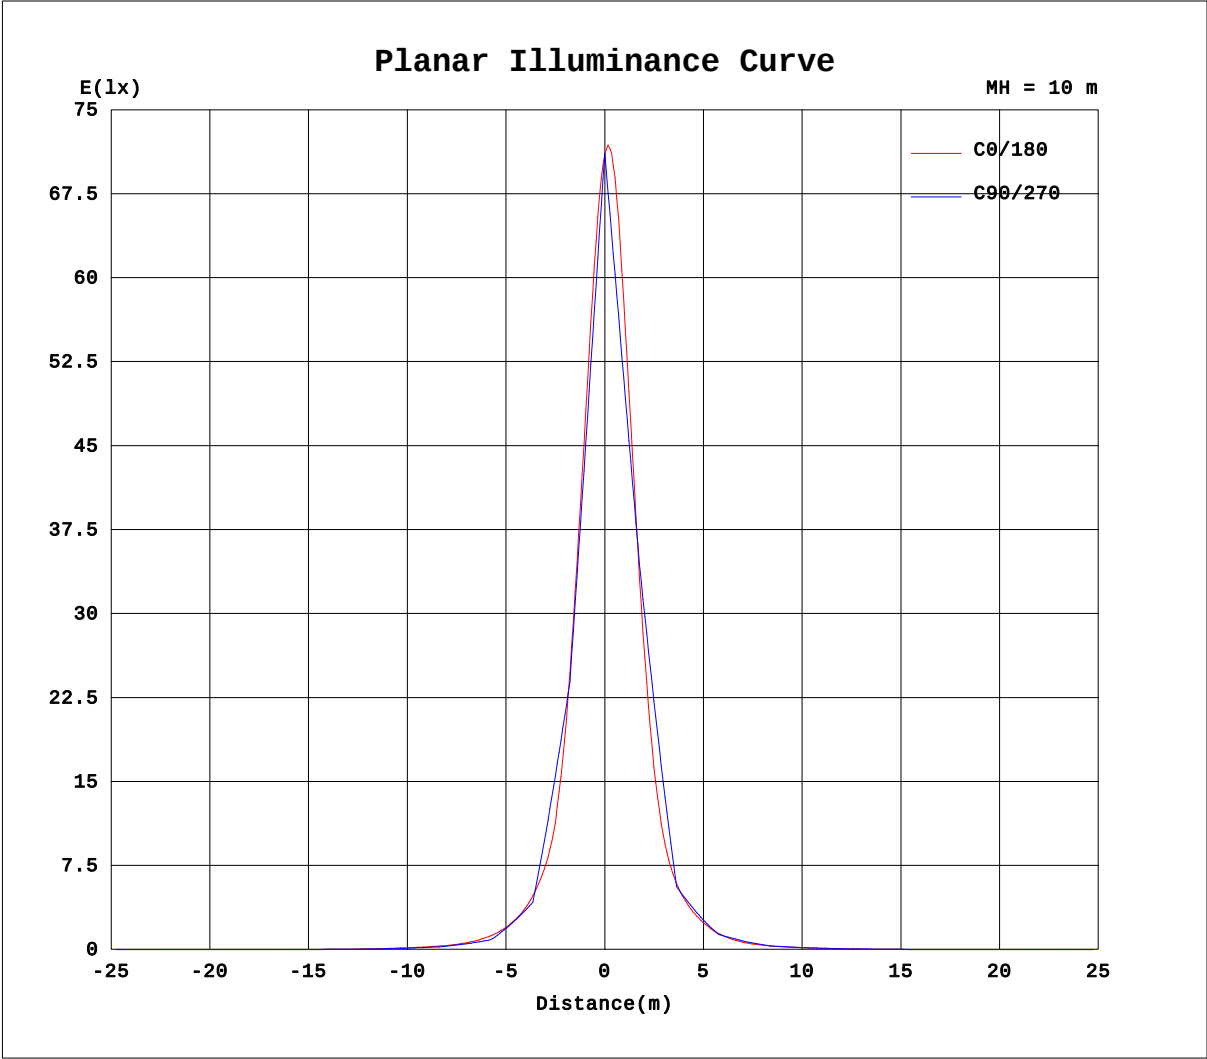


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.8V I:0.1365A P:17.81W PF:1.000 Freq:50.00Hz Lamp Flux:1120.17x1 lm		
NAME: 8.01.017.0115 20° LWW-WZB-W55-L3-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

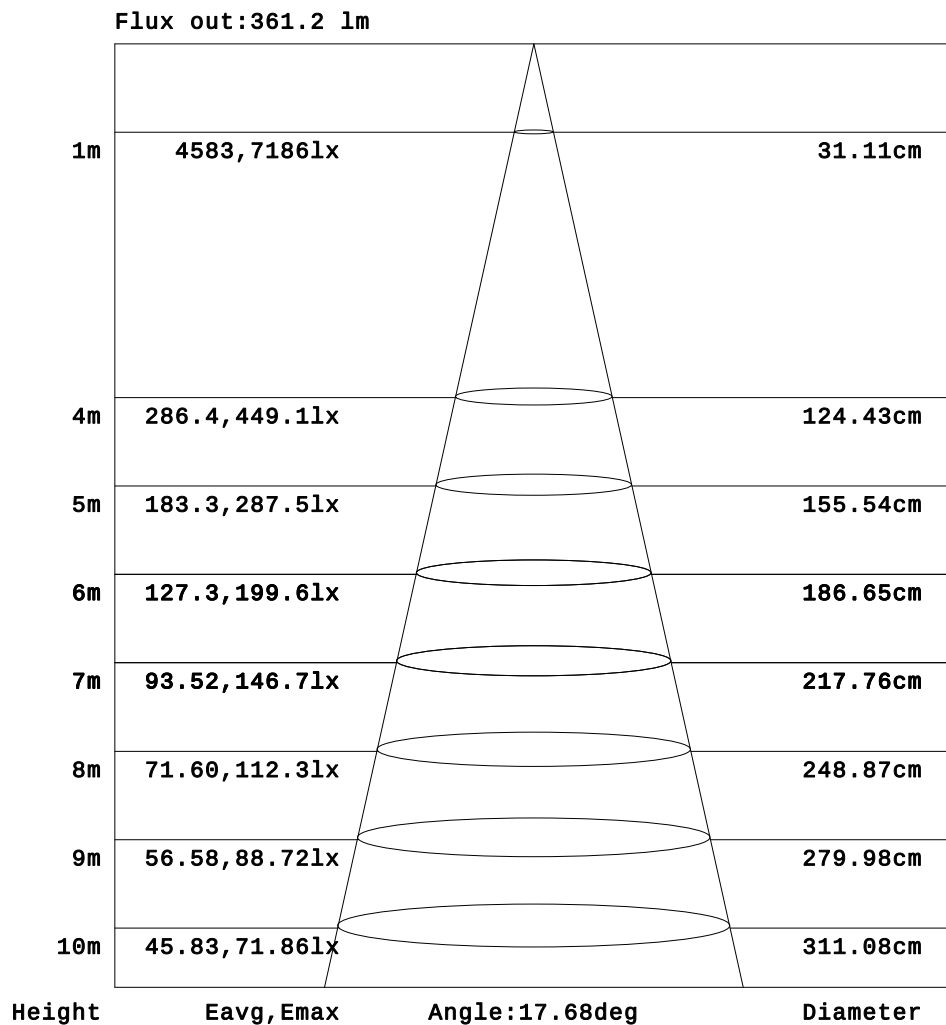

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.8V I:0.1365A P:17.81W PF:1.000 Freq:50.00Hz Lamp Flux:1120.17x1 lm		
NAME: 8.01.017.0115 20° LWW-WZB-W55-L3-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.99	1.90	2.16	2.35	2.64
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.76	2.89	4.13	4.40	4.98	5.30
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.94	2.30	3.85	5.58	7.17	9.53	11.7	13.1	14.0	14.5
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.17	5.68	9.11	12.4	15.4	18.1	20.5	22.5	23.6	23.7
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.48	6.17	10.3	14.9	19.8	24.8	29.7	33.7	37.0	39.4	40.1
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.91	7.24	12.6	18.3	24.5	31.2	38.1	44.7	49.5	53.8	56.2	56.4
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.01	3.12	8.74	15.5	23.0	31.8	41.3	50.6	61.9	73.9	85.5	93.8	96.8
-30	0.00	0.00	0.00	0.00	0.00	0.00	2.47	8.62	15.5	24.0	34.4	46.4	58.9	71.3	88.9	108	125	136	137
-25	0.00	0.00	0.00	0.00	0.00	0.00	1.56	8.61	16.3	26.3	38.8	53.2	72.7	103	146	200	259	306	325
-20	0.00	0.00	0.00	0.00	0.00	0.00	6.09	14.4	24.5	38.2	54.3	73.5	108	166	245	339	434	504	510
-15	0.00	0.00	0.00	0.00	0.00	0.00	4.47	12.7	22.9	37.1	54.6	77.9	124	205	330	514	818	1261	1516
-10	0.00	0.00	0.00	0.00	0.00	1.21	9.07	18.5	31.5	49.4	70.9	111	195	334	545	890	1546	2323	2449
-5	0.00	0.00	0.00	0.00	0.00	0.00	6.78	15.5	27.5	44.3	65.2	99.9	177	316	541	997	2115	3833	4854
0	0.00	0.00	0.00	0.00	0.00	3.02	11.0	21.1	35.6	54.7	80.7	137	252	449	806	1787	4020	6581	6896
5	0.00	0.00	0.00	0.00	0.00	0.00	7.00	15.8	27.9	45.0	66.5	103	184	332	575	1066	2334	4277	5410
10	0.00	0.00	0.00	0.00	0.00	1.58	9.54	19.3	32.6	51.2	74.1	119	216	377	635	1113	2160	3351	3513
15	0.00	0.00	0.00	0.00	0.00	0.00	5.20	13.5	24.0	38.8	57.5	83.8	138	237	394	633	1104	1789	2158
20	0.00	0.00	0.00	0.00	0.00	0.00	7.13	15.5	26.1	40.8	58.5	81.8	127	207	318	451	581	673	674
25	0.00	0.00	0.00	0.00	0.00	0.00	2.61	9.82	17.5	28.0	41.6	58.3	82.2	124	187	269	353	423	447
30	0.00	0.00	0.00	0.00	0.00	0.00	4.20	9.90	16.7	25.7	37.3	50.8	66.3	85.8	117	152	185	205	209
35	0.00	0.00	0.00	0.00	0.00	0.00	0.54	4.43	9.86	16.6	24.7	34.6	46.0	58.7	77.0	98.8	120	136	143
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.02	8.16	13.5	19.7	27.1	35.5	44.5	54.4	62.8	70.4	75.1	75.8
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.61	2.98	7.05	11.4	16.7	22.7	29.0	36.1	42.7	48.5	53.0	54.4
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	4.05	7.09	10.9	14.8	19.0	23.3	27.2	30.7	32.7	33.0
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.38	2.89	4.68	7.69	10.3	13.6	16.7	19.1	20.9	21.8
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.72	2.62	4.13	6.65	8.15	9.01	10.2	10.5
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.04	1.68	2.82	3.84	4.34	4.84	5.24
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.8V I:0.1365A P:17.81W PF:1.000 Freq:50.00Hz Lamp Flux:1120.17x1 lm		
NAME: 8.01.017.0115 20° LWW-WZB-W55-L3-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	2.40	1.87	1.60	0.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	4.35	3.47	2.82	0.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	14.0	12.7	11.2	8.94	6.35	4.84	3.24	1.43	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	22.6	20.8	18.0	14.7	11.4	8.48	4.99	1.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	39.5	37.2	33.4	28.6	23.2	17.9	12.9	8.37	4.61	2.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	54.9	50.9	45.2	38.4	30.5	23.4	17.1	11.9	7.39	2.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	94.5	86.7	75.4	62.9	51.0	40.3	30.4	21.7	14.6	8.52	3.54	0.93	0.00	0.00	0.00	0.00	0.00	0.00
-30	129	114	95.5	77.8	62.7	49.1	36.4	25.3	16.8	10.2	5.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	309	262	205	151	108	77.1	55.8	39.7	26.5	16.8	9.75	3.50	0.00	0.00	0.00	0.00	0.00	0.00
-20	455	365	268	187	126	86.1	61.5	42.8	27.7	17.2	9.57	2.12	0.00	0.00	0.00	0.00	0.00	0.00
-15	1281	825	534	343	215	136	88.1	59.9	39.7	24.7	14.6	6.44	0.02	0.00	0.00	0.00	0.00	0.00
-10	1734	1007	631	385	232	142	88.7	59.8	38.3	23.2	12.9	4.54	0.00	0.00	0.00	0.00	0.00	0.00
-5	3862	2155	1006	561	327	193	116	74.4	49.0	30.1	17.7	8.66	0.87	0.00	0.00	0.00	0.00	0.00
0	4591	2169	935	517	298	173	103	66.8	43.0	25.9	14.7	6.47	0.00	0.00	0.00	0.00	0.00	0.00
5	4301	2381	1079	595	347	202	120	76.8	50.5	31.2	18.3	9.20	1.36	0.00	0.00	0.00	0.00	0.00
10	2448	1303	733	437	259	154	95.2	63.9	40.9	24.8	14.0	5.69	0.00	0.00	0.00	0.00	0.00	0.00
15	1797	1118	656	410	255	154	98.1	66.2	44.0	27.3	16.0	7.32	0.52	0.00	0.00	0.00	0.00	0.00
20	604	482	352	240	157	102	71.4	49.4	32.0	19.7	10.7	2.79	0.00	0.00	0.00	0.00	0.00	0.00
25	421	357	275	198	138	94.4	67.2	47.6	32.0	20.4	12.0	4.36	0.00	0.00	0.00	0.00	0.00	0.00
30	194	166	134	103	80.3	62.2	46.3	32.3	21.6	13.7	7.24	0.03	0.00	0.00	0.00	0.00	0.00	0.00
35	138	124	105	85.3	67.4	53.1	40.3	29.1	20.0	12.6	6.50	1.45	0.00	0.00	0.00	0.00	0.00	0.00
40	73.4	67.6	60.5	51.8	42.6	33.3	25.0	18.2	12.1	6.19	1.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	53.7	50.4	45.6	39.7	33.2	26.7	20.3	14.7	10.1	5.02	1.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	32.0	29.6	26.2	22.5	18.6	14.8	10.9	7.50	4.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	21.3	20.1	18.2	15.4	12.4	9.76	6.59	4.36	2.88	0.75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	9.77	9.26	8.20	5.76	4.00	2.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	5.04	4.71	4.41	3.39	2.29	1.59	0.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: