

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2515.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	83.1V x 51.6H
	At 50% of Imax	51.8V x 18.2H
	At 90% of Imax	14.5V x 7.0H
Beam Flux	Total	999.4 lumens per klm.
	To 10% of Imax	785.0 lumens per klm.
	To 50% of Imax	376.4 lumens per klm.
	To 90% of Imax	51.0 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.3V I:0.1460A P:19.08W PF:0.5908 Lamp Flux:842.749x1 lm		
NAME: LWL-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010033
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

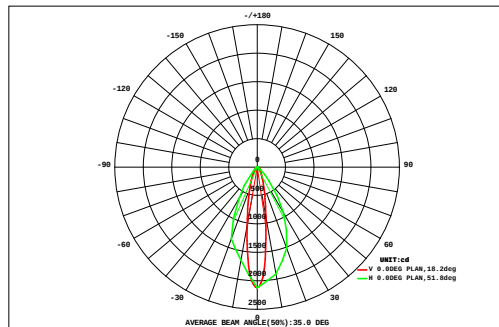

DATA OF LAMP		Eff:44.16lm/W	
MODEL LWL-WZB-W55-L3-RDM	Imax(cd)	2120	
NOMINAL POWER(W)	20	AVAILABILITY(%)	79.1
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	666.7
NOMINAL FLUX(lm)	842.749	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	842.7
TEST VOLTAGE(V)	221.3	θ @50%(H,V)	18,52DEG

		AREA FLUX DIAGRAM																UNIT:lm			Φ t	Φ a
		0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.11	0.15	0.15	0.12	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.72	0.00	
VERTICAL (DEG)	72	0.00	0.00	0.00	0.05	0.18	0.32	0.45	0.54	0.61	0.62	0.56	0.48	0.35	0.16	0.03	0.00	0.00	0.00	4.35	0.00	
	64	0.00	0.00	0.06	0.20	0.36	0.51	0.69	0.88	1.09	1.10	0.92	0.74	0.58	0.39	0.20	0.06	0.00	0.00	7.79	0.00	
	56	0.00	0.02	0.15	0.36	0.56	0.83	1.21	1.92	3.28	3.40	2.06	1.30	0.91	0.63	0.37	0.15	0.02	0.00	17.2	3.75	
	48	0.00	0.07	0.27	0.49	0.82	1.35	2.16	4.14	8.57	8.64	4.20	2.18	1.38	0.88	0.51	0.23	0.06	0.00	35.9	21.9	
	40	0.01	0.13	0.34	0.65	1.14	1.93	3.28	7.32	17.4	17.0	7.02	3.19	1.91	1.17	0.68	0.32	0.10	0.00	63.7	50.0	
	32	0.02	0.16	0.41	0.79	1.41	2.47	4.50	10.3	24.8	24.5	10.1	4.37	2.42	1.43	0.84	0.40	0.13	0.01	89.0	76.3	
	24	0.02	0.18	0.45	0.89	1.58	2.90	5.87	13.2	29.8	30.9	13.7	5.83	2.87	1.63	0.95	0.46	0.15	0.01	111	99.7	
	-24	0.03	0.20	0.49	0.95	1.70	3.17	6.79	15.2	33.4	34.6	15.3	6.58	3.10	1.71	0.99	0.47	0.15	0.01	125	114	
		0.04	0.21	0.51	0.99	1.74	3.26	6.93	15.4	33.9	32.7	13.5	5.96	2.91	1.63	0.94	0.43	0.13	0.01	121	110	
		0.03	0.19	0.47	0.91	1.58	2.77	5.09	11.1	25.8	25.5	10.7	4.80	2.58	1.52	0.88	0.40	0.12	0.01	94.4	82.0	
		0.02	0.16	0.40	0.77	1.32	2.17	3.63	8.24	21.3	21.9	8.63	3.76	2.15	1.31	0.76	0.35	0.10	0.00	76.9	63.1	
		-32	0.00	0.12	0.32	0.61	1.03	1.64	2.58	5.22	12.6	13.5	5.89	2.71	1.66	1.06	0.61	0.28	0.08	0.00	49.9	35.5
		-40	0.00	0.07	0.24	0.46	0.76	1.15	1.71	2.97	5.55	5.58	3.03	1.72	1.16	0.77	0.44	0.20	0.05	0.00	25.8	11.2
		-48	0.00	0.03	0.16	0.33	0.52	0.74	1.01	1.32	1.47	1.32	1.15	0.96	0.72	0.50	0.27	0.11	0.01	0.00	10.6	0.00
		-56	0.00	0.00	0.04	0.19	0.34	0.47	0.55	0.58	0.54	0.58	0.61	0.57	0.48	0.32	0.14	0.03	0.00	0.00	5.46	0.00
	-64	0.00	0.00	0.00	0.02	0.08	0.20	0.31	0.40	0.45	0.46	0.41	0.32	0.21	0.08	0.02	0.01	0.00	0.00	2.96	0.00	
-72	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.09	0.10	0.11	0.09	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.63	0.00		
		-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)				16	24	32	40	48	56	64	72	
Φ t	0.16	1.55	4.33	8.66	15.1	25.9	46.9	98.9	221	222	98.0	45.6	25.5	15.2	8.64	3.89	1.11	0.06	843	---		
Φ a	0.00	0.00	0.00	0.00	0.00	2.61	30.0	87.8	214	216	87.0	27.7	1.49	0.00	0.00	0.00	0.00	0.00	---	667		


one-half-peak spread: U:24.2,D:27.9 , L:9.9,R:9.9 Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.3V I:0.1460A P:19.08W PF:0.5908 Lamp Flux:842.749x1 lm		
NAME: LWL-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010033
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

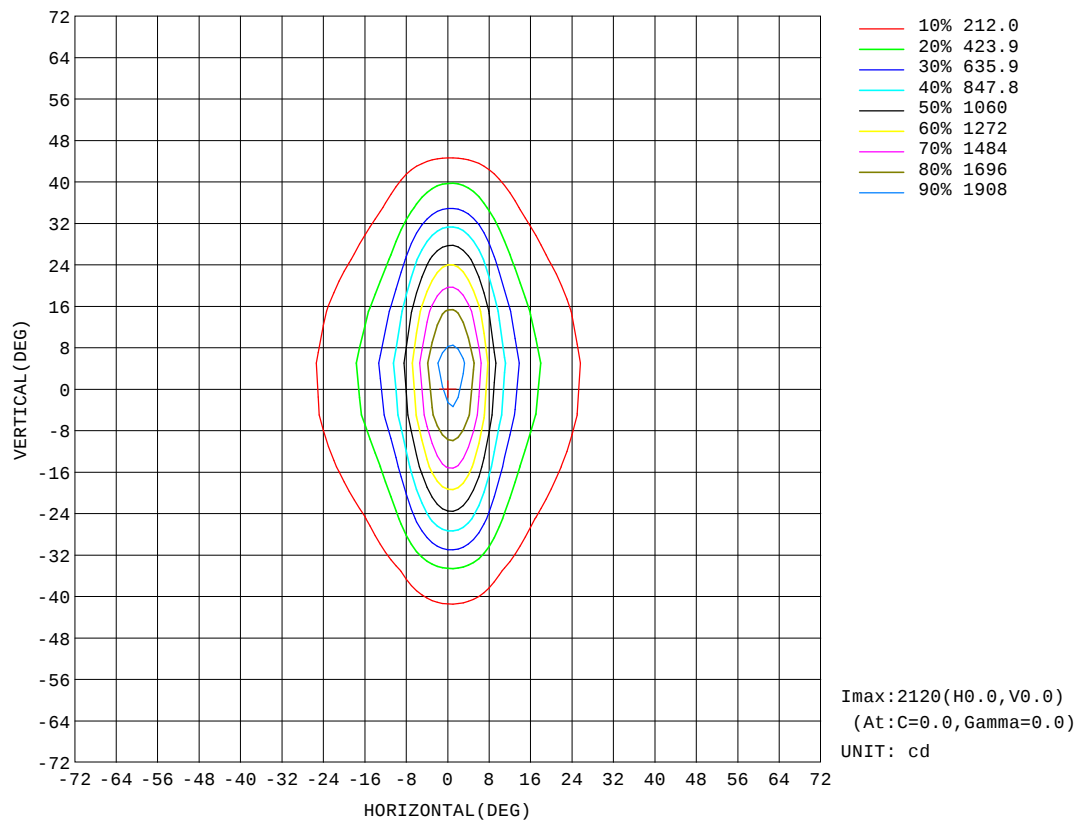


H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2024-01-04

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.3V I:0.1460A P:19.08W PF:0.5908 Lamp Flux:842.749x1 lm		
NAME: LWL-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010033
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

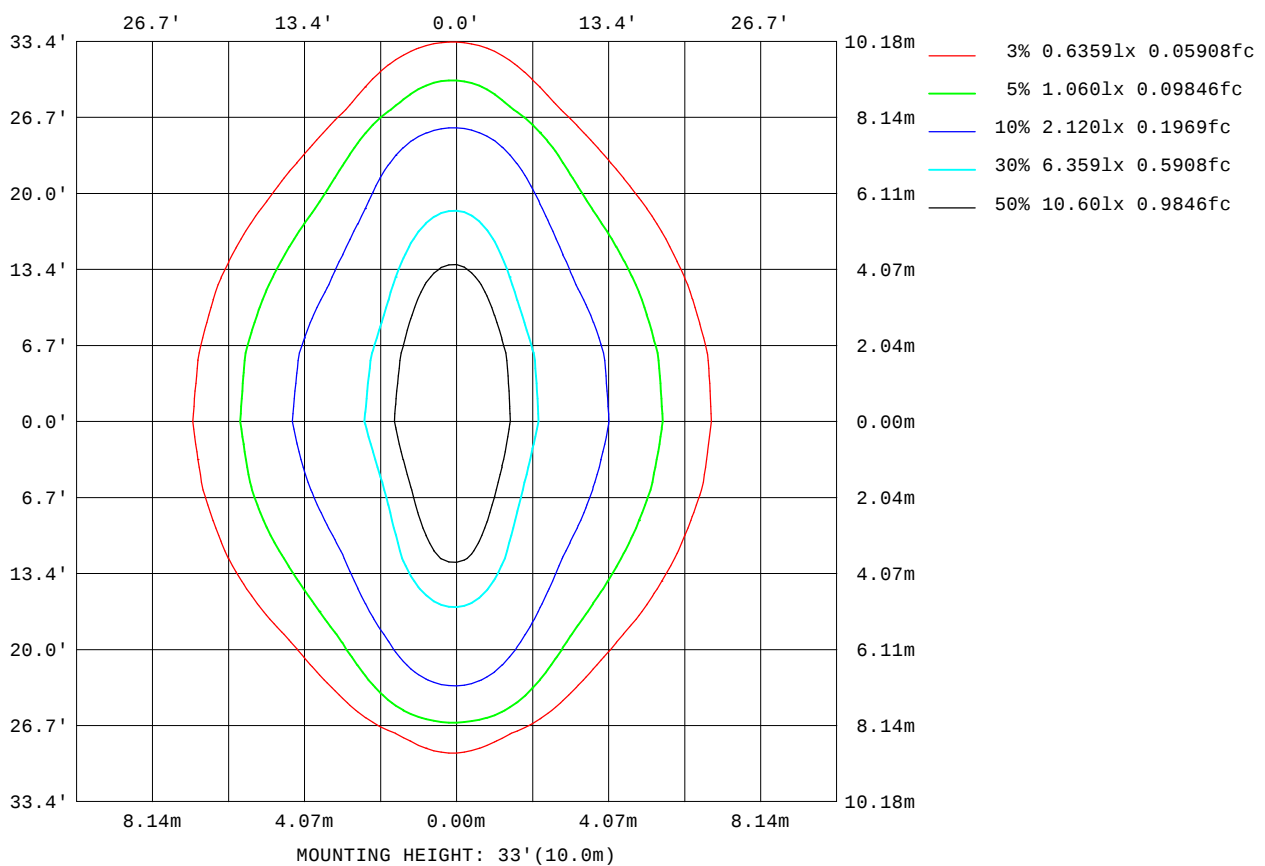


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.3V I:0.1460A P:19.08W PF:0.5908 Lamp Flux:842.749x1 lm		
NAME: LW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010033
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

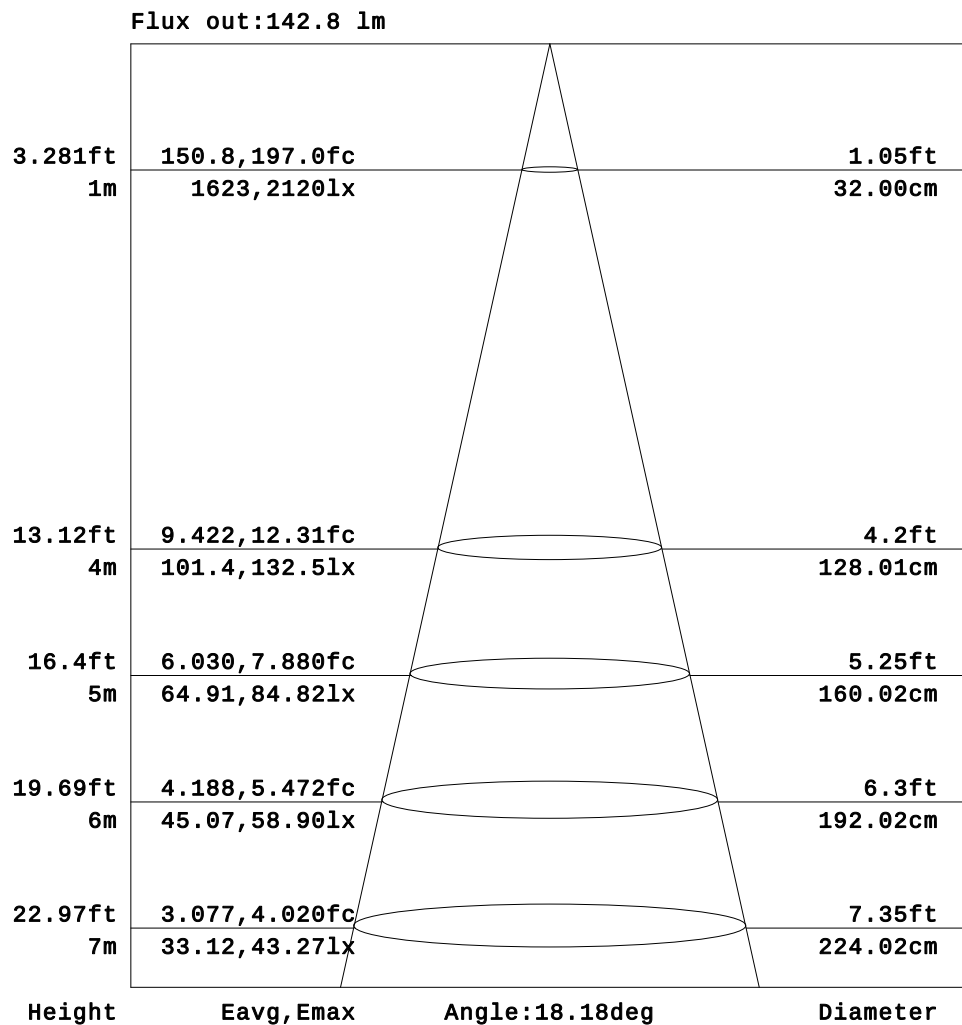


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

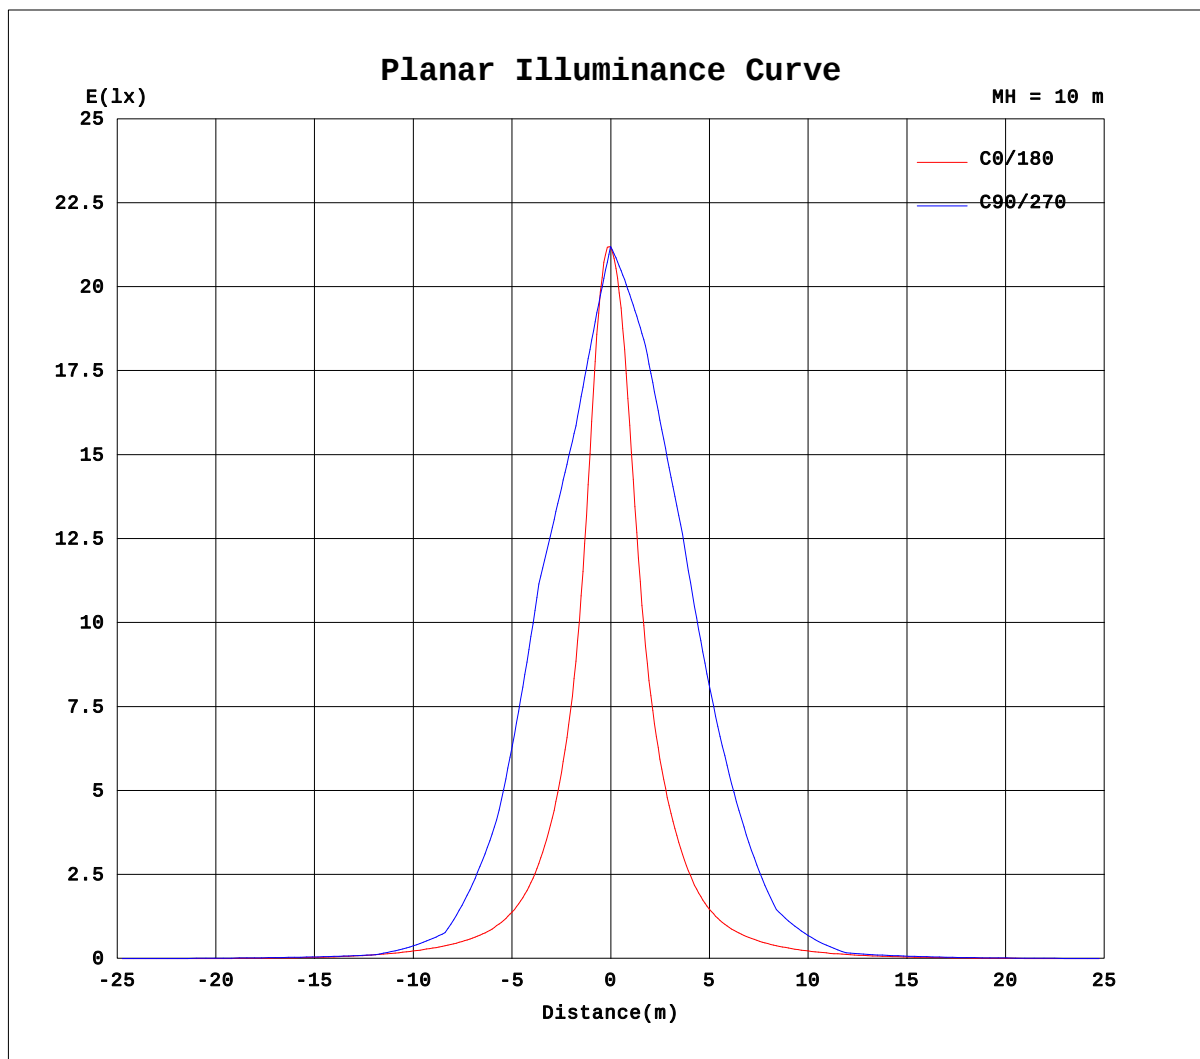

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.3V I:0.1460A P:19.08W PF:0.5908 Lamp Flux:842.749x1 lm																	
NAME: LWL-WZB-W55-L3-RDM									TYPE:LED						WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:2024010033		
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:						PROTECTION ANGLE:		

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.38	2.76	4.75	6.66	8.29	9.69	10.8	11.6	11.9
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.89	6.32	10.3	14.0	17.2	19.9	21.9	23.4	23.9
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.54	7.09	10.6	15.5	19.5	23.2	26.3	29.1	31.5	33.4	34.4
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.61	8.55	15.5	21.5	26.3	30.3	33.6	36.6	39.4	41.9	44.0	44.8
-45	0.00	0.00	0.00	0.00	0.00	0.00	1.16	5.81	13.2	20.1	26.5	32.7	39.0	45.5	52.7	61.8	76.0	95.9	109
-40	0.00	0.00	0.00	0.00	0.00	0.00	4.43	13.3	20.7	27.3	34.0	41.5	50.2	60.1	72.1	88.7	117	155	172
-35	0.00	0.00	0.00	0.00	0.00	0.15	6.20	15.4	23.7	31.9	40.8	51.3	63.5	78.3	97.0	128	194	316	402
-30	0.00	0.00	0.00	0.00	0.00	1.74	12.0	21.0	29.9	39.9	51.6	65.6	82.4	103	131	186	312	527	635
-25	0.00	0.00	0.00	0.00	0.00	2.63	12.7	22.5	32.6	44.1	57.7	74.2	94.9	122	158	226	393	735	984
-20	0.00	0.00	0.00	0.00	0.00	7.11	17.4	27.9	39.6	53.5	69.9	90.2	117	153	205	311	585	1088	1340
-15	0.00	0.00	0.00	0.00	0.00	6.18	16.8	27.8	40.2	54.8	72.3	94.2	124	168	234	348	599	1112	1494
-10	0.00	0.00	0.00	0.00	0.01	9.57	20.6	32.5	46.1	62.6	82.5	108	146	206	298	454	776	1360	1656
-5	0.00	0.00	0.00	0.00	0.00	7.97	19.1	30.9	44.6	61.1	81.1	107	145	209	316	491	807	1424	1877
0	0.00	0.00	0.00	0.00	0.42	10.8	22.2	34.6	49.1	67.0	88.8	118	164	246	392	622	1033	1758	2120
5	0.00	0.00	0.00	0.00	0.00	8.03	19.1	31.0	44.6	61.3	81.9	109	149	218	341	542	889	1542	2002
10	0.00	0.00	0.00	0.00	0.01	9.69	20.7	32.4	46.1	63.3	84.4	112	156	229	357	569	953	1607	1907
15	0.00	0.00	0.00	0.00	0.00	6.38	17.0	27.9	40.2	55.3	74.3	98.7	133	188	278	434	736	1311	1709
20	0.00	0.00	0.00	0.00	0.00	7.31	17.5	28.0	39.7	54.3	72.8	96.5	129	176	248	387	706	1257	1514
25	0.00	0.00	0.00	0.00	0.00	2.98	12.8	22.7	32.9	44.9	60.1	79.6	105	141	193	285	501	930	1221
30	0.00	0.00	0.00	0.00	0.00	2.34	12.1	21.3	30.4	41.0	54.4	71.6	94.1	123	164	241	438	776	928
35	0.00	0.00	0.00	0.00	0.00	0.35	6.59	15.6	24.5	33.0	43.1	55.9	72.5	93.5	122	169	279	489	625
40	0.00	0.00	0.00	0.00	0.00	0.00	4.77	13.5	21.8	28.6	36.4	46.1	58.6	74.0	94.0	126	191	283	325
45	0.00	0.00	0.00	0.00	0.00	0.00	1.49	6.36	14.7	22.0	28.4	35.2	43.1	52.8	64.7	81.8	114	164	195
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.48	10.9	18.0	23.1	27.2	31.2	35.9	41.1	47.2	54.8	62.9	66.1
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.49	4.51	9.04	14.5	19.1	23.4	27.7	32.0	36.4	41.2	46.2	49.0
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.42	7.77	12.8	17.3	21.3	24.7	27.3	29.7	31.3	32.0
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.66	3.37	5.90	8.24	10.3	12.2	14.6	16.5	18.0	18.8
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.80	2.60	4.10	5.18	5.60
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	1.13	1.92	2.50	2.80
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2024-01-04

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.3V I:0.1460A P:19.08W PF:0.5908 Lamp Flux:842.749x1 lm		
NAME: LWV-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010033
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	11.8	11.1	10.1	8.90	7.36	5.33	2.48	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	23.3	21.8	19.8	17.2	14.1	9.67	3.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	34.0	32.3	30.1	27.5	24.4	20.7	15.7	9.64	5.98	2.80	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	44.1	42.0	39.4	36.5	33.5	30.1	25.2	17.8	10.5	4.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	100	80.4	64.8	54.7	47.3	40.6	34.2	26.4	18.2	11.0	4.81	1.02	0.00	0.00	0.00	0.00	0.00	0.00
-40	149	111	85.5	69.7	58.3	48.6	40.5	31.7	22.9	14.9	8.10	0.63	0.00	0.00	0.00	0.00	0.00	0.00
-35	352	224	141	103	81.5	66.0	53.8	42.8	31.3	21.3	12.7	4.95	0.10	0.00	0.00	0.00	0.00	0.00
-30	505	293	175	125	97.8	78.1	62.6	49.3	35.5	24.0	14.2	6.24	0.00	0.00	0.00	0.00	0.00	0.00
-25	826	460	251	168	126	97.2	76.6	60.5	44.8	30.7	18.5	9.41	1.20	0.00	0.00	0.00	0.00	0.00
-20	1000	511	281	190	140	107	83.7	65.7	48.0	32.2	18.7	9.21	0.68	0.00	0.00	0.00	0.00	0.00
-15	1247	687	379	245	172	127	97.2	75.8	57.1	39.0	23.7	12.3	3.32	0.00	0.00	0.00	0.00	0.00
-10	1266	694	407	262	182	132	101	78.6	58.4	39.2	23.4	11.6	2.70	0.00	0.00	0.00	0.00	0.00
-5	1592	886	513	322	212	149	110	85.3	64.8	44.7	27.6	14.4	4.93	0.00	0.00	0.00	0.00	0.00
0	1622	878	523	327	211	146	108	83.5	63.0	42.5	25.8	12.9	3.61	0.00	0.00	0.00	0.00	0.00
5	1711	969	563	349	222	153	113	87.1	66.6	46.7	29.0	15.3	5.55	0.00	0.00	0.00	0.00	0.00
10	1492	846	495	309	200	141	106	81.8	62.4	42.8	26.2	13.2	3.86	0.00	0.00	0.00	0.00	0.00
15	1438	822	463	291	194	139	105	80.7	61.9	43.5	27.4	14.4	5.01	0.00	0.00	0.00	0.00	0.00
20	1138	608	342	225	162	120	92.3	71.5	54.4	37.0	22.9	11.5	2.55	0.00	0.00	0.00	0.00	0.00
25	1019	571	312	204	148	112	86.5	67.2	51.4	35.6	22.5	11.8	3.10	0.00	0.00	0.00	0.00	0.00
30	723	395	223	155	118	92.1	72.1	56.3	41.9	28.6	17.3	8.58	0.51	0.00	0.00	0.00	0.00	0.00
35	537	320	187	130	100	79.4	62.9	49.7	37.2	25.5	15.8	7.59	0.93	0.00	0.00	0.00	0.00	0.00
40	266	175	119	91.6	73.4	59.4	48.0	38.2	27.3	18.2	10.7	3.43	0.00	0.00	0.00	0.00	0.00	0.00
45	174	123	88.2	69.8	57.8	48.3	40.3	31.9	23.0	14.9	7.88	2.48	0.00	0.00	0.00	0.00	0.00	0.00
50	62.0	54.4	47.9	42.7	38.0	33.8	29.5	22.2	15.2	8.59	2.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	47.5	43.2	38.9	35.1	31.3	27.0	21.3	14.8	9.13	4.90	1.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	31.5	30.2	28.3	26.0	23.0	18.3	10.9	5.06	0.73	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	18.5	17.6	16.1	14.3	11.9	9.72	6.07	3.06	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	5.25	4.43	3.28	1.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	2.68	2.31	1.77	1.07	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-04

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: