

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2904.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	80.8V x 46.5H
	At 50% of Imax	50.5V x 18.1H
	At 90% of Imax	13.8V x 6.3H
Beam Flux	Total	998.3 lumens per klm.
	To 10% of Imax	837.7 lumens per klm.
	To 50% of Imax	409.1 lumens per klm.
	To 90% of Imax	47.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.7V I:0.0569A P:6.622W PF:0.5271 Lamp Flux:275.353x1 lm		
NAME: LWV-WZB-W55-L3-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

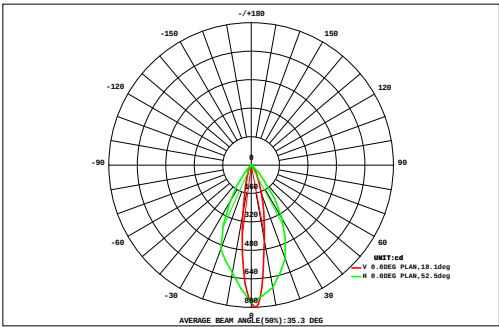

DATA OF LAMP		Eff:41.58lm/W	
MODEL LWV-WZB-W55-L3-RDM	Imax(cd)	799.6	
NOMINAL POWER(W)	7	AVAILABILITY(%)	84.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	232.5
NOMINAL FLUX(lm)	275.353	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	275.4
TEST VOLTAGE(V)	220.7	θ @50%(H,V)	18,51DEG

AREA FLUX DIAGRAM																		UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
48	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.16	0.17	0.11	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.67	0.00
40	0.00	0.00	0.00	0.00	0.02	0.08	0.19	0.48	1.02	1.03	0.53	0.28	0.14	0.05	0.01	0.00	0.00	0.00	3.84	0.79
32	0.00	0.00	0.00	0.01	0.08	0.22	0.47	1.23	3.02	3.06	1.37	0.68	0.38	0.17	0.04	0.00	0.00	0.00	10.7	7.05
24	0.00	0.00	0.00	0.05	0.17	0.35	0.75	2.22	6.31	6.43	2.57	1.17	0.67	0.33	0.12	0.01	0.00	0.00	21.1	17.3
16	0.00	0.00	0.01	0.10	0.24	0.47	1.02	2.99	8.77	9.16	3.84	1.74	0.93	0.46	0.19	0.03	0.00	0.00	29.9	26.3
8	0.00	0.00	0.02	0.13	0.28	0.56	1.23	3.49	10.2	11.8	5.72	2.60	1.18	0.56	0.24	0.05	0.00	0.00	38.1	34.6
0	0.00	0.00	0.03	0.15	0.31	0.62	1.37	3.85	11.2	13.5	6.89	3.14	1.32	0.61	0.26	0.06	0.00	0.00	43.3	39.9
-8	0.00	0.00	0.04	0.15	0.32	0.62	1.38	3.89	11.2	13.3	6.55	3.00	1.28	0.59	0.25	0.05	0.00	0.00	42.6	39.1
-16	0.00	0.00	0.03	0.14	0.29	0.55	1.18	3.25	8.96	9.92	4.50	2.08	1.06	0.52	0.22	0.04	0.00	0.00	32.7	29.1
-24	0.00	0.00	0.01	0.10	0.24	0.45	0.96	2.76	7.91	8.12	3.15	1.39	0.78	0.39	0.15	0.02	0.00	0.00	26.4	22.5
-32	0.00	0.00	0.00	0.05	0.17	0.33	0.67	1.80	4.77	4.89	1.99	0.90	0.52	0.25	0.08	0.00	0.00	0.00	16.4	12.6
-40	0.00	0.00	0.00	0.01	0.08	0.20	0.39	0.88	1.92	2.01	0.99	0.50	0.28	0.12	0.03	0.00	0.00	0.00	7.41	3.49
-48	0.00	0.00	0.00	0.00	0.02	0.07	0.15	0.24	0.34	0.35	0.26	0.17	0.08	0.02	0.00	0.00	0.00	0.00	1.71	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.25	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
VERTICAL (DEG)	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.00	0.00	0.14	0.90	2.23	4.52	9.82	27.2	76.0	83.7	38.5	17.7	8.65	4.07	1.58	0.25	0.00	0.00	275	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	2.12	23.8	74.4	82.2	35.5	13.0	1.65	0.00	0.00	0.00	0.00	0.00	---	233


one-half-peak spread: U:23.7,D:27.2 , L:9.4,R:9.4 Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.7V I:0.0569A P:6.622W PF:0.5271 Lamp Flux:275.353x1 lm		
NAME: LWL-WZB-W55-L3-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

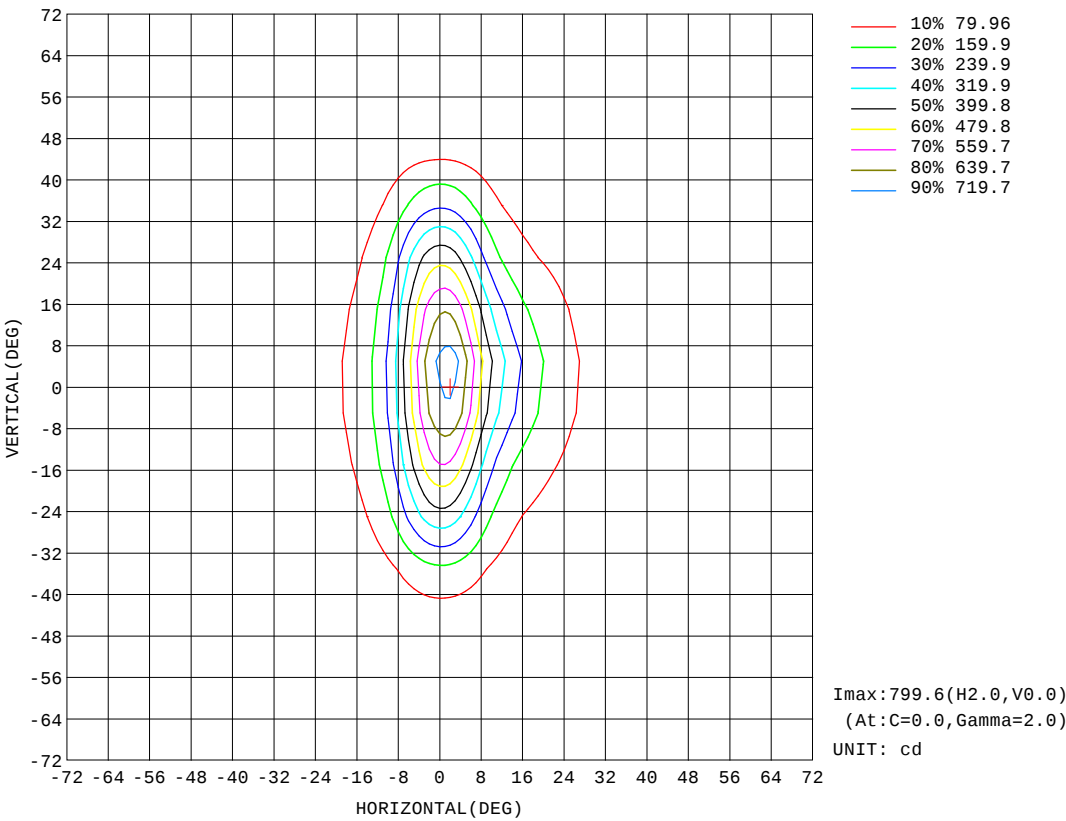


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.7V I:0.0569A P:6.622W PF:0.5271 Lamp Flux:275.353x1 lm		
NAME: LWL-WZB-W55-L3-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

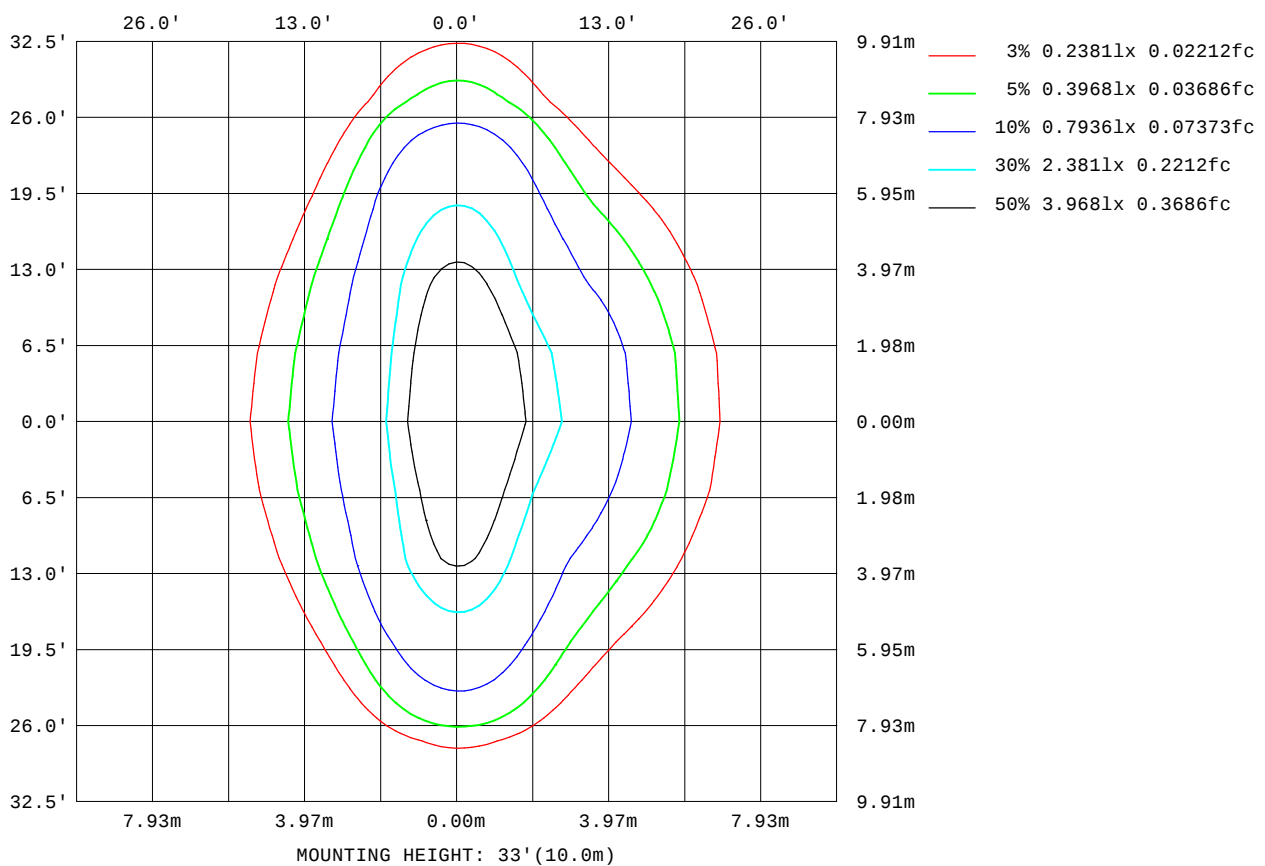


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.7V I:0.0569A P:6.622W PF:0.5271 Lamp Flux:275.353x1 lm		
NAME: LWL-WZB-W55-L3-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

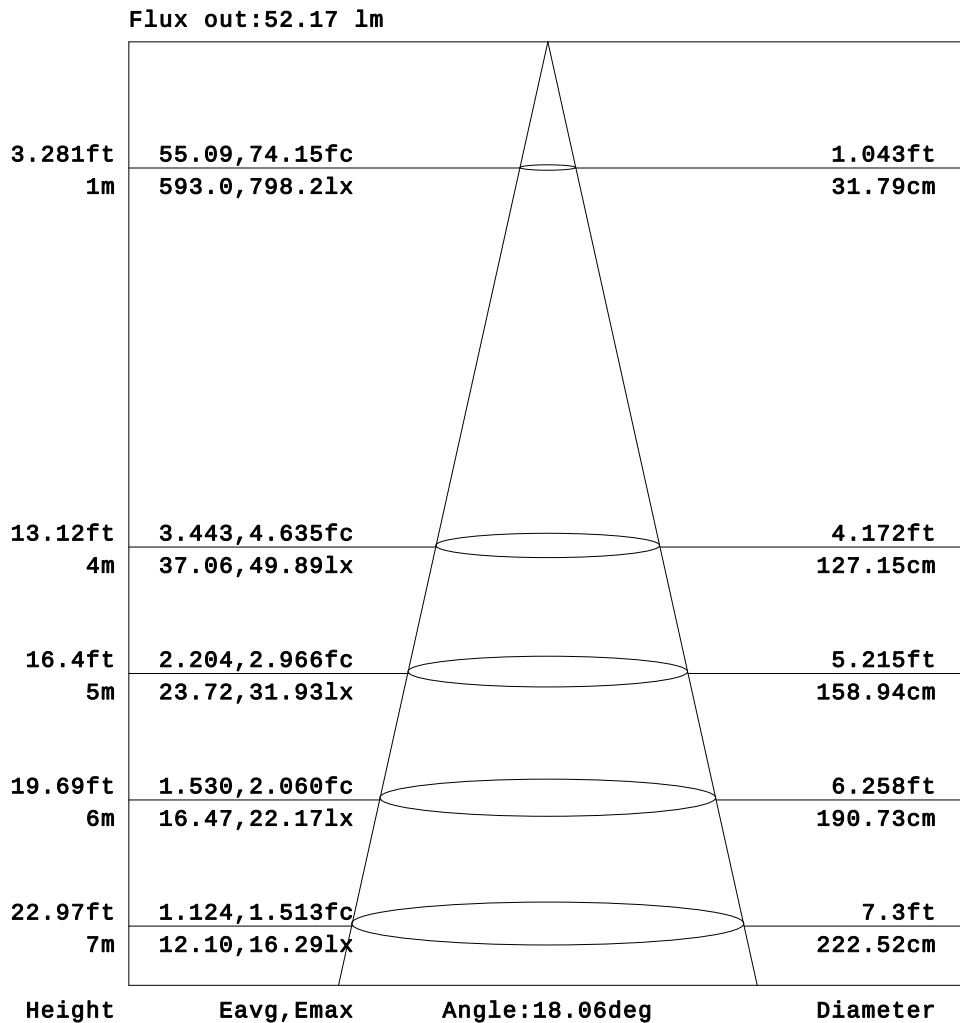


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

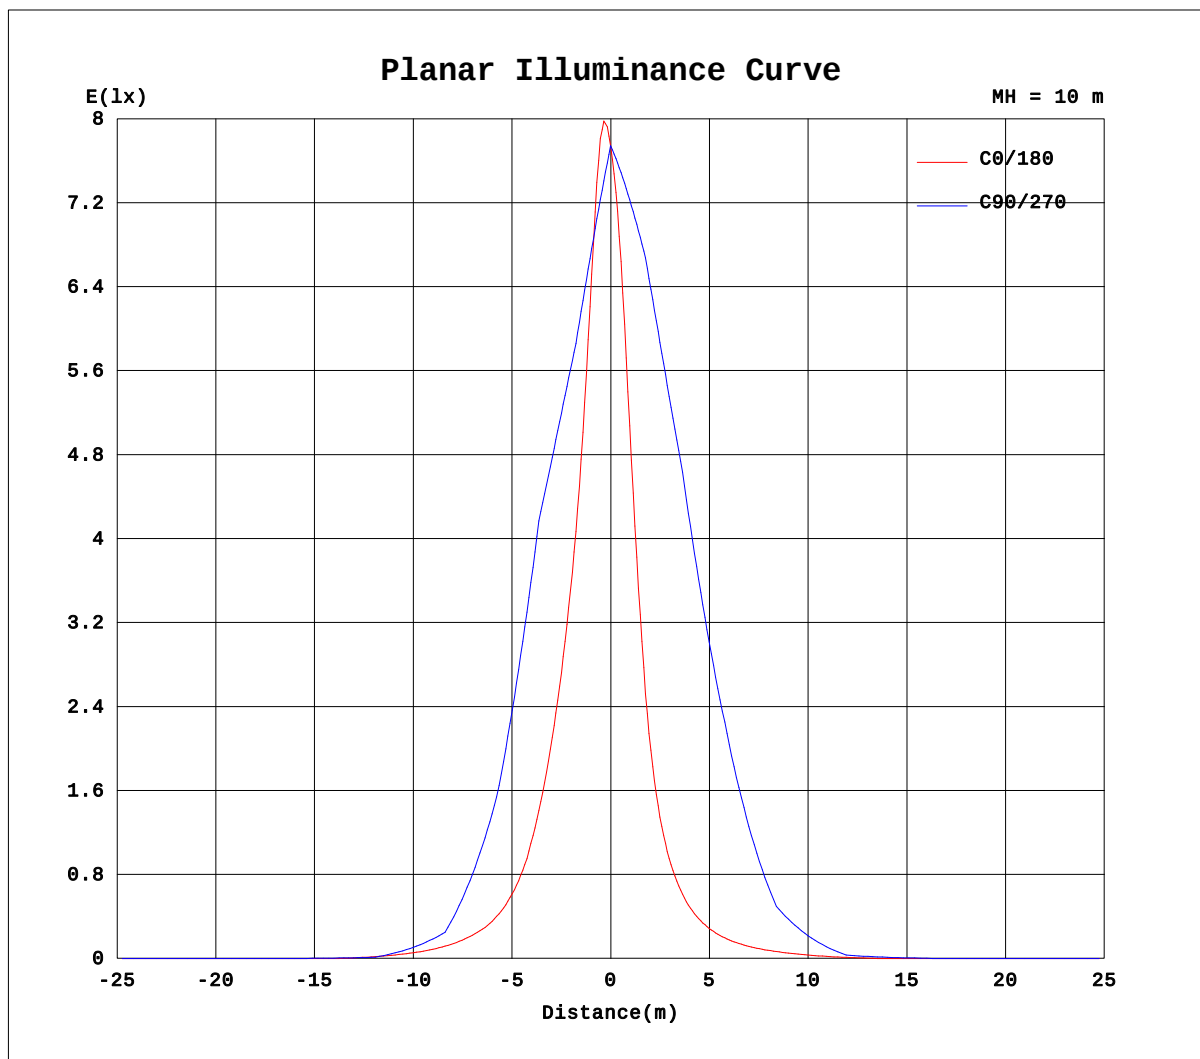

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.0569A P:6.622W PF:0.5271 Lamp Flux:275.353x1 lm		
NAME: LWL-WZB-W55-L3-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.25	0.87	1.43	1.95	2.38	2.66	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.50	1.73	2.86	3.90	4.76	5.33	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	1.53	2.99	4.95	7.75	11.5	17.5	25.7	30.7	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.40	3.06	5.98	9.40	13.8	20.1	31.0	46.6	56.1	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.05	3.16	6.57	10.5	15.4	22.6	36.0	65.0	115	147	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.10	5.92	10.1	15.0	21.3	31.4	51.9	99.0	183	237	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.94	4.19	8.50	13.1	18.8	26.8	40.9	70.4	143	281	370	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.88	6.28	11.1	16.2	22.6	32.4	50.4	88.8	186	379	503	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.86	7.55	12.6	18.0	25.3	36.7	57.6	101	205	411	558	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.83	8.83	14.0	19.9	27.9	40.9	64.7	112	223	444	613	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	4.27	9.31	14.6	20.6	29.2	43.4	69.3	121	244	495	694	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	4.70	9.80	15.1	21.4	30.5	45.9	74.0	130	264	546	775	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	4.18	9.19	14.4	20.6	29.3	44.0	70.6	124	252	521	737	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.65	8.57	13.8	19.7	28.1	42.2	67.3	118	239	497	699	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.66	7.27	12.3	17.9	25.5	38.1	60.6	107	220	458	629	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.67	5.97	10.8	16.1	23.0	34.0	53.9	95.7	201	420	559	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.84	4.00	8.33	13.2	19.3	28.5	44.9	79.6	169	346	453	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.03	5.88	10.3	15.6	23.1	35.9	63.4	137	273	347	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.01	3.26	6.93	11.4	17.4	27.1	46.7	95.3	182	229	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.64	3.57	7.14	11.7	18.3	30.0	53.9	91.0	111	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.32	1.79	3.57	6.27	10.5	17.5	30.8	51.0	62.0	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.86	2.75	4.96	7.74	11.0	12.9	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.43	1.37	2.48	3.87	5.49	6.46	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.0569A P:6.622W PF:0.5271 Lamp Flux:275.353x1 lm		
NAME: LWV-WZB-W55-L3-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	2.62	2.21	1.72	1.16	0.60	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	5.23	4.42	3.44	2.33	1.20	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	27.0	19.2	13.3	9.58	6.68	4.02	2.22	0.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	48.8	33.9	23.1	16.8	12.2	8.04	4.45	1.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	121	72.4	43.0	30.0	22.1	15.4	9.75	5.19	1.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	194	111	62.8	43.1	31.9	22.8	15.1	8.99	3.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	293	158	86.1	58.8	43.3	30.8	20.7	12.9	6.51	1.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	393	205	109	74.5	54.6	38.9	26.3	16.8	9.45	2.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	457	257	148	97.8	67.5	46.3	31.3	20.2	11.8	4.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	520	308	186	121	80.5	53.8	36.3	23.6	14.2	5.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	606	367	230	145	90.2	58.0	38.5	25.1	15.1	6.69	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	691	426	273	170	99.9	62.2	40.7	26.6	16.0	7.57	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	656	407	258	161	96.2	60.6	40.0	26.0	15.7	7.55	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	620	387	242	152	92.5	58.9	39.2	25.5	15.4	7.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	533	317	191	123	79.4	52.5	35.2	22.7	13.4	6.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	447	246	140	93.5	66.3	46.1	31.1	19.8	11.4	4.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	362	197	111	74.8	54.2	38.1	25.5	15.9	8.72	2.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	277	149	81.0	56.1	42.1	30.0	19.8	12.0	6.04	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	185	103	58.6	41.1	30.6	21.5	13.8	7.84	3.02	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	92.3	57.0	36.2	26.1	19.1	13.0	7.80	3.70	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	52.1	33.1	21.4	15.3	11.0	7.03	3.90	1.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	11.9	9.13	6.56	4.55	2.76	1.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	5.94	4.56	3.28	2.27	1.38	0.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: