

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2813.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	80.7V x 48.7H
	At 50% of Imax	49.3V x 19.6H
	At 90% of Imax	11.2V x 7.2H
Beam Flux	Total	998.7 lumens per klm.
	To 10% of Imax	834.1 lumens per klm.
	To 50% of Imax	402.0 lumens per klm.
	To 90% of Imax	46.0 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.9V I:0.0586A P:6.816W PF:0.5268 Lamp Flux:306.526x1 lm		
NAME: LWL-WZB-W55-L3-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

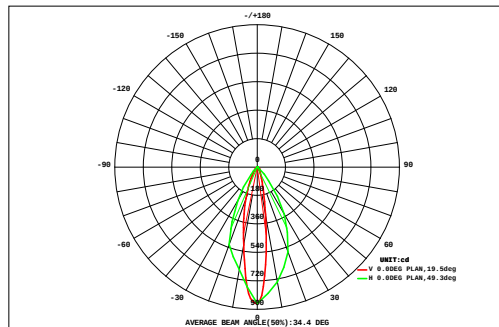

DATA OF LAMP		Eff:44.97lm/W	
MODEL LWL-WZB-W55-L3-RDM	Imax(cd)	862.4	
NOMINAL POWER(W)	7	AVAILABILITY(%)	84.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	257.9
NOMINAL FLUX(lm)	306.526	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	306.5
TEST VOLTAGE(V)	220.9	θ @50%(H,V)	20,49DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00
56	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.13	0.20	0.20	0.13	0.08	0.04	0.01	0.00	0.00	0.00	0.88	0.00
48	0.00	0.00	0.00	0.01	0.05	0.15	0.30	0.54	1.03	1.11	0.59	0.28	0.14	0.06	0.01	0.00	0.00	4.28	0.73
40	0.00	0.00	0.00	0.04	0.18	0.42	0.74	1.40	3.00	3.17	1.44	0.59	0.30	0.15	0.05	0.00	0.00	11.5	7.19
32	0.00	0.00	0.01	0.12	0.35	0.74	1.28	2.62	6.25	6.51	2.58	0.93	0.46	0.25	0.11	0.01	0.00	22.2	17.8
24	0.00	0.00	0.04	0.20	0.51	1.07	1.98	4.03	9.19	9.39	3.66	1.28	0.60	0.32	0.16	0.04	0.00	32.5	28.4
	0.00	0.00	0.06	0.25	0.61	1.34	2.94	6.08	11.9	11.8	4.63	1.60	0.73	0.38	0.20	0.07	0.00	42.5	38.8
	0.00	0.00	0.08	0.28	0.68	1.52	3.59	7.59	14.0	13.4	5.04	1.75	0.79	0.41	0.22	0.07	0.00	49.4	45.7
	0.00	0.00	0.09	0.30	0.70	1.59	3.68	7.68	14.3	12.9	4.55	1.62	0.75	0.39	0.21	0.06	0.00	48.8	45.1
	0.00	0.00	0.07	0.26	0.60	1.26	2.43	4.91	10.4	10.2	3.96	1.44	0.68	0.36	0.19	0.05	0.00	36.7	32.8
	0.00	0.00	0.04	0.18	0.45	0.89	1.52	3.16	8.09	8.76	3.40	1.18	0.56	0.31	0.15	0.03	0.00	28.7	24.3
-24	0.00	0.00	0.01	0.11	0.29	0.59	0.98	1.93	4.78	5.32	2.26	0.84	0.42	0.23	0.10	0.01	0.00	17.9	13.3
-32	0.00	0.00	0.00	0.04	0.16	0.33	0.56	1.04	2.12	2.10	1.03	0.48	0.26	0.13	0.04	0.00	0.00	8.29	3.80
-40	0.00	0.00	0.00	0.00	0.05	0.13	0.22	0.34	0.43	0.39	0.27	0.19	0.11	0.04	0.00	0.00	0.00	2.18	0.00
-48	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.05	0.07	0.09	0.07	0.05	0.02	0.00	0.00	0.00	0.00	0.42	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.07	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72		
Φ t	0.00	0.00	0.39	1.80	4.63	10.1	20.3	41.5	85.8	85.2	33.6	12.3	5.88	3.06	1.44	0.35	0.00	0.00	307
Φ a	0.00	0.00	0.00	0.00	0.00	2.94	15.3	38.0	83.9	83.4	30.0	4.23	0.00	0.00	0.00	0.00	0.00	---	258


one-half-peak spread: U:23.5,D:26.2 , L:12.0,NEMA8Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.9V I:0.0586A P:6.816W PF:0.5268 Lamp Flux:306.526x1 lm		
NAME: LWL-WZB-W55-L3-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

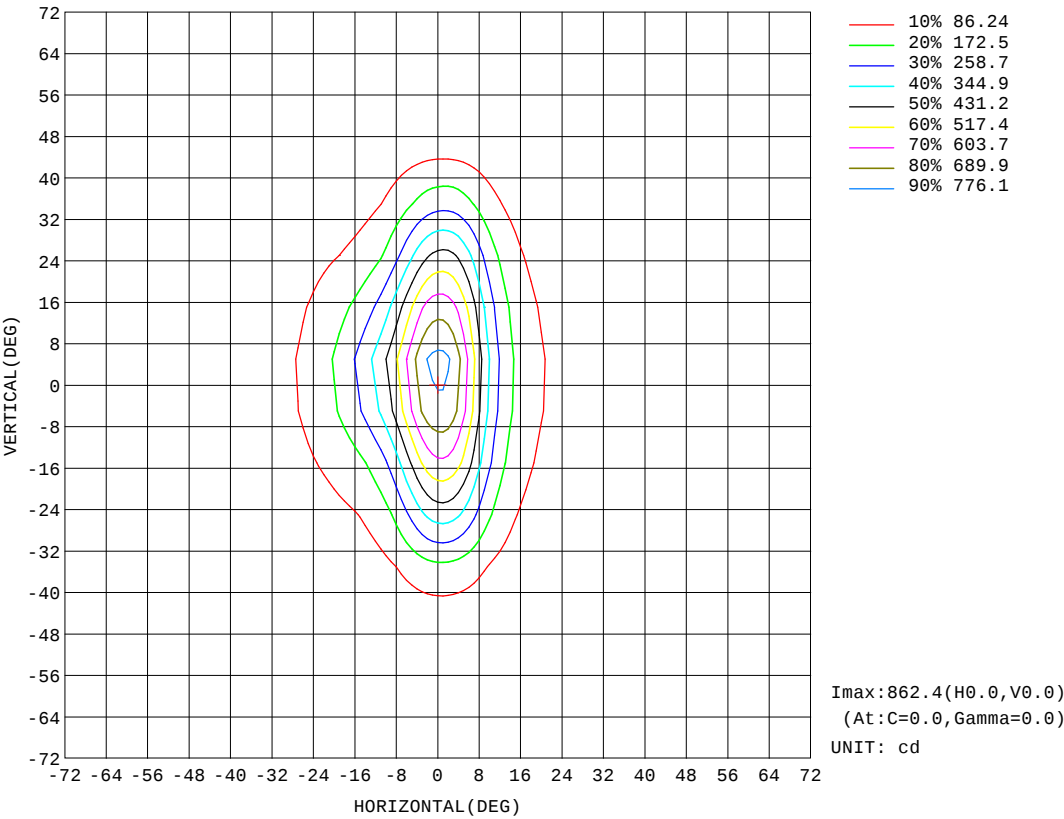


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.9V I:0.0586A P:6.816W PF:0.5268 Lamp Flux:306.526x1 lm		
NAME: LWL-WZB-W55-L3-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

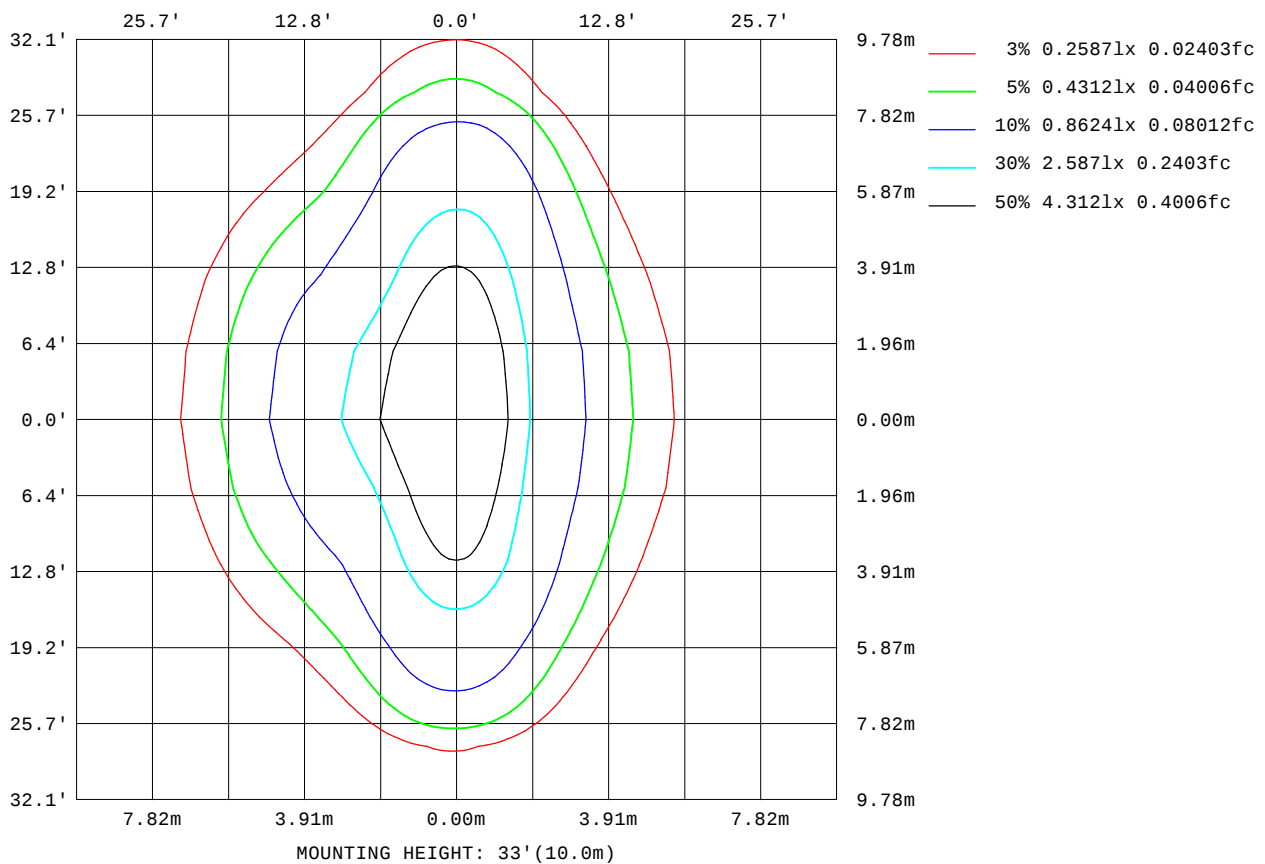


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.9V I:0.0586A P:6.816W PF:0.5268 Lamp Flux:306.526x1 lm		
NAME: LWL-WZB-W55-L3-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

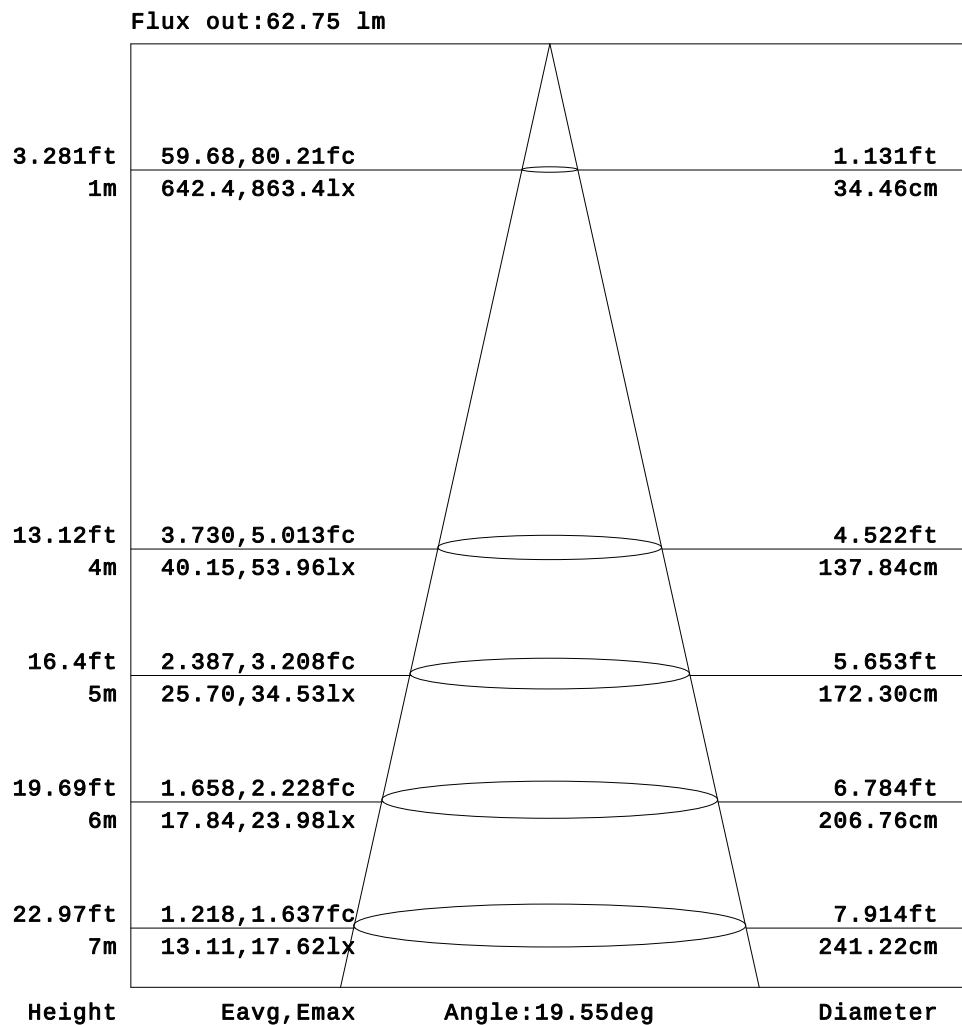


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

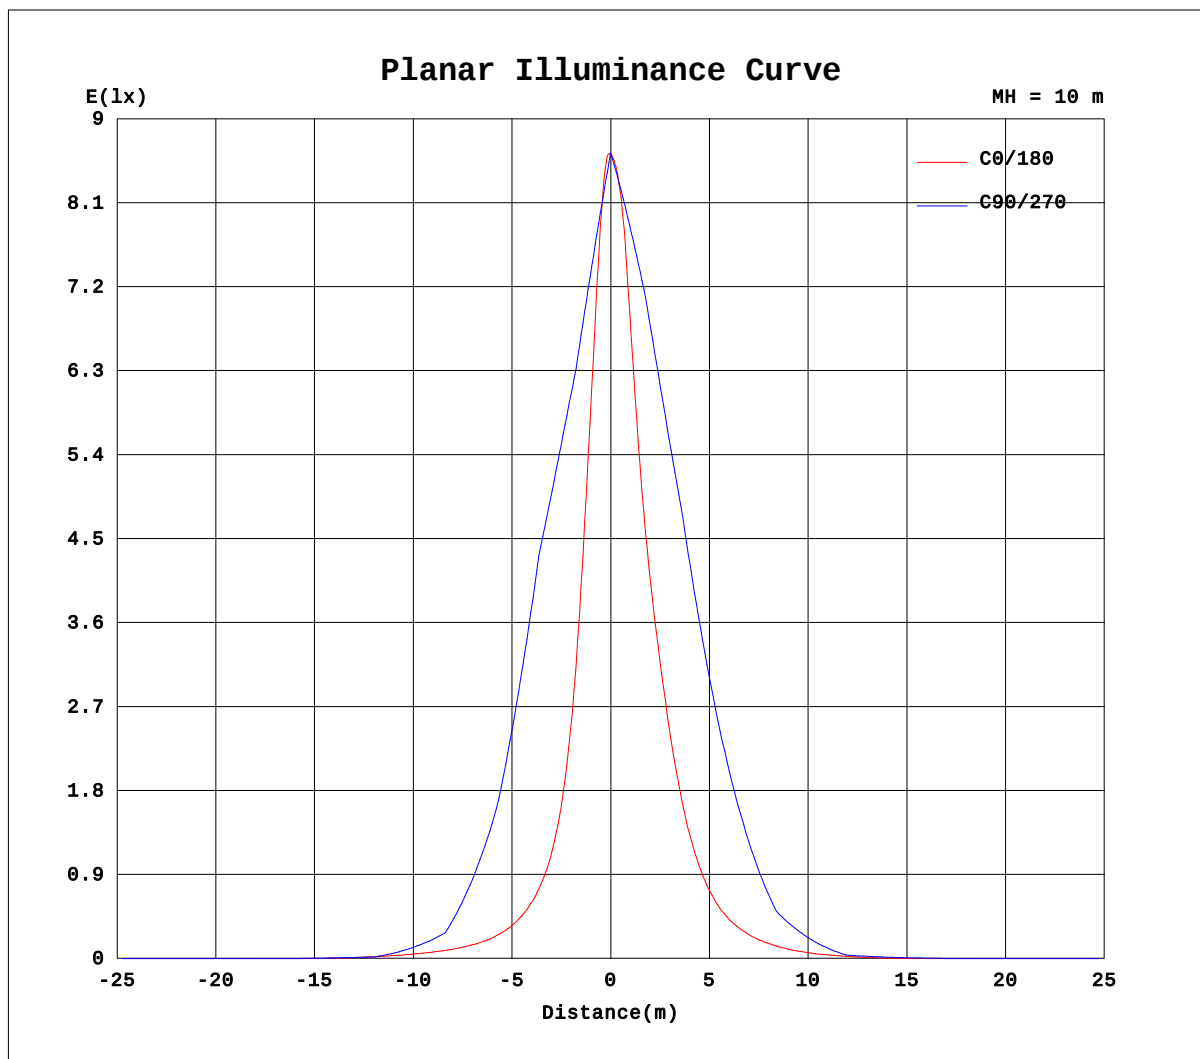

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.9V I:0.0586A P:6.816W PF:0.5268 Lamp Flux:306.526x1 lm		
NAME: LWL-WZB-W55-L3-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.82	1.47	2.04	2.59	3.09	3.56	3.77	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	1.92	3.18	4.29	5.38	6.38	7.26	7.53	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	1.33	3.00	5.72	8.63	11.6	15.2	20.8	29.1	34.4	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	3.26	6.64	10.7	15.3	20.2	26.8	38.1	54.2	61.2	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	2.53	6.54	11.5	17.7	25.0	32.9	44.5	69.8	118	154	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.42	5.98	11.6	18.7	27.5	37.7	49.3	69.2	118	204	248	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.61	7.97	14.7	23.4	34.8	48.8	64.4	88.6	149	278	382	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.47	5.76	12.4	20.9	32.2	47.4	65.8	86.8	124	221	411	521	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.65	6.05	13.1	22.3	34.8	52.2	76.6	109	157	252	441	587	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.44	8.91	17.1	28.0	43.4	65.6	98.8	147	218	342	555	658	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.67	8.10	16.3	27.2	42.5	65.2	103	163	254	386	606	759	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.27	10.2	19.3	31.6	49.1	76.7	126	211	335	499	757	862	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.62	8.05	16.4	27.7	43.5	67.4	108	179	285	430	656	802	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.32	8.80	17.5	29.2	45.7	70.9	113	184	287	435	656	737	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.59	5.97	13.4	23.5	37.5	57.8	88.3	135	204	318	516	656	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	5.75	12.9	22.7	36.1	54.8	79.2	110	159	269	464	571	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.58	8.32	16.0	26.5	40.9	59.3	81.2	113	186	336	453	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.47	6.41	12.9	21.9	33.8	47.6	62.5	86.8	154	274	343	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	2.76	7.40	13.8	22.2	32.3	43.2	58.4	95.7	169	225	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.68	4.09	8.64	14.5	21.3	28.8	39.8	62.2	96.4	113	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	1.66	3.82	7.21	11.4	16.0	22.0	33.1	51.3	63.6	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	1.54	3.30	5.18	7.48	10.4	13.4	14.5	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.61	1.47	2.39	3.49	5.05	7.01	8.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.55	1.21	1.42	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.55	0.71	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.9V I:0.0586A P:6.816W PF:0.5268 Lamp Flux:306.526x1 lm																	
NAME: LWV-WZB-W55-L3-RDM-W									TYPE:LED						WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:2024010037		
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:						PROTECTION ANGLE:		

Table--2																	
UNIT: cd																	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	3.60	3.21	2.69	2.10	1.48	0.76	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	7.08	6.21	5.16	3.97	2.69	1.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	30.9	22.4	15.6	11.2	8.05	5.37	3.03	1.65	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	51.6	35.4	23.9	17.0	12.3	8.54	5.44	2.73	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	134	82.1	46.3	29.1	20.2	14.4	10.1	6.46	2.83	0.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	198	111	59.5	36.9	25.4	18.4	13.1	8.80	4.53	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	330	182	90.3	52.1	34.1	24.1	17.5	12.4	7.77	2.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	407	206	100	58.0	37.8	26.7	19.7	14.2	9.05	3.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	501	271	131	74.3	47.1	32.4	23.4	17.1	11.7	6.07	0.64	0.00	0.00	0.00	0.00	0.00	0.00
-10	507	261	131	76.6	49.0	33.8	24.4	17.9	12.3	6.31	0.33	0.00	0.00	0.00	0.00	0.00	0.00
-5	622	329	159	89.7	56.3	37.9	27.0	19.7	14.0	8.23	1.89	0.00	0.00	0.00	0.00	0.00	0.00
0	620	304	149	85.9	54.5	36.8	26.2	19.2	13.4	7.65	1.26	0.00	0.00	0.00	0.00	0.00	0.00
5	653	345	165	92.6	57.8	38.7	27.4	19.9	14.1	8.64	2.47	0.00	0.00	0.00	0.00	0.00	0.00
10	563	288	142	81.6	51.7	35.1	25.1	18.2	12.7	7.30	1.22	0.00	0.00	0.00	0.00	0.00	0.00
15	550	299	145	80.4	50.5	34.3	24.5	17.8	12.3	7.19	1.52	0.00	0.00	0.00	0.00	0.00	0.00
20	441	226	111	63.9	41.4	28.8	20.9	15.1	9.86	4.93	0.05	0.00	0.00	0.00	0.00	0.00	0.00
25	393	216	106	59.1	38.0	26.5	19.1	13.6	8.77	4.18	0.31	0.00	0.00	0.00	0.00	0.00	0.00
30	278	148	74.3	43.4	29.0	20.7	14.9	10.1	5.84	1.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	202	117	61.2	36.0	24.0	16.9	11.9	7.78	4.13	1.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	93.6	57.5	34.3	22.4	15.6	10.9	7.13	3.97	0.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	56.9	37.3	22.9	15.0	10.4	7.06	4.34	2.28	0.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	12.9	10.0	7.46	5.39	3.64	2.06	0.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	7.31	5.58	3.97	2.89	1.98	1.18	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	1.08	0.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.59	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: