

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3609.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	53.3V x 49.9H
	At 50% of Imax	25.0V x 23.8H
	At 90% of Imax	6.4V x 9.6H
Beam Flux	Total	999.5 lumens per klm.
	To 10% of Imax	733.6 lumens per klm.
	To 50% of Imax	337.1 lumens per klm.
	To 90% of Imax	38.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-04-26

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.3V I:0.1335A P:17.02W PF:0.5788 Lamp Flux:642.298x1 lm		
NAME: 8.01.017.0067 30°LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000061
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

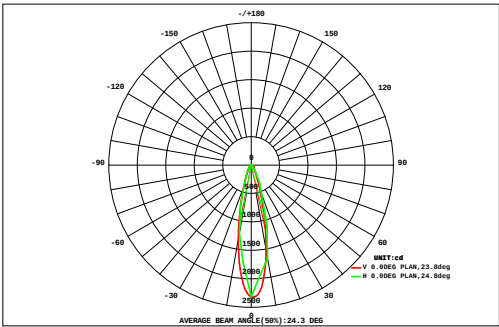

DATA OF LAMP		Eff:37.74lm/W	
MODEL LWW-WZB-W55-L3-RDM	Imax(cd)	2318	
NOMINAL POWER(W)	18	AVAILABILITY(%)	73.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	472.1
NOMINAL FLUX(lm)	642.298	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	642.3
TEST VOLTAGE(V)	220.3	θ @50%(H,V)	24, 25DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a								
	45	0.09	0.14	0.18	0.24	0.29	0.35	0.41	0.46	0.49	0.50	0.49	0.46	0.41	0.36	0.30	0.24	0.19	0.14	5.76	0.00							
	40	0.15	0.20	0.26	0.33	0.41	0.48	0.55	0.61	0.64	0.64	0.61	0.55	0.49	0.41	0.34	0.27	0.21	0.15	7.31	0.00							
	35	0.15	0.21	0.29	0.39	0.50	0.64	0.80	0.95	1.07	1.11	1.07	0.95	0.80	0.65	0.51	0.40	0.30	0.22	11.0	0.00							
	30	0.21	0.30	0.41	0.54	0.71	0.91	1.13	1.33	1.45	1.45	1.33	1.14	0.92	0.72	0.55	0.41	0.30	0.22	14.0	0.00							
	25	0.20	0.29	0.41	0.59	0.84	1.21	1.75	2.43	3.09	3.39	3.12	2.46	1.78	1.24	0.86	0.60	0.42	0.30	25.0	16.7							
	20	0.28	0.41	0.59	0.86	1.28	1.90	2.82	3.87	4.68	4.70	3.91	2.82	1.91	1.27	0.84	0.57	0.39	0.27	33.4	26.0							
	15	0.23	0.35	0.52	0.79	1.26	2.11	3.71	6.28	9.09	10.5	9.50	6.82	4.09	2.31	1.35	0.84	0.55	0.36	60.6	54.5							
	10	0.32	0.48	0.74	1.20	2.04	3.68	6.72	10.9	14.2	14.5	11.4	7.10	3.81	2.03	1.16	0.72	0.47	0.31	81.8	75.9							
	5	0.25	0.37	0.56	0.87	1.43	2.58	4.96	9.09	13.9	16.4	15.2	10.7	6.05	3.10	1.66	0.97	0.61	0.40	89.1	83.5							
	0	0.33	0.50	0.78	1.28	2.30	4.47	8.64	14.3	18.5	18.5	14.3	8.42	4.18	2.11	1.19	0.72	0.47	0.31	101	95.7							
	-5	0.23	0.35	0.51	0.75	1.16	1.88	3.28	5.87	9.23	11.3	11.0	8.18	4.88	2.64	1.48	0.90	0.58	0.38	64.6	58.5							
	-10	0.29	0.43	0.64	0.98	1.55	2.52	4.06	5.92	7.15	6.92	5.24	3.32	2.05	1.30	0.87	0.59	0.41	0.28	44.5	37.6							
	-15	0.20	0.29	0.41	0.57	0.80	1.12	1.63	2.44	3.51	4.31	4.33	3.49	2.39	1.54	1.00	0.67	0.46	0.32	29.5	21.7							
	-20	0.23	0.33	0.46	0.62	0.83	1.07	1.28	1.35	1.24	1.06	0.88	0.78	0.76	0.67	0.54	0.41	0.31	0.22	13.0	2.15							
	-25	0.15	0.22	0.29	0.39	0.51	0.65	0.83	1.02	1.24	1.38	1.38	1.23	1.01	0.79	0.60	0.45	0.33	0.24	12.7	0.00							
	-30	0.17	0.23	0.30	0.37	0.45	0.53	0.58	0.59	0.56	0.52	0.50	0.48	0.46	0.41	0.35	0.28	0.22	0.16	7.16	0.00							
	-35	0.10	0.15	0.20	0.25	0.31	0.38	0.44	0.51	0.56	0.59	0.59	0.55	0.49	0.42	0.35	0.28	0.22	0.17	6.57	0.00							
	-40	0.10	0.14	0.18	0.22	0.26	0.29	0.32	0.34	0.35	0.35	0.33	0.31	0.28	0.25	0.21	0.18	0.14	0.10	4.37	0.00							
-45	0.10	0.14	0.18	0.22	0.26	0.29	0.32	0.34	0.35	0.35	0.33	0.31	0.28	0.25	0.21	0.18	0.14	0.10	4.37	0.00								
HORIZONTAL (DEG)																					10	15	20	25	30	35	40	45
Φ t	3.70	5.37	7.73	11.2	16.9	26.8	43.9	68.3	91.0	98.1	85.1	59.8	36.7	22.2	14.2	9.52	6.57	4.56	612	---								
Φ a	0.00	0.00	0.00	0.20	5.42	18.2	36.2	61.1	84.0	90.9	78.3	53.4	29.7	12.6	2.01	0.00	0.00	0.00	---	472								


one-half-peak spread: U:10.7,D:14.5 , L:12.3,R:11.6 NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-04-26

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.3V I:0.1335A P:17.02W PF:0.5788 Lamp Flux:642.298x1 lm		
NAME: 8.01.017.0067 30°LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000061
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

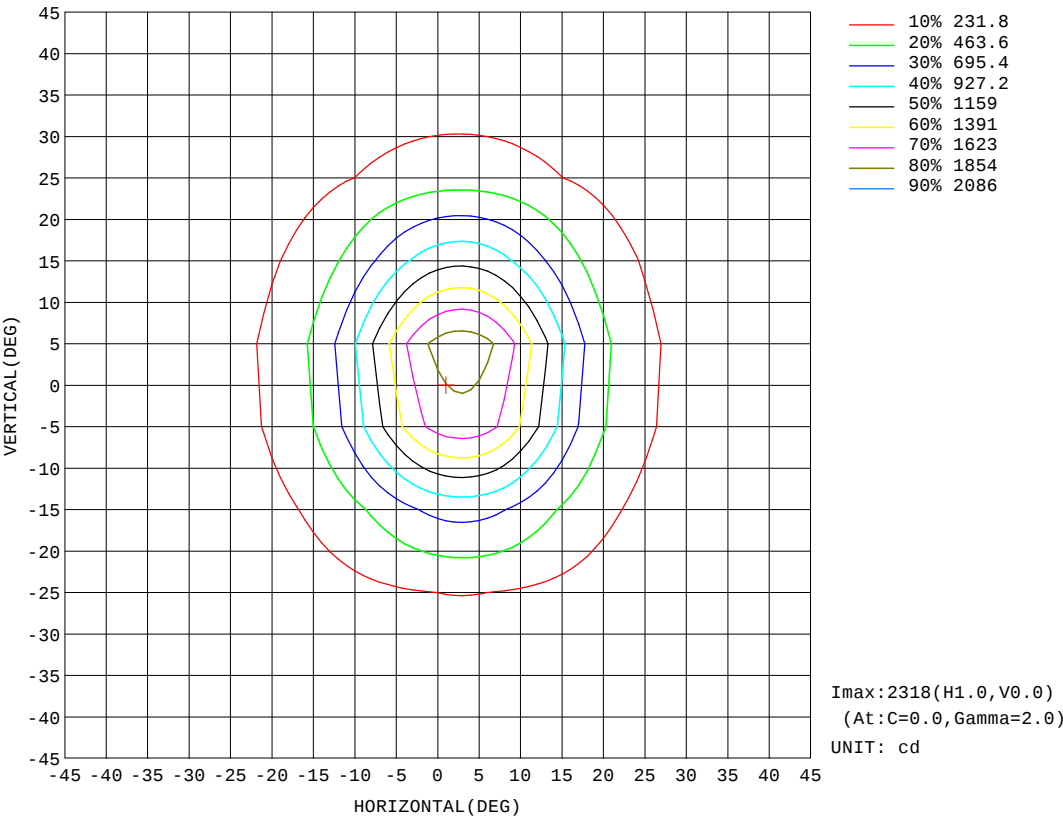


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-04-26

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.3V I:0.1335A P:17.02W PF:0.5788 Lamp Flux:642.298x1 lm		
NAME: 8.01.017.0067 30°LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000061
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

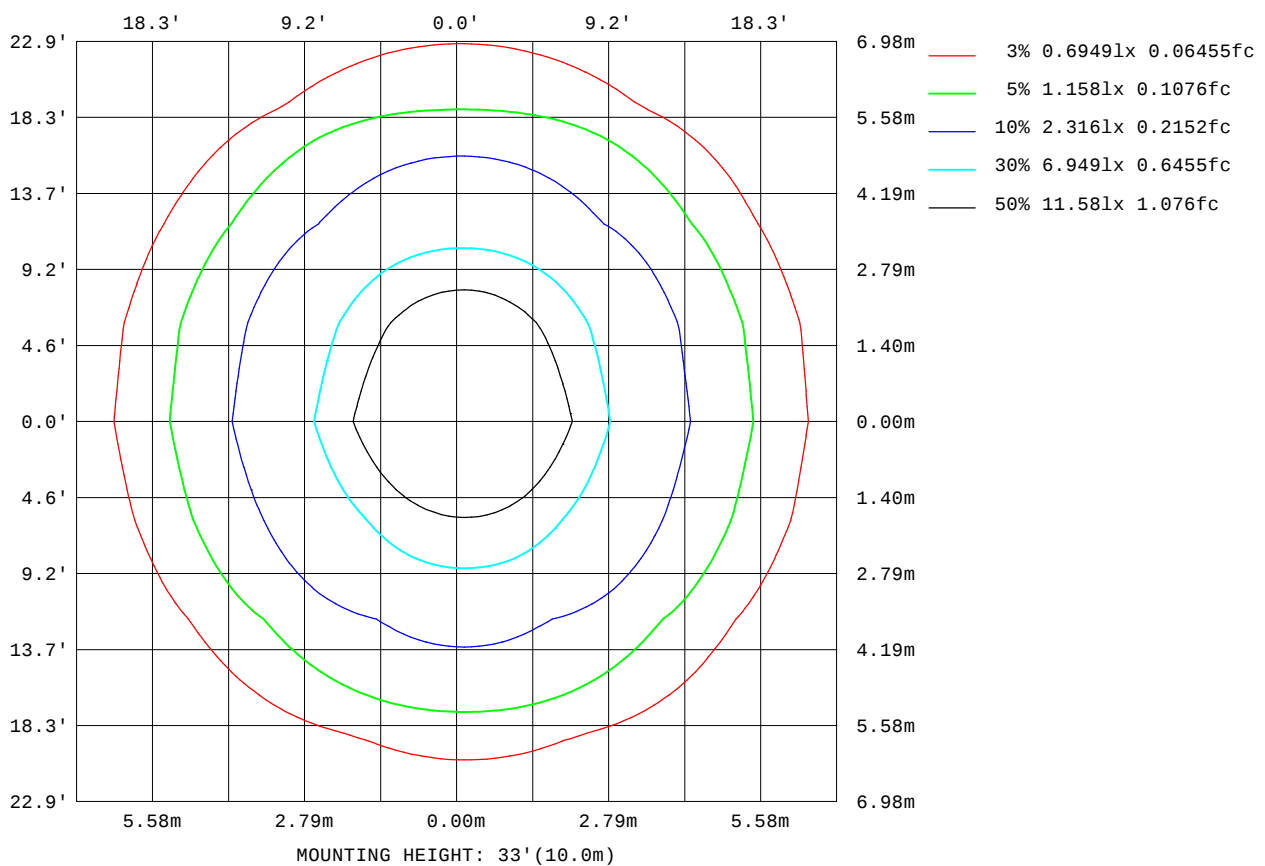


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-04-26

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.3V I:0.1335A P:17.02W PF:0.5788 Lamp Flux:642.298x1 lm		
NAME: 8.01.017.0067 30°LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000061
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

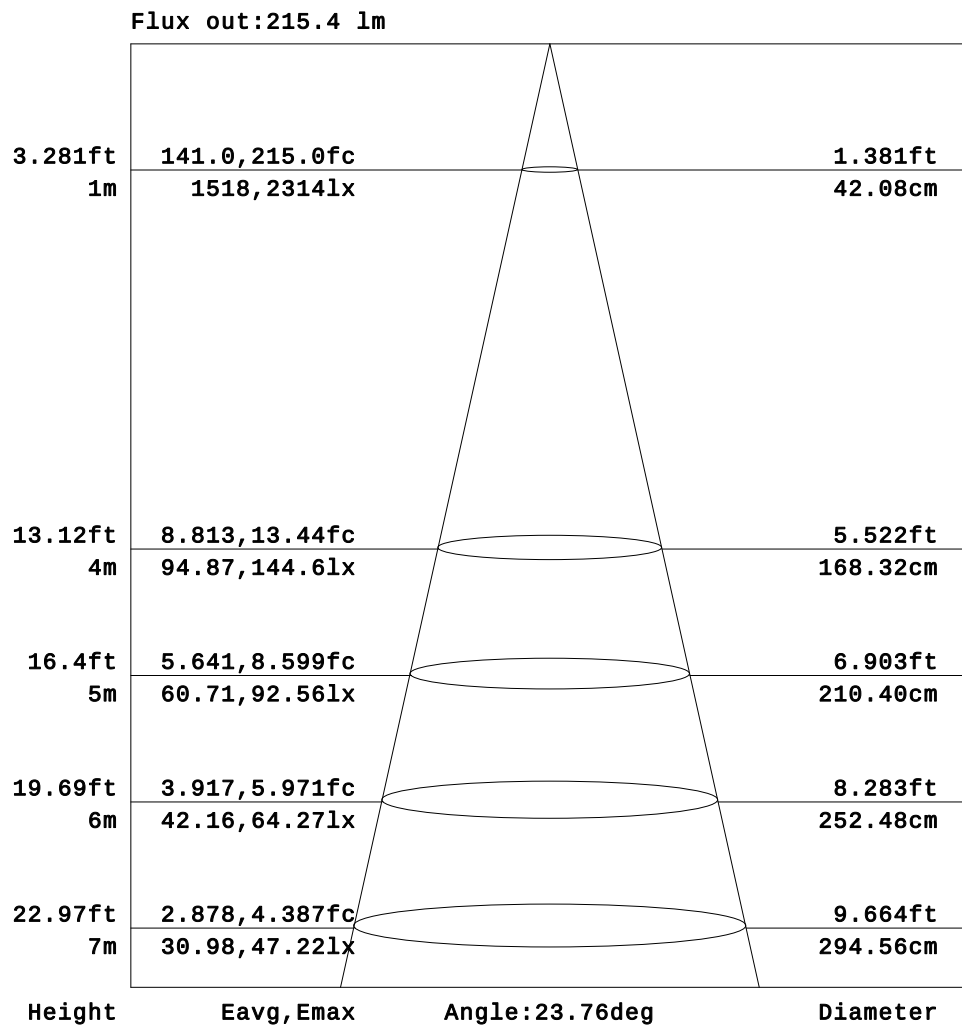


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-04-26

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

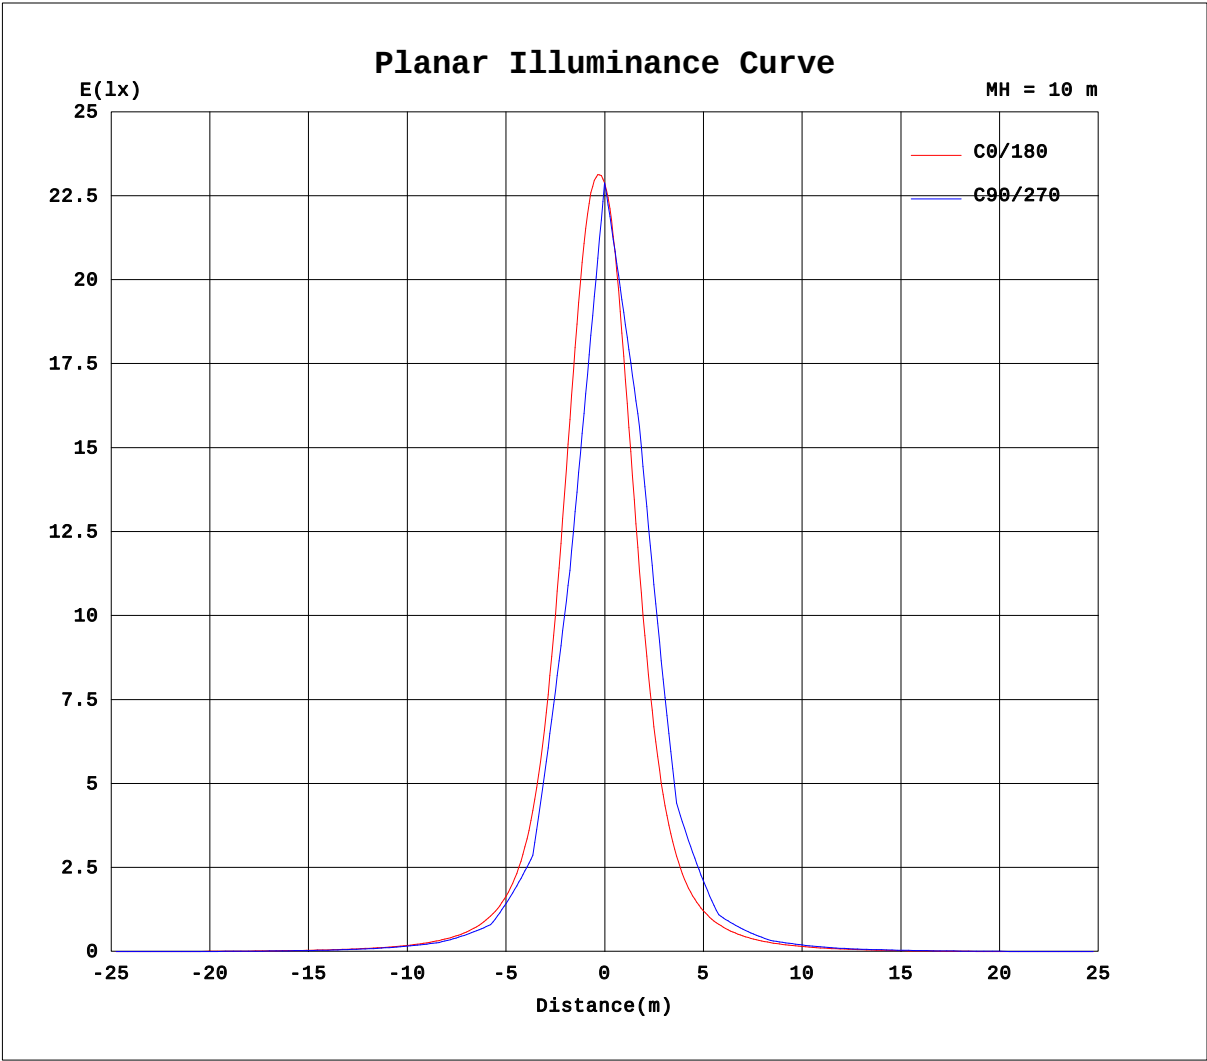

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-04-26

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.3V I:0.1335A P:17.02W PF:0.5788 Lamp Flux:642.298x1 lm		
NAME: 8.01.017.0067 30°LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000061
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	1.42	2.61	3.69	4.66	5.55	6.32	6.88	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.29	3.82	6.11	8.19	10.1	11.8	13.2	14.0	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	2.27	4.43	6.56	9.77	12.7	15.4	17.8	20.0	21.8	23.1	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.86	6.29	10.5	14.5	18.1	21.5	24.6	27.3	29.8	31.7	32.9	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.48	4.47	9.57	14.6	19.5	24.2	28.8	33.3	37.5	41.4	44.7	46.8	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.34	11.2	16.9	22.6	28.3	34.0	39.8	45.5	50.9	55.9	59.6	61.5	
-35	0.00	0.00	0.00	0.00	0.00	0.00	1.08	6.13	12.6	19.1	25.8	32.9	40.8	49.5	59.0	68.8	78.5	87.0	92.3	
-30	0.00	0.00	0.00	0.00	0.00	0.00	5.02	12.2	19.3	26.6	34.5	43.7	54.4	66.7	80.3	94.6	108	119	125	
-25	0.00	0.00	0.00	0.00	0.00	0.00	4.36	12.0	19.6	27.7	36.8	48.0	62.1	80.0	103	132	168	205	233	
-20	0.00	0.00	0.00	0.00	0.00	1.74	9.78	17.9	26.3	35.7	47.5	62.7	83.1	110	148	198	257	318	349	
-15	0.00	0.00	0.00	0.00	0.00	0.27	7.84	16.2	24.9	34.6	46.9	63.5	86.9	122	178	270	416	603	753	
-10	0.00	0.00	0.00	0.00	0.00	3.94	12.6	21.4	30.9	42.5	58.3	81.0	115	172	270	445	721	1031	1205	
-5	0.00	0.00	0.00	0.00	0.00	1.09	9.80	18.6	28.0	39.0	53.9	75.2	108	163	265	464	829	1322	1705	
0	0.00	0.00	0.00	0.00	0.00	5.14	14.0	23.1	33.2	46.3	64.6	92.0	137	218	387	733	1322	1984	2312	
5	0.00	0.00	0.00	0.00	0.00	1.29	10.1	18.9	28.4	39.7	55.0	77.2	112	171	284	506	922	1488	1924	
10	0.00	0.00	0.00	0.00	0.00	4.37	13.1	22.0	31.8	44.1	61.2	86.2	125	195	321	562	963	1415	1658	
15	0.00	0.00	0.00	0.00	0.00	0.47	8.60	17.1	26.1	36.3	49.8	68.4	95.6	139	212	340	557	843	1064	
20	0.00	0.00	0.00	0.00	0.00	2.65	10.9	19.2	28.0	38.3	51.7	69.9	95.2	132	187	266	374	483	538	
25	0.00	0.00	0.00	0.00	0.00	0.00	5.59	13.4	21.4	29.9	40.2	53.3	70.7	94.1	127	172	232	299	347	
30	0.00	0.00	0.00	0.00	0.00	0.01	6.54	13.9	21.3	29.3	38.3	49.5	63.1	79.6	99.2	121	144	162	169	
35	0.00	0.00	0.00	0.00	0.00	0.00	1.78	7.94	14.7	21.6	29.0	37.3	46.9	58.3	71.3	85.8	101	114	122	
40	0.00	0.00	0.00	0.00	0.00	0.00	1.19	7.42	13.5	19.7	25.9	32.5	39.5	47.0	54.7	62.4	69.0	73.8	75.6	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.47	6.84	12.3	17.7	23.1	28.6	34.3	40.0	45.6	50.6	54.6	56.8	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	4.50	9.27	13.8	18.2	22.3	26.1	29.7	33.0	35.8	37.7	38.4	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.29	3.69	6.37	10.2	13.8	17.1	20.2	23.0	25.4	27.2	28.2	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.01	5.11	8.00	10.6	13.0	15.0	16.7	17.7	18.1	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	1.95	3.43	4.81	6.05	7.14	8.04	8.97	9.55	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.80	1.03	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	0.52	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-04-26

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.3V I:0.1335A P:17.02W PF:0.5788 Lamp Flux:642.298x1 lm		
NAME: 8.01.017.0067 30°LWW-WZB-W55-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000061
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	7.07	6.86	6.26	5.45	4.51	3.49	2.38	1.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	14.1	13.3	11.9	10.2	8.24	6.12	3.81	1.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	23.5	23.0	21.5	19.4	17.1	14.5	11.7	8.69	5.57	3.46	1.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	32.8	31.6	29.5	26.9	23.9	20.8	17.3	13.5	9.47	5.14	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	47.3	46.0	43.1	39.3	35.0	30.6	26.1	21.5	16.7	11.7	6.52	2.31	0.00	0.00	0.00	0.00	0.00	0.00
-40	61.1	58.3	53.8	48.4	42.7	36.9	31.2	25.6	20.0	14.1	8.24	2.22	0.00	0.00	0.00	0.00	0.00	0.00
-35	93.1	88.9	81.1	71.4	61.2	51.6	42.9	35.0	27.8	21.0	14.4	7.70	1.78	0.00	0.00	0.00	0.00	0.00
-30	123	114	101	86.2	72.0	59.2	48.0	38.4	30.1	22.5	15.3	7.88	0.70	0.00	0.00	0.00	0.00	0.00
-25	235	211	173	137	106	82.2	64.0	49.8	38.5	29.1	20.9	13.0	5.36	0.00	0.00	0.00	0.00	0.00
-20	333	279	216	162	119	89.6	67.7	51.5	39.0	29.0	20.3	12.0	3.90	0.00	0.00	0.00	0.00	0.00
-15	767	634	440	282	182	124	88.9	65.1	48.3	35.7	25.8	17.0	8.50	0.62	0.00	0.00	0.00	0.00
-10	1126	835	522	312	192	127	88.7	63.9	46.7	34.1	24.2	15.1	6.35	0.00	0.00	0.00	0.00	0.00
-5	1732	1380	870	480	268	165	109	76.1	54.7	39.8	28.6	19.2	10.2	1.45	0.00	0.00	0.00	0.00
0	2143	1520	861	444	245	150	99.0	69.1	49.6	35.8	25.3	16.0	6.99	0.00	0.00	0.00	0.00	0.00
5	1951	1545	966	523	285	172	112	77.8	55.6	40.2	28.9	19.4	10.4	1.59	0.00	0.00	0.00	0.00
10	1528	1110	664	372	216	138	93.7	66.5	48.1	34.9	24.5	15.5	6.72	0.00	0.00	0.00	0.00	0.00
15	1077	870	581	351	214	139	96.5	69.1	50.5	37.1	26.7	17.7	9.10	0.76	0.00	0.00	0.00	0.00
20	502	399	289	202	142	102	74.4	55.3	41.2	30.4	21.4	12.9	4.65	0.00	0.00	0.00	0.00	0.00
25	348	300	233	173	128	94.8	71.6	54.2	41.1	30.9	22.3	14.2	6.33	0.01	0.00	0.00	0.00	0.00
30	164	148	127	105	84.9	67.7	53.5	41.9	32.4	24.2	16.7	9.15	1.70	0.00	0.00	0.00	0.00	0.00
35	122	114	101	86.9	72.6	59.7	48.4	38.6	30.3	23.0	16.1	9.23	2.35	0.00	0.00	0.00	0.00	0.00
40	74.3	70.2	64.3	57.2	49.6	42.1	35.0	28.4	22.2	16.1	10.1	3.79	0.00	0.00	0.00	0.00	0.00	0.00
45	56.7	54.6	50.9	46.3	41.0	35.5	29.9	24.5	19.2	13.9	8.50	3.16	0.01	0.00	0.00	0.00	0.00	0.00
50	37.9	36.4	34.1	31.3	28.0	24.4	20.4	16.3	11.9	7.33	2.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	28.1	27.2	25.7	23.6	21.1	18.3	15.1	11.7	8.00	4.59	2.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	17.9	17.0	15.7	14.1	12.1	9.84	7.09	4.17	1.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	9.46	9.00	8.14	7.38	6.45	5.35	4.10	2.69	1.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.89	0.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.42	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-04-26

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: