

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5800.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	40.6V x 40.8H
	At 50% of Imax	17.8V x 18.6H
	At 90% of Imax	4.8V x 7.0H
Beam Flux	Total	999.5 lumens per klm.
	To 10% of Imax	735.8 lumens per klm.
	To 50% of Imax	298.5 lumens per klm.
	To 90% of Imax	29.1 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.4V I:0.0963A P:11.88W PF:0.5601 Lamp Flux:1250.16x1 lm		
NAME: 8.01.017.0102 20° LWV-WZB-W55-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

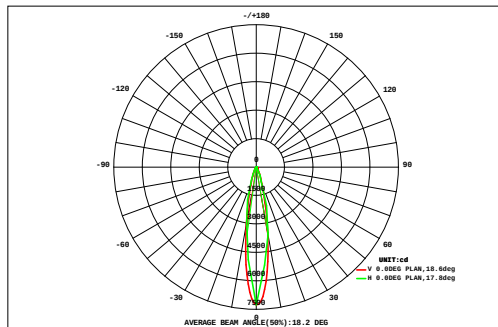

DATA OF LAMP		Eff:105.20lm/W	
MODEL	LWV-WZB-W55-L3-S	Imax(cd)	7251
NOMINAL POWER(W)	12	AVAILABILITY(%)	75.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	940.2
NOMINAL FLUX(lm)	1250.16	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1250
TEST VOLTAGE(V)	220.4	θ @50%(H,V)	19,18DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	27	0.25	0.31	0.38	0.47	0.57	0.68	0.79	0.88	0.95	0.97	0.96	0.90	0.81	0.70	0.59	0.48	0.39	0.32	11.4	0.00	
	24	0.28	0.36	0.48	0.63	0.82	1.04	1.27	1.49	1.65	1.75	1.74	1.65	1.48	1.26	1.03	0.82	0.64	0.49	18.9	0.00	
	21	0.37	0.50	0.67	0.89	1.15	1.44	1.74	1.99	2.16	2.22	2.15	1.97	1.71	1.41	1.13	0.88	0.66	0.50	23.5	8.44	
	18	0.48	0.65	0.87	1.17	1.50	1.87	2.23	2.51	2.68	2.69	2.55	2.27	1.92	1.55	1.21	0.91	0.68	0.50	28.3	16.3	
	15	0.44	0.63	0.89	1.27	1.79	2.54	3.69	5.09	6.39	7.14	7.05	6.15	4.82	3.51	2.49	1.80	1.28	0.90	57.9	50.0	
	12	0.54	0.78	1.14	1.65	2.36	3.48	5.13	7.05	8.70	9.47	9.05	7.63	5.79	4.10	2.87	2.04	1.43	0.99	74.2	67.4	
	9	0.79	1.16	1.70	2.44	3.51	5.31	7.69	10.1	11.7	11.8	10.4	8.07	5.65	3.80	2.64	1.83	1.25	0.85	90.8	84.3	
	6	0.68	1.01	1.50	2.18	3.22	5.03	7.70	10.9	13.7	15.0	14.2	11.6	8.46	5.69	3.71	2.46	1.67	1.13	110	104	
	3	0.54	0.81	1.22	1.83	2.81	4.56	7.49	11.5	15.7	18.3	18.2	15.5	11.5	7.78	4.90	3.16	2.14	1.44	129	124	
	0	0.93	1.39	2.09	3.16	5.25	8.64	13.3	18.1	21.2	21.1	17.9	13.2	8.80	5.45	3.32	2.22	1.48	0.98	149	143	
	-3	0.90	1.34	2.01	3.03	4.99	8.17	12.6	17.1	20.1	20.1	17.3	12.8	8.64	5.42	3.35	2.25	1.50	1.00	143	137	
	-6	0.48	0.69	1.00	1.41	1.88	2.70	4.13	6.41	9.03	11.1	11.7	10.6	8.25	5.90	3.99	2.66	1.85	1.27	85.0	78.3	
	-9	0.59	0.85	1.21	1.69	2.22	3.02	4.14	5.52	6.80	7.58	7.51	6.60	5.18	3.84	2.78	1.95	1.38	0.96	63.8	56.3	
	-12	0.74	1.05	1.49	2.06	2.74	3.62	4.52	5.01	4.82	4.05	3.09	2.27	1.75	1.52	1.39	1.13	0.83	0.60	42.7	32.1	
	-15	0.37	0.51	0.70	0.95	1.28	1.67	2.23	2.94	3.66	4.16	4.27	3.94	3.31	2.58	1.96	1.48	1.10	0.80	37.9	28.1	
	-18	0.30	0.39	0.51	0.66	0.85	0.99	1.18	1.49	1.91	2.33	2.60	2.61	2.35	1.93	1.52	1.18	0.90	0.67	24.4	10.3	
	-21	0.38	0.49	0.62	0.78	0.93	1.04	1.02	0.88	0.68	0.55	0.50	0.49	0.55	0.58	0.54	0.46	0.37	0.30	11.2	0.00	
	-24	0.28	0.36	0.44	0.55	0.65	0.74	0.75	0.71	0.74	0.79	0.79	0.76	0.70	0.62	0.56	0.48	0.40	0.32	10.7	0.00	
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
Φ t	9.34	13.3	18.9	26.8	38.5	56.5	81.6	110	133	141	132	109	81.7	57.6	40.0	28.2	19.9	14.0	11.1	---		
Φ a	0.00	0.21	4.19	13.2	27.8	47.6	74.3	104	127	137	127	103	73.9	50.1	31.2	16.1	4.41	0.00	---	940		

one-half-peak spread: U:8.0,D:10.1 , L:8.9,R:9.8


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.4V I:0.0963A P:11.88W PF:0.5601 Lamp Flux:1250.16x1 lm		
NAME: 8.01.017.0102 20° LWW-WZB-W55-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

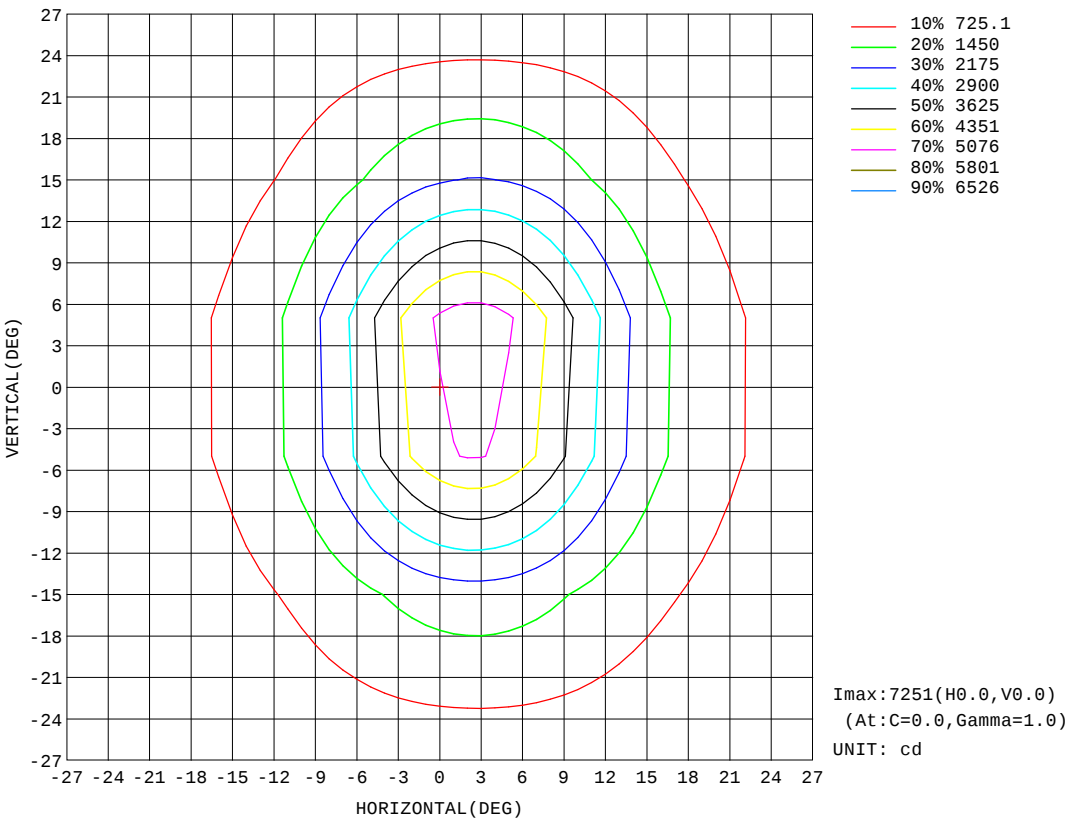


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.4V I:0.0963A P:11.88W PF:0.5601 Lamp Flux:1250.16x1 lm		
NAME: 8.01.017.0102 20° LWW-WZB-W55-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

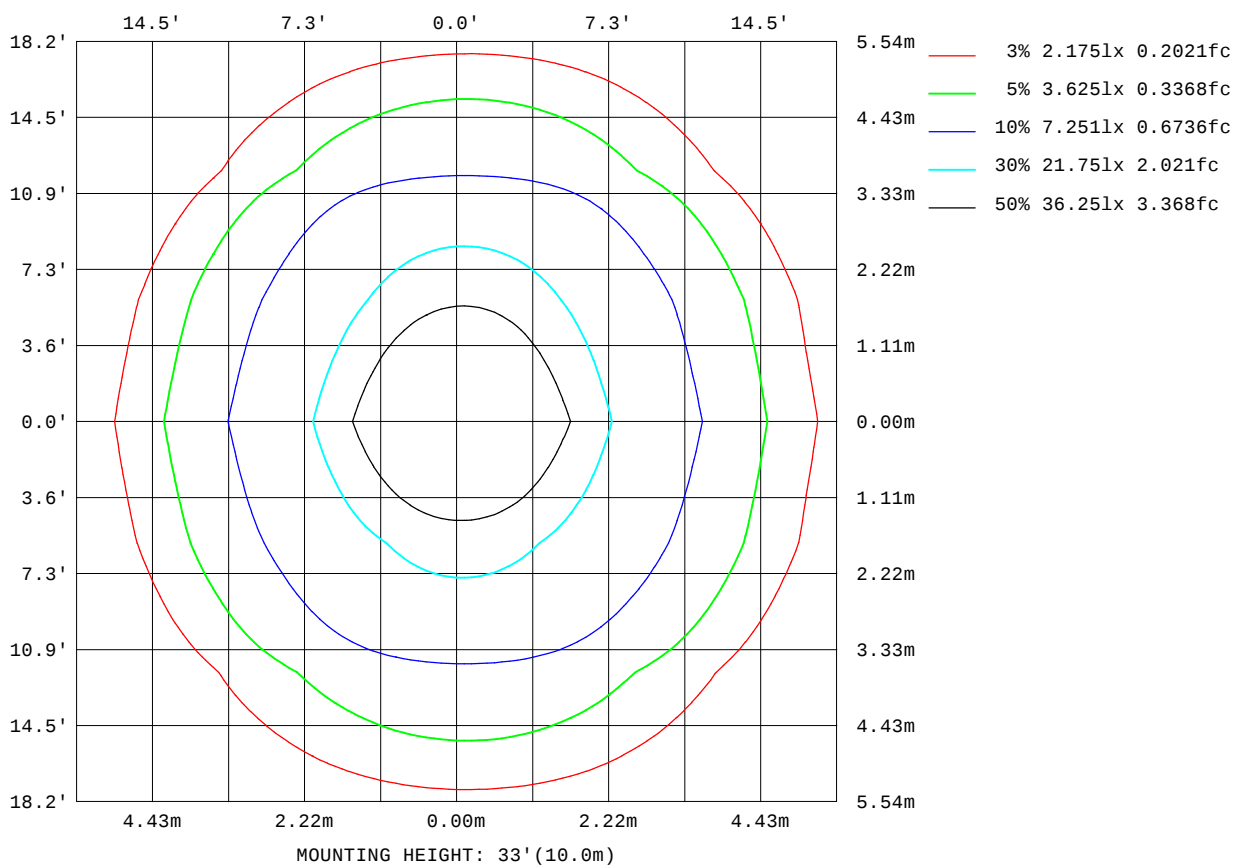


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.4V I:0.0963A P:11.88W PF:0.5601 Lamp Flux:1250.16x1 lm		
NAME: 8.01.017.0102 20° LWW-WZB-W55-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

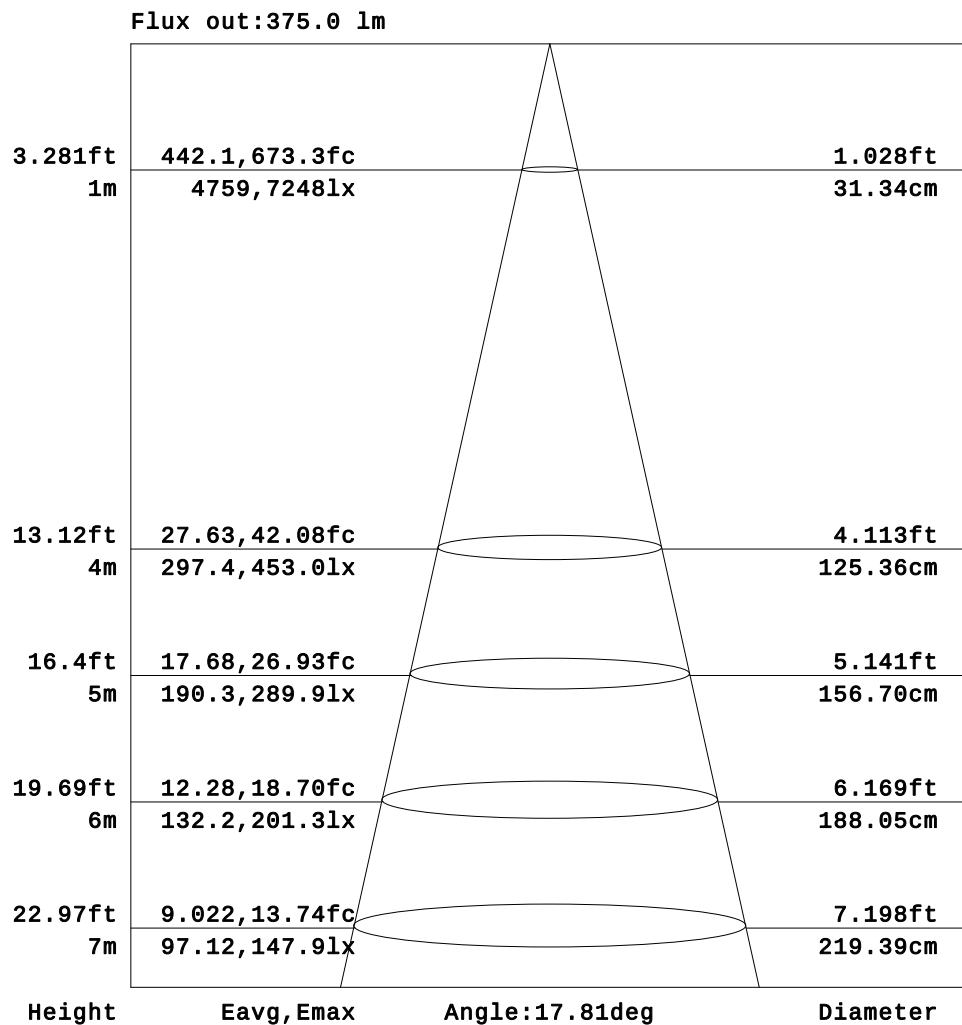


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

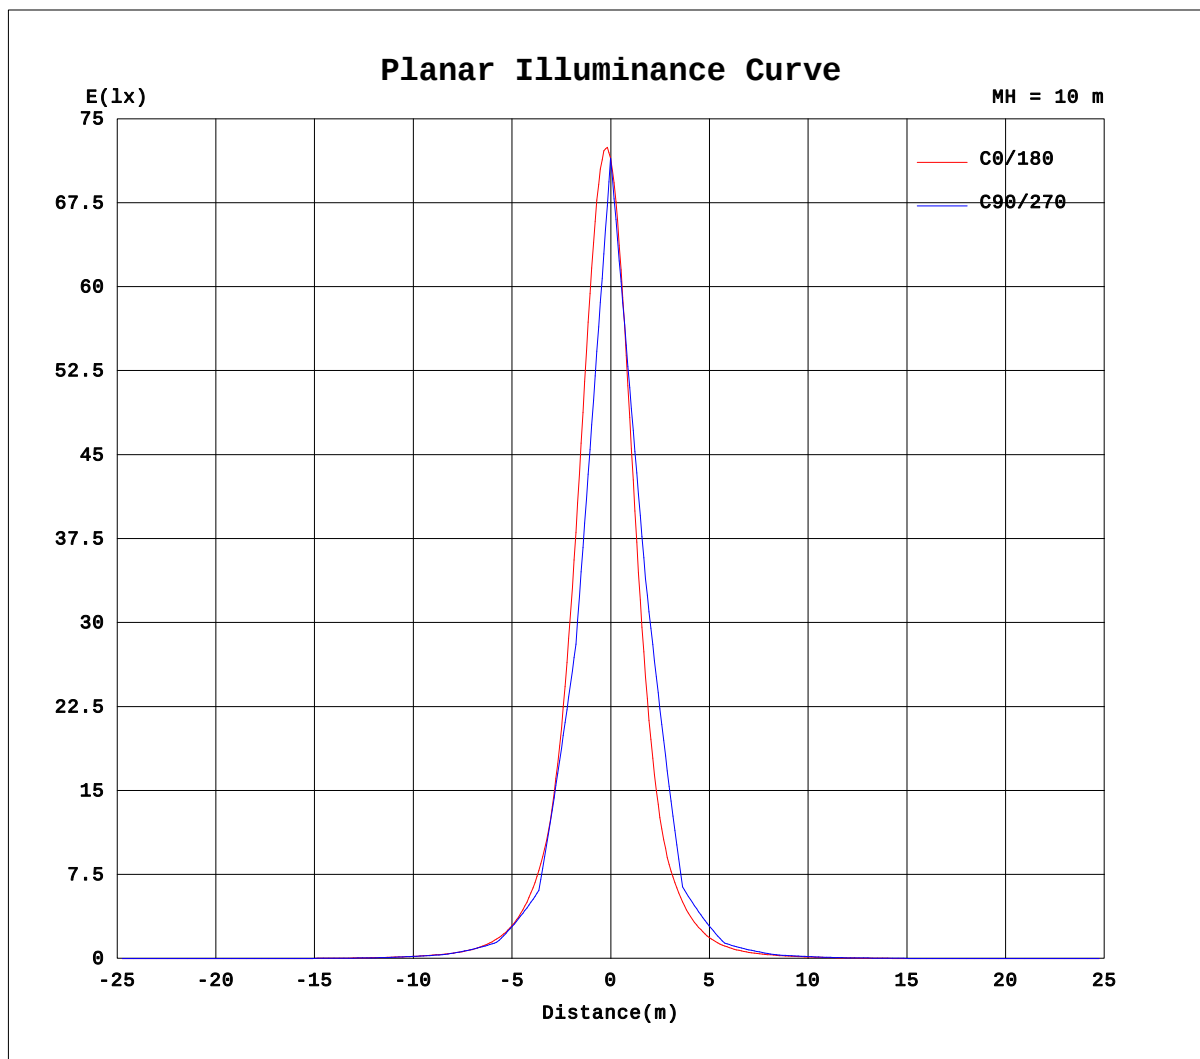

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-09-11

V(β) Range: -80 - 80DEG
V(β) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.0963A P:11.88W PF:0.5601 Lamp Flux:1250.16x1 lm		
NAME: 8.01.017.0102 20° LWW-WZB-W55-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.87	2.00	2.54	2.96	3.47
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.47	2.70	4.57	5.36	6.37	7.08
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.76	3.65	5.84	7.84	10.7	13.8	16.0	17.7	19.1
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.41	4.92	9.04	13.4	17.2	21.2	25.1	28.1	30.3	31.5
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.55	4.49	9.39	14.7	21.1	28.0	35.2	42.5	48.9	54.2	57.3
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.37	11.5	17.9	25.3	34.3	44.5	55.1	65.3	74.4	81.2	83.9
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.16	6.84	13.7	22.0	32.1	44.8	60.1	77.9	98.7	121	141	153
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.10	6.82	13.4	22.2	33.7	48.4	67.0	89.3	117	150	184	212	226
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.36	6.37	13.9	23.5	36.7	54.3	77.6	112	163	236	326	415	474
-20	0.00	0.00	0.00	0.00	0.00	0.00	3.68	11.8	21.4	34.5	52.7	77.3	112	170	261	392	543	675	742
-15	0.00	0.00	0.00	0.00	0.00	0.00	1.86	9.77	19.5	32.5	50.9	76.2	116	188	316	528	855	1358	1795
-10	0.00	0.00	0.00	0.00	0.00	0.00	6.09	14.9	26.8	43.9	67.3	102	168	292	517	889	1538	2453	2978
-5	0.00	0.00	0.00	0.00	0.00	0.00	3.81	12.0	22.8	38.1	59.6	90.4	146	257	475	870	1739	3360	4897
0	0.00	0.00	0.00	0.00	0.00	0.00	7.84	16.9	29.5	48.0	73.7	114	196	367	697	1377	3074	5697	7251
5	0.00	0.00	0.00	0.00	0.00	0.00	3.91	12.1	22.8	38.0	59.4	89.6	144	255	473	875	1781	3518	5187
10	0.00	0.00	0.00	0.00	0.00	0.00	6.35	15.1	26.7	43.6	66.5	99.5	164	287	518	910	1701	2882	3614
15	0.00	0.00	0.00	0.00	0.00	0.00	2.02	9.78	19.4	32.2	50.0	73.9	111	182	310	531	899	1529	2104
20	0.00	0.00	0.00	0.00	0.00	0.00	3.71	11.6	21.1	33.9	50.8	73.3	106	162	253	390	555	707	782
25	0.00	0.00	0.00	0.00	0.00	0.00	0.41	6.27	13.7	23.0	35.4	51.7	72.5	104	153	228	323	422	488
30	0.00	0.00	0.00	0.00	0.00	0.00	0.40	6.68	13.0	21.2	31.9	45.3	61.5	80.9	107	139	173	201	215
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.11	6.65	13.0	20.6	30.0	41.3	55.1	71.1	91.1	113	132	144
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	5.01	10.5	16.4	23.3	31.8	41.1	51.0	60.7	69.0	75.0	77.6
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.47	4.11	8.55	13.3	19.2	25.8	32.7	39.8	46.1	51.1	54.0
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.34	4.30	7.84	11.9	15.9	20.1	24.2	27.6	30.0	31.2
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.56	3.15	5.12	7.15	10.1	13.4	16.1	18.0	19.5
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	2.84	4.94	6.25	7.39	8.18	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.93	2.10	2.89	3.47	3.99	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-09-11

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.0963A P:11.88W PF:0.5601 Lamp Flux:1250.16x1 lm		
NAME: 8.01.017.0102 20° LWW-WZB-W55-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	3.43	3.01	2.71	1.88	0.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	6.51	5.79	4.95	2.73	0.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	19.1	17.9	16.3	13.5	10.0	7.24	5.07	2.97	1.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	30.8	28.8	25.7	21.4	17.0	12.7	8.38	4.56	1.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	57.6	54.8	49.7	42.6	34.6	26.8	19.4	13.1	8.04	3.65	0.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	82.9	77.2	68.4	57.4	45.8	34.7	25.2	17.3	10.9	4.97	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	154	144	125	103	80.1	60.9	44.4	31.2	20.7	12.4	5.75	1.49	0.00	0.00	0.00	0.00	0.00	0.00
-30	220	198	164	129	98.5	73.3	52.5	36.0	23.4	14.0	6.98	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	480	427	340	250	173	117	80.7	55.4	36.5	22.6	12.8	4.92	0.00	0.00	0.00	0.00	0.00	0.00
-20	709	593	443	304	199	128	87.0	58.2	37.4	22.6	12.1	3.64	0.00	0.00	0.00	0.00	0.00	0.00
-15	1802	1382	898	568	343	202	124	80.9	52.7	32.4	18.5	8.62	0.92	0.00	0.00	0.00	0.00	0.00
-10	2628	1758	1058	629	360	203	121	78.7	50.0	29.9	16.5	6.87	0.00	0.00	0.00	0.00	0.00	0.00
-5	4846	3308	1774	928	511	279	159	97.6	62.8	38.6	22.2	11.1	2.36	0.00	0.00	0.00	0.00	0.00
0	6040	3504	1671	836	443	240	136	85.3	54.2	32.5	18.1	8.20	0.01	0.00	0.00	0.00	0.00	0.00
5	5153	3494	1832	938	511	278	158	97.1	62.9	38.9	22.5	11.3	2.43	0.00	0.00	0.00	0.00	0.00
10	3164	2018	1112	637	357	200	120	78.4	50.5	30.6	17.0	7.14	0.00	0.00	0.00	0.00	0.00	0.00
15	2127	1582	960	577	341	200	123	80.8	53.5	33.5	19.4	9.34	1.00	0.00	0.00	0.00	0.00	0.00
20	744	611	445	300	195	126	86.5	59.4	39.0	24.1	13.2	4.55	0.00	0.00	0.00	0.00	0.00	0.00
25	493	435	340	245	169	116	81.1	57.3	38.7	24.6	14.2	6.18	0.01	0.00	0.00	0.00	0.00	0.00
30	209	187	156	123	96.2	74.1	55.0	39.3	26.2	16.1	8.52	1.28	0.00	0.00	0.00	0.00	0.00	0.00
35	146	136	119	98.7	79.1	62.5	47.5	34.7	23.8	14.9	7.55	2.22	0.00	0.00	0.00	0.00	0.00	0.00
40	77.0	72.8	66.2	57.7	48.1	38.5	29.2	21.1	14.0	7.42	1.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	54.4	52.4	48.5	43.2	36.6	29.9	23.1	16.6	11.0	5.65	1.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	30.8	29.3	26.9	23.6	19.8	15.9	11.6	7.47	3.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	19.7	18.7	17.4	15.3	12.4	9.52	6.69	4.53	2.64	0.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	7.93	7.21	6.43	4.67	2.60	0.84	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	4.08	3.75	3.41	2.74	1.70	0.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: