

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	6605.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	38.3V x 37.3H
	At 50% of Imax	16.9V x 17.8H
	At 90% of Imax	4.9V x 6.7H

Beam Flux	Total	997.5 lumens per klm.
	To 10% of Imax	722.2 lumens per klm.
	To 50% of Imax	305.4 lumens per klm.
	To 90% of Imax	30.0 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.5V I:0.1866A P:24.64W PF:0.5991 Lamp Flux:1190.06x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

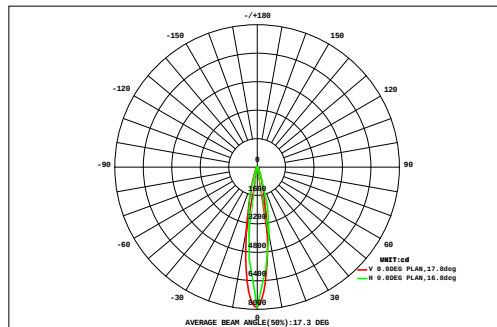

DATA OF LAMP		Eff:48.30lm/W	
MODEL LWW-WZB-W55-L6-RDM		Imax(cd)	7861
NOMINAL POWER(W)	24	AVAILABILITY(%)	73.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	878.2
NOMINAL FLUX(lm)	1190.06	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1190
TEST VOLTAGE(V)	220.5	θ @50%(H,V)	18,17DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.22	0.29	0.37	0.47	0.58	0.71	0.82	0.91	0.97	0.98	0.95	0.87	0.77	0.66	0.54	0.44	0.35	0.28	11.2	0.00
27	0.22	0.29	0.37	0.47	0.58	0.71	0.82	0.91	0.97	0.98	0.95	0.87	0.77	0.66	0.54	0.44	0.35	0.28	11.2	0.00
24	0.26	0.35	0.48	0.65	0.85	1.07	1.30	1.50	1.65	1.70	1.67	1.55	1.38	1.17	0.95	0.75	0.58	0.44	18.3	0.00
21	0.36	0.50	0.69	0.93	1.19	1.49	1.76	1.99	2.12	2.13	2.02	1.82	1.57	1.30	1.04	0.80	0.60	0.44	22.8	2.25
18	0.47	0.67	0.92	1.22	1.56	1.93	2.25	2.50	2.59	2.54	2.36	2.08	1.75	1.41	1.10	0.83	0.61	0.44	27.2	12.8
15	0.42	0.62	0.90	1.30	1.85	2.72	4.03	5.63	7.02	7.59	7.04	5.71	4.17	2.91	2.08	1.52	1.10	0.78	57.4	48.1
12	0.52	0.78	1.15	1.68	2.46	3.77	5.70	7.89	9.59	10.0	8.92	6.95	4.90	3.35	2.36	1.70	1.22	0.85	73.8	65.6
9	0.79	1.17	1.73	2.49	3.74	5.84	8.64	11.3	12.7	12.1	9.78	6.95	4.54	3.04	2.16	1.52	1.05	0.72	90.4	82.7
6	0.66	0.99	1.48	2.18	3.37	5.50	8.75	12.4	15.3	16.1	14.3	10.9	7.42	4.66	2.94	1.97	1.35	0.92	111	104
3	0.49	0.76	1.15	1.77	2.85	4.95	8.62	13.3	17.8	20.2	19.1	15.3	10.6	6.45	3.81	2.47	1.69	1.15	133	125
0	0.87	1.32	2.01	3.23	5.69	9.98	15.4	20.6	23.4	22.2	17.8	12.3	7.49	4.21	2.54	1.72	1.15	0.77	153	146
-3	0.82	1.25	1.90	3.04	5.33	9.30	14.4	19.3	22.0	21.0	17.0	11.9	7.30	4.15	2.52	1.70	1.14	0.77	145	138
-6	0.40	0.58	0.85	1.17	1.55	2.27	3.97	6.49	9.38	11.5	11.6	9.74	7.15	4.70	2.97	1.96	1.37	0.95	78.5	69.8
-9	0.48	0.69	0.99	1.36	1.77	2.39	3.50	4.92	6.24	6.92	6.55	5.35	3.99	2.86	2.00	1.40	0.99	0.69	53.1	43.5
-12	0.60	0.85	1.20	1.66	2.20	2.85	3.46	3.75	3.32	2.26	1.27	0.75	0.58	0.77	0.90	0.75	0.56	0.40	28.1	17.1
-15	0.28	0.39	0.54	0.74	1.00	1.32	1.80	2.47	3.17	3.62	3.61	3.13	2.43	1.80	1.35	1.02	0.75	0.55	30.0	18.1
-18	0.21	0.27	0.35	0.46	0.57	0.63	0.73	0.98	1.39	1.83	2.09	2.01	1.69	1.30	1.01	0.78	0.59	0.44	17.3	5.01
-21	0.26	0.34	0.42	0.51	0.59	0.62	0.52	0.34	0.21	0.16	0.15	0.18	0.25	0.30	0.29	0.26	0.22	0.18	5.81	0.00
-24	0.20	0.24	0.30	0.35	0.41	0.44	0.42	0.46	0.51	0.53	0.53	0.50	0.45	0.39	0.33	0.28	0.24	0.20	6.74	0.00
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)	6	9	12	15	18	21	24	27			
Φ t	8.32	12.1	17.4	25.2	37.6	57.8	86.1	117	139	143	127	98.0	68.4	45.4	30.9	21.9	15.5	11.0	1062	---
Φ a	0.00	0.00	2.79	9.91	26.2	49.0	78.1	110	133	137	121	90.7	60.1	35.5	19.8	4.95	0.00	0.00	---	878

one-half-peak spread: U:7.2,D:9.8 , L:9.4,R:8.5


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-11-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.5V I:0.1866A P:24.64W PF:0.5991 Lamp Flux:1190.06x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

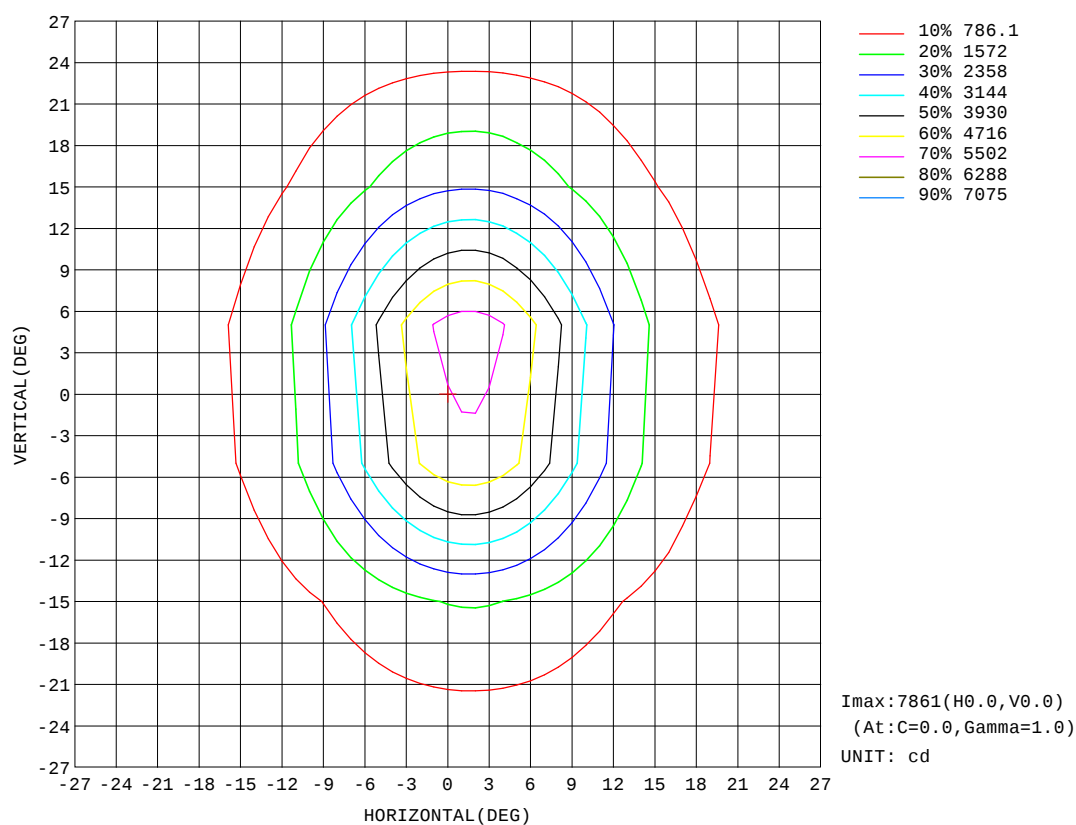


H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2023-11-06

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.5V I:0.1866A P:24.64W PF:0.5991 Lamp Flux:1190.06x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

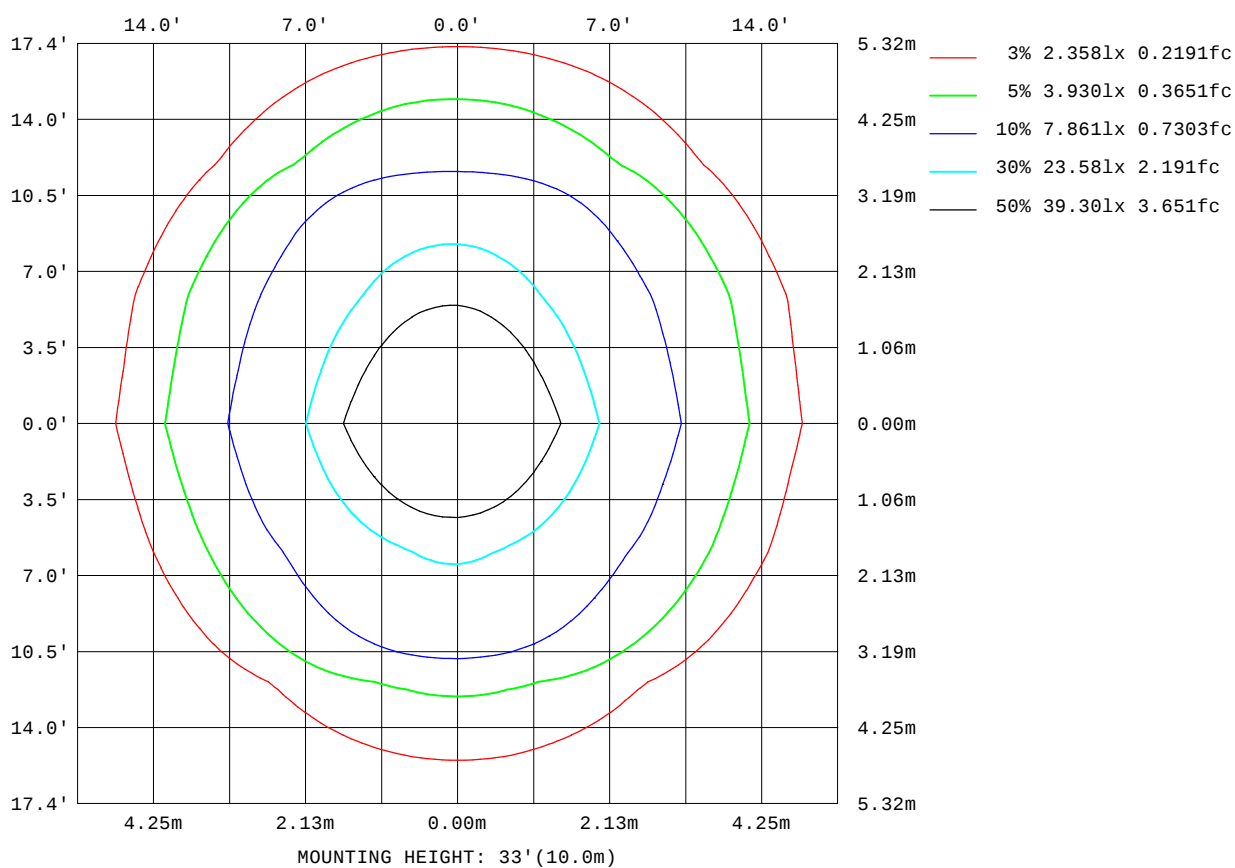


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.5V I:0.1866A P:24.64W PF:0.5991 Lamp Flux:1190.06x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

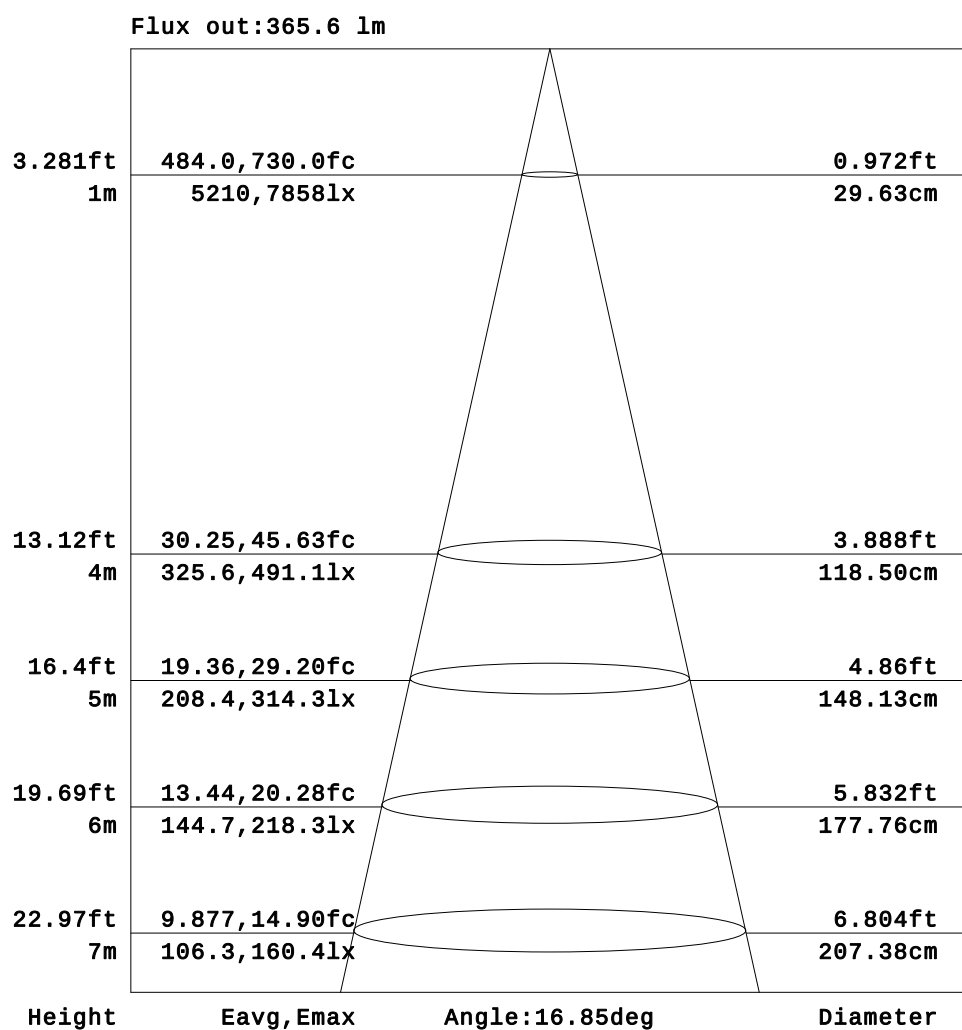


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

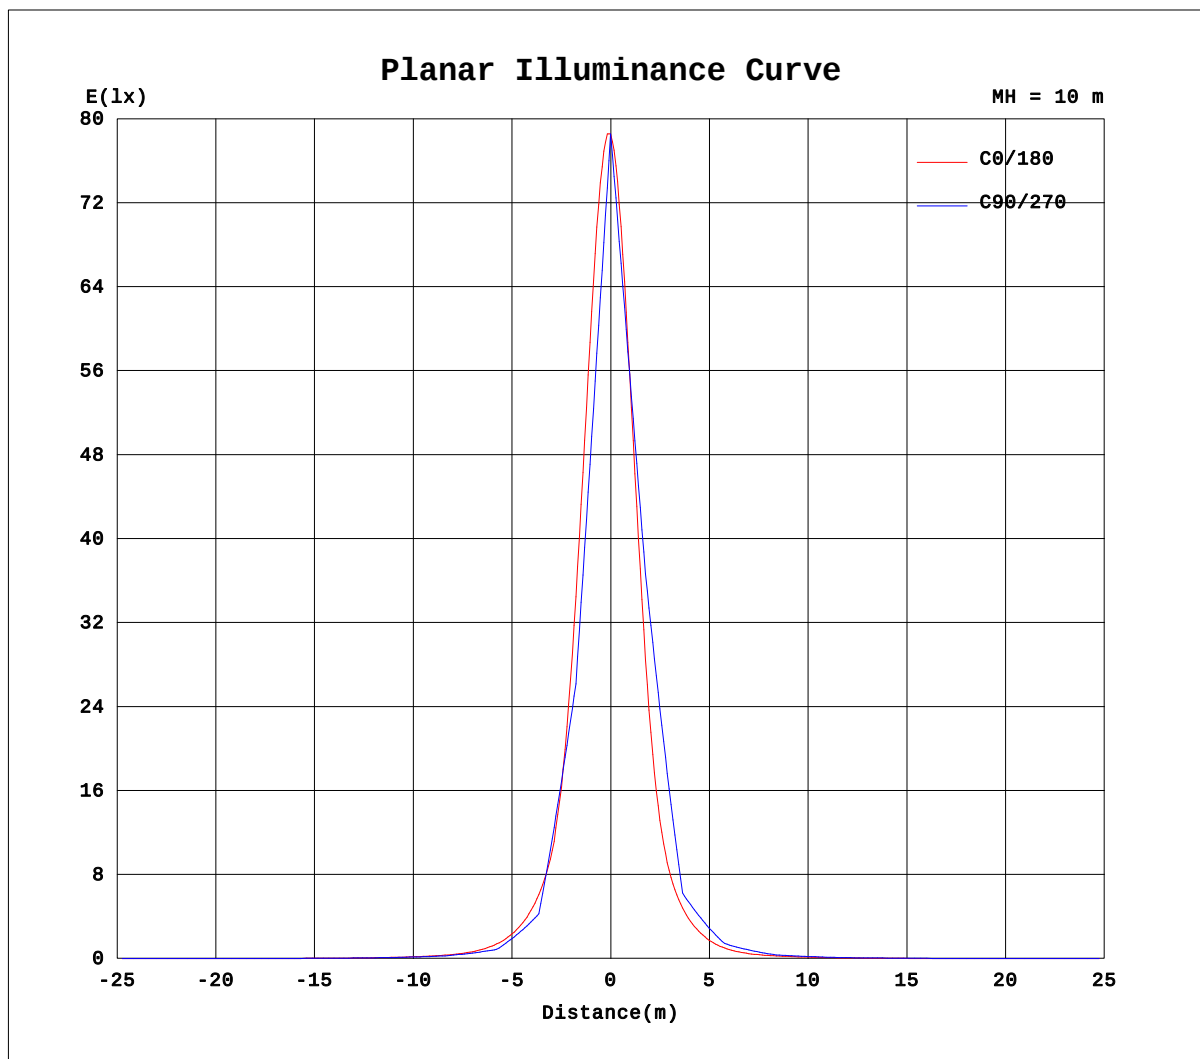

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2023-11-06

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.1866A P:24.64W PF:0.5991 Lamp Flux:1190.06x1 lm																	
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM									TYPE:LED			WEIGHT:					
DIM.:									SPEC.:			SERIAL No.:2023110012					
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:			PROTECTION ANGLE:					

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	1.89	2.95	3.61	4.60	5.68	6.30	6.72	6.80
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.03	4.80	6.44	7.91	10.1	11.9	13.0	13.5	13.9
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.61	3.80	5.58	8.43	11.0	13.1	15.5	18.1	20.1	21.9	22.7
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.03	5.51	8.73	11.3	14.4	17.3	20.1	23.0	25.9	28.8	31.1	32.0
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.83	2.83	6.70	11.2	14.8	18.7	23.0	27.4	31.9	36.0	40.1	43.8	46.0
-40	0.00	0.00	0.00	0.00	0.00	0.00	3.17	6.74	12.0	16.7	21.2	26.4	32.2	38.4	44.2	49.4	54.7	58.7	60.5
-35	0.00	0.00	0.00	0.00	0.00	0.00	3.44	8.34	13.2	18.7	24.7	31.7	39.1	46.8	56.2	67.2	79.6	91.1	98.1
-30	0.00	0.00	0.00	0.00	0.00	1.71	7.24	13.0	18.6	25.4	33.7	42.8	51.9	62.3	76.7	94.7	114	130	138
-25	0.00	0.00	0.00	0.00	0.00	0.60	6.76	12.8	18.9	26.6	36.1	46.8	59.8	80.6	115	165	227	287	324
-20	0.00	0.00	0.00	0.00	0.00	4.12	10.8	17.2	24.9	35.2	46.9	59.9	82.0	123	190	281	390	481	516
-15	0.00	0.00	0.00	0.00	0.00	2.31	9.11	15.7	23.5	33.9	46.4	61.5	89.4	148	253	427	714	1192	1600
-10	0.00	0.00	0.00	0.00	0.01	6.03	12.5	20.0	29.5	42.4	56.8	80.7	134	245	436	765	1383	2303	2750
-5	0.00	0.00	0.00	0.00	0.00	4.04	10.6	17.5	26.4	38.8	53.1	74.3	123	228	429	820	1793	3638	5197
0	0.00	0.00	0.00	0.00	0.86	7.35	13.9	21.6	32.0	46.2	63.0	97.5	177	344	666	1443	3552	6497	7861
5	0.00	0.00	0.00	0.00	0.00	4.24	10.8	17.6	26.6	39.2	54.1	76.6	129	243	462	886	1965	4013	5737
10	0.00	0.00	0.00	0.00	0.17	6.43	12.8	20.2	30.1	43.5	59.2	87.6	153	286	525	944	1867	3223	3840
15	0.00	0.00	0.00	0.00	0.00	2.83	9.12	15.7	23.8	34.6	48.2	65.5	100	176	314	543	964	1672	2259
20	0.00	0.00	0.00	0.00	0.00	4.25	10.5	17.2	25.2	36.2	49.1	65.0	96.2	158	261	404	569	707	754
25	0.00	0.00	0.00	0.00	0.00	0.92	6.58	12.6	18.9	26.9	37.2	49.2	66.4	97.4	152	233	333	428	485
30	0.00	0.00	0.00	0.00	0.00	1.63	7.59	12.8	18.4	25.4	34.4	44.8	57.1	73.7	101	138	178	210	223
35	0.00	0.00	0.00	0.00	0.00	0.00	3.56	8.43	12.9	18.3	24.7	32.5	41.8	52.6	68.6	90.2	115	137	150
40	0.00	0.00	0.00	0.00	0.00	0.00	3.61	7.50	11.5	16.1	21.0	27.3	34.6	42.7	52.2	61.3	70.6	77.5	80.1
45	0.00	0.00	0.00	0.00	0.00	0.00	0.96	3.02	6.69	10.9	14.5	18.8	24.0	29.6	36.3	43.2	50.1	56.0	59.1
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.13	5.24	8.67	11.1	14.2	17.8	21.7	26.1	30.5	34.8	37.8	38.8
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.78	3.73	5.66	8.25	11.4	14.0	17.2	20.8	23.9	26.3	27.8
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	2.02	4.80	7.21	8.67	11.3	13.6	14.9	16.3	17.1
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.61	1.81	3.21	4.01	5.06	6.42	7.43	8.29	9.45
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.45	1.27	2.11
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.42	0.98
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-11-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.1866A P:24.64W PF:0.5991 Lamp Flux:1190.06x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	7.07	6.68	5.95	4.90	3.59	2.78	2.00	0.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	14.1	12.8	11.2	8.69	6.42	5.04	3.03	0.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	22.9	21.5	19.1	16.3	13.2	10.8	8.60	5.71	3.83	2.59	0.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	31.1	28.4	24.9	21.3	17.9	14.9	11.9	9.02	6.79	3.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	46.0	43.2	38.9	33.8	28.8	23.8	19.2	14.9	11.6	8.24	4.23	1.70	0.00	0.00	0.00	0.00	0.00	0.00
-40	59.3	54.9	48.9	42.2	35.6	28.8	22.9	18.0	13.8	9.56	5.60	1.97	0.00	0.00	0.00	0.00	0.00	0.00
-35	98.0	90.2	78.4	65.2	53.4	43.5	34.8	27.1	20.4	14.9	10.2	5.92	1.53	0.00	0.00	0.00	0.00	0.00
-30	132	117	97.2	78.3	62.9	50.9	40.6	30.5	22.4	16.3	11.4	6.31	0.83	0.00	0.00	0.00	0.00	0.00
-25	320	276	216	157	111	78.2	57.6	43.5	31.8	22.6	15.8	10.1	4.29	0.00	0.00	0.00	0.00	0.00
-20	479	389	285	195	128	86.8	62.6	46.4	33.1	22.9	15.7	9.31	3.00	0.00	0.00	0.00	0.00	0.00
-15	1506	1024	626	393	239	144	91.0	62.3	44.5	30.5	20.8	13.3	6.81	0.85	0.00	0.00	0.00	0.00
-10	2182	1288	756	449	259	151	92.3	62.7	43.8	29.3	19.6	12.0	5.46	0.00	0.00	0.00	0.00	0.00
-5	4766	2900	1360	696	387	216	124	77.2	53.5	36.2	24.0	15.6	8.78	2.31	0.00	0.00	0.00	0.00
0	5970	3074	1259	652	352	193	110	70.0	48.2	31.9	21.1	13.5	6.77	0.60	0.00	0.00	0.00	0.00
5	5232	3170	1467	750	415	229	130	80.0	54.9	37.1	24.5	16.0	9.19	2.73	0.00	0.00	0.00	0.00
10	2973	1670	909	535	306	169	101	66.8	46.2	30.8	20.5	12.8	6.28	0.20	0.00	0.00	0.00	0.00
15	2086	1389	805	494	295	171	104	69.1	48.7	33.2	22.3	14.4	7.72	1.44	0.00	0.00	0.00	0.00
20	695	563	408	273	172	108	73.6	53.3	37.6	25.7	17.4	10.4	3.99	0.00	0.00	0.00	0.00	0.00
25	476	409	316	224	151	101	70.8	51.9	37.6	26.3	18.3	11.8	5.46	0.18	0.00	0.00	0.00	0.00
30	213	184	147	112	84.8	65.9	51.1	38.2	27.7	19.8	13.9	8.12	1.83	0.00	0.00	0.00	0.00	0.00
35	150	136	115	92.8	72.9	57.5	45.3	34.8	26.0	18.8	13.1	8.21	2.88	0.00	0.00	0.00	0.00	0.00
40	78.9	72.9	65.3	56.6	47.6	38.9	30.7	23.9	18.2	12.9	8.45	4.16	0.00	0.00	0.00	0.00	0.00	0.00
45	59.4	56.3	51.1	45.1	38.5	32.3	26.2	20.7	16.2	11.7	7.01	3.05	0.70	0.00	0.00	0.00	0.00	0.00
50	38.2	35.8	32.3	28.4	24.5	20.8	17.1	13.7	10.6	6.61	2.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	27.8	26.4	24.4	21.7	18.6	16.0	13.3	9.90	7.31	4.64	1.97	0.10	0.00	0.00	0.00	0.00	0.00	0.00
60	16.4	15.5	14.6	12.5	10.5	9.25	6.80	3.83	2.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	9.32	8.34	7.95	6.85	5.58	4.90	4.00	2.43	1.33	0.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	1.34	0.84	0.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.89	0.44	0.42	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-11-06

V(β) Range:-80 - 80DEG
 V(β) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks: