

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		7383.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	37.8V x 35.1H
	At 50% of Imax	15.7V x 17.3H
	At 90% of Imax	4.5V x 7.1H
Beam Flux	Total	997.6 lumens per klm.
	To 10% of Imax	766.2 lumens per klm.
	To 50% of Imax	328.8 lumens per klm.
	To 90% of Imax	34.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.5V I:0.1797A P:23.61W PF:0.5956 Lamp Flux:423.49x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110014
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

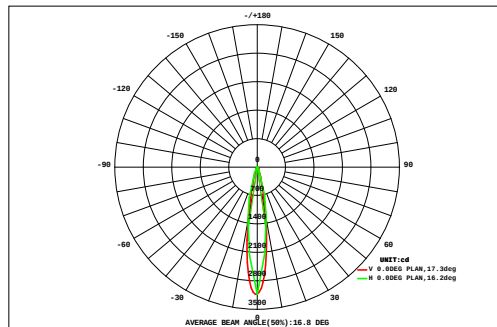

DATA OF LAMP		Eff:17.94lm/W	
MODEL LWW-WZB-W55-L6-RDM		Imax(cd)	3127
NOMINAL POWER(W)	24	AVAILABILITY(%)	78.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	332.3
NOMINAL FLUX(lm)	423.49	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	423.5
TEST VOLTAGE(V)	220.5	θ @50%(H,V)	17,16DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.04	0.05	0.07	0.09	0.12	0.14	0.17	0.19	0.21	0.21	0.21	0.19	0.16	0.14	0.11	0.08	0.06	0.05	2.30	0.00
27	0.04	0.05	0.07	0.09	0.12	0.14	0.17	0.19	0.21	0.21	0.21	0.19	0.16	0.14	0.11	0.08	0.06	0.05	2.30	0.00
24	0.05	0.07	0.09	0.13	0.18	0.25	0.31	0.37	0.42	0.43	0.43	0.39	0.34	0.28	0.22	0.16	0.12	0.08	4.33	0.00
21	0.07	0.10	0.14	0.20	0.27	0.36	0.44	0.51	0.55	0.56	0.53	0.48	0.40	0.32	0.24	0.17	0.12	0.08	5.55	0.00
18	0.09	0.13	0.19	0.27	0.37	0.48	0.58	0.66	0.69	0.69	0.64	0.55	0.45	0.35	0.25	0.18	0.12	0.08	6.77	0.00
15	0.09	0.14	0.22	0.34	0.51	0.76	1.17	1.72	2.22	2.45	2.32	1.86	1.31	0.88	0.62	0.44	0.29	0.19	17.5	13.9
12	0.11	0.18	0.30	0.47	0.71	1.09	1.72	2.49	3.11	3.31	2.99	2.30	1.56	1.04	0.73	0.51	0.34	0.21	23.2	19.7
9	0.18	0.30	0.49	0.74	1.09	1.73	2.70	3.67	4.22	4.10	3.33	2.28	1.44	0.98	0.69	0.46	0.29	0.18	28.9	25.7
6	0.15	0.26	0.43	0.67	1.02	1.73	2.95	4.44	5.60	5.93	5.34	4.08	2.69	1.64	1.01	0.66	0.43	0.27	39.3	36.4
3	0.12	0.21	0.35	0.56	0.90	1.68	3.15	5.19	7.02	7.88	7.54	6.07	4.07	2.38	1.36	0.88	0.59	0.38	50.3	47.7
0	0.24	0.42	0.67	1.02	1.89	3.65	6.11	8.36	9.41	8.99	7.33	4.96	2.92	1.59	0.94	0.64	0.41	0.25	59.8	57.1
-3	0.24	0.40	0.65	0.99	1.80	3.45	5.78	7.97	9.05	8.71	7.18	4.93	2.96	1.64	0.97	0.66	0.43	0.27	58.1	55.3
-6	0.10	0.17	0.30	0.47	0.56	0.81	1.54	2.80	4.18	5.01	5.05	4.31	3.09	1.97	1.19	0.79	0.55	0.37	33.3	29.8
-9	0.15	0.24	0.39	0.57	0.73	1.04	1.63	2.41	3.12	3.40	3.16	2.56	1.84	1.26	0.86	0.59	0.41	0.27	24.6	21.3
-12	0.20	0.33	0.52	0.71	0.96	1.42	1.92	2.21	2.16	1.75	1.12	0.63	0.44	0.44	0.46	0.36	0.25	0.16	16.1	11.7
-15	0.08	0.13	0.20	0.32	0.44	0.57	0.81	1.16	1.53	1.77	1.79	1.56	1.22	0.89	0.64	0.47	0.34	0.23	14.1	10.0
-18	0.06	0.09	0.14	0.23	0.30	0.31	0.35	0.48	0.69	0.92	1.07	1.05	0.90	0.69	0.52	0.39	0.28	0.19	8.66	3.63
-21	0.10	0.14	0.21	0.29	0.36	0.40	0.34	0.22	0.14	0.10	0.11	0.15	0.20	0.24	0.21	0.15	0.10	0.07	3.53	0.00
-24	0.06	0.09	0.13	0.18	0.23	0.27	0.25	0.24	0.27	0.29	0.29	0.28	0.25	0.24	0.21	0.16	0.12	0.08	3.65	0.00
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
Φ t	2.13	3.46	5.49	8.25	12.4	20.1	31.9	45.1	54.6	56.5	50.4	38.6	26.2	16.9	11.2	7.76	5.26	3.42	400	---
Φ a	0.00	0.00	0.29	2.12	8.02	16.2	28.9	42.3	51.8	53.9	47.8	36.2	23.8	13.8	5.58	1.48	0.00	0.00	---	332

one-half-peak spread: U:8.1,D:7.8 , L:8.0,R:9.4


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-11-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.5V I:0.1797A P:23.61W PF:0.5956 Lamp Flux:423.49x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110014
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

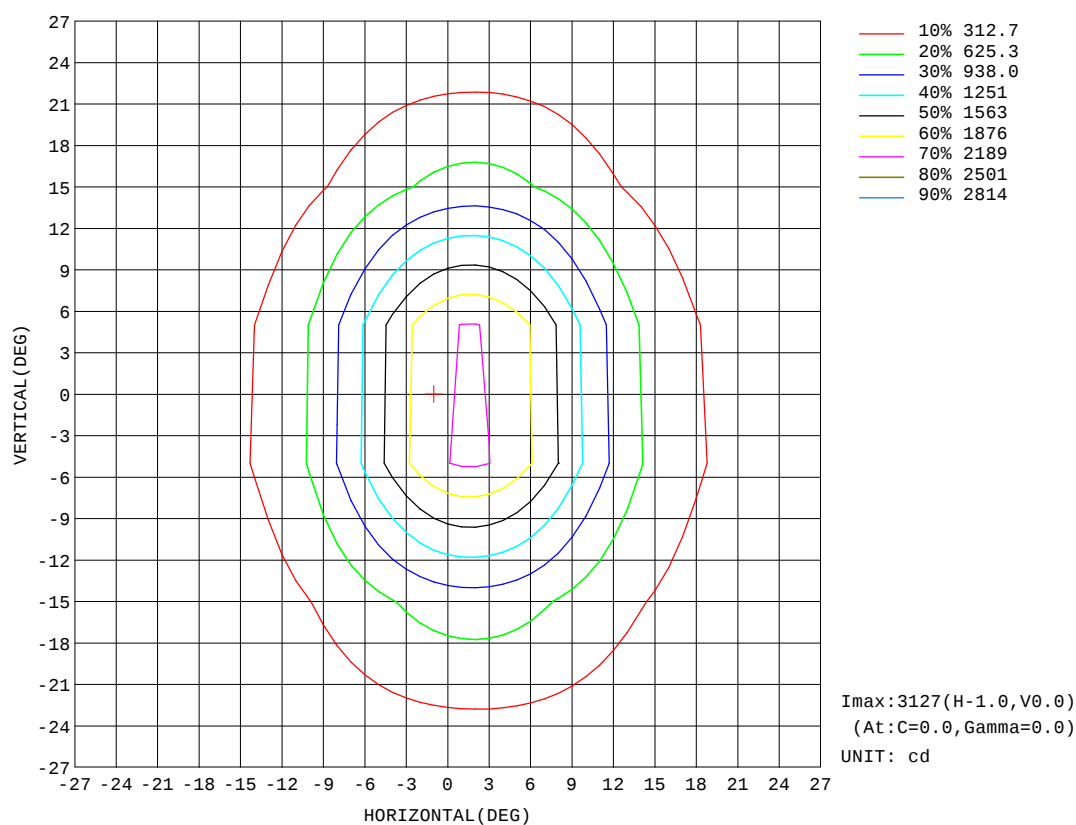


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.5V I:0.1797A P:23.61W PF:0.5956 Lamp Flux:423.49x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110014
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

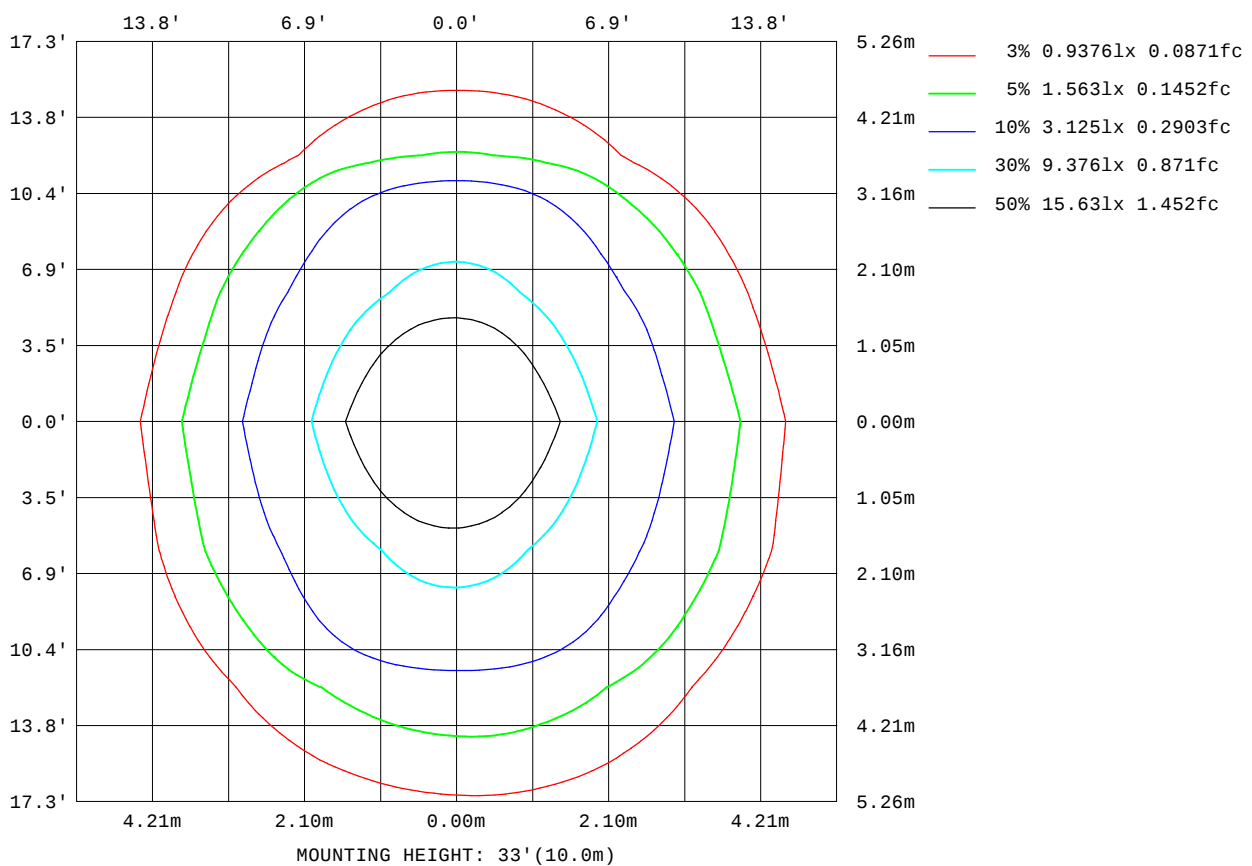


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.5V I:0.1797A P:23.61W PF:0.5956 Lamp Flux:423.49x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110014
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

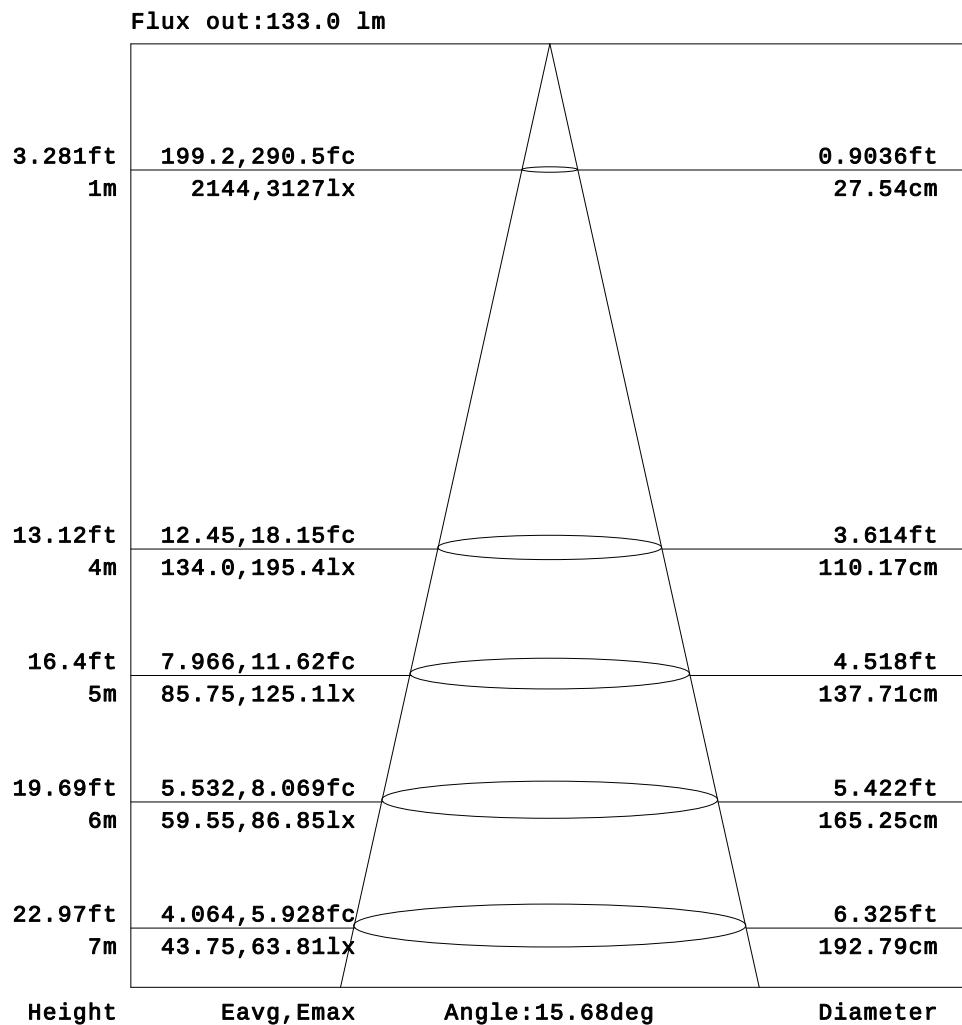


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

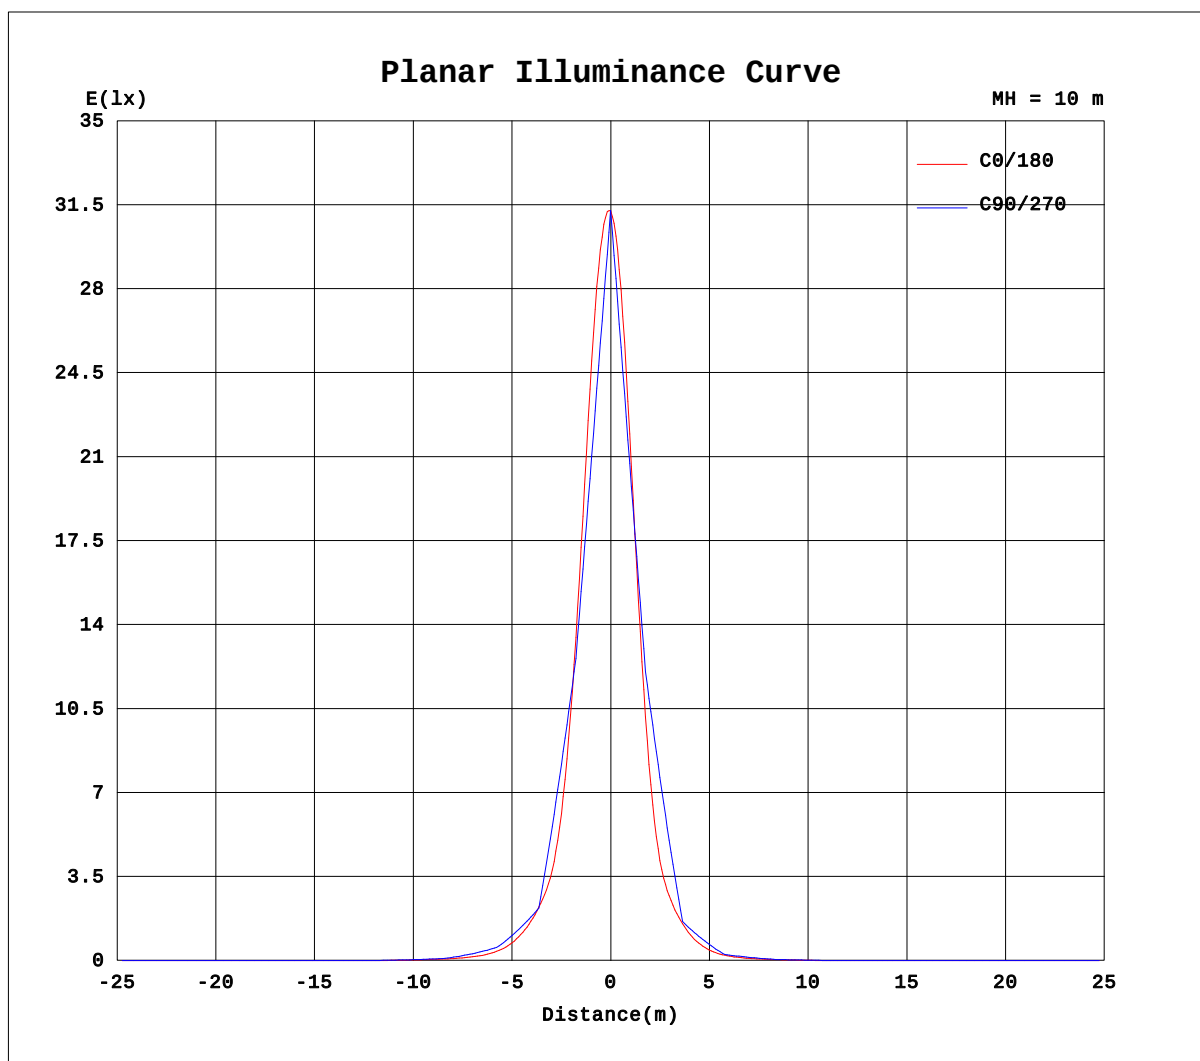

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2023-11-06

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.1797A P:23.61W PF:0.5956 Lamp Flux:423.49x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110014
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.37	1.05	1.47
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.31	2.50	3.15
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	2.07	3.85	5.78	8.02	10.6	12.1
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.24	5.49	9.24	13.0	16.9	20.2	21.9
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	2.32	5.10	9.36	15.4	24.2	34.9	45.4	52.4
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.20	6.33	11.2	17.4	28.0	43.4	62.0	77.1	85.8
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	2.95	7.44	13.2	23.3	43.5	76.8	116	150	172
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.43	7.18	12.5	21.9	42.3	82.8	141	200	245	267
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.71	6.55	12.1	21.7	44.0	94.5	180	309	560	775
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	4.82	9.99	17.7	34.7	77.9	169	299	597	1084	1326
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.30	8.43	14.8	28.2	62.0	142	285	652	1492	2182
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.76	5.82	11.3	20.0	41.2	96.5	215	456	1292	2597	3124
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.37	8.40	14.5	26.9	57.9	131	271	635	1464	2153
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	4.96	9.75	16.4	30.9	64.6	141	274	550	1025	1272
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.75	6.18	10.9	18.7	35.8	72.9	144	263	500	713
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.14	6.26	10.4	17.2	30.2	53.3	90.6	138	180	197
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	2.30	6.04	10.3	17.1	28.8	48.0	74.4	101	117
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.36	4.70	7.99	11.8	17.7	25.2	32.9	38.4	40.5
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	1.69	3.53	6.47	10.1	14.6	19.6	23.6	25.7
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.32	3.86	6.02	7.94	9.80	11.0	11.3
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	1.43	2.58	3.60	4.64	5.66	6.15
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.81	1.01
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	0.51
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.1797A P:23.61W PF:0.5956 Lamp Flux:423.49x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110014
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	1.59	1.23	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	3.02	1.93	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	12.7	11.6	9.01	6.29	4.11	2.29	0.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	22.1	19.5	15.2	10.8	6.69	3.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	54.2	49.2	39.1	27.6	17.6	10.7	5.40	2.23	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	84.2	71.8	53.5	35.7	22.3	13.7	7.45	2.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	176	156	120	80.9	47.6	26.5	14.7	7.85	2.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	256	214	156	96.8	53.3	28.2	15.8	8.47	2.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	740	501	294	178	99.8	50.0	25.7	14.3	7.12	1.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	1053	597	326	190	99.8	47.6	24.4	13.8	6.83	1.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	2023	1211	540	270	143	66.9	32.5	17.7	9.90	3.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	2421	1188	464	236	114	51.0	26.0	14.6	7.65	1.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	1998	1177	514	253	128	59.2	29.2	16.3	9.20	3.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	1000	528	287	154	75.3	36.1	19.9	11.8	5.82	0.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	678	430	234	136	71.1	35.8	19.7	11.7	5.96	1.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	183	143	95.7	57.0	32.2	19.1	12.1	6.81	1.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	116	98.2	71.6	46.2	28.1	17.2	10.8	6.24	1.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	39.1	33.3	25.9	19.0	13.7	9.34	5.70	2.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	25.7	23.3	19.0	14.5	10.5	7.01	3.60	1.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	11.2	10.1	8.42	6.54	4.45	1.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	6.08	5.52	4.58	3.74	2.62	1.52	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.81	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.43	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-11-06

$V(\beta)$ Range:-80 - 80DEG
 $V(\beta)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks: