

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	6178.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	38.4V x 39.9H
	At 50% of Imax	17.0V x 18.5H
	At 90% of Imax	4.7V x 6.5H

Beam Flux	Total	997.9 lumens per klm.
	To 10% of Imax	723.8 lumens per klm.
	To 50% of Imax	293.2 lumens per klm.
	To 90% of Imax	27.0 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.3V I:0.1808A P:23.74W PF:0.5961 Lamp Flux:1520.6x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110013
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

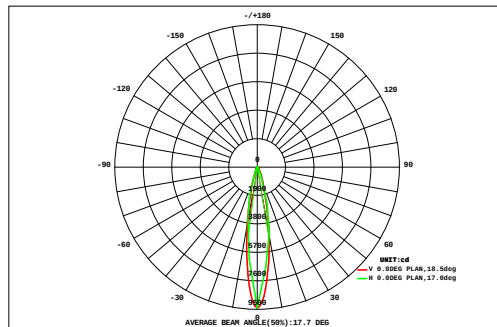

DATA OF LAMP		Eff:64.04lm/W	
MODEL LWW-WZB-W55-L6-RDM	Imax(cd)	9394	
NOMINAL POWER(W)	24	AVAILABILITY(%)	74.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1127
NOMINAL FLUX(lm)	1520.6	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1521
TEST VOLTAGE(V)	220.3	θ @50%(H,V)	19,17DEG

AREA FLUX DIAGRAM																	UNIT:lm		Φ t	Φ a
27	0.23	0.27	0.33	0.40	0.50	0.62	0.76	0.89	1.00	1.08	1.09	1.06	1.00	0.91	0.81	0.70	0.58	0.48	12.7	0.00
24	0.25	0.31	0.41	0.54	0.74	0.99	1.28	1.56	1.80	1.94	1.99	1.93	1.81	1.63	1.42	1.21	0.99	0.79	21.6	0.00
21	0.32	0.42	0.56	0.78	1.08	1.44	1.82	2.17	2.40	2.52	2.49	2.37	2.16	1.90	1.63	1.35	1.08	0.83	27.3	2.39
18	0.40	0.53	0.73	1.04	1.44	1.91	2.38	2.80	3.01	3.11	2.99	2.79	2.50	2.15	1.83	1.48	1.14	0.86	33.1	15.6
15	0.36	0.51	0.75	1.16	1.85	2.82	4.24	6.07	7.84	8.91	8.72	7.45	5.84	4.38	3.25	2.50	1.93	1.47	70.1	60.8
12	0.44	0.64	0.99	1.59	2.57	3.98	6.06	8.59	10.9	11.9	11.2	9.23	7.02	5.11	3.73	2.84	2.17	1.64	90.6	82.5
9	0.63	0.96	1.56	2.57	4.06	6.25	9.35	12.6	14.9	15.0	12.8	9.72	7.01	4.88	3.57	2.69	2.02	1.48	112	104
6	0.53	0.81	1.30	2.19	3.65	6.01	9.48	13.6	17.5	19.2	17.8	14.3	10.7	7.37	4.93	3.42	2.46	1.81	137	131
3	0.41	0.61	0.97	1.69	3.08	5.56	9.34	14.4	20.0	23.7	23.2	19.4	14.7	10.1	6.42	4.21	2.95	2.18	163	157
0	0.70	1.13	1.99	3.56	6.36	11.0	16.8	23.2	27.6	27.0	22.4	16.9	11.7	7.29	4.56	3.04	2.20	1.61	189	182
-3	0.67	1.07	1.87	3.34	5.96	10.3	15.8	21.8	26.1	25.7	21.5	16.3	11.4	7.17	4.51	3.01	2.17	1.59	180	173
-6	0.35	0.48	0.66	1.03	1.65	2.68	4.61	7.31	10.8	14.0	14.6	12.6	10.0	7.29	4.90	3.38	2.41	1.80	101	93.3
-9	0.42	0.59	0.86	1.33	1.99	2.91	4.34	6.06	7.84	9.12	8.94	7.59	5.96	4.48	3.28	2.45	1.83	1.38	71.4	61.6
-12	0.52	0.74	1.14	1.78	2.57	3.52	4.56	5.33	5.21	4.21	2.97	2.13	1.49	1.32	1.45	1.38	1.17	0.90	42.4	28.7
-15	0.28	0.36	0.47	0.65	0.98	1.41	2.04	2.89	3.81	4.56	4.77	4.34	3.64	2.87	2.20	1.73	1.35	1.04	39.4	26.8
-18	0.23	0.27	0.31	0.35	0.46	0.57	0.74	1.07	1.56	2.19	2.65	2.69	2.47	2.08	1.66	1.33	1.05	0.83	22.5	8.58
-21	0.27	0.33	0.40	0.47	0.55	0.60	0.55	0.40	0.27	0.22	0.22	0.29	0.41	0.54	0.59	0.53	0.44	0.35	7.42	0.00
-24	0.22	0.26	0.30	0.34	0.38	0.41	0.43	0.52	0.60	0.65	0.68	0.67	0.64	0.59	0.57	0.52	0.44	0.36	8.59	0.00
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)	6	9	12	15	18	21	24	27			
Φ t	7.21	10.3	15.6	24.8	39.9	63.0	94.5	131	163	175	161	132	100	72.1	51.3	37.8	28.4	21.4	1329	---
Φ a	0.00	0.00	0.91	9.23	27.4	53.4	84.9	124	156	168	154	124	91.5	61.6	38.4	25.0	8.11	0.54	---	1127

one-half-peak spread: U:7.5,D:9.7 , L:8.7,R:9.9


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.3V I:0.1808A P:23.74W PF:0.5961 Lamp Flux:1520.6x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110013
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

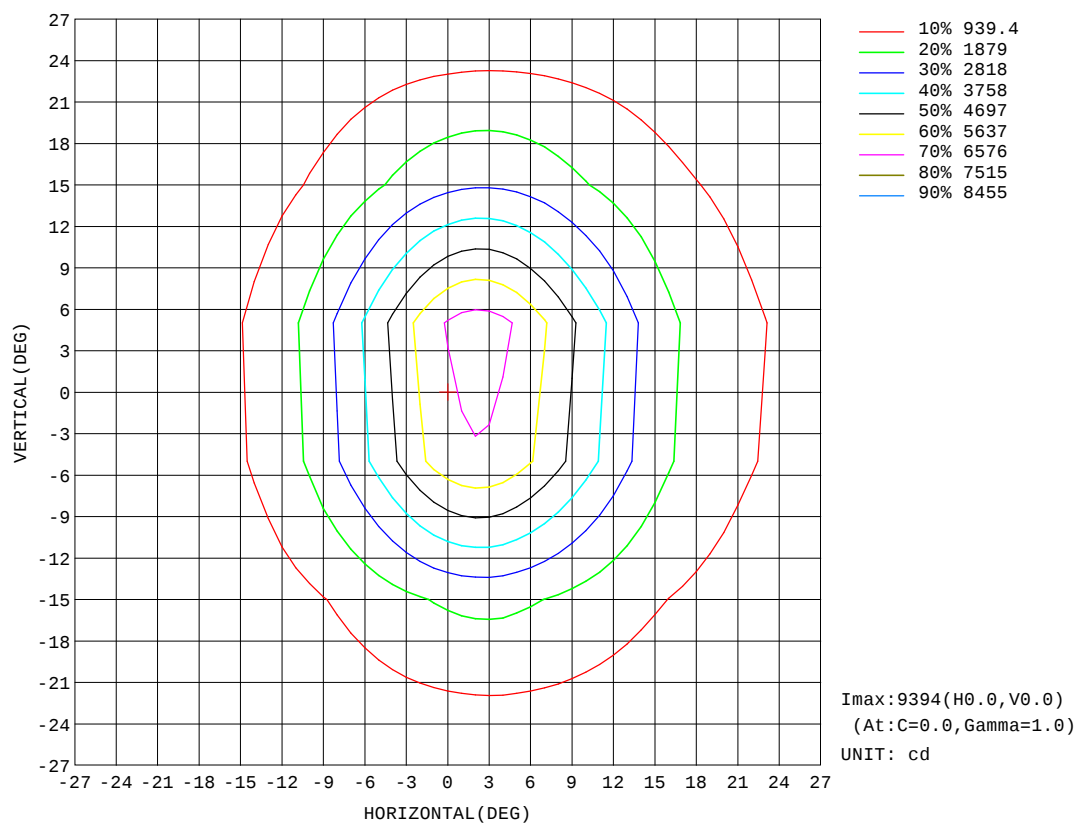


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.3V I:0.1808A P:23.74W PF:0.5961 Lamp Flux:1520.6x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110013
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

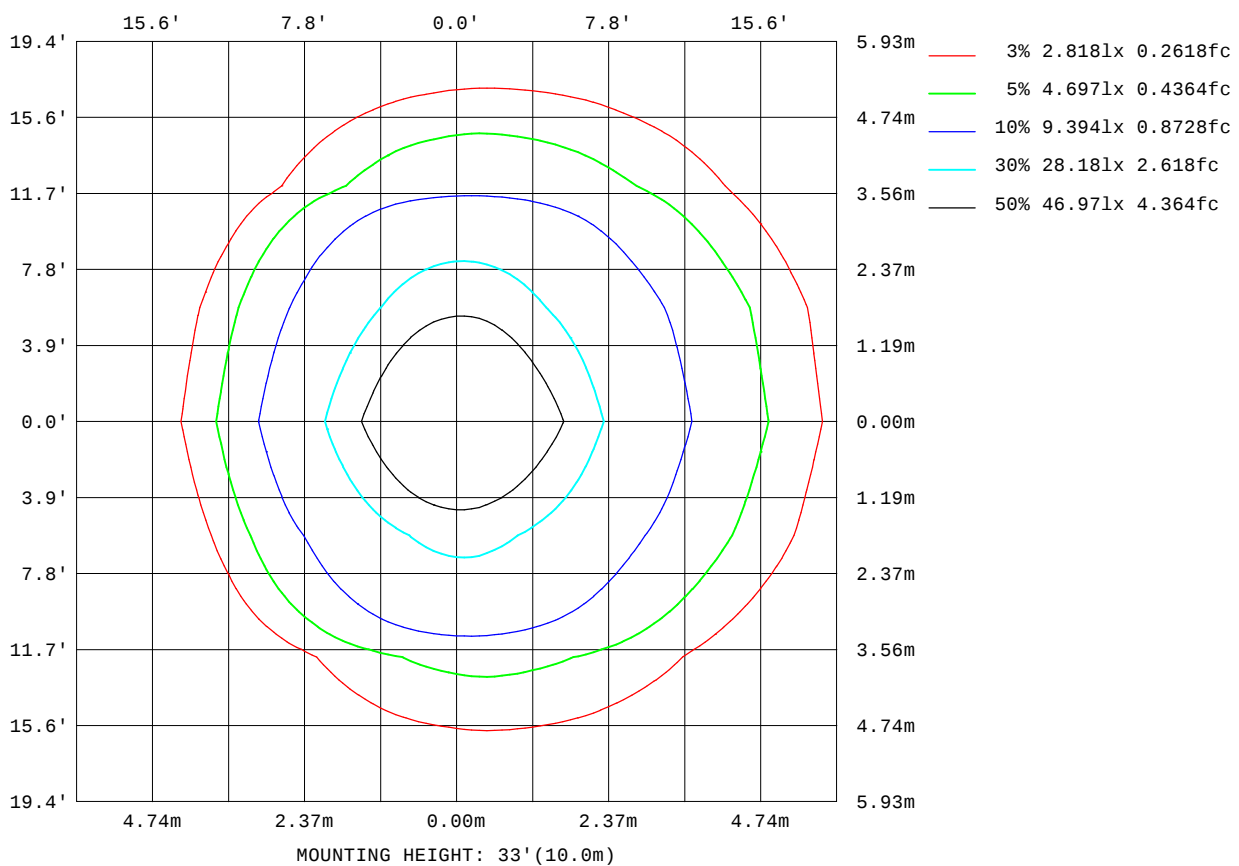


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.3V I:0.1808A P:23.74W PF:0.5961 Lamp Flux:1520.6x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110013
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

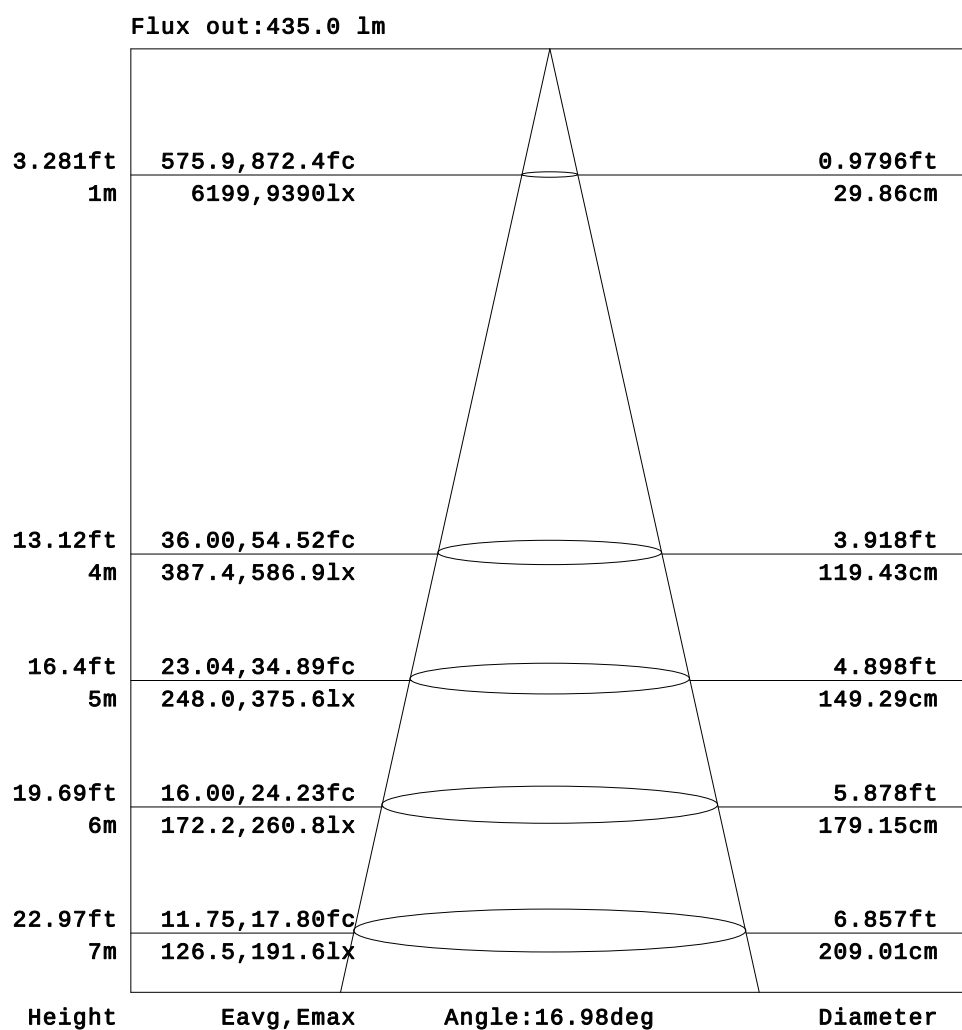


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

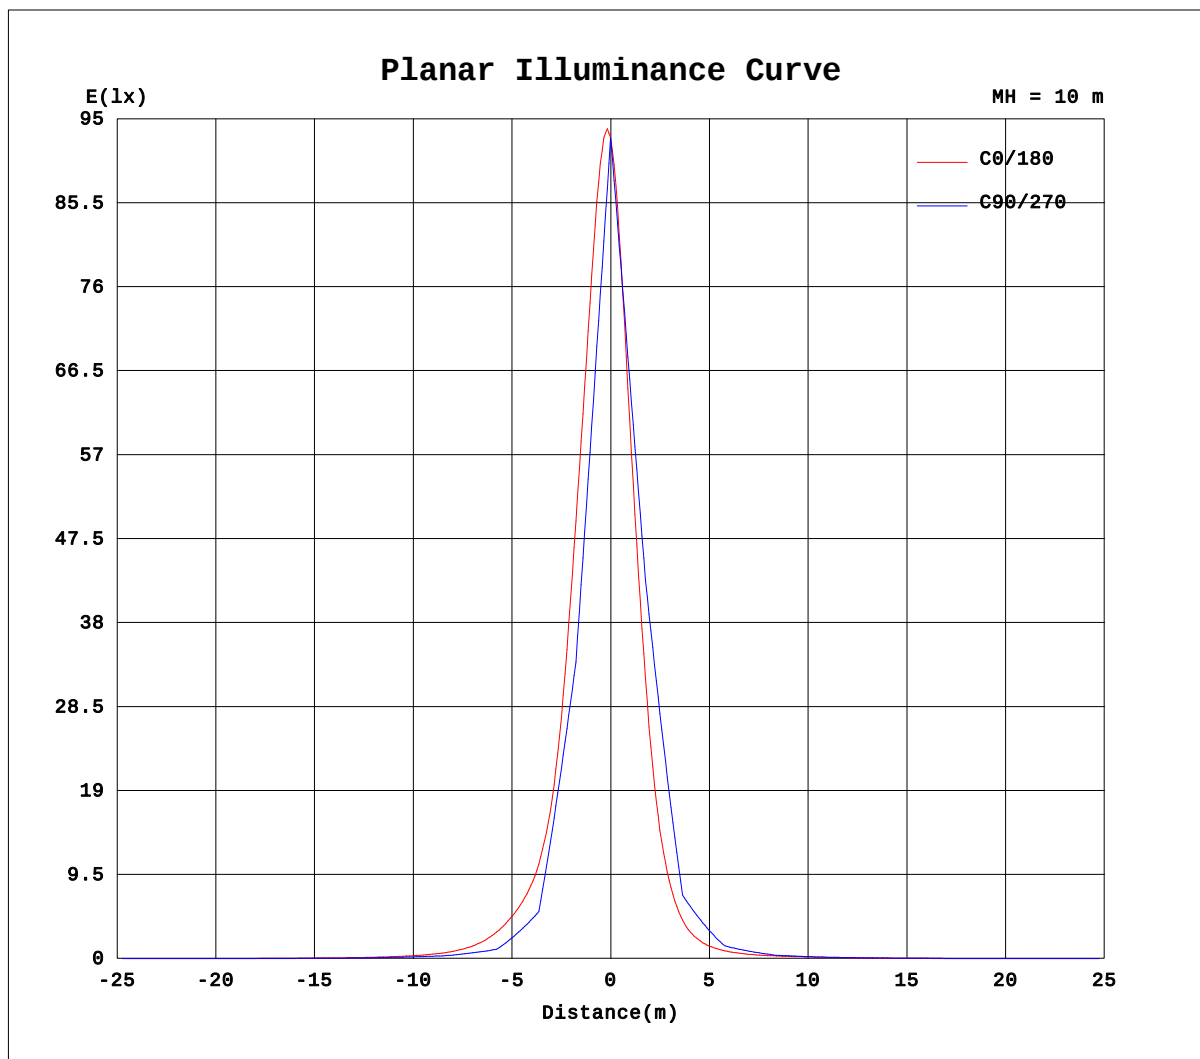

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2023-11-06

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.3V I:0.1808A P:23.74W PF:0.5961 Lamp Flux:1520.6x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110013
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.63	1.11	0.91	0.04
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.89	2.15	0.83	0.94
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.05	3.09	4.59	5.92	6.75	7.51	9.26	10.6	10.5	9.59
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.14	4.96	7.21	10.4	12.6	14.0	15.9	18.1	19.1	18.8	20.0
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.13	2.20	4.41	9.38	12.2	15.3	18.4	20.8	23.0	25.5	28.1	29.5	30.6
-50	0.00	0.00	0.00	0.00	0.00	0.00	1.72	5.68	11.7	16.3	19.5	22.9	26.2	29.2	32.0	35.0	38.4	40.9	42.7
-45	0.00	0.00	0.00	0.00	0.00	0.69	3.84	8.65	13.6	19.2	23.8	28.2	32.8	37.5	42.3	46.3	51.1	55.3	58.4
-40	0.00	0.00	0.00	0.00	0.00	4.07	9.35	14.1	20.5	26.1	31.6	37.1	43.0	49.7	55.9	60.9	67.6	72.3	76.6
-35	0.00	0.00	0.00	0.00	0.00	3.06	9.57	16.1	22.3	28.6	35.2	43.1	50.5	58.0	67.2	77.4	90.0	105	118
-30	0.00	0.00	0.00	0.00	0.02	7.42	14.5	22.2	28.9	36.3	44.8	55.1	63.8	73.1	86.3	103	124	148	168
-25	0.00	0.00	0.00	0.00	0.06	5.99	14.1	22.0	29.6	38.2	48.0	58.8	70.8	87.9	116	161	234	325	395
-20	0.00	0.00	0.00	0.00	2.07	11.2	19.7	27.7	36.6	47.9	59.3	71.3	89.8	122	177	268	415	570	656
-15	0.00	0.00	0.00	0.00	0.92	8.66	17.6	25.9	34.8	45.8	58.8	72.3	94.2	138	225	423	802	1418	2010
-10	0.00	0.00	0.00	0.00	4.93	13.6	22.0	30.9	40.9	54.1	68.2	87.8	127	210	395	839	1633	2807	3579
-5	0.00	0.00	0.00	0.00	2.78	11.0	19.5	28.0	37.9	50.8	64.8	82.1	116	191	371	862	2012	4075	6190
0	0.00	0.00	0.00	0.00	6.98	15.4	23.5	32.6	43.9	58.4	73.0	97.9	152	283	629	1589	3876	7233	9394
5	0.00	0.00	0.00	0.00	3.61	11.7	20.0	28.4	38.3	51.2	65.4	83.4	119	198	392	917	2147	4365	6657
10	0.00	0.00	0.00	0.00	6.62	14.8	23.0	31.8	41.7	55.5	70.0	91.7	135	230	458	989	1985	3540	4567
15	0.00	0.00	0.00	0.00	2.40	10.5	18.6	26.7	35.8	47.0	60.4	74.8	99.5	150	260	510	997	1797	2586
20	0.00	0.00	0.00	0.00	4.53	12.7	20.7	28.6	37.7	49.4	61.4	73.9	95.7	138	213	355	560	769	880
25	0.00	0.00	0.00	0.00	0.72	7.88	15.7	22.9	30.3	39.1	49.4	60.1	73.4	95.1	132	200	308	434	532
30	0.00	0.00	0.00	0.00	1.73	9.43	16.8	22.9	29.3	37.1	45.8	55.5	65.7	77.6	95.8	122	156	195	229
35	0.00	0.00	0.00	0.00	4.47	11.4	17.2	22.8	29.0	35.6	43.3	51.4	60.0	71.7	87.2	107	130	152	
40	0.00	0.00	0.00	0.00	5.39	10.9	16.0	21.0	26.1	31.4	37.4	44.2	50.7	59.5	66.5	75.2	82.7	88.6	
45	0.00	0.00	0.00	0.00	1.33	5.63	10.1	14.8	19.5	23.7	28.2	33.2	38.2	44.6	50.4	56.8	62.6	67.1	
50	0.00	0.00	0.00	0.00	0.01	3.76	7.86	12.4	16.3	19.4	22.9	26.4	30.5	34.8	38.7	43.5	46.6	48.6	
55	0.00	0.00	0.00	0.00	0.00	1.19	3.07	6.47	9.93	12.6	15.3	18.8	22.0	25.2	28.5	32.1	34.0	35.9	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.16	3.70	5.83	7.78	10.5	13.8	16.0	18.3	20.9	22.2	23.2	24.4	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.18	2.52	3.50	4.60	6.28	8.07	9.69	12.1	13.6	13.9	15.1	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	1.25	2.85	4.90	5.17	5.30	6.74	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	1.02	2.11	2.60	2.55	3.08	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-11-06

V(β) Range:-80 - 80DEG
 V(β) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.3V I:0.1808A P:23.74W PF:0.5961 Lamp Flux:1520.6x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110013
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	1.90	2.17	2.06	2.42	1.63	0.63	0.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	4.81	3.98	4.52	4.59	2.22	1.08	0.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	12.5	12.9	12.5	12.8	10.7	8.28	7.65	5.38	3.42	2.94	2.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	21.8	21.0	21.0	19.7	16.8	14.9	13.2	8.79	6.15	5.61	2.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	32.2	32.0	30.8	29.5	26.4	22.7	20.3	16.3	12.7	11.1	7.66	3.26	2.38	0.96	0.00	0.00	0.00	0.00
-50	43.1	41.8	39.9	37.1	32.9	28.6	24.7	20.3	17.9	14.6	9.16	5.37	4.25	0.00	0.00	0.00	0.00	0.00
-45	60.9	60.4	58.5	54.7	49.0	41.9	35.6	29.5	24.7	20.7	14.9	10.2	7.51	3.62	0.00	0.00	0.00	0.00
-40	78.7	77.6	74.6	68.7	59.5	49.8	41.6	34.4	28.5	22.3	16.5	12.3	8.78	2.11	0.00	0.00	0.00	0.00
-35	126	125	118	105	90.2	75.1	61.8	49.5	39.1	30.6	23.2	17.3	12.1	6.39	0.00	0.00	0.00	0.00
-30	175	169	152	131	108	89.5	72.1	55.8	42.6	32.6	25.0	18.0	11.4	4.71	0.00	0.00	0.00	0.00
-25	423	400	346	275	204	148	106	79.4	58.5	43.0	32.2	23.4	15.4	8.24	1.37	0.00	0.00	0.00
-20	660	596	485	360	251	170	117	84.8	60.8	43.8	32.2	22.2	13.3	6.46	0.01	0.00	0.00	0.00
-15	2036	1542	1014	682	459	298	183	119	82.6	57.4	41.0	29.0	19.3	11.2	4.61	0.00	0.00	0.00
-10	3082	2037	1234	808	529	322	188	121	81.6	56.2	39.7	27.7	18.1	10.5	3.07	0.00	0.00	0.00
-5	6015	4108	2248	1216	741	458	263	154	101	68.0	46.9	33.6	23.3	14.3	7.34	0.00	0.00	0.00
0	7543	4604	2215	1152	707	416	234	137	89.8	60.6	42.6	30.8	20.8	12.5	4.44	0.00	0.00	0.00
5	6488	4383	2394	1294	789	484	275	160	103	69.8	48.4	34.8	24.5	15.6	8.34	0.00	0.00	0.00
10	3886	2476	1452	937	605	359	206	128	86.0	59.4	42.3	30.1	20.8	12.8	4.85	0.00	0.00	0.00
15	2618	1914	1237	824	552	349	210	132	90.0	62.3	44.6	32.1	22.2	13.7	6.64	0.00	0.00	0.00
20	871	775	628	473	323	210	138	97.3	68.7	49.3	36.2	25.8	16.4	8.97	1.68	0.00	0.00	0.00
25	564	529	452	362	266	186	130	93.4	68.4	49.9	37.2	27.8	18.8	10.4	3.25	0.00	0.00	0.00
30	240	231	207	174	139	111	87.6	67.8	51.7	39.3	30.4	22.6	14.0	6.13	0.00	0.00	0.00	0.00
35	165	164	154	136	114	93.6	76.1	60.6	48.0	37.5	28.9	22.3	15.5	8.01	0.85	0.00	0.00	0.00
40	92.2	91.5	87.8	81.6	72.0	61.6	51.6	42.7	35.5	28.3	22.0	16.7	11.1	3.52	0.00	0.00	0.00	0.00
45	70.2	70.5	68.1	64.0	57.9	50.8	43.8	36.9	31.2	26.1	20.0	14.8	10.9	5.20	0.00	0.00	0.00	0.00
50	49.1	48.2	45.6	42.1	38.2	34.3	30.2	26.0	23.0	19.1	13.6	9.60	7.00	0.23	0.00	0.00	0.00	0.00
55	36.9	36.4	35.0	33.3	30.1	27.3	24.8	20.8	17.5	15.6	11.8	7.05	4.18	1.72	0.00	0.00	0.00	0.00
60	24.5	23.6	23.4	22.1	19.4	18.5	16.4	12.4	10.3	9.75	6.00	1.63	0.00	0.00	0.00	0.00	0.00	0.00
65	15.8	15.1	14.6	14.6	12.4	10.9	10.7	8.14	5.44	5.04	3.97	1.60	0.03	0.00	0.00	0.00	0.00	0.00
70	6.73	5.90	6.10	5.79	3.70	3.23	3.71	0.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	3.47	3.11	2.94	3.09	2.27	1.55	1.87	1.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-11-06

$V(\beta)$ Range:-80 - 80DEG
 $V(\beta)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks: