

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		6392.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	41.0V x 36.4H
	At 50% of Imax	18.9V x 17.8H
	At 90% of Imax	5.2V x 7.2H
Beam Flux	Total	995.6 lumens per klm.
	To 10% of Imax	752.1 lumens per klm.
	To 50% of Imax	336.4 lumens per klm.
	To 90% of Imax	34.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.5V I:0.1785A P:23.43W PF:0.5952 Lamp Flux:853.167x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

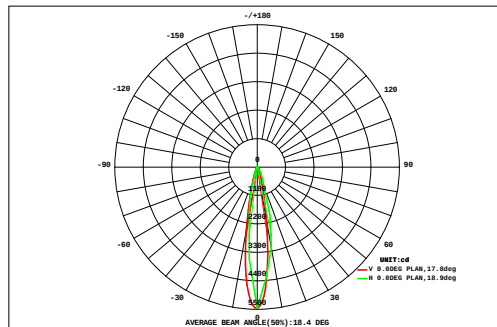

DATA OF LAMP		Eff:36.42lm/W	
MODEL LWW-WZB-W55-L6-RDM	Imax(cd)	5454	
NOMINAL POWER(W)	24	AVAILABILITY(%)	77.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	661.7
NOMINAL FLUX(lm)	853.167	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	853.2
TEST VOLTAGE(V)	220.5	θ @50%(H,V)	18,19DEG

		AREA FLUX DIAGRAM														UNIT:lm				Φ t	Φ a
		0.17	0.24	0.34	0.47	0.62	0.78	0.93	1.05	1.13	1.15	1.11	1.01	0.88	0.72	0.57	0.43	0.32	0.23	12.1	0.00
VERTICAL (DEG)	27	0.17	0.26	0.39	0.58	0.80	1.03	1.28	1.50	1.67	1.74	1.72	1.60	1.41	1.19	0.97	0.75	0.54	0.37	18.0	7.79
	24	0.26	0.40	0.60	0.85	1.13	1.43	1.71	1.96	2.10	2.12	2.02	1.82	1.56	1.29	1.02	0.76	0.53	0.36	21.9	13.7
	21	0.35	0.55	0.82	1.15	1.50	1.86	2.17	2.44	2.54	2.50	2.31	2.02	1.69	1.37	1.05	0.76	0.51	0.33	25.9	18.9
	18	0.25	0.42	0.67	1.01	1.45	2.23	3.47	4.89	6.01	6.39	5.97	4.93	3.65	2.51	1.73	1.27	0.90	0.60	48.3	42.6
	15	0.32	0.52	0.84	1.25	1.87	3.05	4.83	6.71	8.03	8.27	7.46	5.92	4.19	2.77	1.90	1.38	0.97	0.64	60.9	55.9
	12	0.52	0.85	1.31	1.85	2.88	4.84	7.35	9.50	10.5	9.90	8.17	5.87	3.77	2.33	1.64	1.16	0.76	0.47	73.6	68.9
	9	0.39	0.64	1.04	1.55	2.39	4.15	6.79	9.63	11.6	12.0	10.9	8.38	5.61	3.41	2.07	1.41	0.96	0.61	83.6	78.9
	6	0.23	0.39	0.70	1.16	1.77	3.22	5.95	9.51	12.6	14.2	13.8	11.1	7.66	4.62	2.56	1.69	1.18	0.77	93.2	88.7
	3	0.47	0.80	1.30	2.03	3.77	6.89	10.9	14.2	15.9	15.4	12.5	8.45	4.99	2.62	1.59	1.11	0.71	0.43	104	99.4
	0	0.43	0.74	1.19	1.87	3.48	6.35	10.0	13.1	14.8	14.4	11.7	7.95	4.71	2.50	1.52	1.05	0.66	0.40	96.9	92.0
-9	-3	0.17	0.26	0.43	0.69	0.89	1.40	2.57	4.49	6.40	7.63	7.86	6.69	4.79	3.10	1.84	1.20	0.82	0.53	51.8	46.1
	-6	0.21	0.32	0.51	0.80	1.08	1.47	2.21	3.23	4.09	4.43	4.21	3.45	2.51	1.79	1.20	0.79	0.52	0.34	33.2	27.2
	-3	0.27	0.41	0.63	0.98	1.40	1.79	2.16	2.23	1.92	1.19	0.57	0.26	0.19	0.33	0.47	0.33	0.19	0.13	15.4	9.17
	0	0.13	0.18	0.25	0.37	0.54	0.76	1.08	1.54	2.01	2.30	2.27	1.94	1.46	1.04	0.76	0.56	0.39	0.26	17.8	10.3
	3	0.10	0.12	0.14	0.18	0.24	0.28	0.33	0.51	0.79	1.08	1.25	1.20	0.97	0.71	0.53	0.41	0.30	0.21	9.34	1.98
	6	0.13	0.16	0.19	0.22	0.25	0.24	0.18	0.11	0.07	0.05	0.05	0.06	0.07	0.09	0.08	0.07	0.07	0.07	2.16	0.00
-24	-27	0.10	0.12	0.14	0.16	0.17	0.18	0.21	0.25	0.28	0.29	0.29	0.27	0.23	0.20	0.16	0.13	0.10	0.08	3.35	0.00
	-24	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)	6	9	12	15	18	21	24	27			
Φ t		4.65	7.36	11.5	17.2	26.3	42.0	64.1	86.9	102	105	94.2	72.9	50.4	32.6	21.7	15.3	10.4	6.83	772	---
Φ a		0.00	0.00	1.73	6.82	18.5	37.5	59.6	83.9	99.6	102	91.8	70.6	45.7	25.4	14.6	3.27	0.15	0.00	---	662

one-half-peak spread: U:7.0,D:12.1 , L:9.5,R:8.5


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-11-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.5V I:0.1785A P:23.43W PF:0.5952 Lamp Flux:853.167x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

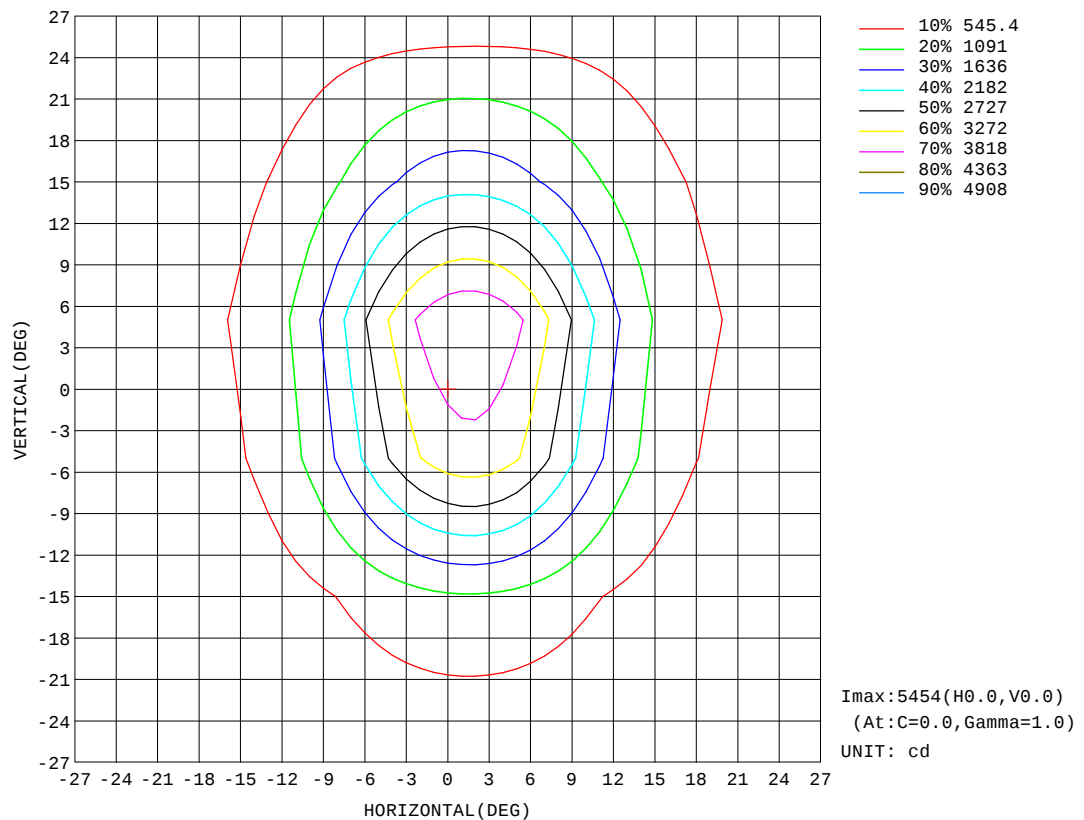


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.5V I:0.1785A P:23.43W PF:0.5952 Lamp Flux:853.167x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

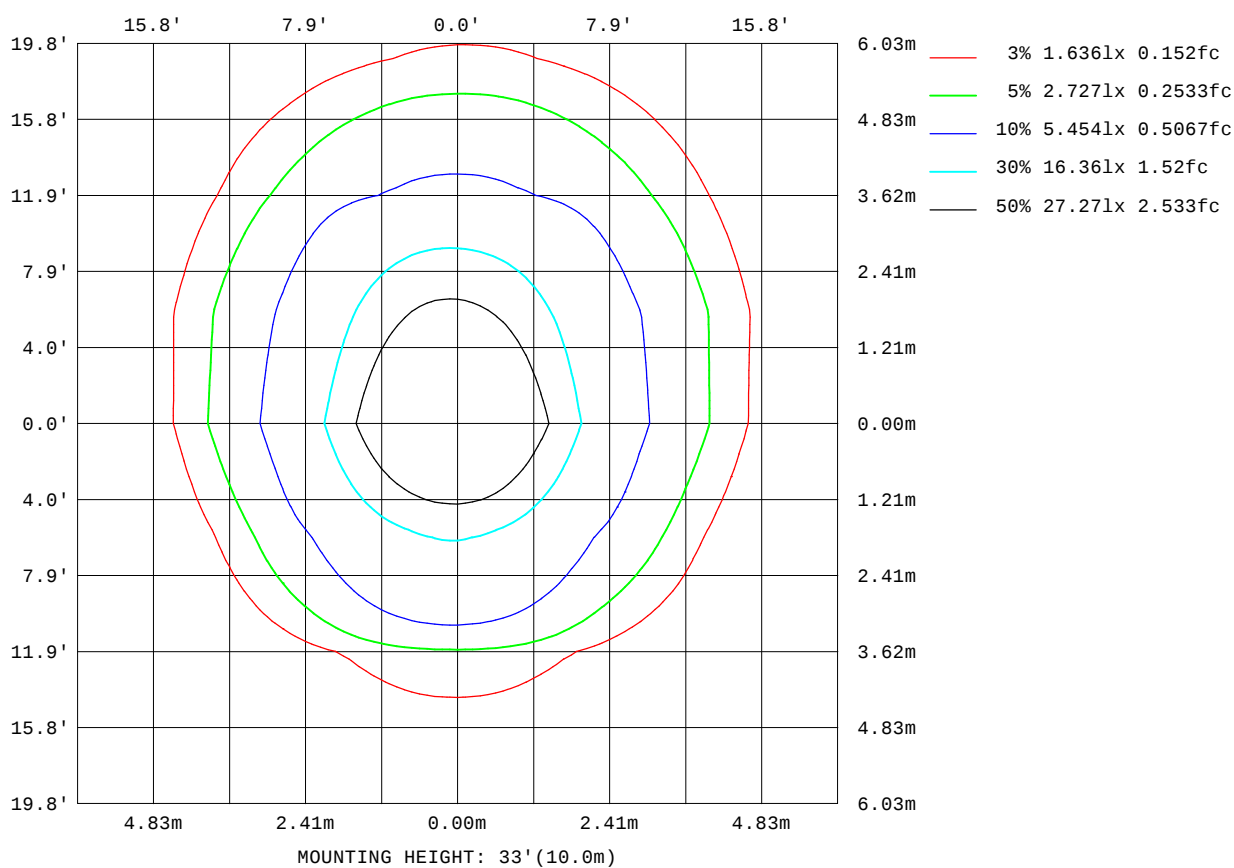


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.5V I:0.1785A P:23.43W PF:0.5952 Lamp Flux:853.167x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

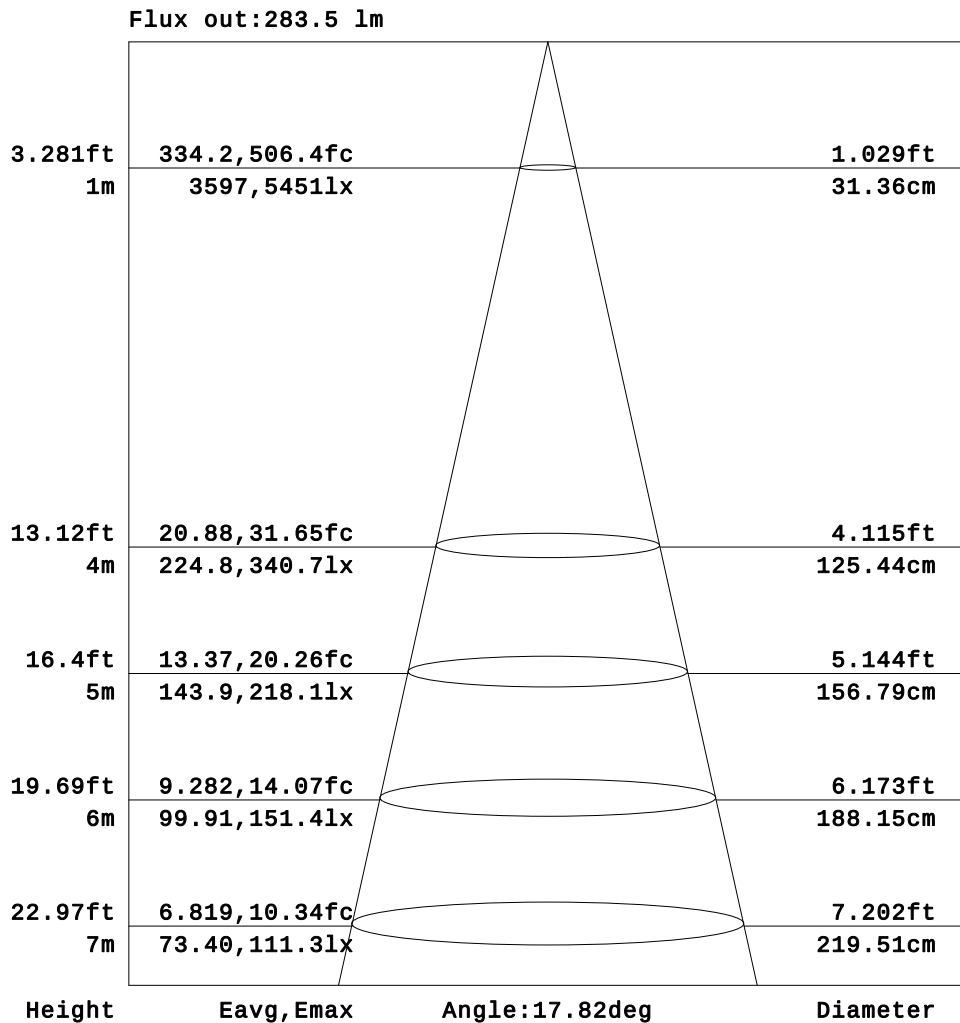


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

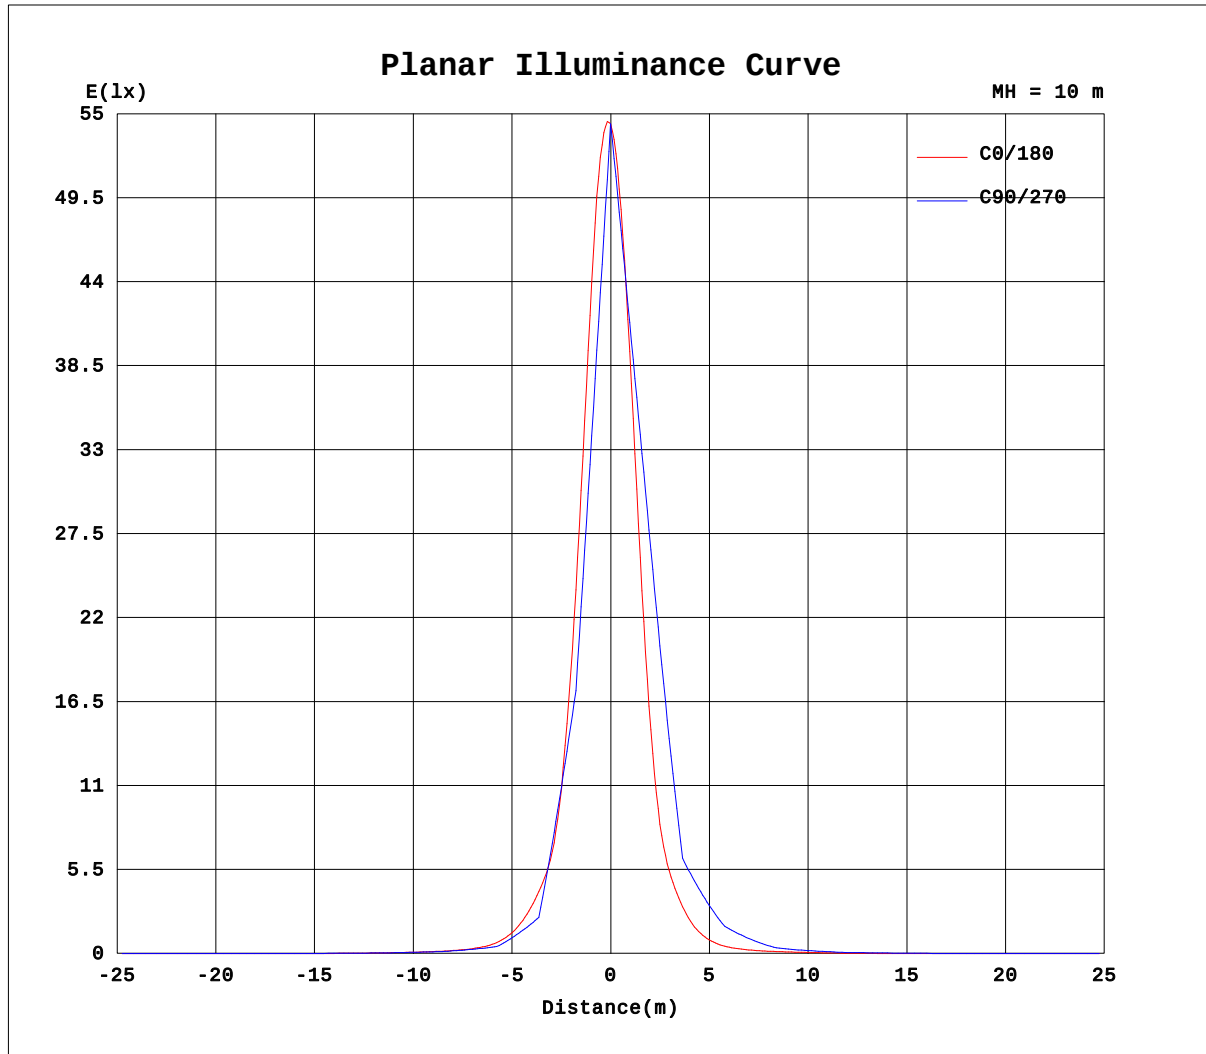

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2023-11-06

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.1785A P:23.43W PF:0.5952 Lamp Flux:853.167x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.72	1.50	2.05	2.42	2.43
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.47	2.07	3.50	4.48	4.84	5.07
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.85	1.95	3.06	4.07	5.82	7.76	9.24	10.5	11.2
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	2.54	4.80	6.94	8.93	11.1	13.4	15.1	16.8	17.7
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.77	2.33	4.71	7.40	10.4	13.6	16.3	19.1	21.9	24.1	25.6
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.79	5.90	8.97	12.3	16.6	20.5	23.8	27.4	30.4	32.8	33.9
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.81	3.40	7.03	11.1	15.4	19.9	24.7	29.8	35.9	42.6	48.8	52.3
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.09	6.88	11.2	16.8	21.9	27.2	32.8	40.5	50.0	59.9	68.6	71.3
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.05	2.91	6.99	11.7	17.7	23.9	30.4	40.2	56.4	81.9	117	154	178
-20	0.00	0.00	0.00	0.00	0.00	0.00	1.72	5.91	10.7	16.6	23.8	30.6	40.4	58.7	90.2	140	204	264	288
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.48	4.85	9.85	16.2	23.8	31.3	43.2	69.0	126	240	436	761	1029
-10	0.00	0.00	0.00	0.00	0.00	0.00	2.63	7.60	13.6	22.0	29.4	39.4	62.0	114	236	477	901	1528	1804
-5	0.00	0.00	0.00	0.00	0.00	0.00	1.35	5.95	11.6	19.5	27.9	37.8	59.2	112	247	513	1205	2539	3554
0	0.00	0.00	0.00	0.00	0.00	0.00	3.58	8.52	15.2	24.0	33.2	49.0	87.3	191	432	929	2467	4575	5454
5	0.00	0.00	0.00	0.00	0.00	0.00	1.72	6.07	11.9	20.2	29.1	40.7	66.7	137	309	613	1427	3047	4237
10	0.00	0.00	0.00	0.00	0.00	0.00	3.16	7.87	14.5	23.6	32.8	48.2	85.4	188	395	719	1563	2736	3165
15	0.00	0.00	0.00	0.00	0.00	0.00	0.79	4.88	10.3	17.7	26.5	37.2	57.9	113	238	442	812	1471	1943
20	0.00	0.00	0.00	0.00	0.00	0.00	1.43	5.94	11.3	18.9	27.9	38.9	61.6	117	227	385	555	700	754
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.89	7.21	12.7	20.1	28.8	41.8	68.4	126	221	334	443	511
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.25	6.96	12.1	18.9	27.3	38.6	56.7	92.2	146	208	257	279
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.88	3.41	7.13	12.1	18.3	26.4	37.5	56.2	86.0	123	158	179
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	2.45	5.91	9.85	15.2	22.3	30.8	41.6	54.5	68.3	80.0	84.5
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.71	2.22	5.37	8.58	13.3	19.0	26.1	34.7	43.9	52.5	57.4
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.25	3.10	5.43	8.80	12.5	17.2	22.1	26.6	30.3	31.5
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	2.16	3.76	6.32	9.20	13.0	16.2	18.8	20.5
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.01	2.10	4.17	6.74	7.88	9.12	9.99	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.85	1.58	2.93	3.77	4.27	4.91	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-11-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.1785A P:23.43W PF:0.5952 Lamp Flux:853.167x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	2.68	2.39	1.78	0.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	5.37	4.26	3.04	1.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	11.3	10.2	8.53	6.30	4.02	2.83	1.76	0.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	16.7	14.7	12.4	9.59	7.00	4.78	2.64	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	25.3	23.3	20.5	16.9	13.5	10.4	7.14	4.34	2.29	0.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	32.8	29.7	25.8	21.5	17.5	13.2	9.33	6.21	3.57	0.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	51.8	47.2	40.2	32.6	26.2	21.1	16.0	11.9	7.65	4.19	1.48	0.04	0.00	0.00	0.00	0.00	0.00	0.00
-30	68.1	59.4	48.4	38.3	30.7	24.7	19.5	14.1	8.85	4.97	1.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	174	145	108	74.4	50.6	36.2	27.4	21.1	14.4	8.97	4.71	1.29	0.00	0.00	0.00	0.00	0.00	0.00
-20	261	201	139	89.1	57.1	39.7	30.3	22.6	15.2	9.28	4.85	0.90	0.00	0.00	0.00	0.00	0.00	0.00
-15	955	623	362	216	115	64.8	41.8	30.5	22.0	14.0	7.93	3.34	0.00	0.00	0.00	0.00	0.00	0.00
-10	1409	795	458	247	124	66.9	42.8	31.6	22.3	13.3	7.22	2.32	0.00	0.00	0.00	0.00	0.00	0.00
-5	3316	1968	873	437	224	108	58.6	38.8	27.8	17.8	10.1	4.71	0.40	0.00	0.00	0.00	0.00	0.00
0	4250	2106	818	434	220	96.8	54.4	36.5	25.3	15.4	8.45	3.42	0.00	0.00	0.00	0.00	0.00	0.00
5	3935	2378	1052	538	286	133	68.5	42.7	29.7	19.1	10.8	5.23	0.91	0.00	0.00	0.00	0.00	0.00
10	2506	1419	712	420	213	101	56.5	37.3	25.3	15.3	8.27	3.55	0.00	0.00	0.00	0.00	0.00	0.00
15	1803	1228	693	419	232	114	62.2	40.1	27.5	17.2	9.66	4.30	0.51	0.00	0.00	0.00	0.00	0.00
20	696	559	404	254	138	73.9	46.3	31.8	20.9	12.3	6.40	1.62	0.00	0.00	0.00	0.00	0.00	0.00
25	505	431	328	221	130	74.1	46.7	31.9	21.3	13.0	7.27	2.58	0.00	0.00	0.00	0.00	0.00	0.00
30	267	224	164	109	70.1	47.7	33.5	22.8	14.4	8.61	4.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	180	160	127	91.1	61.8	42.7	30.1	20.9	13.7	8.06	4.10	0.89	0.00	0.00	0.00	0.00	0.00	0.00
40	82.7	72.7	60.2	47.2	35.9	26.6	18.7	12.8	8.02	4.00	1.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	57.9	53.3	45.4	36.9	28.6	21.6	15.6	10.7	7.11	3.20	1.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	30.9	27.9	23.9	19.7	15.3	11.7	8.20	5.59	3.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	20.5	18.9	16.8	13.9	10.6	8.26	5.50	3.21	2.18	0.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	9.26	8.34	7.55	5.33	3.86	2.83	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	4.85	4.31	4.01	3.15	2.12	1.71	0.73	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-11-06

$V(\beta)$ Range:-80 - 80DEG
 $V(\beta)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks: