

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		6901.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	37.7V x 36.2H
	At 50% of Imax	15.5V x 17.2H
	At 90% of Imax	4.6V x 6.5H
Beam Flux	Total	996.5 lumens per klm.
	To 10% of Imax	702.4 lumens per klm.
	To 50% of Imax	292.0 lumens per klm.
	To 90% of Imax	28.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.4V I:0.1763A P:23.22W PF:0.5975 Lamp Flux:1605.8x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

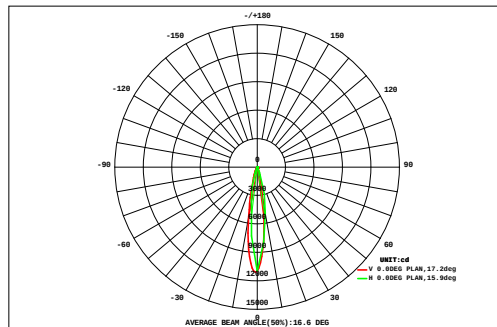

DATA OF LAMP		Eff:69.17lm/W	
MODEL LWW-WZB-W55-L6-RDM		Imax(cd)	11082
NOMINAL POWER(W)	24	AVAILABILITY(%)	71.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1152
NOMINAL FLUX(lm)	1605.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1606
TEST VOLTAGE(V)	220.4	θ @50%(H,V)	17,16DEG

		AREA FLUX DIAGRAM															UNIT:lm				Φ t	Φ a
		0.42	0.53	0.66	0.79	0.92	1.04	1.13	1.17	1.18	1.11	1.01	0.88	0.74	0.61	0.49	0.39	0.32	0.26	13.7	0.00	
VERTICAL (DEG)	27	0.52	0.71	0.94	1.19	1.45	1.70	1.92	2.07	2.14	2.09	1.93	1.72	1.45	1.16	0.88	0.65	0.48	0.37	23.4	0.00	
	24	0.74	1.01	1.32	1.65	1.97	2.27	2.51	2.65	2.67	2.53	2.30	1.99	1.63	1.25	0.92	0.66	0.48	0.36	28.9	0.00	
	21	0.97	1.33	1.72	2.13	2.52	2.87	3.12	3.25	3.21	2.96	2.66	2.23	1.78	1.32	0.94	0.66	0.48	0.35	34.5	9.66	
	18	0.91	1.29	1.78	2.35	3.07	4.19	5.84	7.80	9.42	9.81	8.72	6.62	4.43	2.88	2.03	1.40	0.92	0.62	74.1	60.1	
	15	1.13	1.61	2.21	2.94	3.98	5.69	8.13	10.9	12.8	12.9	11.0	7.96	5.12	3.32	2.32	1.57	1.01	0.66	95.2	82.7	
	12	1.69	2.33	3.13	4.10	5.74	8.43	12.0	15.3	16.7	15.2	11.6	7.47	4.42	2.98	2.06	1.31	0.83	0.54	116	106	
	9	1.43	2.02	2.77	3.70	5.33	8.35	12.7	17.6	21.2	21.6	18.4	13.3	8.30	4.73	2.83	1.82	1.16	0.73	148	138	
		1.10	1.62	2.30	3.16	4.71	8.03	13.2	19.8	25.8	28.4	25.9	19.8	12.6	6.68	3.68	2.39	1.52	0.94	182	171	
		1.81	2.56	3.47	5.18	9.02	15.1	22.9	30.0	33.2	30.4	23.4	15.2	8.13	3.98	2.39	1.55	0.95	0.60	210	201	
		1.72	2.43	3.30	4.90	8.44	14.1	21.4	28.1	31.2	28.8	22.4	14.7	7.99	3.98	2.39	1.55	0.95	0.61	199	189	
	0.88	1.27	1.79	2.21	2.54	3.74	5.98	9.53	13.4	15.9	15.3	12.4	8.53	5.06	2.95	1.92	1.25	0.79	106	91.4		
	1.03	1.44	1.95	2.40	2.78	3.64	5.01	6.83	8.41	8.88	8.00	6.22	4.44	3.06	2.01	1.33	0.88	0.58	68.9	54.2		
	1.23	1.68	2.20	2.73	3.32	4.01	4.65	4.66	3.63	1.79	0.79	0.35	0.30	0.79	0.93	0.64	0.44	0.33	34.5	20.9		
	0.56	0.80	1.09	1.44	1.76	2.17	2.79	3.61	4.46	4.91	4.60	3.75	2.69	1.86	1.38	0.99	0.69	0.48	40.0	22.9		
	0.40	0.55	0.75	0.98	1.12	1.18	1.28	1.55	2.07	2.64	2.78	2.52	1.92	1.34	1.03	0.77	0.56	0.40	23.8	6.05		
	0.49	0.64	0.80	0.95	1.06	1.06	0.84	0.49	0.29	0.20	0.19	0.21	0.27	0.27	0.22	0.21	0.20	0.19	8.57	0.00		
	0.35	0.44	0.55	0.65	0.74	0.76	0.68	0.69	0.72	0.72	0.68	0.61	0.52	0.42	0.34	0.27	0.23	0.21	9.57	0.00		
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
	Φ t	17.4	24.3	32.7	43.5	60.5	88.4	126	166	193	191	162	118	75.3	45.7	29.8	20.1	13.4	9.03	1415	---	
	Φ a	0.00	2.00	10.4	21.7	45.6	74.8	115	157	183	181	152	109	63.5	31.2	7.51	0.00	0.00	0.00	---	1152	

one-half-peak spread: U:6.9,D:8.9 , L:8.8,R:8.5


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-11-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.4V I:0.1763A P:23.22W PF:0.5975 Lamp Flux:1605.8x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

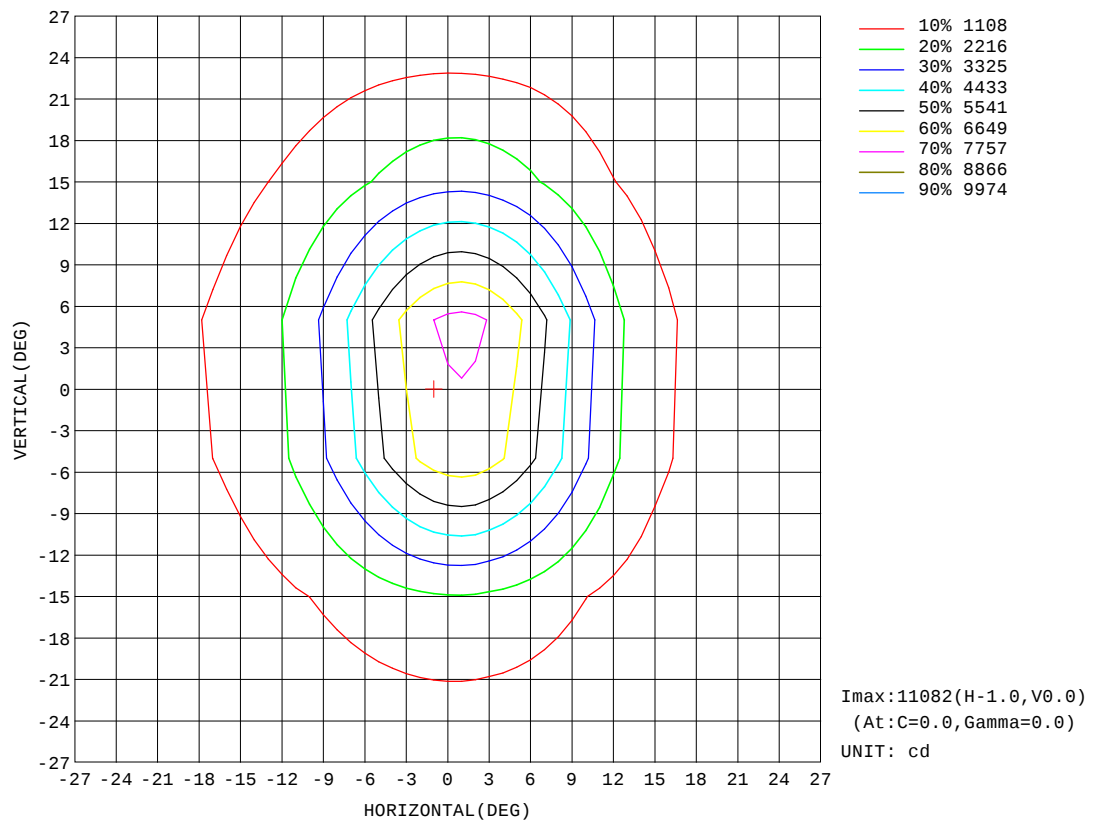


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.4V I:0.1763A P:23.22W PF:0.5975 Lamp Flux:1605.8x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

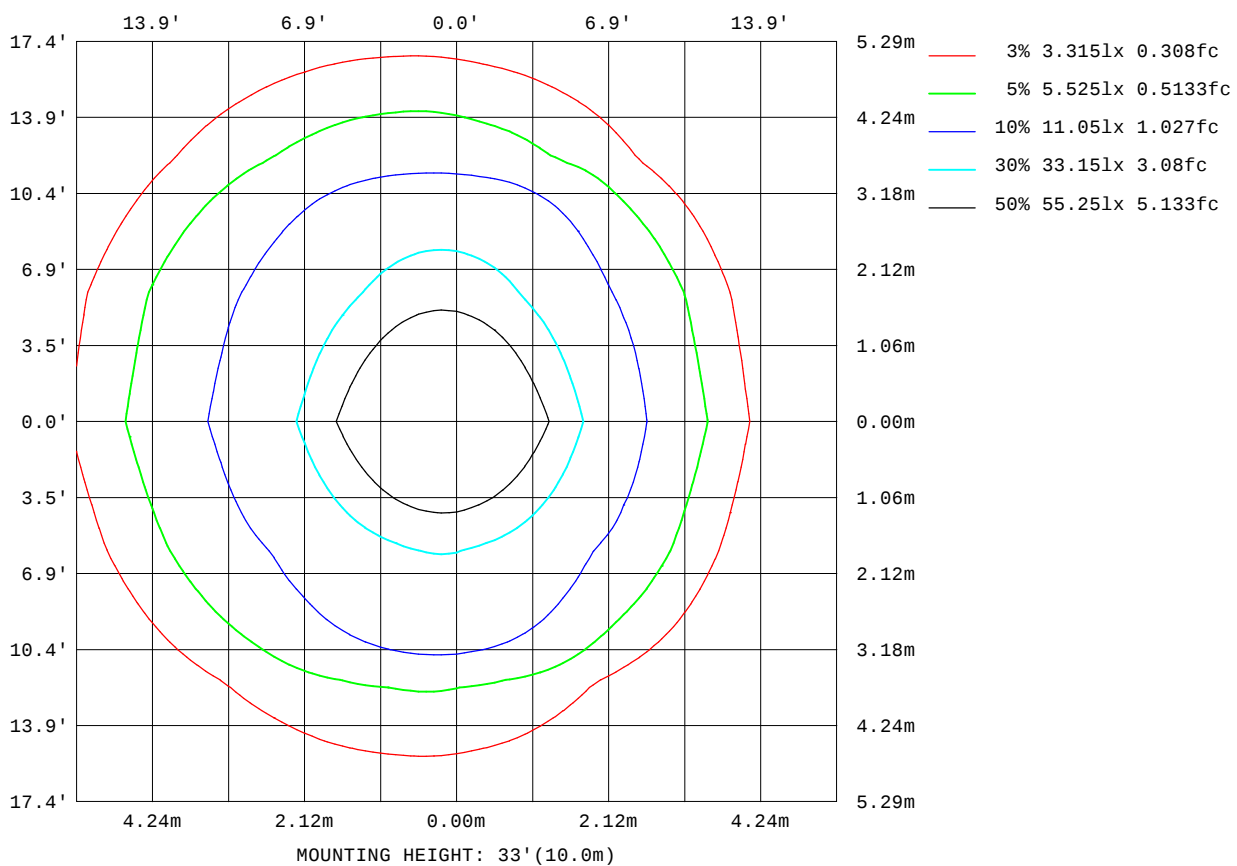


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.4V I:0.1763A P:23.22W PF:0.5975 Lamp Flux:1605.8x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

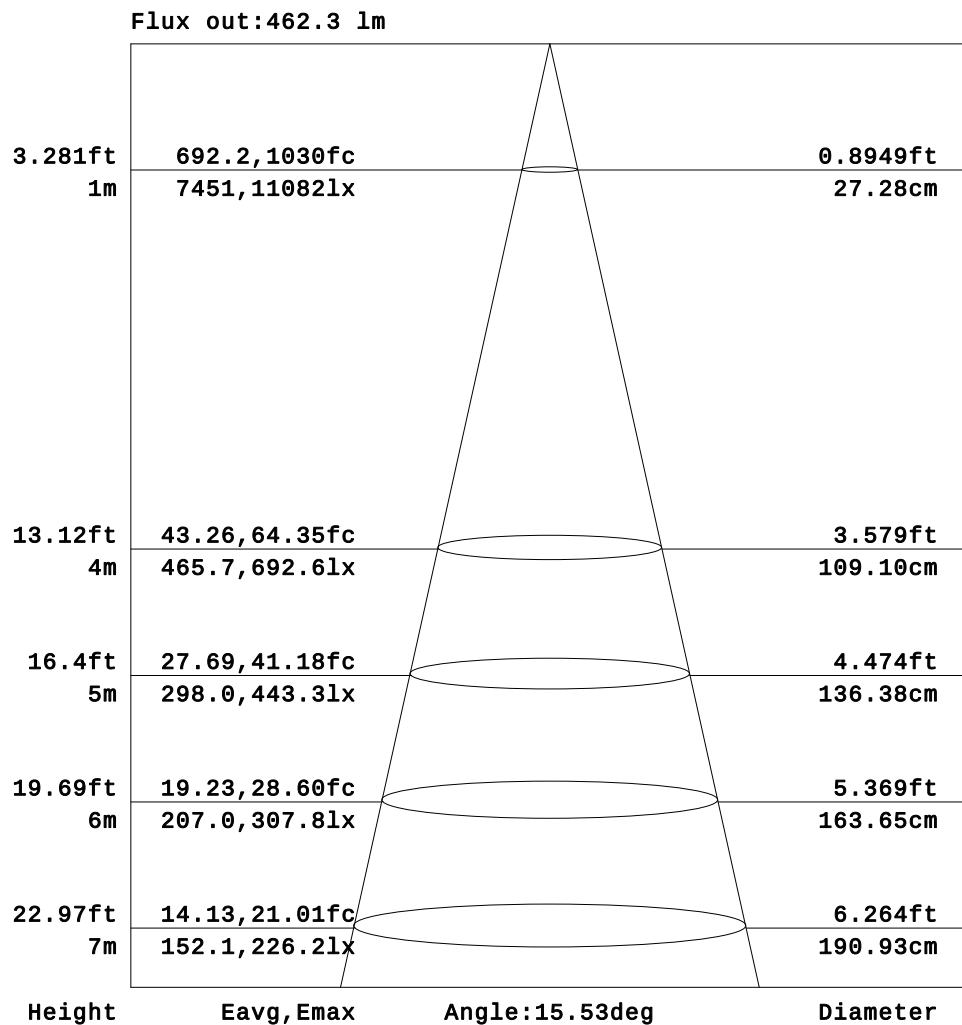


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

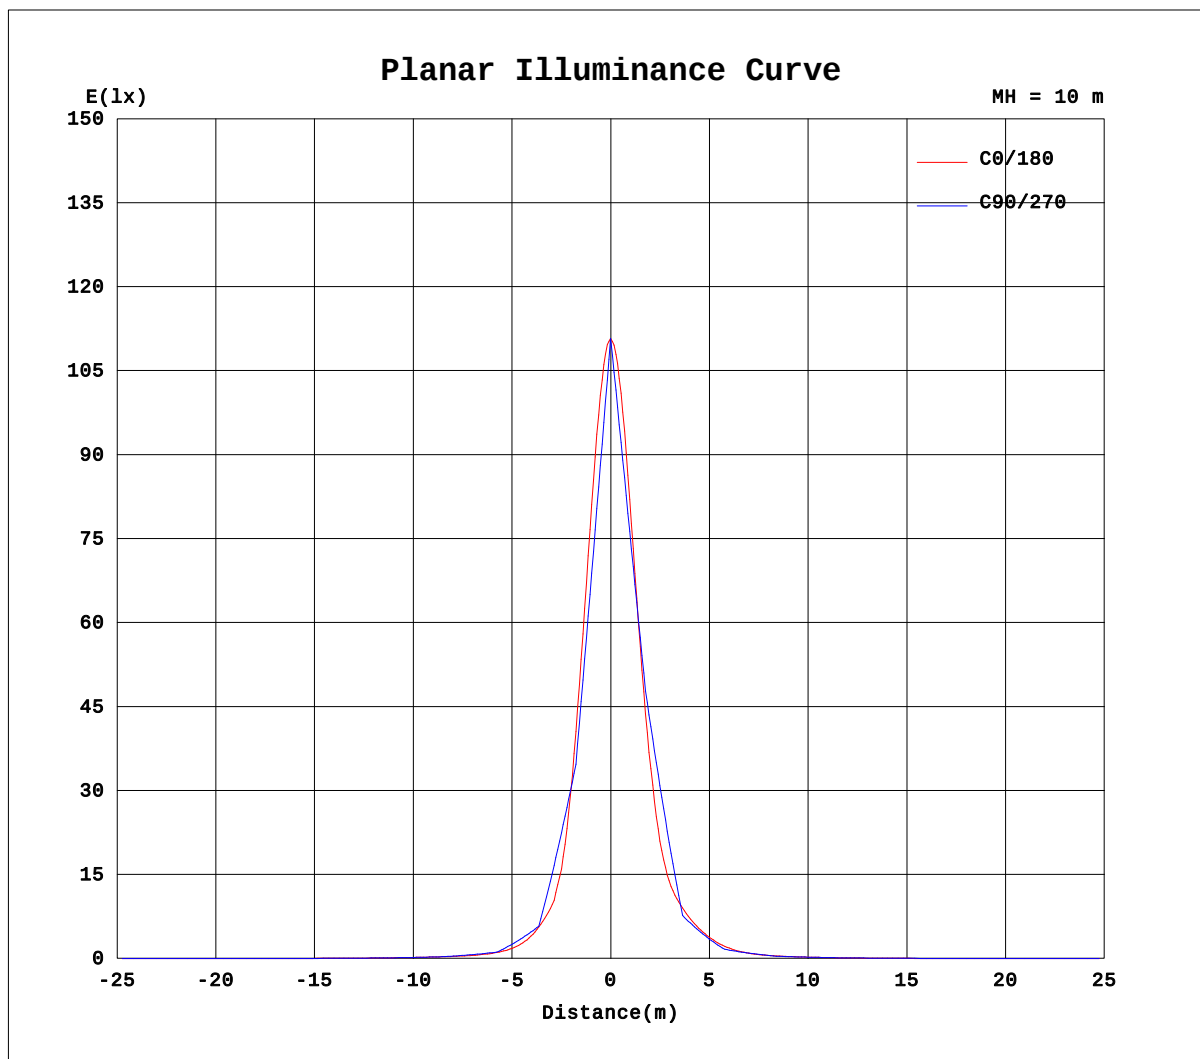

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2023-11-06

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.1763A P:23.22W PF:0.5975 Lamp Flux:1605.8x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.02	0.03	0.18	0.23	0.21	0.25	0.14
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.01	0.17	0.44	0.43	0.45	0.39	0.29
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.23	0.35	0.47	0.70	0.77	0.83	1.13	1.30	1.31	1.40	1.27
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.37	0.62	0.76	1.07	1.42	1.51	1.70	2.05	2.17	2.24	2.29	2.26
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.39	0.88	1.27	1.54	1.91	2.20	2.41	2.77	3.10	3.27	3.43	3.45
-50	0.00	0.00	0.00	0.00	0.00	0.19	0.43	0.89	1.59	1.97	2.27	2.68	3.04	3.39	3.80	4.19	4.43	4.64	4.57
-45	0.00	0.00	0.00	0.00	0.00	0.41	0.71	1.14	1.73	2.35	2.81	3.36	3.98	4.57	5.20	5.76	6.18	6.47	6.48
-40	0.00	0.00	0.00	0.00	0.30	0.88	1.25	1.70	2.46	3.11	3.75	4.54	5.38	6.24	7.08	7.71	8.18	8.39	8.22
-35	0.00	0.00	0.00	0.00	0.06	0.79	1.36	1.99	2.62	3.46	4.37	5.44	6.61	7.83	9.31	10.8	12.3	13.3	13.4
-30	0.00	0.00	0.00	0.00	0.35	1.15	1.93	2.64	3.43	4.51	5.82	7.26	8.80	10.5	12.8	15.2	17.4	18.5	17.9
-25	0.00	0.00	0.00	0.00	0.23	0.98	1.80	2.63	3.50	4.79	6.37	8.17	10.7	14.8	21.6	29.7	37.3	43.0	44.6
-20	0.00	0.00	0.00	0.00	0.52	1.46	2.30	3.25	4.51	6.29	8.32	10.8	15.4	23.8	36.6	50.5	62.7	69.6	69.1
-15	0.00	0.00	0.00	0.00	0.50	1.19	2.11	3.08	4.31	6.10	8.30	11.3	17.6	30.3	50.1	75.2	111	172	216
-10	0.00	0.00	0.00	0.26	0.89	1.69	2.65	3.81	5.40	7.61	10.3	15.8	28.2	51.0	82.8	123	204	321	358
-5	0.00	0.00	0.00	0.02	0.77	1.51	2.42	3.46	4.91	7.04	9.73	14.4	26.0	49.0	83.8	137	277	533	729
0	0.00	0.00	0.00	0.43	1.16	2.05	2.97	4.13	5.93	8.46	12.0	20.1	39.1	71.8	120	230	535	949	1098
5	0.00	0.00	0.00	0.03	0.87	1.60	2.51	3.54	5.04	7.27	10.2	15.4	28.0	52.8	90.1	147	301	582	798
10	0.00	0.00	0.00	0.42	1.10	1.87	2.80	4.00	5.74	8.20	11.4	18.2	33.4	60.3	98.0	153	270	439	494
15	0.00	0.00	0.00	0.01	0.71	1.37	2.24	3.31	4.67	6.63	9.24	13.1	21.2	37.2	62.0	93.5	146	232	296
20	0.00	0.00	0.00	0.18	0.80	1.52	2.47	3.62	5.00	7.00	9.53	12.9	19.6	32.3	49.8	68.3	84.7	93.8	91.3
25	0.00	0.00	0.00	0.00	0.39	1.08	1.96	2.94	3.95	5.37	7.30	9.62	13.1	19.3	29.1	40.5	51.3	58.9	60.3
30	0.00	0.00	0.00	0.00	0.47	1.28	2.21	3.04	3.92	5.17	6.78	8.61	10.7	13.5	17.4	21.6	25.2	26.6	25.4
35	0.00	0.00	0.00	0.00	0.12	0.95	1.69	2.38	3.05	3.94	5.02	6.35	7.90	9.66	12.0	14.5	16.8	18.3	18.2
40	0.00	0.00	0.00	0.00	0.42	1.22	1.73	2.22	2.83	3.51	4.26	5.30	6.40	7.49	8.58	9.38	10.00	10.2	9.93
45	0.00	0.00	0.00	0.00	0.02	0.79	1.19	1.56	2.13	2.73	3.19	3.86	4.66	5.42	6.23	6.91	7.42	7.79	7.77
50	0.00	0.00	0.00	0.00	0.17	0.77	0.90	1.30	1.94	2.32	2.59	3.07	3.54	3.99	4.47	4.89	5.23	5.46	5.39
55	0.00	0.00	0.00	0.00	0.00	0.32	0.42	0.75	1.32	1.66	1.87	2.27	2.68	2.95	3.33	3.70	3.86	4.06	4.12
60	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.64	1.05	1.16	1.42	1.83	2.07	2.18	2.53	2.65	2.66	2.76	2.78
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.47	0.56	0.74	1.13	1.34	1.37	1.62	1.81	1.74	1.80	1.88
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.37	0.70	0.63	0.70	0.95	0.93	0.84	0.93	0.91
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.30	0.34	0.32	0.43	0.49	0.42	0.44	0.48
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-11-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.1763A P:23.22W PF:0.5975 Lamp Flux:1605.8x1 lm		
NAME: 8.01.017.0029 20°LWW-WZB-W55-L6-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023110015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.21	0.23	0.23	0.15	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.46	0.47	0.44	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	1.32	1.32	1.27	1.05	0.80	0.71	0.60	0.42	0.30	0.22	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	2.23	2.15	1.97	1.69	1.50	1.36	1.05	0.72	0.54	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	3.35	3.19	2.94	2.62	2.32	2.07	1.77	1.41	1.14	0.87	0.43	0.20	0.04	0.00	0.00	0.00	0.00	0.00
-50	4.37	4.06	3.64	3.30	2.92	2.57	2.20	1.86	1.54	1.13	0.65	0.27	0.00	0.00	0.00	0.00	0.00	0.00
-45	6.23	5.79	5.26	4.73	4.19	3.59	3.04	2.56	2.14	1.71	1.23	0.79	0.38	0.00	0.00	0.00	0.00	0.00
-40	7.77	7.12	6.46	5.75	4.98	4.17	3.47	2.92	2.41	1.90	1.45	0.99	0.43	0.00	0.00	0.00	0.00	0.00
-35	12.4	10.8	9.19	7.81	6.66	5.64	4.77	3.92	3.16	2.55	2.01	1.51	0.91	0.19	0.00	0.00	0.00	0.00
-30	15.8	13.2	10.8	8.90	7.50	6.38	5.39	4.26	3.42	2.73	2.19	1.57	0.84	0.06	0.00	0.00	0.00	0.00
-25	40.3	31.6	22.4	15.4	10.9	8.38	6.78	5.52	4.39	3.42	2.70	2.05	1.32	0.53	0.00	0.00	0.00	0.00
-20	58.7	42.5	27.7	17.8	12.0	8.92	7.16	5.83	4.54	3.49	2.71	1.96	1.17	0.38	0.00	0.00	0.00	0.00
-15	185	112	64.3	37.3	20.6	12.8	9.04	7.09	5.64	4.30	3.31	2.48	1.69	0.86	0.11	0.00	0.00	0.00
-10	255	134	77.5	40.8	21.4	13.0	9.11	7.20	5.62	4.25	3.24	2.38	1.55	0.71	0.00	0.00	0.00	0.00
-5	625	342	136	66.1	32.2	17.3	11.0	8.15	6.48	4.94	3.72	2.79	1.96	1.11	0.27	0.00	0.00	0.00
0	779	346	118	58.7	27.8	15.4	10.1	7.71	6.13	4.53	3.42	2.53	1.68	0.85	0.00	0.00	0.00	0.00
5	685	371	143	70.0	33.9	17.8	11.2	8.27	6.55	4.96	3.72	2.78	1.96	1.13	0.30	0.00	0.00	0.00
10	351	168	89.3	46.2	23.3	13.7	9.46	7.40	5.72	4.26	3.23	2.38	1.58	0.76	0.00	0.00	0.00	0.00
15	255	149	78.2	44.3	23.8	14.0	9.69	7.51	5.94	4.46	3.38	2.52	1.74	0.93	0.13	0.00	0.00	0.00
20	77.9	58.0	37.1	22.3	14.3	10.0	7.86	6.36	4.91	3.70	2.81	2.04	1.26	0.47	0.00	0.00	0.00	0.00
25	53.7	42.7	30.0	19.5	13.2	9.66	7.66	6.21	4.88	3.73	2.89	2.16	1.41	0.62	0.00	0.00	0.00	0.00
30	21.7	17.3	13.5	10.7	8.81	7.48	6.23	4.97	3.85	3.03	2.38	1.70	0.92	0.14	0.00	0.00	0.00	0.00
35	16.4	13.9	11.4	9.43	7.88	6.71	5.63	4.62	3.66	2.90	2.28	1.70	1.04	0.28	0.00	0.00	0.00	0.00
40	9.30	8.47	7.69	6.82	5.94	5.08	4.20	3.46	2.83	2.24	1.73	1.19	0.56	0.00	0.00	0.00	0.00	0.00
45	7.45	6.89	6.25	5.64	4.98	4.35	3.69	3.09	2.59	2.06	1.52	1.03	0.56	0.06	0.00	0.00	0.00	0.00
50	5.18	4.83	4.35	3.95	3.51	3.09	2.68	2.30	1.94	1.44	0.92	0.50	0.10	0.00	0.00	0.00	0.00	0.00
55	3.98	3.75	3.50	3.14	2.80	2.53	2.20	1.81	1.53	1.18	0.68	0.33	0.14	0.00	0.00	0.00	0.00	0.00
60	2.60	2.52	2.37	2.06	1.88	1.71	1.40	1.07	0.87	0.54	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	1.74	1.62	1.60	1.36	1.13	1.05	0.90	0.59	0.47	0.35	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.73	0.73	0.69	0.43	0.28	0.31	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.40	0.36	0.37	0.27	0.16	0.15	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: