

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5904.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	39.3V x 39.5H
	At 50% of Imax	18.4V x 18.2H
	At 90% of Imax	5.0V x 6.6H
Beam Flux	Total	999.1 lumens per klm.
	To 10% of Imax	706.0 lumens per klm.
	To 50% of Imax	296.6 lumens per klm.
	To 90% of Imax	28.1 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.8V I:0.2479A P:34.16W PF:0.6212 Lamp Flux:1701.79x1 lm		
NAME: 8.01.017.0045 20° LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

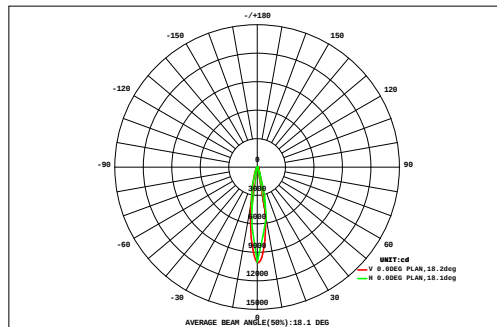

DATA OF LAMP		Eff:49.82lm/W	
MODEL LWW-WZB-W55-L6-RDM	Imax(cd)	10048	
NOMINAL POWER(W)	34	AVAILABILITY(%)	72.0
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	1226
NOMINAL FLUX(lm)	1701.79	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1702
TEST VOLTAGE(V)	221.8	θ @50%(H,V)	18,18DEG

		AREA FLUX DIAGRAM														UNIT:lm				Φ t	Φ a	
VERTICAL (DEG)	27	0.37	0.46	0.57	0.69	0.83	0.98	1.11	1.23	1.31	1.34	1.31	1.22	1.10	0.96	0.81	0.67	0.54	0.44	15.9	0.00	
	24	0.43	0.56	0.74	0.95	1.19	1.46	1.74	2.00	2.21	2.32	2.31	2.18	1.97	1.70	1.42	1.14	0.90	0.69	25.9	0.00	
	21	0.58	0.78	1.02	1.31	1.64	1.99	2.34	2.65	2.86	2.92	2.82	2.59	2.28	1.92	1.56	1.23	0.95	0.71	32.2	7.23	
	18	0.74	1.01	1.33	1.70	2.11	2.55	2.97	3.33	3.53	3.52	3.32	2.98	2.57	2.11	1.68	1.30	0.97	0.72	38.4	20.0	
	15	0.68	0.95	1.31	1.78	2.41	3.46	5.05	7.14	9.27	10.6	10.5	9.02	6.81	4.77	3.29	2.36	1.72	1.25	82.4	70.8	
	12	0.83	1.16	1.62	2.23	3.15	4.71	7.09	10.1	12.8	14.2	13.6	11.2	8.15	5.53	3.75	2.66	1.91	1.37	106	95.8	
	9	1.20	1.68	2.32	3.21	4.69	7.17	10.8	14.7	17.6	18.0	15.7	11.7	7.80	5.00	3.40	2.39	1.69	1.20	130	121	
		1.04	1.47	2.05	2.87	4.16	6.50	10.3	15.0	19.3	21.6	20.6	16.6	11.9	7.73	4.82	3.17	2.17	1.51	153	144	
		0.83	1.19	1.69	2.40	3.45	5.54	9.51	14.8	20.7	25.3	25.7	22.0	16.4	10.8	6.39	4.02	2.70	1.87	175	167	
		1.34	1.90	2.70	3.97	6.36	11.0	17.2	23.7	28.8	29.3	24.9	18.5	12.1	7.09	4.24	2.76	1.89	1.32	199	191	
		1.29	1.82	2.58	3.78	6.02	10.3	16.1	22.2	27.0	27.5	23.6	17.6	11.7	6.95	4.22	2.76	1.90	1.33	189	180	
	-9	0.71	0.99	1.36	1.82	2.34	3.01	4.80	7.49	10.9	14.2	15.3	13.7	10.8	7.64	4.96	3.31	2.29	1.61	107	96.3	
	-12	0.84	1.15	1.56	2.07	2.65	3.29	4.50	6.15	7.83	9.07	9.12	7.88	6.20	4.67	3.35	2.40	1.72	1.24	75.7	63.9	
	-15	1.00	1.37	1.83	2.44	3.18	3.95	4.68	5.34	5.16	3.99	2.55	1.58	1.15	1.31	1.52	1.35	1.07	0.81	44.3	29.6	
	-18	0.52	0.70	0.92	1.21	1.57	1.99	2.54	3.31	4.20	4.92	5.13	4.70	3.88	3.01	2.32	1.78	1.35	1.01	45.1	29.6	
	-21	0.42	0.53	0.68	0.85	1.04	1.21	1.34	1.60	2.05	2.61	3.03	3.06	2.74	2.23	1.78	1.41	1.10	0.84	28.5	9.85	
	-24	0.50	0.62	0.78	0.94	1.07	1.17	1.16	0.97	0.67	0.50	0.45	0.48	0.57	0.67	0.66	0.58	0.50	0.41	12.7	0.00	
	-27	0.38	0.46	0.56	0.67	0.77	0.85	0.87	0.80	0.85	0.89	0.89	0.86	0.79	0.72	0.67	0.59	0.51	0.42	12.6	0.00	
		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27	
Φ t	13.7	18.8	25.6	34.9	48.6	71.1	104	142	177	193	181	148	109	74.8	50.8	35.9	25.9	18.8	1473	---		
Φ a	0.00	0.00	4.28	15.1	33.3	58.4	93.3	134	170	185	173	139	98.3	63.5	37.4	17.9	3.09	0.00	---	1226		

one-half-peak spread: U:7.4,D:11.2 , L:9.4,R:8.9


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.8V I:0.2479A P:34.16W PF:0.6212 Lamp Flux:1701.79x1 lm		
NAME: 8.01.017.0045 20° LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

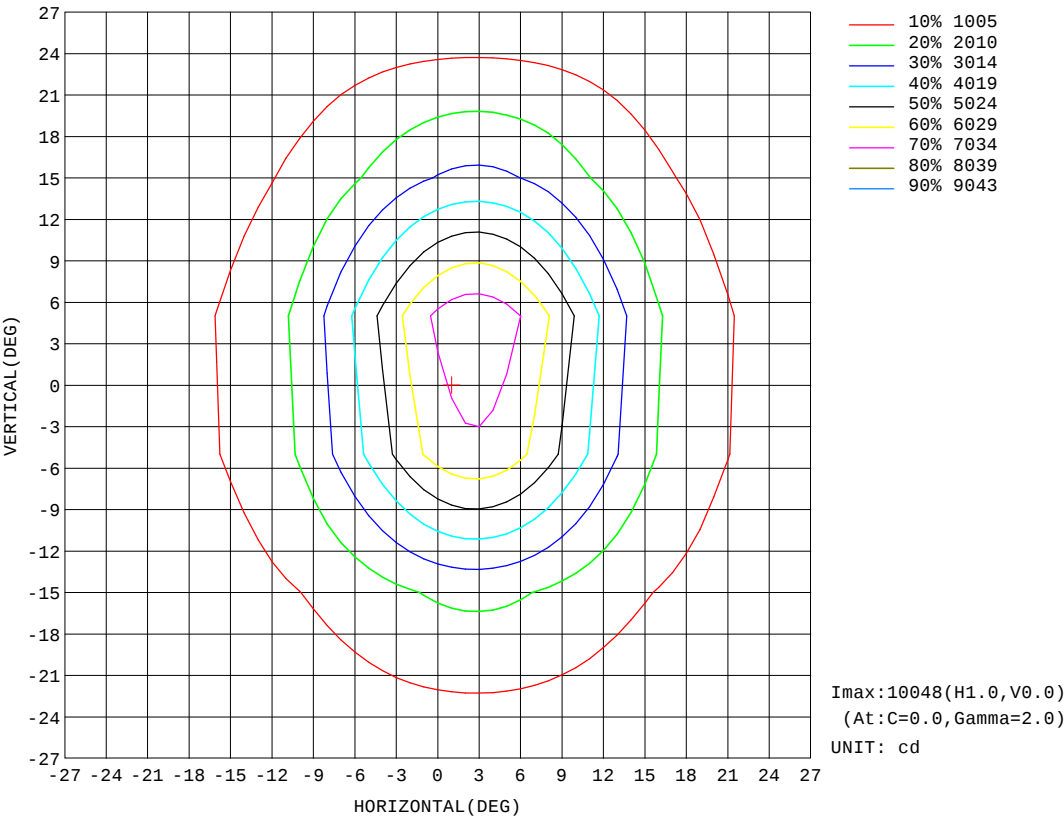


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.8V I:0.2479A P:34.16W PF:0.6212 Lamp Flux:1701.79x1 lm		
NAME: 8.01.017.0045 20° LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

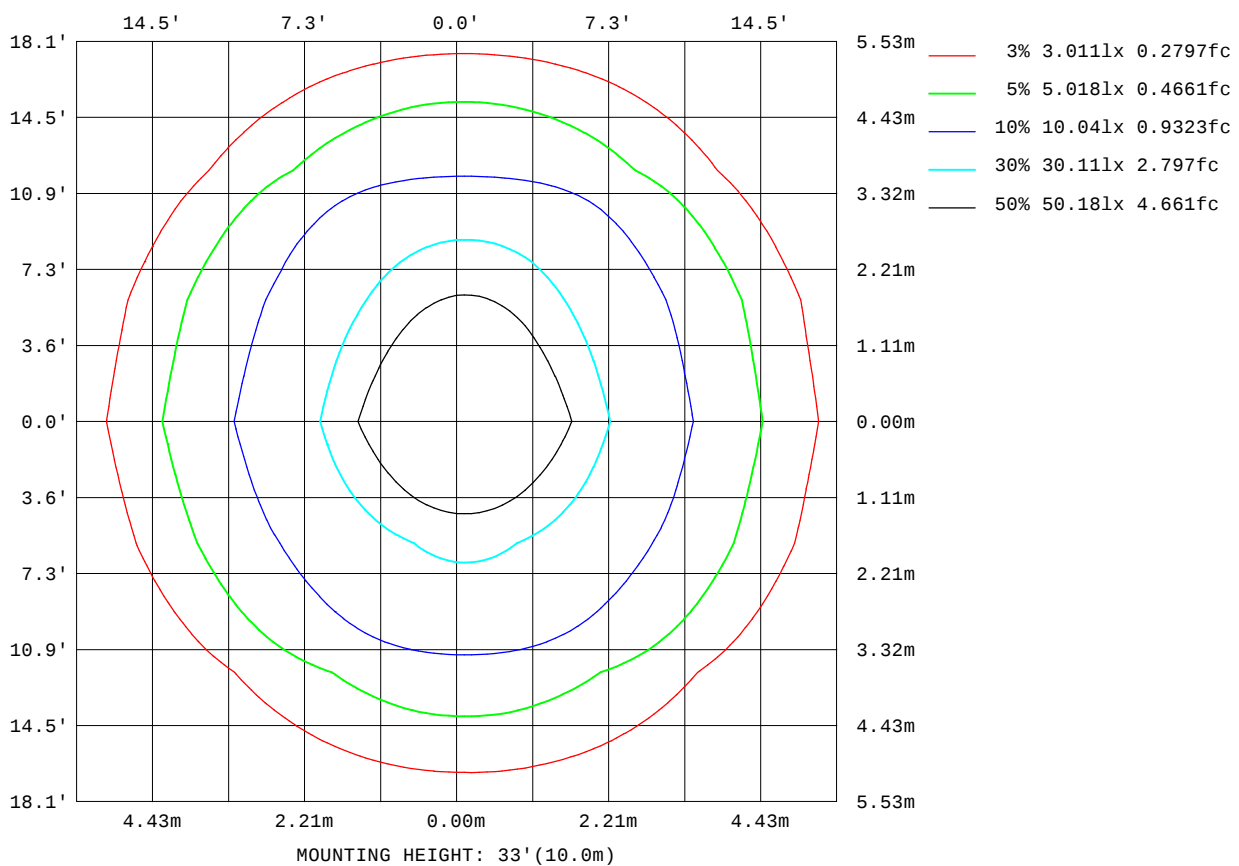


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.8V I:0.2479A P:34.16W PF:0.6212 Lamp Flux:1701.79x1 lm		
NAME: 8.01.017.0045 20° LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

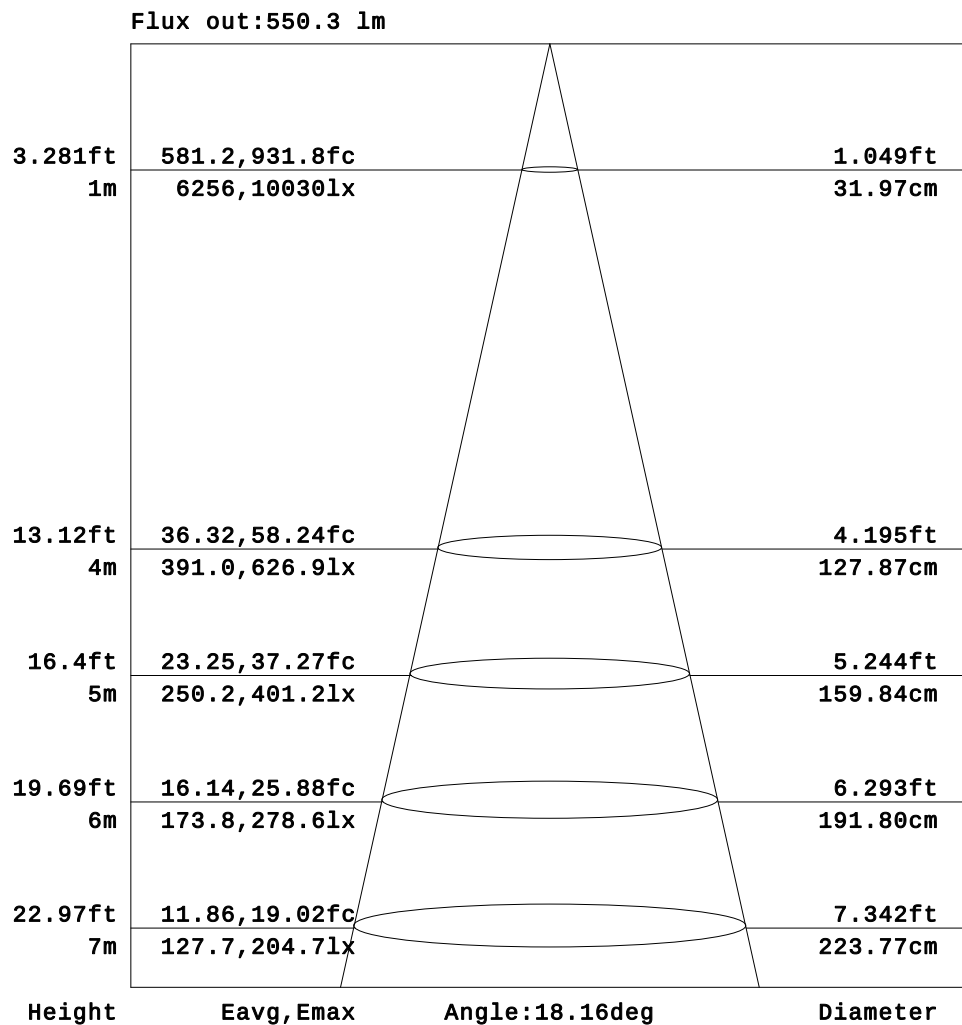


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

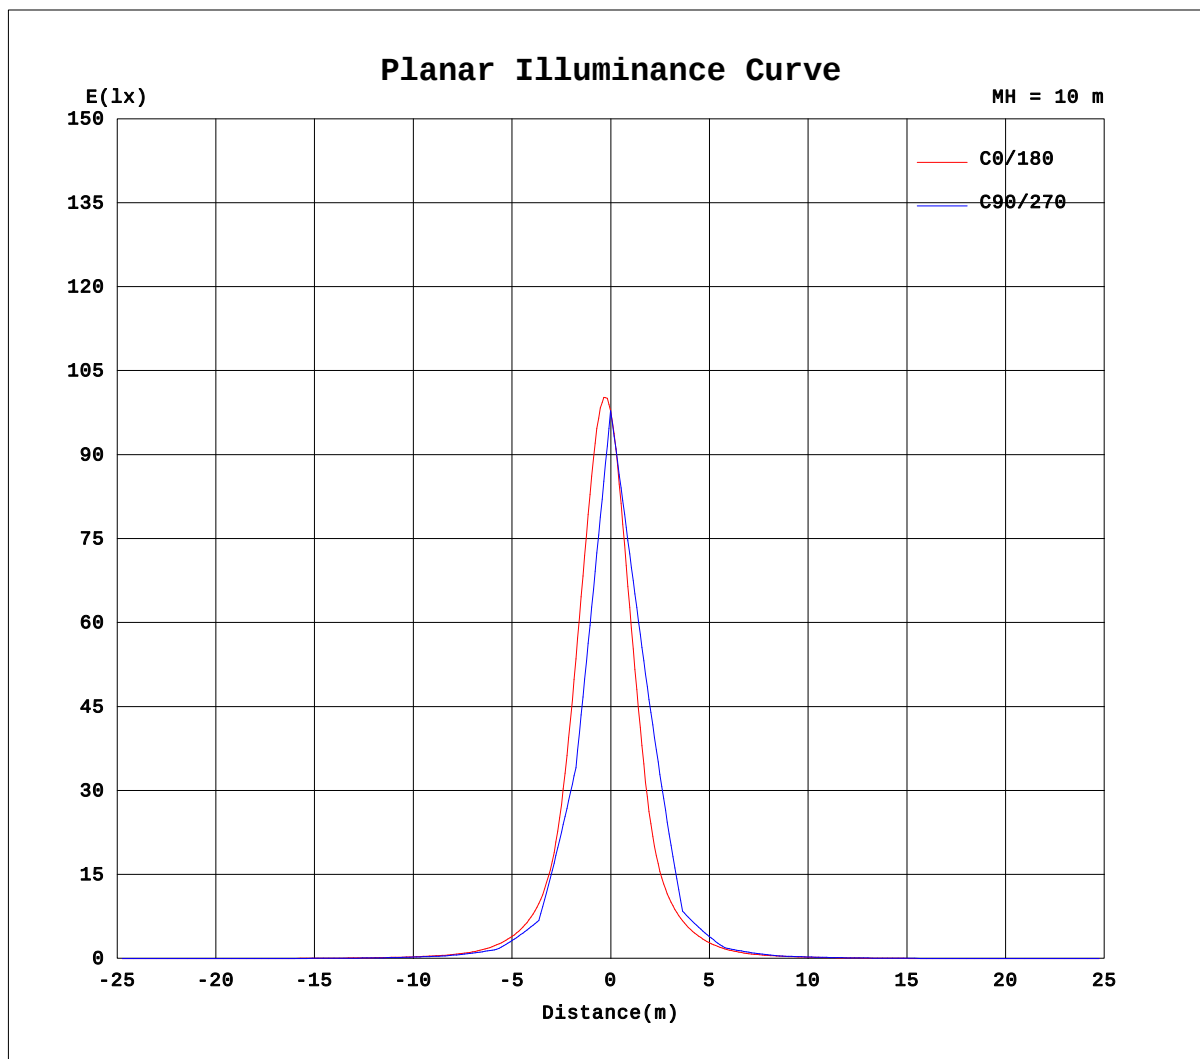

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-08-06

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.8V I:0.2479A P:34.16W PF:0.6212 Lamp Flux:1701.79x1 lm		
NAME: 8.01.017.0045 20° LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: ×10cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.08	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.16	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.18	0.42	0.61	0.72	0.88	1.04	1.11	1.16	1.31	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.54	1.03	1.31	1.54	1.92	2.16	2.24	2.38	2.47	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.42	0.74	1.15	1.67	2.15	2.51	2.92	3.31	3.58	3.78	3.95	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	1.09	1.65	2.13	2.73	3.30	3.77	4.26	4.71	5.08	5.34	5.47	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.22	0.59	1.37	2.11	2.78	3.50	4.29	5.08	5.94	6.72	7.40	7.96	8.27	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.61	1.39	2.25	3.13	3.96	4.90	5.92	7.08	8.27	9.29	10.2	10.9	11.2	
-35	0.00	0.00	0.00	0.00	0.00	0.01	0.77	1.58	2.45	3.46	4.54	5.82	7.31	8.91	10.8	12.8	15.0	17.0	18.2	
-30	0.00	0.00	0.00	0.00	0.00	0.48	1.49	2.43	3.43	4.64	6.07	7.91	9.97	12.1	14.9	18.1	21.6	24.4	25.7	
-25	0.00	0.00	0.00	0.00	0.00	0.23	1.32	2.40	3.51	4.86	6.59	8.77	11.5	15.4	21.1	29.0	38.2	47.3	53.6	
-20	0.00	0.00	0.00	0.00	0.00	0.87	2.01	3.22	4.58	6.36	8.74	11.6	15.8	22.8	33.3	47.0	62.4	76.3	83.0	
-15	0.00	0.00	0.00	0.00	0.00	0.61	1.71	2.95	4.35	6.15	8.61	11.8	17.1	26.4	41.6	64.8	99.6	155	213	
-10	0.00	0.00	0.00	0.00	0.11	1.19	2.38	3.73	5.41	7.76	10.8	15.5	24.7	40.6	66.2	107	175	286	365	
-5	0.00	0.00	0.00	0.00	0.00	0.87	2.02	3.29	4.85	7.00	9.91	14.1	22.5	37.8	64.0	109	211	419	642	
0	0.00	0.00	0.00	0.00	0.32	1.42	2.64	4.00	5.82	8.41	11.8	18.0	30.2	53.0	91.2	170	395	745	1002	
5	0.00	0.00	0.00	0.00	0.00	0.89	2.04	3.30	4.86	7.03	9.93	14.1	22.8	38.9	66.2	114	227	469	725	
10	0.00	0.00	0.00	0.00	0.18	1.24	2.43	3.75	5.44	7.82	10.9	15.8	25.8	43.6	72.3	121	231	415	544	
15	0.00	0.00	0.00	0.00	0.00	0.66	1.76	2.97	4.39	6.22	8.70	11.9	17.6	28.2	46.0	73.2	122	212	307	
20	0.00	0.00	0.00	0.00	0.00	0.91	2.04	3.25	4.64	6.49	8.83	11.7	16.4	25.1	38.7	56.0	76.0	94.1	103	
25	0.00	0.00	0.00	0.00	0.00	0.28	1.35	2.43	3.57	4.93	6.71	8.86	11.7	16.2	23.6	33.6	45.6	57.4	65.7	
30	0.00	0.00	0.00	0.00	0.00	0.49	1.53	2.49	3.50	4.71	6.22	8.05	10.0	12.4	15.9	20.4	25.1	28.7	30.5	
35	0.00	0.00	0.00	0.00	0.00	0.03	0.82	1.68	2.54	3.52	4.63	5.97	7.46	9.13	11.2	13.9	16.8	19.3	20.8	
40	0.00	0.00	0.00	0.00	0.00	0.03	0.80	1.54	2.32	3.18	4.06	5.05	6.20	7.40	8.60	9.72	10.7	11.4	11.6	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.73	1.44	2.20	2.89	3.63	4.46	5.35	6.24	7.10	7.86	8.48	8.82	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.46	1.18	1.79	2.29	2.85	3.43	4.00	4.58	5.11	5.60	5.95	6.10	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.44	0.87	1.30	1.78	2.30	2.71	3.15	3.60	3.95	4.23	4.41	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	0.67	1.14	1.52	1.76	2.09	2.40	2.54	2.68	2.79	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.25	0.47	0.70	0.83	0.97	1.21	1.36	1.46	1.59	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	0.24	0.35	0.44	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.11	0.15	0.21	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-06

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.8V I:0.2479A P:34.16W PF:0.6212 Lamp Flux:1701.79x1 lm		
NAME: 8.01.017.0045 20° LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																		UNIT: ×10cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.06	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.07	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	1.27	1.16	1.13	1.02	0.86	0.75	0.61	0.41	0.22	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	2.37	2.27	2.18	1.91	1.62	1.41	1.07	0.65	0.34	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	3.93	3.78	3.59	3.28	2.88	2.51	2.11	1.62	1.21	0.83	0.42	0.11	0.00	0.00	0.00	0.00	0.00	0.00	
-50	5.38	5.15	4.79	4.33	3.83	3.32	2.76	2.24	1.79	1.22	0.56	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-45	8.29	7.99	7.45	6.73	5.91	5.04	4.19	3.39	2.72	2.06	1.35	0.70	0.23	0.00	0.00	0.00	0.00	0.00	
-40	11.0	10.5	9.57	8.50	7.29	6.07	4.96	3.98	3.14	2.33	1.58	0.91	0.13	0.00	0.00	0.00	0.00	0.00	
-35	18.4	17.4	15.6	13.3	11.0	9.06	7.33	5.75	4.43	3.34	2.41	1.62	0.77	0.03	0.00	0.00	0.00	0.00	
-30	25.3	23.0	19.7	16.2	13.1	10.6	8.37	6.40	4.81	3.58	2.60	1.66	0.66	0.00	0.00	0.00	0.00	0.00	
-25	54.0	48.5	39.8	30.4	22.2	16.1	11.7	8.83	6.54	4.73	3.42	2.33	1.26	0.22	0.00	0.00	0.00	0.00	
-20	79.7	67.6	52.3	37.6	25.9	17.7	12.5	9.32	6.70	4.74	3.35	2.14	1.01	0.00	0.00	0.00	0.00	0.00	
-15	217	163	106	68.7	43.8	27.6	17.6	12.1	8.69	6.07	4.23	2.85	1.65	0.54	0.00	0.00	0.00	0.00	
-10	319	207	126	77.3	47.1	28.1	17.4	11.9	8.42	5.75	3.95	2.57	1.39	0.29	0.00	0.00	0.00	0.00	
-5	653	443	227	115	65.4	38.6	22.7	14.3	10.0	6.95	4.73	3.19	1.95	0.77	0.00	0.00	0.00	0.00	
0	843	489	213	105	58.9	33.9	20.0	12.8	9.00	6.13	4.17	2.77	1.57	0.40	0.00	0.00	0.00	0.00	
5	740	495	245	120	67.4	39.4	22.9	14.3	10.1	7.01	4.77	3.21	1.97	0.79	0.00	0.00	0.00	0.00	
10	473	282	146	83.8	49.7	28.9	17.6	11.9	8.52	5.86	4.02	2.62	1.43	0.32	0.00	0.00	0.00	0.00	
15	313	223	129	76.7	47.1	28.9	17.9	12.2	8.87	6.24	4.34	2.92	1.71	0.59	0.00	0.00	0.00	0.00	
20	97.6	81.5	61.1	42.3	27.8	18.3	12.7	9.54	6.99	4.92	3.45	2.22	1.08	0.05	0.00	0.00	0.00	0.00	
25	65.8	58.2	46.5	34.2	24.0	16.7	12.1	9.19	6.88	4.98	3.58	2.45	1.33	0.29	0.00	0.00	0.00	0.00	
30	29.5	26.2	21.8	17.3	13.6	11.0	8.88	6.91	5.16	3.83	2.77	1.79	0.72	0.00	0.00	0.00	0.00	0.00	
35	20.9	19.5	17.0	14.3	11.7	9.59	7.86	6.27	4.84	3.64	2.65	1.79	0.84	0.07	0.00	0.00	0.00	0.00	
40	11.5	10.9	10.1	9.12	7.97	6.76	5.53	4.44	3.50	2.61	1.83	1.03	0.22	0.00	0.00	0.00	0.00	0.00	
45	8.85	8.56	8.01	7.33	6.52	5.65	4.73	3.85	3.10	2.38	1.59	0.89	0.27	0.00	0.00	0.00	0.00	0.00	
50	6.05	5.80	5.39	4.91	4.36	3.80	3.21	2.64	2.15	1.52	0.78	0.17	0.00	0.00	0.00	0.00	0.00	0.00	
55	4.44	4.30	4.07	3.76	3.34	2.95	2.52	2.00	1.55	1.11	0.53	0.20	0.00	0.00	0.00	0.00	0.00	0.00	
60	2.75	2.64	2.53	2.28	1.99	1.77	1.43	0.97	0.62	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	1.61	1.52	1.45	1.33	1.08	0.93	0.79	0.57	0.38	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.40	0.34	0.31	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.21	0.18	0.16	0.13	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: