


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		6191.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	39.6V x 38.3H
	At 50% of Imax	18.3V x 17.8H
	At 90% of Imax	7.3V x 6.6H
Beam Flux	Total	997.7 lumens per klm.
	To 10% of Imax	702.3 lumens per klm.
	To 50% of Imax	286.8 lumens per klm.
	To 90% of Imax	28.1 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.6V I:0.2512A P:34.86W PF:1.000 Freq:50.00Hz Lamp Flux:2315.71x1 lm		
NAME: 8.01.017.0064 20° LWW-WZB-W55-L6-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

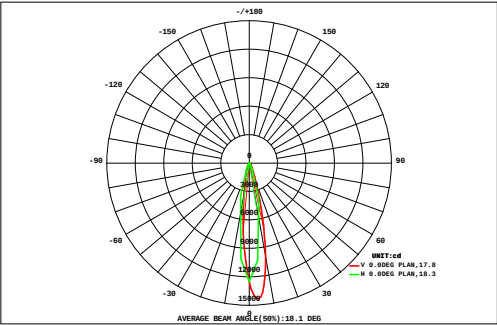

DATA OF LAMP		Eff:66.43lm/W	
MODEL LWW-WZB-W55-L6-RDM	Imax(cd)	14337	
NOMINAL POWER(W)	34	AVAILABILITY(%)	71.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1665
NOMINAL FLUX(lm)	2315.71	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2316
TEST VOLTAGE(V)	220	θ @50%(H,V)	18,18DEG


AREA FLUX DIAGRAM																	UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	27	0.55	0.68	0.83	0.99	1.16	1.30	1.42	1.49	1.51	1.46	1.37	1.24	1.09	0.93	0.79	0.66	0.55	0.46	18.5	0.00
	24	0.63	0.84	1.09	1.39	1.70	2.03	2.32	2.55	2.65	2.63	2.51	2.28	2.00	1.70	1.40	1.13	0.88	0.69	30.4	0.00
	21	0.95	1.26	1.62	2.02	2.43	2.81	3.12	3.29	3.30	3.16	2.90	2.55	2.17	1.80	1.44	1.12	0.86	0.67	37.5	0.00
	18	1.30	1.72	2.19	2.69	3.20	3.64	3.95	4.04	3.94	3.67	3.26	2.79	2.31	1.86	1.44	1.09	0.82	0.62	44.5	8.64
	15	1.10	1.54	2.13	2.94	4.15	5.98	8.36	10.7	11.9	11.5	9.81	7.44	5.36	3.92	2.96	2.23	1.67	1.23	95.0	77.2
	12	1.42	2.01	2.83	4.06	5.98	8.79	12.1	14.8	15.7	14.5	11.7	8.57	6.07	4.40	3.29	2.46	1.81	1.32	122	105
	9	2.32	3.25	4.55	6.66	10.0	14.4	18.5	20.4	19.0	15.3	10.7	7.18	5.00	3.69	2.71	1.97	1.42	1.01	148	133
		1.89	2.68	3.82	5.65	9.01	14.1	20.0	25.2	27.3	25.1	19.9	14.1	9.19	5.84	3.97	2.82	2.02	1.44	194	180
		1.34	1.96	2.87	4.32	7.58	13.2	21.1	30.1	36.2	35.9	30.1	21.8	13.9	8.23	5.38	3.76	2.69	1.94	242	229
		2.76	4.05	6.34	11.4	19.4	29.2	38.7	43.4	40.1	31.4	21.5	13.0	7.26	4.67	3.25	2.30	1.64	1.15	282	270
		2.65	3.88	6.03	10.8	18.2	27.5	36.7	41.6	39.0	31.0	21.7	13.4	7.61	4.89	3.38	2.39	1.71	1.20	274	261
	-9	1.15	1.59	2.07	2.28	3.34	6.16	11.0	17.7	23.8	25.5	22.5	17.1	11.5	7.13	4.78	3.37	2.43	1.76	165	149
-12	1.61	2.24	3.01	3.84	5.46	8.06	11.4	14.6	16.5	15.8	13.0	9.63	6.85	4.71	3.34	2.42	1.76	1.28	126	110	
-15	2.21	3.06	4.26	5.97	8.36	11.1	13.0	12.2	8.94	5.18	2.38	1.27	1.45	1.88	1.65	1.31	0.98	0.72	85.9	68.9	
-18	0.88	1.19	1.58	2.06	2.61	3.53	5.04	6.93	8.47	8.92	8.14	6.50	4.73	3.52	2.69	2.04	1.54	1.16	71.5	50.5	
-21	0.67	0.85	1.05	1.19	1.16	1.25	1.68	2.87	4.37	5.42	5.60	4.87	3.68	2.80	2.20	1.70	1.30	0.99	43.7	20.2	
-24	1.04	1.31	1.59	1.83	1.96	1.76	1.19	0.67	0.42	0.37	0.40	0.59	0.78	0.82	0.73	0.61	0.50	0.41	17.0	0.00	
-27	0.69	0.86	1.05	1.22	1.32	1.26	1.14	1.26	1.32	1.33	1.28	1.18	1.06	0.94	0.83	0.71	0.58	0.48	18.5	0.00	
		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27
Φ t	25.2	35.0	48.9	71.3	107	156	211	254	265	238	189	135	92.0	63.7	46.2	34.1	25.2	18.5	2015	---	
Φ a	0.42	7.76	24.3	49.2	89.5	140	197	241	252	224	175	123	79.3	39.9	17.7	3.55	0.00	0.00	---	1665	

one-half-peak spread: U:9.4,D:9.0 , L:8.7,R:9.3 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20
V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.6V I:0.2512A P:34.86W PF:1.000 Freq:50.00Hz Lamp Flux:2315.71x1 lm		
NAME: 8.01.017.0064 20° LWW-WZB-W55-L6-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

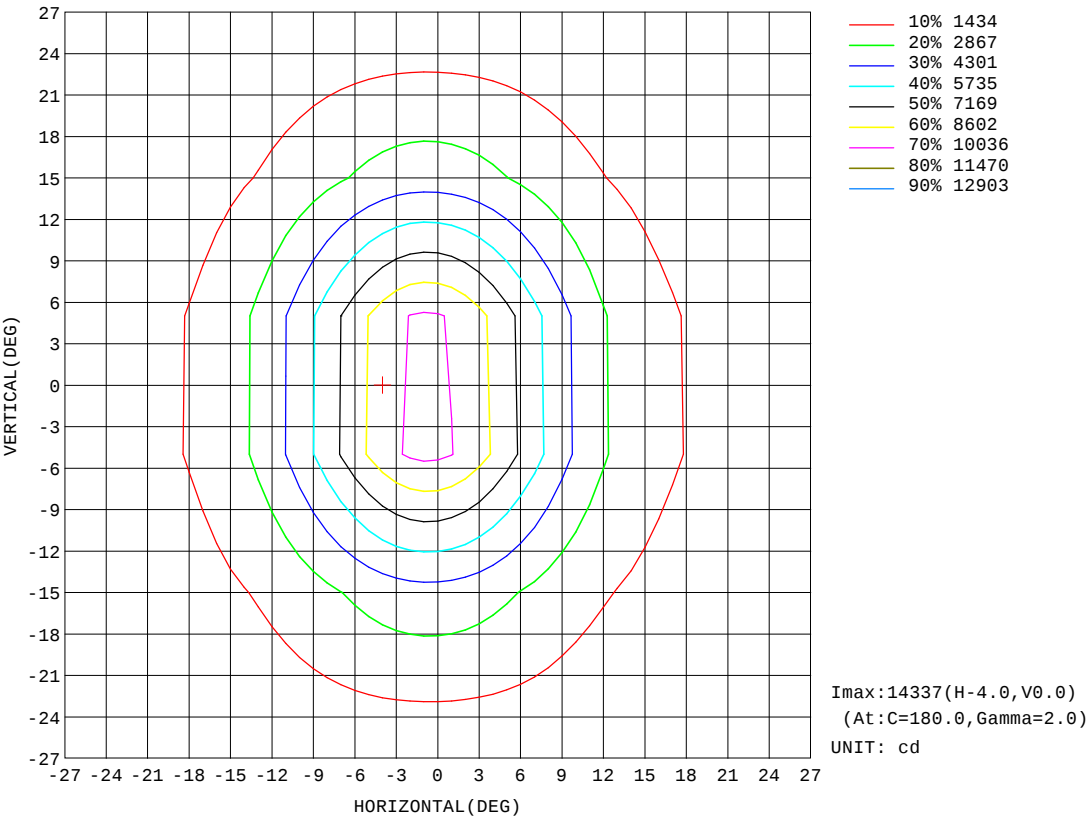


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.6V I:0.2512A P:34.86W PF:1.000 Freq:50.00Hz Lamp Flux:2315.71x1 lm		
NAME: 8.01.017.0064 20° LWW-WZB-W55-L6-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

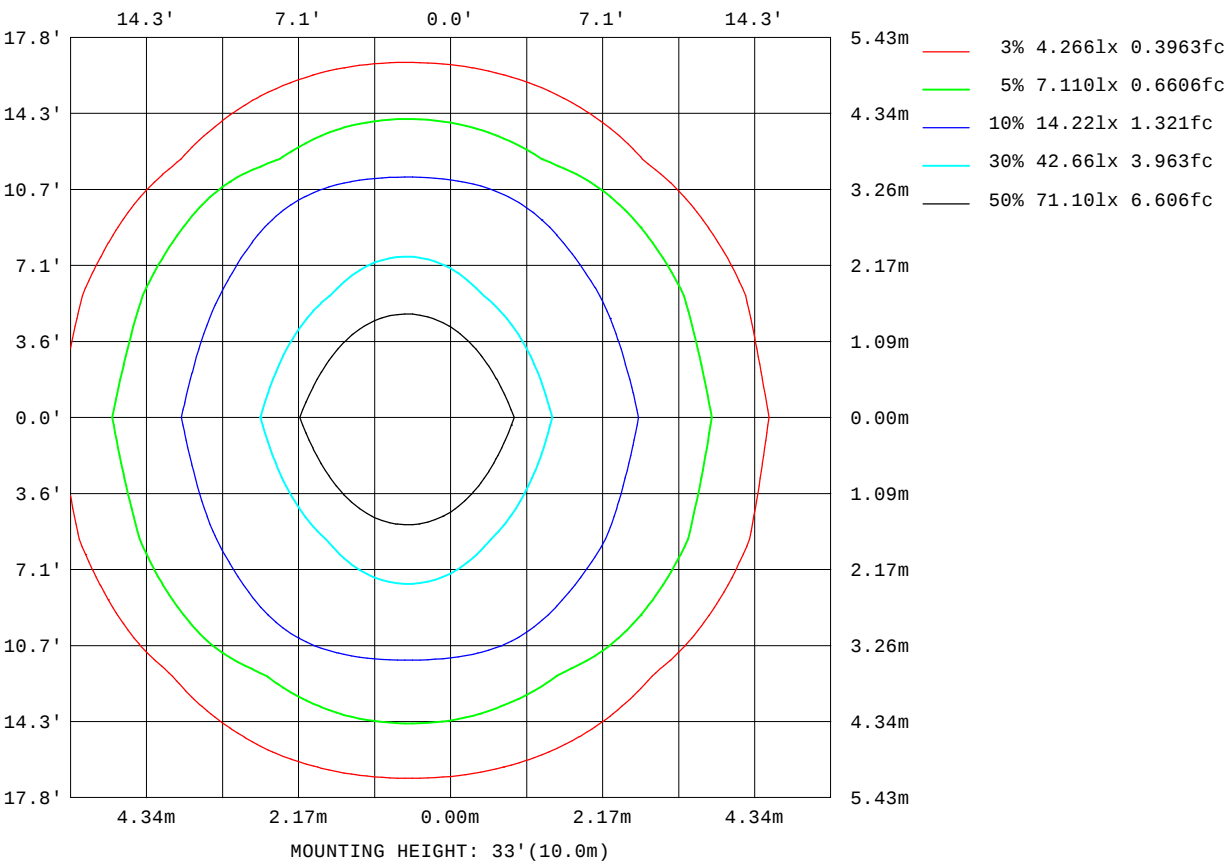

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

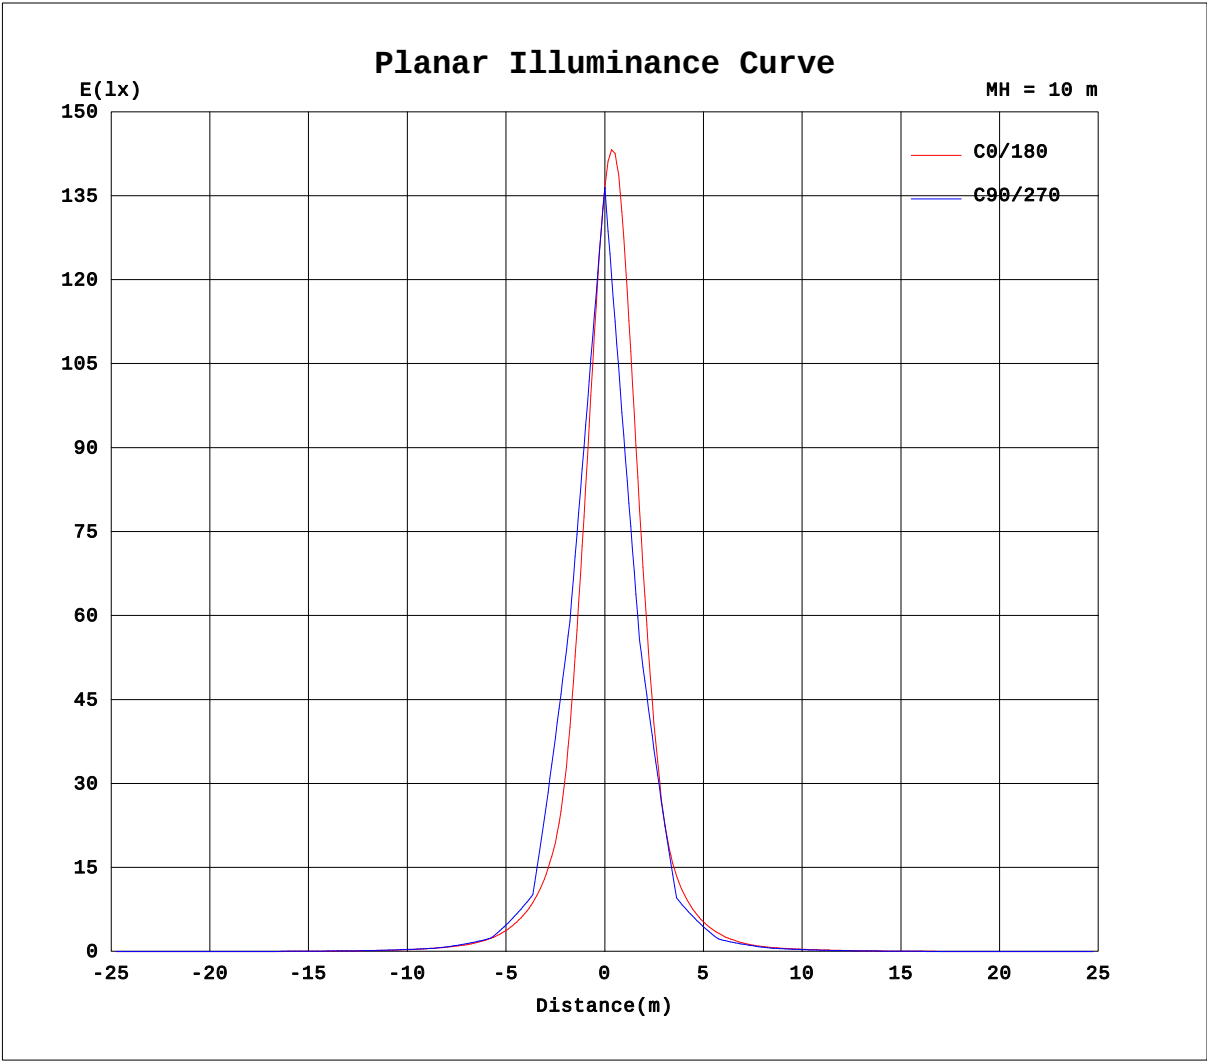


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.6V I:0.2512A P:34.86W PF:1.000 Freq:50.00Hz Lamp Flux:2315.71x1 lm		
NAME: 8.01.017.0064 20° LWW-WZB-W55-L6-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

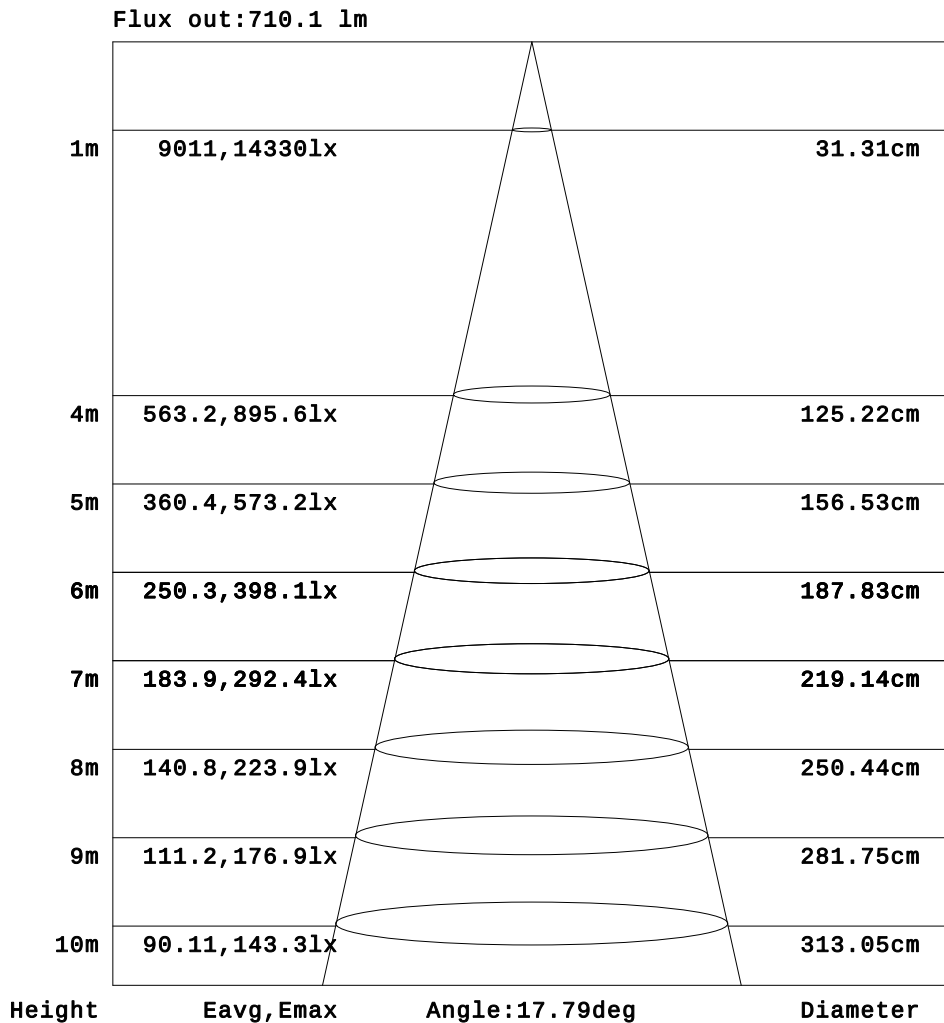

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.2512A P:34.86W PF:1.000 Freq:50.00Hz Lamp Flux:2315.71x1 lm		
NAME: 8.01.017.0064 20° LWW-WZB-W55-L6-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: ×10cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.11	0.21	0.29	0.32	0.35
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.33	0.53	0.63	0.67	0.74
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.48	0.71	1.00	1.27	1.48	1.75	2.00	2.09	2.16	2.23
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.75	1.23	1.75	2.32	2.64	2.92	3.30	3.51	3.57	3.69	3.67
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.53	1.22	1.92	2.46	3.09	3.71	4.18	4.66	5.12	5.42	5.61	5.72
-50	0.00	0.00	0.00	0.00	0.00	0.09	0.75	1.55	2.56	3.27	3.90	4.64	5.35	6.01	6.60	7.13	7.52	7.72	7.63
-45	0.00	0.00	0.00	0.00	0.00	0.16	0.83	1.77	2.74	3.74	4.65	5.68	6.82	7.95	9.07	10.00	10.8	11.4	11.5
-40	0.00	0.00	0.00	0.00	0.06	0.87	2.05	3.08	4.15	5.31	6.60	8.08	9.63	11.3	12.7	13.9	14.8	15.3	15.3
-35	0.00	0.00	0.00	0.00	0.00	0.63	1.84	3.07	4.22	5.62	7.29	9.22	11.4	13.8	16.8	20.2	23.3	25.6	26.3
-30	0.00	0.00	0.00	0.00	0.48	1.76	3.16	4.40	5.91	7.86	10.3	12.9	15.8	19.8	25.0	30.4	34.8	37.1	36.6
-25	0.00	0.00	0.00	0.00	0.14	1.24	2.65	4.10	5.68	7.80	10.5	13.6	18.3	26.1	37.2	51.3	66.1	77.5	80.7
-20	0.00	0.00	0.00	0.00	1.00	2.38	3.89	5.61	7.83	10.8	14.4	19.4	29.1	45.0	65.8	90.0	112	124	121
-15	0.00	0.00	0.00	0.00	0.38	1.70	3.21	4.84	6.92	9.83	13.4	18.7	29.1	48.0	77.6	126	212	331	381
-10	0.00	0.00	0.00	0.06	1.28	2.83	4.40	6.42	9.30	13.0	18.1	28.8	49.3	83.2	141	252	457	629	576
-5	0.00	0.00	0.00	0.00	0.54	1.98	3.56	5.28	7.67	11.0	15.1	22.7	39.0	68.1	119	230	500	873	1031
0	0.00	0.00	0.00	0.11	1.41	3.06	4.65	6.81	9.91	13.8	19.7	34.0	60.0	107	202	489	993	1415	1250
5	0.00	0.00	0.00	0.00	0.52	1.94	3.51	5.22	7.59	10.9	14.9	22.3	38.3	67.2	118	227	496	862	1015
10	0.00	0.00	0.00	0.05	1.24	2.73	4.31	6.27	9.07	12.6	17.5	27.7	47.9	81.3	136	246	442	600	543
15	0.00	0.00	0.00	0.00	0.34	1.64	3.11	4.69	6.67	9.46	12.9	17.7	27.5	45.8	74.8	121	205	317	361
20	0.00	0.00	0.00	0.00	0.94	2.28	3.75	5.34	7.44	10.2	13.4	17.8	26.8	42.2	62.5	85.3	106	117	113
25	0.00	0.00	0.00	0.00	0.12	1.18	2.50	3.87	5.31	7.26	9.70	12.5	16.7	23.8	34.7	48.2	62.2	73.1	75.9
30	0.00	0.00	0.00	0.00	0.47	1.62	2.90	4.05	5.37	7.12	9.28	11.6	14.2	17.8	22.8	28.2	32.5	34.7	34.1
35	0.00	0.00	0.00	0.00	0.00	0.62	1.68	2.76	3.81	5.03	6.49	8.22	10.1	12.3	15.2	18.5	21.8	24.0	24.6
40	0.00	0.00	0.00	0.00	0.02	0.86	1.78	2.71	3.66	4.61	5.74	7.09	8.58	10.1	11.6	12.9	13.9	14.4	14.4
45	0.00	0.00	0.00	0.00	0.00	0.16	0.73	1.51	2.33	3.18	3.97	4.91	5.95	7.04	8.19	9.21	10.1	10.7	10.9
50	0.00	0.00	0.00	0.00	0.00	0.02	0.61	1.30	2.04	2.68	3.28	3.97	4.62	5.33	6.02	6.64	7.12	7.35	7.30
55	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.44	0.90	1.48	1.96	2.50	3.05	3.55	4.12	4.62	4.99	5.25	5.36
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.46	0.85	1.27	1.72	2.08	2.45	2.85	3.07	3.20	3.35	3.33
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.31	0.51	0.73	0.93	1.11	1.35	1.59	1.70	1.81	1.88
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.17	0.26	0.32	0.38	0.35
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.11	0.14	0.17	0.19
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.2512A P:34.86W PF:1.000 Freq:50.00Hz Lamp Flux:2315.71x1 lm		
NAME: 8.01.017.0064 20° LWW-WZB-W55-L6-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.33	0.25	0.19	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.57	0.42	0.28	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	2.13	1.91	1.77	1.51	1.15	0.99	0.77	0.46	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	3.42	3.23	2.99	2.51	2.09	1.76	1.16	0.58	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	5.55	5.20	4.81	4.27	3.65	3.14	2.57	1.89	1.34	0.81	0.36	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-50	7.27	6.73	6.01	5.28	4.58	3.90	3.15	2.51	1.93	1.08	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	11.3	10.6	9.66	8.49	7.23	6.01	4.92	3.96	3.17	2.34	1.39	0.58	0.07	0.00	0.00	0.00	0.00	0.00
-40	14.7	13.4	11.9	10.2	8.39	6.80	5.49	4.45	3.48	2.44	1.54	0.52	0.00	0.00	0.00	0.00	0.00	0.00
-35	25.4	22.9	19.7	16.4	13.4	10.8	8.53	6.60	5.10	3.85	2.78	1.74	0.52	0.00	0.00	0.00	0.00	0.00
-30	33.5	28.7	23.4	18.8	15.2	12.0	9.17	6.86	5.19	3.92	2.83	1.51	0.17	0.00	0.00	0.00	0.00	0.00
-25	75.4	63.5	49.3	36.2	25.9	18.7	13.9	10.2	7.39	5.40	3.96	2.64	1.17	0.06	0.00	0.00	0.00	0.00
-20	104	81.2	58.8	40.5	27.3	19.1	14.0	9.98	7.04	5.07	3.53	2.04	0.60	0.00	0.00	0.00	0.00	0.00
-15	306	188	118	75.5	48.1	30.5	20.1	14.1	9.85	6.82	4.81	3.20	1.70	0.28	0.00	0.00	0.00	0.00
-10	361	199	122	74.9	45.7	27.8	18.5	12.9	8.72	6.01	4.12	2.55	1.01	0.00	0.00	0.00	0.00	0.00
-5	776	413	197	113	67.5	40.2	24.7	16.7	11.4	7.72	5.33	3.61	2.07	0.51	0.00	0.00	0.00	0.00
0	739	321	158	90.6	53.2	31.7	20.2	13.8	9.32	6.34	4.40	2.81	1.17	0.00	0.00	0.00	0.00	0.00
5	761	408	193	111	66.6	39.5	24.3	16.5	11.4	7.72	5.34	3.63	2.09	0.53	0.00	0.00	0.00	0.00
10	341	190	117	72.6	44.0	26.7	17.9	12.7	8.69	6.02	4.15	2.58	1.03	0.00	0.00	0.00	0.00	0.00
15	288	179	112	72.2	45.8	29.0	19.3	13.9	9.83	6.85	4.83	3.21	1.72	0.31	0.00	0.00	0.00	0.00
20	97.7	76.3	55.5	37.7	25.4	18.1	13.6	9.96	7.10	5.10	3.52	2.03	0.63	0.00	0.00	0.00	0.00	0.00
25	70.7	59.4	46.2	33.9	24.2	17.8	13.5	10.2	7.51	5.51	4.02	2.61	1.16	0.07	0.00	0.00	0.00	0.00
30	30.9	26.5	21.7	17.7	14.6	11.9	9.33	7.08	5.37	4.04	2.85	1.45	0.17	0.00	0.00	0.00	0.00	0.00
35	23.6	21.3	18.4	15.5	12.9	10.7	8.71	6.87	5.33	4.03	2.89	1.73	0.51	0.00	0.00	0.00	0.00	0.00
40	13.8	12.7	11.5	10.1	8.58	7.09	5.82	4.75	3.68	2.61	1.60	0.55	0.00	0.00	0.00	0.00	0.00	0.00
45	10.7	10.1	9.34	8.37	7.32	6.24	5.17	4.26	3.44	2.49	1.49	0.60	0.07	0.00	0.00	0.00	0.00	0.00
50	7.03	6.58	6.01	5.39	4.77	4.10	3.38	2.79	2.11	1.11	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	5.24	4.99	4.66	4.20	3.69	3.20	2.59	2.02	1.50	0.87	0.39	0.02	0.00	0.00	0.00	0.00	0.00	0.00
60	3.16	3.04	2.79	2.37	2.04	1.63	1.10	0.63	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	1.79	1.66	1.53	1.32	1.11	0.95	0.71	0.45	0.23	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.25	0.14	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.16	0.10	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: