

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2329.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	81.8V x 55.4H
	At 50% of Imax	49.2V x 19.1H
	At 90% of Imax	10.7V x 6.8H

Beam Flux	Total	999.6 lumens per klm.
	To 10% of Imax	740.6 lumens per klm.
	To 50% of Imax	327.3 lumens per klm.
	To 90% of Imax	34.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.9V I:0.2485A P:34.07W PF:0.6206 Lamp Flux:1443.49x1 lm		
NAME: 8.01.017.0096 15x55° LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080123
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

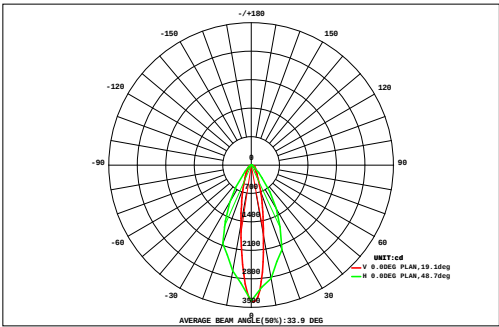

DATA OF LAMP		Eff:42.36lm/W	
MODEL LWW-WZB-W55-L6-RDM	Imax(cd)	3363	
NOMINAL POWER(W)	34	AVAILABILITY(%)	74.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1077
NOMINAL FLUX(lm)	1443.49	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1443
TEST VOLTAGE(V)	220.9	θ @50%(H,V)	19,49DEG

		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	72	0.00	0.00	0.01	0.03	0.14	0.32	0.50	0.65	0.76	0.77	0.71	0.59	0.43	0.26	0.11	0.02	0.00	0.00	5.30	0.00
	64	0.00	0.01	0.14	0.39	0.66	0.95	1.21	1.42	1.55	1.57	1.49	1.32	1.09	0.81	0.53	0.26	0.05	0.00	13.5	0.00
	56	0.00	0.10	0.36	0.70	1.03	1.34	1.64	1.92	2.14	2.20	2.04	1.79	1.50	1.19	0.86	0.52	0.21	0.03	19.6	0.00
	48	0.02	0.22	0.58	0.97	1.38	1.84	2.39	3.16	4.44	4.93	3.69	2.71	2.08	1.57	1.13	0.73	0.36	0.08	32.3	2.66
	40	0.07	0.36	0.75	1.21	1.78	2.58	3.69	5.73	10.3	11.9	7.05	4.20	2.89	2.01	1.36	0.86	0.45	0.13	57.4	28.2
	32	0.11	0.44	0.88	1.45	2.26	3.48	5.33	9.60	21.4	24.7	12.0	6.02	3.86	2.54	1.65	1.01	0.54	0.19	97.5	71.3
	24	0.14	0.50	0.99	1.67	2.67	4.23	7.05	13.7	32.7	38.4	17.7	8.29	4.87	3.04	1.90	1.15	0.61	0.23	140	117
		0.16	0.53	1.06	1.81	2.95	4.82	8.73	18.0	40.1	49.0	24.9	11.3	5.85	3.41	2.10	1.25	0.67	0.26	177	156
		0.17	0.56	1.11	1.90	3.12	5.21	9.99	21.4	46.7	56.7	29.3	13.3	6.39	3.58	2.19	1.29	0.69	0.27	204	183
		0.19	0.58	1.14	1.95	3.17	5.37	10.5	22.6	49.9	56.7	27.8	12.5	6.07	3.45	2.11	1.24	0.65	0.24	206	186
		0.17	0.54	1.07	1.82	2.95	4.78	8.39	17.0	38.1	44.4	22.0	10.2	5.44	3.21	2.00	1.19	0.63	0.24	164	143
	-24	0.13	0.48	0.96	1.61	2.54	3.92	6.27	12.1	29.7	36.1	16.8	7.75	4.58	2.86	1.80	1.09	0.58	0.21	129	105
-32	0.08	0.39	0.82	1.36	2.09	3.13	4.68	8.13	18.6	23.1	11.5	5.61	3.59	2.38	1.54	0.96	0.51	0.18	88.6	61.9	
-40	0.05	0.30	0.68	1.12	1.66	2.37	3.31	5.13	9.46	10.7	6.25	3.71	2.60	1.83	1.25	0.79	0.42	0.12	51.7	23.5	
-48	0.02	0.21	0.53	0.89	1.27	1.69	2.17	2.78	3.24	3.00	2.67	2.23	1.75	1.32	0.95	0.61	0.29	0.05	25.6	0.00	
-56	0.00	0.07	0.32	0.63	0.93	1.18	1.37	1.47	1.41	1.41	1.49	1.40	1.21	0.99	0.72	0.42	0.15	0.01	15.2	0.00	
-64	0.00	0.00	0.07	0.27	0.51	0.76	0.99	1.16	1.28	1.30	1.22	1.06	0.86	0.62	0.39	0.17	0.04	0.00	10.7	0.00	
-72	0.00	0.00	0.01	0.05	0.12	0.24	0.38	0.50	0.58	0.60	0.56	0.46	0.34	0.20	0.09	0.04	0.01	0.00	4.17	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)					16	24	32	40	48	56	64	72
Φ t	1.31	5.28	11.5	19.8	31.2	48.2	78.6	146	312	367	189	94.5	55.4	35.3	22.7	13.6	6.87	2.24	1442	---	
Φ a	0.00	0.00	0.00	0.00	0.00	4.70	47.9	124	296	354	169	67.0	14.7	0.00	0.00	0.00	0.00	0.00	---	1077	


one-half-peak spread: U:24.0,D:25.5 , L:9.8,R:9.8 Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.9V I:0.2485A P:34.07W PF:0.6206 Lamp Flux:1443.49x1 lm		
NAME: 8.01.017.0096 15x55° LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080123
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

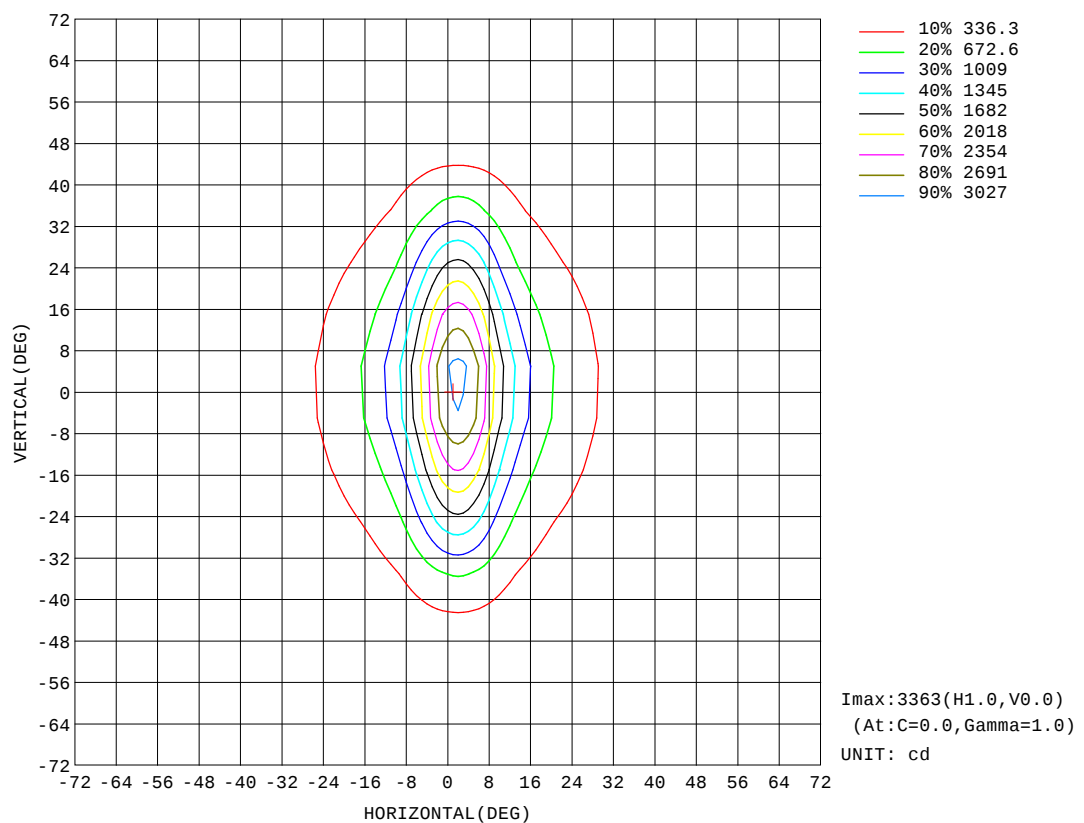


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.9V I:0.2485A P:34.07W PF:0.6206 Lamp Flux:1443.49x1 lm		
NAME: 8.01.017.0096 15x55° LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080123
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

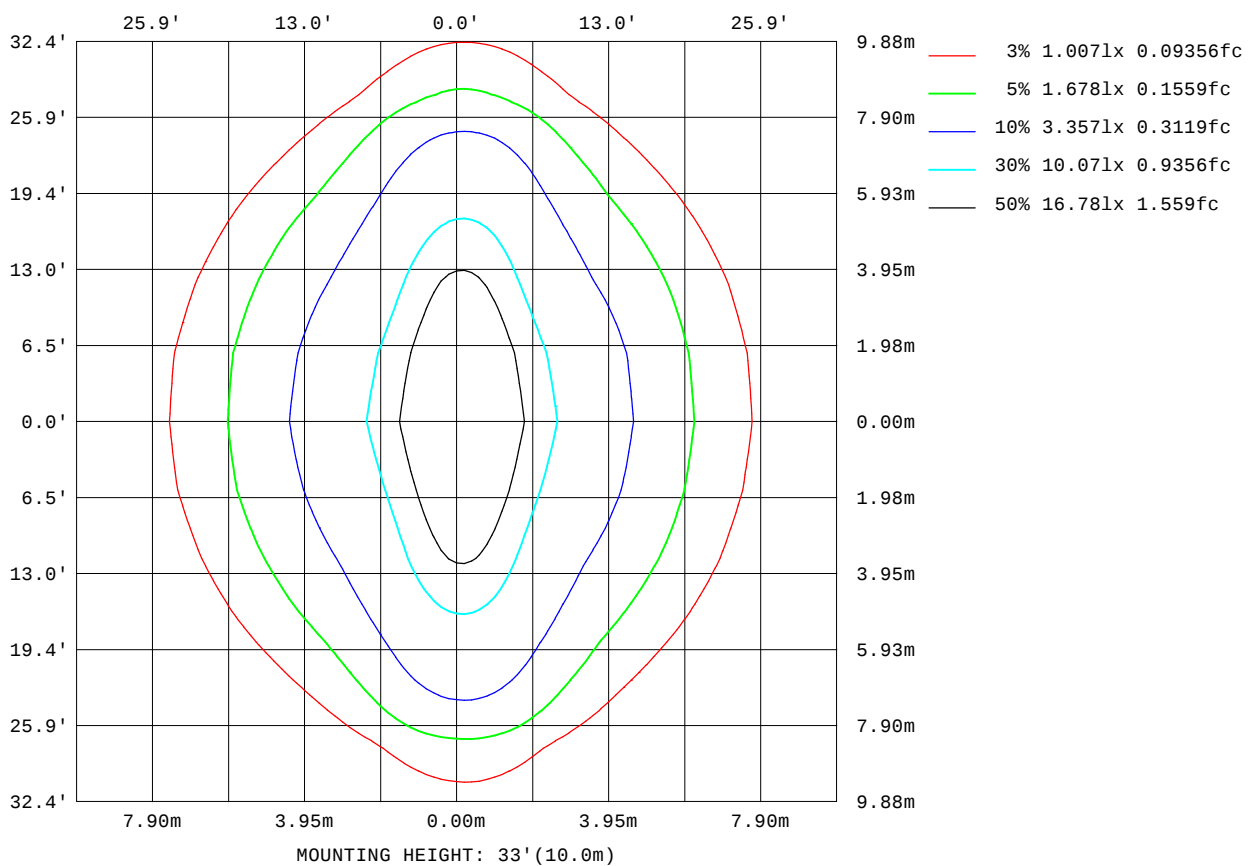


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.9V I:0.2485A P:34.07W PF:0.6206 Lamp Flux:1443.49x1 lm		
NAME: 8.01.017.0096 15x55° LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080123
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

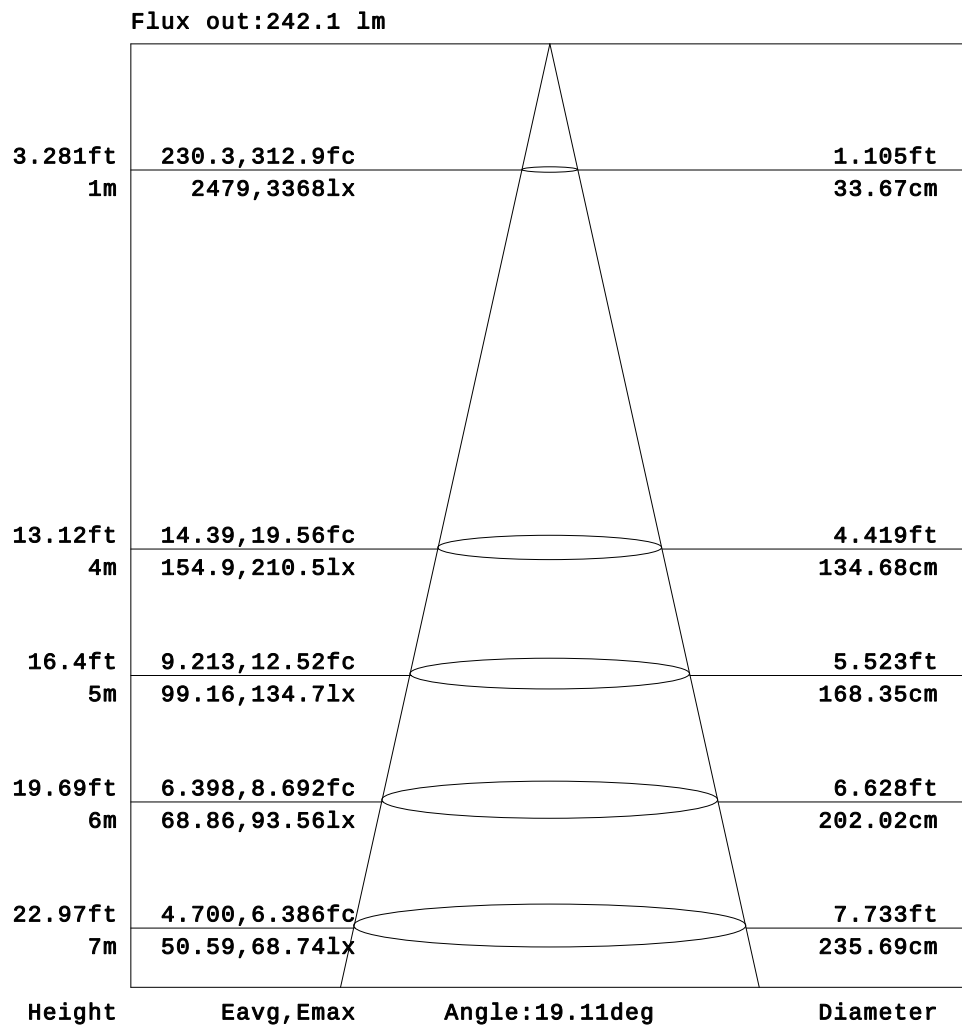


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

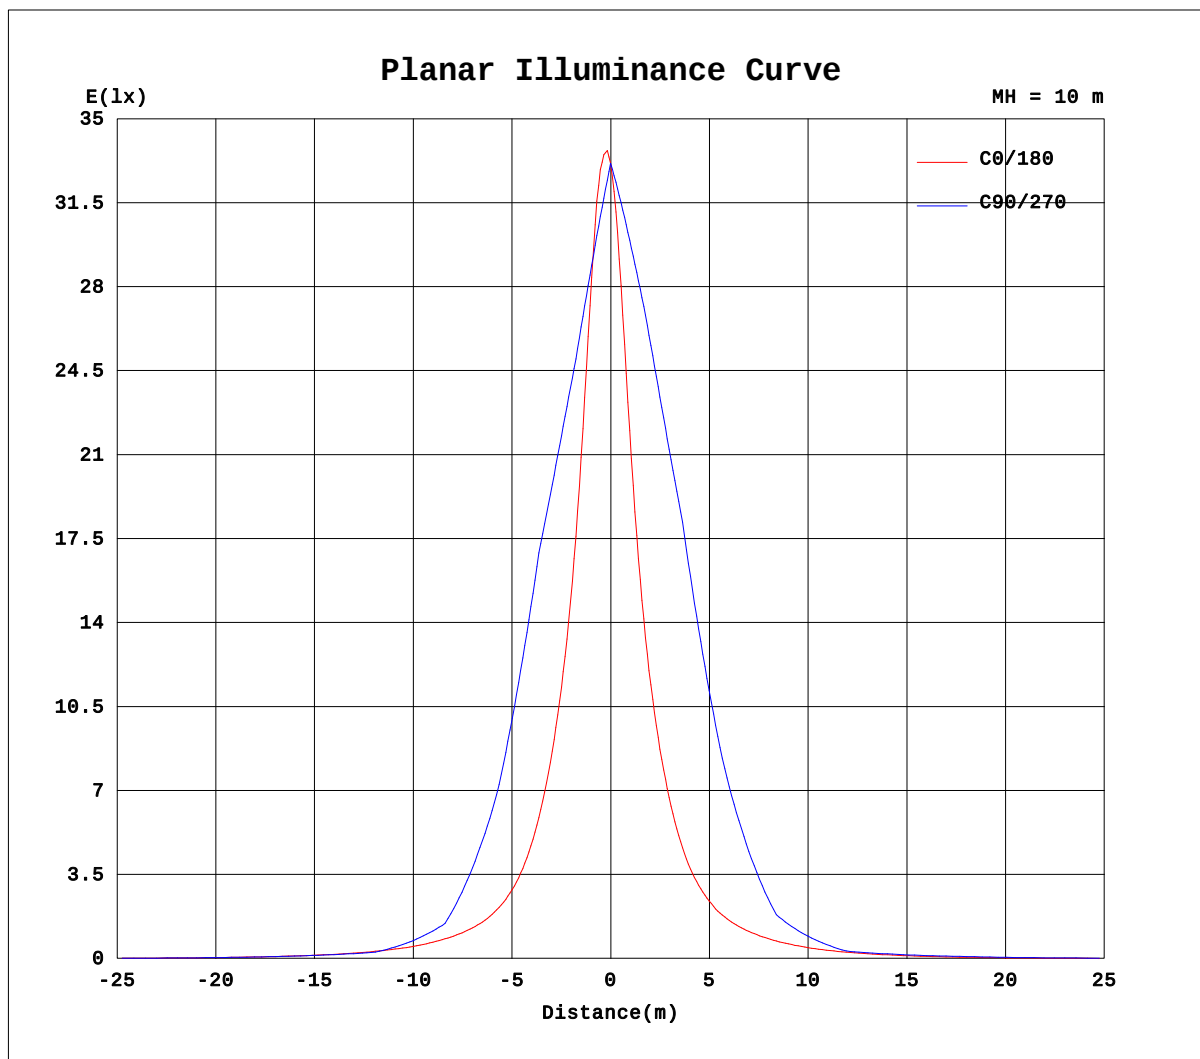

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.9V I:0.2485A P:34.07W PF:0.6206 Lamp Flux:1443.49x1 lm		
NAME: 8.01.017.0096 15x55° LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080123
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	2.02	3.96	5.81	7.50	8.93	10.0	10.7
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.84	4.82	8.68	12.3	15.6	18.4	20.4	21.5
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	4.24	8.52	12.7	16.9	22.5	27.8	32.6	36.7	40.1	42.8	44.3
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.69	10.3	18.8	27.0	35.1	42.5	48.9	54.6	59.3	63.1	66.0	67.3
-55	0.00	0.00	0.00	0.00	0.00	0.00	3.86	10.5	21.3	31.6	40.9	49.4	56.8	63.2	68.9	74.1	78.7	82.6	85.0
-50	0.00	0.00	0.00	0.00	0.00	0.01	10.1	23.6	36.6	48.3	58.4	66.9	73.9	79.8	85.5	90.8	96.0	101	103
-45	0.00	0.00	0.00	0.00	0.00	3.91	15.8	30.5	44.3	56.7	68.0	78.8	89.5	101	114	129	151	185	214
-40	0.00	0.00	0.00	0.00	0.00	10.8	27.7	43.2	57.1	69.8	82.0	94.9	110	127	147	174	218	284	328
-35	0.00	0.00	0.00	0.00	0.50	12.8	30.4	47.0	62.4	77.3	92.8	110	131	156	187	232	320	499	680
-30	0.00	0.00	0.00	0.00	3.66	21.9	40.3	57.2	73.6	90.9	110	133	161	197	242	315	478	802	1061
-25	0.00	0.00	0.00	0.00	4.06	22.6	41.9	59.9	78.1	97.4	120	146	179	223	283	377	579	1028	1519
-20	0.00	0.00	0.00	0.00	11.1	31.4	50.6	69.9	89.9	112	139	171	213	270	355	494	813	1484	2055
-15	0.00	0.00	0.00	0.00	9.21	29.6	49.6	69.7	90.7	114	143	178	223	289	391	559	882	1548	2286
-10	0.00	0.00	0.00	0.01	15.4	35.9	56.5	77.7	100	127	159	200	256	342	481	718	1151	1955	2641
-5	0.00	0.00	0.00	0.00	12.3	33.0	53.9	75.4	98.0	124	156	197	252	341	490	748	1187	2001	2914
0	0.00	0.00	0.00	0.00	17.5	38.4	59.8	81.8	105	134	168	212	275	388	582	915	1476	2463	3343
5	0.00	0.00	0.00	0.00	12.7	33.4	54.5	76.0	98.7	125	158	199	256	349	507	783	1246	2079	3010
10	0.00	0.00	0.00	0.01	16.1	36.7	57.6	79.1	102	129	162	206	265	360	519	797	1277	2120	2831
15	0.00	0.00	0.00	0.00	10.6	30.8	51.0	71.5	92.9	117	146	184	233	306	424	620	979	1684	2459
20	0.00	0.00	0.00	0.00	13.1	32.9	52.6	72.3	92.9	116	144	180	226	291	391	551	897	1607	2210
25	0.00	0.00	0.00	0.00	6.11	25.3	44.3	62.9	81.6	102	125	154	192	242	313	422	647	1137	1676
30	0.00	0.00	0.00	0.00	6.68	25.3	43.5	60.8	78.0	96.0	117	142	176	216	270	356	544	918	1229
35	0.00	0.00	0.00	0.00	1.51	16.7	34.4	51.2	67.0	82.5	99.0	118	143	172	210	264	368	579	801
40	0.00	0.00	0.00	0.00	0.22	15.2	32.2	48.0	62.2	75.3	88.6	103	121	142	167	202	258	346	410
45	0.00	0.00	0.00	0.00	0.00	5.91	20.5	35.7	50.0	62.9	74.8	86.3	98.4	112	128	147	176	221	262
50	0.00	0.00	0.00	0.00	0.00	1.35	15.0	29.3	43.1	55.4	65.6	73.9	81.0	88.1	95.5	103	110	117	121
55	0.00	0.00	0.00	0.00	0.00	0.02	6.06	15.4	27.3	38.7	48.8	57.6	65.4	72.7	79.8	86.4	92.4	97.5	101
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.31	16.2	26.3	35.7	44.5	52.8	60.3	66.8	72.4	76.7	79.6	81.1
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.19	7.11	12.1	17.4	24.4	31.1	37.4	43.1	48.1	52.2	55.0	56.6
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.98	7.04	12.1	16.9	21.5	25.6	28.9	31.3	32.5
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	3.00	5.54	7.98	10.3	12.4	14.2	15.4	16.2
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.9V I:0.2485A P:34.07W PF:0.6206 Lamp Flux:1443.49x1 lm		
NAME: 8.01.017.0096 15x55° LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080123
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2		UNIT: cd																	
H(°)	V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	10.7	10.2	9.31	8.05	6.57	4.94	3.18	1.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	21.3	20.2	18.2	15.5	12.5	9.19	5.62	1.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	44.2	42.9	40.5	37.2	33.3	28.9	24.0	18.5	13.2	9.07	4.83	0.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	66.8	64.8	61.6	57.4	52.5	46.8	40.2	32.8	24.8	16.4	7.98	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	84.7	82.0	78.1	73.3	68.1	62.4	56.2	49.1	41.0	31.8	21.6	10.9	3.80	0.00	0.00	0.00	0.00	0.00	0.00
-50	102	97.9	92.7	87.2	81.5	75.6	69.5	62.4	53.7	43.1	30.9	17.9	5.11	0.00	0.00	0.00	0.00	0.00	0.00
-45	209	176	145	125	110	98.0	86.8	76.5	66.2	55.1	42.9	29.3	14.9	3.11	0.00	0.00	0.00	0.00	0.00
-40	306	239	189	156	134	116	99.9	86.4	74.4	62.4	49.5	35.0	19.0	3.25	0.00	0.00	0.00	0.00	0.00
-35	652	447	294	219	179	149	125	106	89.0	74.1	59.7	44.5	28.1	11.1	0.05	0.00	0.00	0.00	0.00
-30	930	578	361	263	210	172	142	118	97.4	80.1	63.9	47.6	30.4	12.2	0.00	0.00	0.00	0.00	0.00
-25	1426	879	509	348	265	210	169	137	112	91.6	73.3	55.6	37.6	18.9	1.33	0.00	0.00	0.00	0.00
-20	1732	986	571	393	295	229	183	146	119	95.6	75.5	56.5	37.5	18.0	0.36	0.00	0.00	0.00	0.00
-15	2162	1345	785	514	362	267	207	165	133	107	84.4	64.1	44.3	24.3	4.37	0.00	0.00	0.00	0.00
-10	2306	1414	859	561	385	277	213	169	136	108	85.0	63.8	43.1	22.6	2.25	0.00	0.00	0.00	0.00
-5	2773	1760	1064	676	443	309	232	183	146	116	91.2	69.2	48.1	27.3	6.57	0.00	0.00	0.00	0.00
0	2880	1754	1078	679	435	303	228	180	142	113	88.4	66.2	44.8	23.7	2.90	0.00	0.00	0.00	0.00
5	2861	1827	1110	703	456	316	236	186	148	118	92.5	70.2	48.8	27.8	6.88	0.00	0.00	0.00	0.00
10	2477	1540	944	608	408	289	221	175	140	112	87.6	65.6	44.4	23.5	2.85	0.00	0.00	0.00	0.00
15	2316	1454	861	562	389	283	218	173	139	111	88.0	66.8	46.2	25.7	5.26	0.00	0.00	0.00	0.00
20	1855	1062	627	431	320	247	196	156	126	101	79.9	59.7	39.8	19.7	0.93	0.00	0.00	0.00	0.00
25	1571	966	562	385	291	229	184	149	121	98.4	78.5	59.4	40.4	20.9	2.25	0.00	0.00	0.00	0.00
30	1076	655	404	294	234	191	156	129	107	87.2	69.4	51.6	33.3	14.4	0.00	0.00	0.00	0.00	0.00
35	768	519	335	249	202	168	140	118	98.7	81.8	65.7	49.1	31.7	13.6	0.39	0.00	0.00	0.00	0.00
40	378	288	221	183	154	133	114	98.0	83.6	69.8	55.5	39.8	22.8	5.80	0.00	0.00	0.00	0.00	0.00
45	256	211	171	146	128	113	99.9	87.7	75.9	63.4	50.0	35.2	19.5	4.63	0.00	0.00	0.00	0.00	0.00
50	120	115	109	102	95.1	88.1	80.8	72.8	63.2	51.8	38.7	24.3	9.81	0.00	0.00	0.00	0.00	0.00	0.00
55	101	97.9	93.4	88.1	82.0	75.4	68.2	60.1	51.0	40.5	29.1	16.9	6.35	0.11	0.00	0.00	0.00	0.00	0.00
60	80.8	78.9	76.0	71.9	66.4	59.9	52.4	44.0	34.7	24.8	14.6	4.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	56.7	55.2	52.8	49.5	45.0	39.9	34.0	27.5	20.5	13.4	8.32	3.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	32.2	30.8	28.5	25.4	21.7	17.6	13.1	8.39	3.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	16.2	15.6	14.5	13.0	11.3	9.22	7.01	4.67	2.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: