

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5907.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	39.6V x 39.4H
	At 50% of Imax	19.0V x 17.9H
	At 90% of Imax	5.1V x 6.5H
Beam Flux	Total	998.6 lumens per klm.
	To 10% of Imax	710.5 lumens per klm.
	To 50% of Imax	306.8 lumens per klm.
	To 90% of Imax	29.0 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:242.0V I:0.2350A P:34.46W PF:0.6062 Lamp Flux:1510.29x1 lm		
NAME: 8.01.017.0045 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

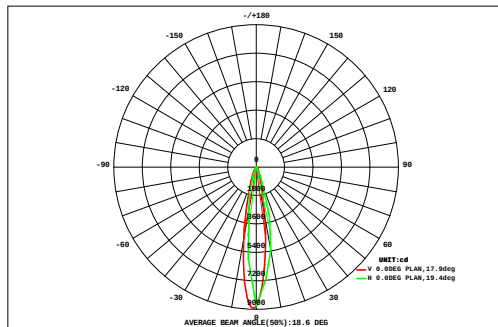

DATA OF LAMP		Eff:43.82lm/W	
MODEL LWW-WZB-W55-L6-RDM	Imax(cd)	8922	
NOMINAL POWER(W)	34	AVAILABILITY(%)	72.7
RATED VOLTAGE(V)	242	Avai. FLUX(lm)	1097
NOMINAL FLUX(lm)	1510.29	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1510
TEST VOLTAGE(V)	242.0	θ @50%(H,V)	18,19DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm				Φ t	Φ a
	27	0.43	0.54	0.67	0.81	0.96	1.11	1.24	1.34	1.39	1.39	1.31	1.19	1.04	0.88	0.73	0.59	0.47	0.38	16.5	0.00
	24	0.50	0.66	0.87	1.11	1.38	1.67	1.96	2.21	2.38	2.43	2.34	2.13	1.84	1.53	1.24	0.99	0.77	0.58	26.6	2.86
	21	0.69	0.92	1.20	1.53	1.89	2.26	2.61	2.88	3.03	3.00	2.80	2.47	2.08	1.69	1.34	1.04	0.79	0.59	32.8	15.8
	18	0.89	1.20	1.55	1.97	2.42	2.88	3.28	3.56	3.68	3.56	3.23	2.78	2.28	1.82	1.41	1.08	0.80	0.59	39.0	25.2
	15	0.80	1.11	1.53	2.10	2.93	4.25	6.24	8.44	10.2	10.6	9.58	7.54	5.35	3.65	2.57	1.86	1.35	0.97	81.1	71.1
	12	0.96	1.35	1.89	2.67	3.88	5.90	8.77	11.7	13.8	13.9	12.0	9.08	6.21	4.16	2.89	2.05	1.47	1.05	104	95.1
	9	1.39	1.94	2.73	3.90	5.82	9.09	13.1	16.5	18.0	16.4	12.9	8.79	5.61	3.71	2.57	1.79	1.27	0.89	126	118
		1.18	1.66	2.34	3.36	5.07	8.16	12.4	16.8	19.8	19.9	17.0	12.5	8.28	5.21	3.36	2.27	1.58	1.11	142	134
		0.91	1.29	1.84	2.66	4.07	6.85	11.3	16.6	21.4	23.5	21.3	16.5	11.2	6.87	4.24	2.80	1.93	1.35	157	149
		1.45	2.07	3.01	4.61	7.93	13.1	18.9	24.1	26.2	23.6	18.0	12.2	7.40	4.38	2.78	1.90	1.33	0.92	174	167
		1.37	1.96	2.84	4.33	7.37	12.1	17.4	22.2	24.2	21.9	16.7	11.4	7.03	4.23	2.71	1.86	1.30	0.91	162	154
	-9	0.73	1.01	1.38	1.81	2.22	3.22	5.18	7.82	10.7	12.6	12.2	9.91	7.22	4.83	3.20	2.18	1.55	1.10	88.9	78.3
	-12	0.84	1.14	1.53	1.98	2.35	2.95	4.02	5.29	6.44	7.00	6.53	5.36	4.13	3.04	2.19	1.58	1.14	0.82	58.3	46.7
	-15	0.99	1.34	1.78	2.29	2.74	3.07	3.30	3.15	2.28	1.35	0.84	0.65	0.74	1.02	1.05	0.88	0.68	0.49	28.6	14.9
	-18	0.50	0.66	0.87	1.15	1.48	1.84	2.33	2.98	3.59	3.90	3.75	3.20	2.54	1.98	1.53	1.17	0.88	0.66	35.0	19.9
	-21	0.37	0.47	0.60	0.76	0.92	1.02	1.16	1.44	1.84	2.20	2.34	2.16	1.81	1.47	1.17	0.91	0.70	0.54	21.9	5.19
	-24	0.42	0.53	0.65	0.77	0.85	0.88	0.79	0.57	0.40	0.33	0.32	0.36	0.43	0.45	0.41	0.35	0.29	0.24	9.03	0.00
-27	0.32	0.38	0.46	0.54	0.61	0.64	0.61	0.61	0.65	0.66	0.65	0.60	0.54	0.48	0.43	0.37	0.31	0.26	9.13	0.00	
-27 -24 -21 -18 -15 -12 -9 -6 HORIZONTAL(DEG) 6 9 12 15 18 21 24 27																					
Φ t	14.7	20.2	27.8	38.3	54.9	81.0	115	148	170	168	144	109	75.7	51.4	35.8	25.7	18.6	13.5	1311	---	
Φ a	0.00	1.89	9.33	22.3	44.5	71.7	107	141	164	163	139	102	64.3	39.0	23.4	5.87	0.00	0.00	---	1097	

one-half-peak spread: U:6.8,D:12.4 , L:9.4,R:8.7


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:242.0V I:0.2350A P:34.46W PF:0.6062 Lamp Flux:1510.29x1 lm		
NAME: 8.01.017.0045 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

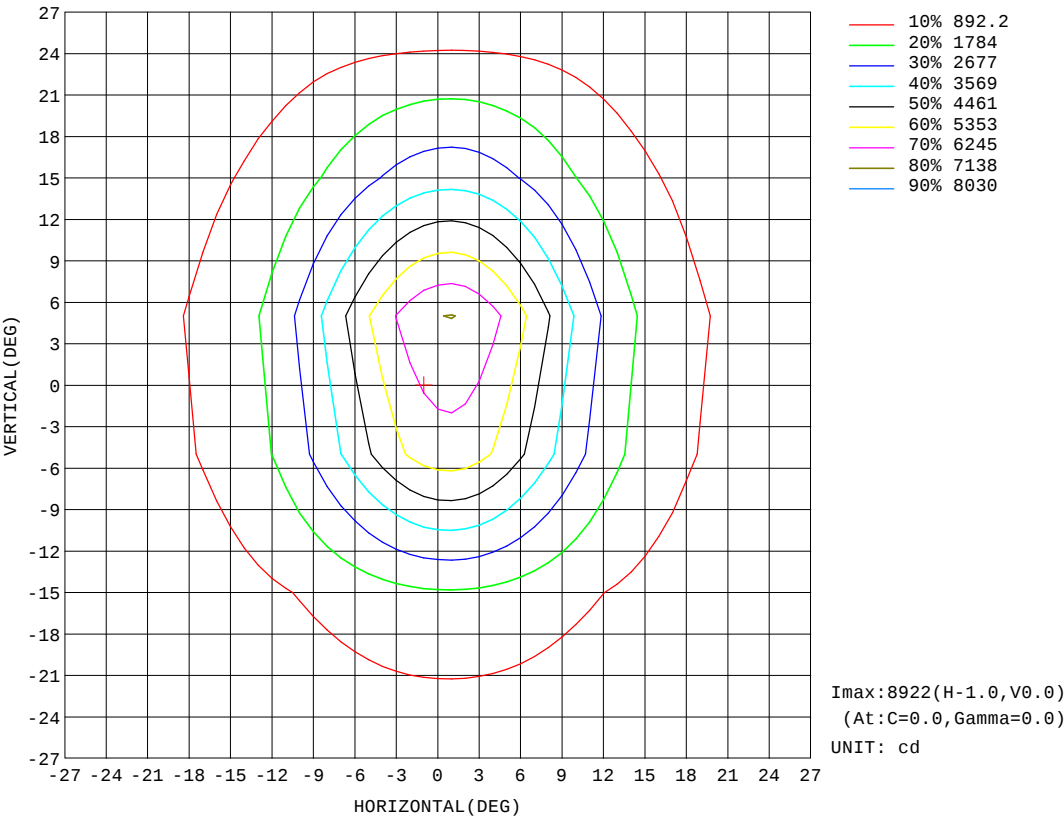


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:242.0V I:0.2350A P:34.46W PF:0.6062 Lamp Flux:1510.29x1 lm		
NAME: 8.01.017.0045 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

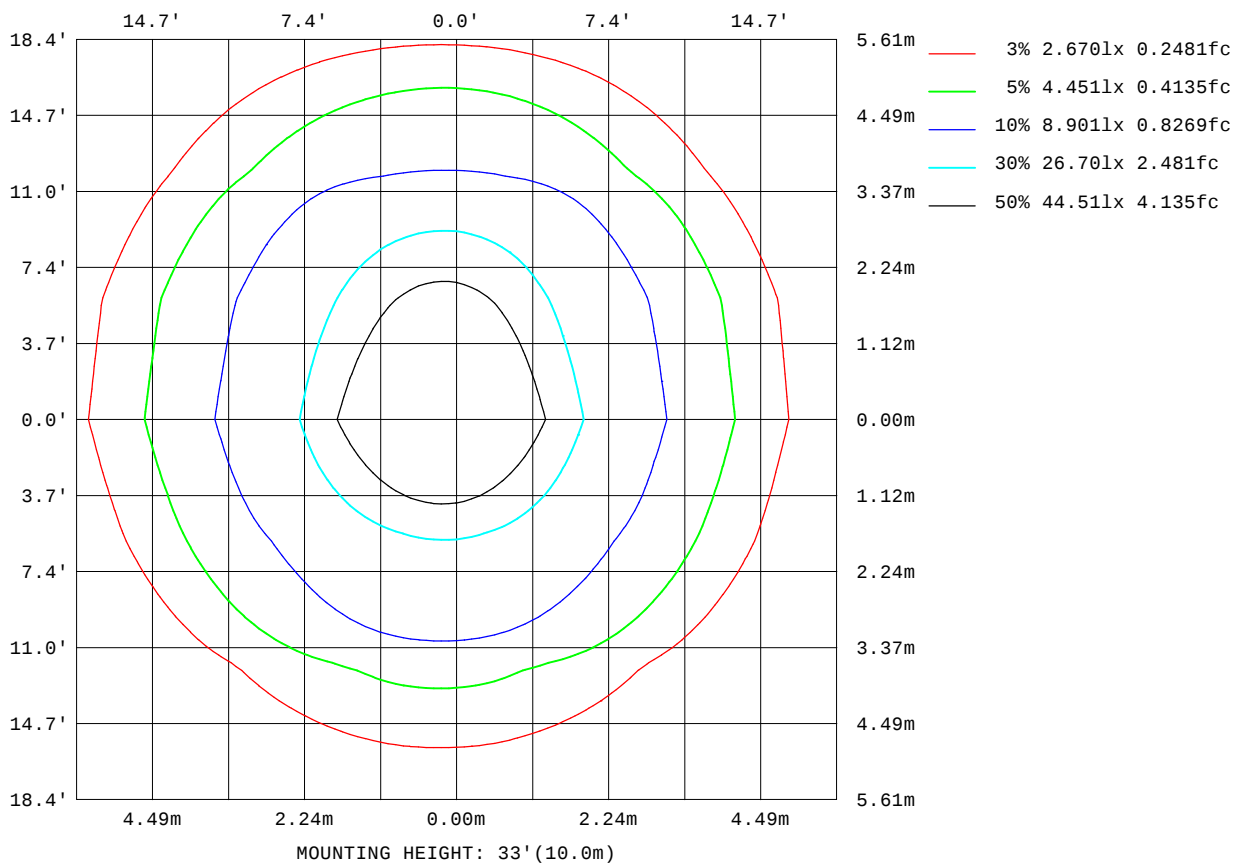


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:242.0V I:0.2350A P:34.46W PF:0.6062 Lamp Flux:1510.29x1 lm		
NAME: 8.01.017.0045 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

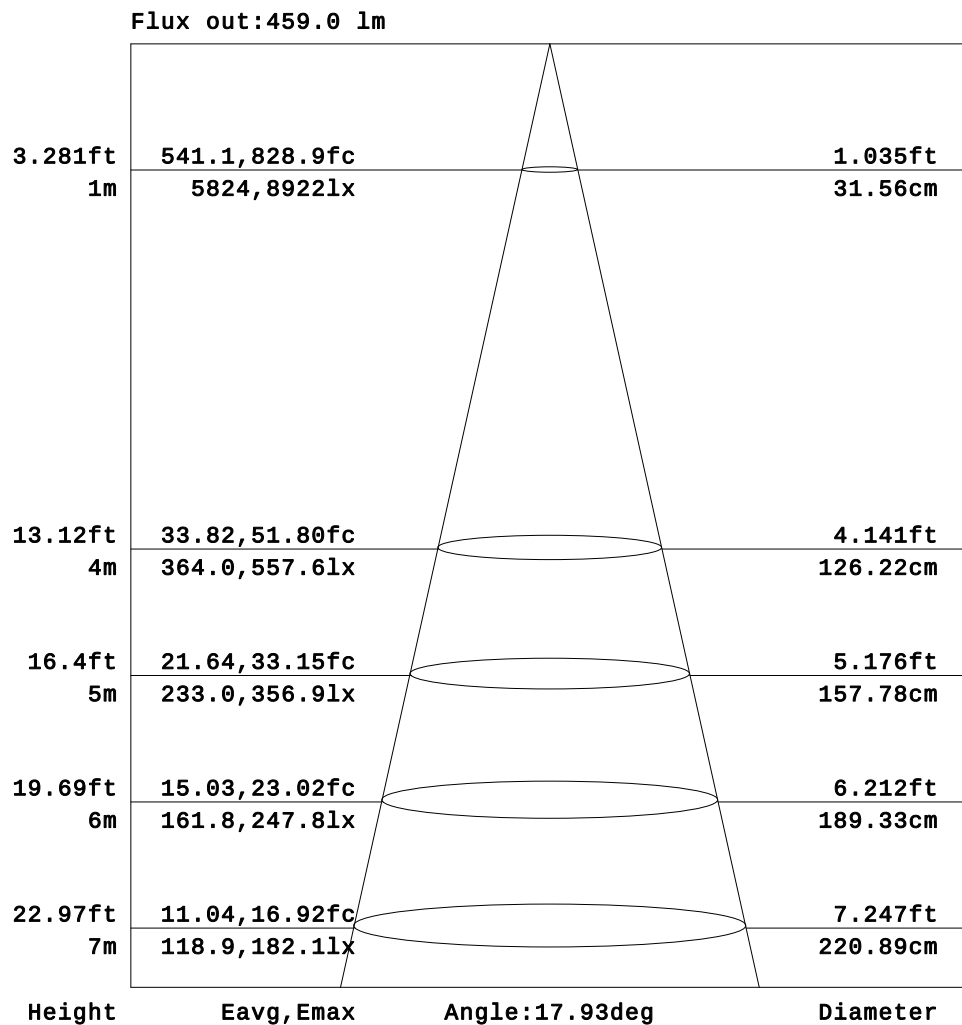


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

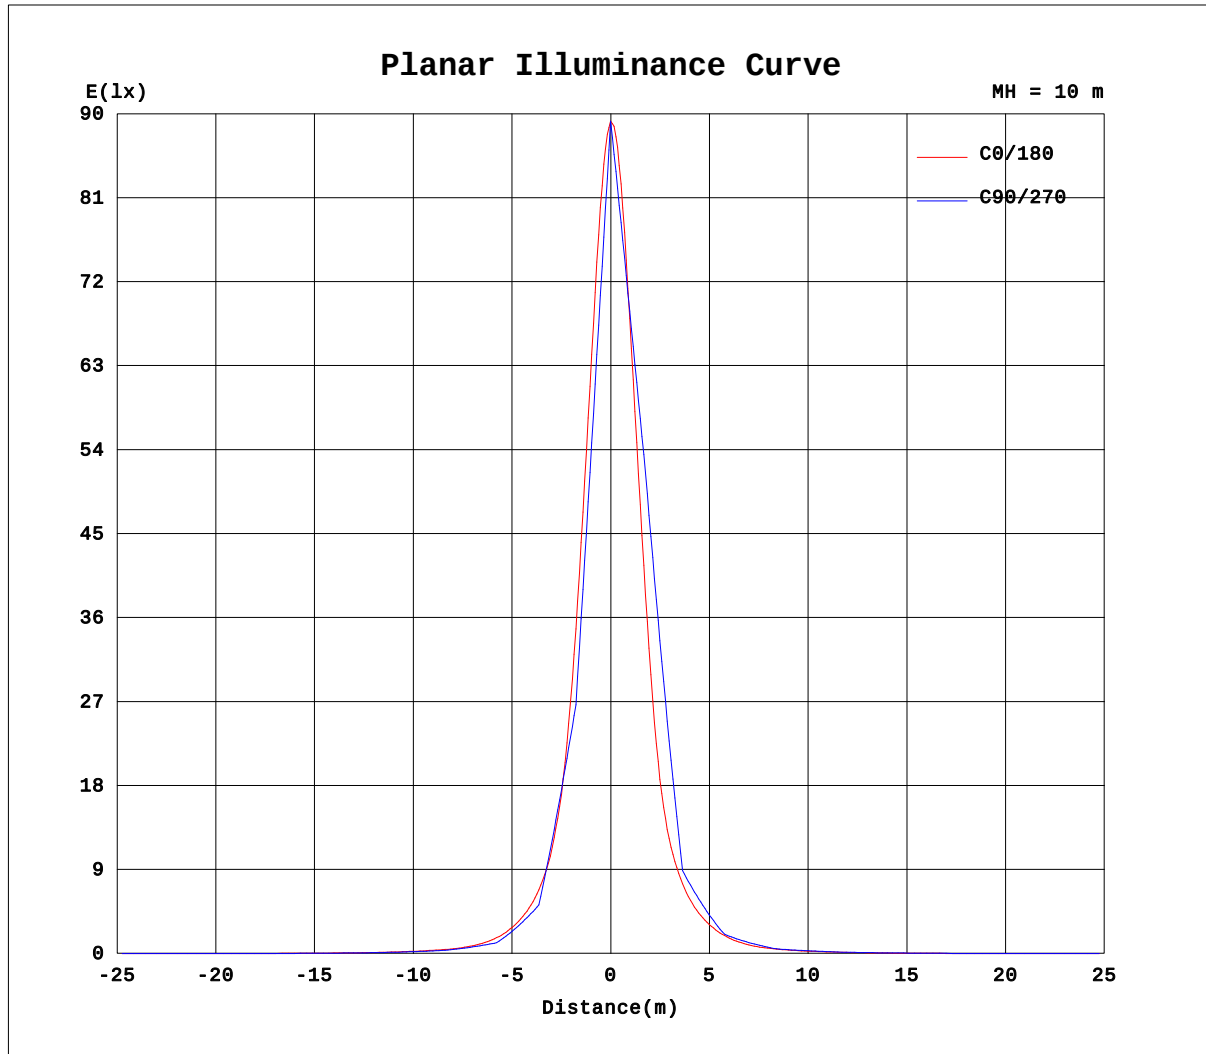

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-05-08

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:242.0V I:0.2350A P:34.46W PF:0.6062 Lamp Flux:1510.29x1 lm		
NAME: 8.01.017.0045 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	1.68	3.50	4.98	5.69	6.83	7.95	8.35	8.68	9.10
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.82	4.72	8.42	10.6	12.1	14.7	16.4	16.9	17.8	18.2
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.88	3.76	7.03	10.1	14.0	17.8	20.3	23.2	26.0	27.7	29.0	29.8
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.08	10.00	14.6	18.4	23.0	27.1	30.7	34.2	37.2	39.6	41.1	41.3
-45	0.00	0.00	0.00	0.00	0.00	0.00	2.89	6.42	12.6	18.8	24.0	29.7	36.0	42.1	48.3	53.5	57.7	60.9	61.9
-40	0.00	0.00	0.00	0.00	0.00	1.82	6.80	13.2	20.4	27.3	34.0	41.5	49.7	58.6	66.7	73.3	78.7	82.0	82.2
-35	0.00	0.00	0.00	0.00	0.00	0.96	8.52	15.3	22.5	30.8	39.9	50.6	62.1	73.9	87.3	102	116	127	132
-30	0.00	0.00	0.00	0.00	0.00	5.56	14.1	22.6	31.1	41.4	54.0	68.8	83.7	99.7	119	141	163	178	181
-25	0.00	0.00	0.00	0.00	0.00	4.00	13.5	22.7	32.3	44.3	59.6	77.7	101	134	183	249	318	378	405
-20	0.00	0.00	0.00	0.00	1.06	10.00	19.8	30.1	42.3	58.9	78.9	103	141	203	297	412	525	612	626
-15	0.00	0.00	0.00	0.00	0.39	7.75	17.6	28.3	40.8	58.0	80.3	110	163	256	403	623	930	1384	1702
-10	0.00	0.00	0.00	0.00	4.08	13.2	23.6	35.7	51.6	74.0	102	153	248	411	667	1052	1671	2500	2764
-5	0.00	0.00	0.00	0.00	1.53	10.3	20.5	31.9	46.7	68.2	95.9	141	233	400	678	1189	2420	4390	5824
0	0.00	0.00	0.00	0.00	5.70	15.2	26.0	38.9	57.2	82.8	118	191	333	576	1017	2045	4652	7789	8787
5	0.00	0.00	0.00	0.00	1.56	10.4	20.8	32.4	47.8	70.2	99.7	151	252	436	746	1333	2834	5326	7119
10	0.00	0.00	0.00	0.00	4.29	13.6	24.4	36.9	54.3	79.1	112	177	297	503	847	1494	2900	4746	5344
15	0.00	0.00	0.00	0.00	0.42	8.46	18.4	29.6	43.3	62.8	88.9	128	201	329	537	868	1490	2510	3217
20	0.00	0.00	0.00	0.00	1.88	10.9	21.0	32.3	46.2	66.0	91.3	127	192	300	454	648	857	1020	1070
25	0.00	0.00	0.00	0.00	0.00	5.62	14.8	24.7	35.4	49.7	69.0	93.2	130	188	277	391	519	633	695
30	0.00	0.00	0.00	0.00	0.01	7.52	16.5	25.2	35.0	47.6	64.6	84.3	108	140	185	234	281	312	318
35	0.00	0.00	0.00	0.00	0.00	2.46	10.2	17.8	25.8	35.5	47.3	61.7	78.5	98.4	125	155	185	208	218
40	0.00	0.00	0.00	0.00	0.00	3.69	10.0	16.5	24.0	32.0	41.0	52.0	64.3	76.9	89.4	101	110	116	116
45	0.00	0.00	0.00	0.00	0.00	0.47	3.92	9.50	16.1	22.7	29.3	37.0	45.8	54.9	64.2	72.8	80.4	85.7	87.8
50	0.00	0.00	0.00	0.00	0.00	0.00	1.91	7.59	13.7	18.7	23.5	29.0	34.6	40.4	46.1	51.5	55.7	58.4	59.0
55	0.00	0.00	0.00	0.00	0.00	0.00	0.08	2.58	6.64	10.8	14.6	19.3	23.8	27.9	32.4	36.6	39.6	41.9	43.2
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.26	5.85	9.29	13.3	16.3	19.0	22.2	24.4	25.4	26.7	27.3
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.96	2.41	3.87	5.88	7.64	9.26	11.9	14.1	15.0	15.9	16.8
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	1.49	3.75	4.77	5.06	6.02	6.38
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.37	1.44	2.27	2.45	2.80	3.21
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:242.0V I:0.2350A P:34.46W PF:0.6062 Lamp Flux:1510.29x1 lm		
NAME: 8.01.017.0045 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	8.82	8.26	8.07	7.24	5.75	4.72	3.78	2.05	0.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	17.1	16.4	15.7	13.3	10.5	8.81	6.31	2.71	0.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	29.3	27.9	26.3	23.9	20.5	17.6	14.7	10.6	7.11	4.69	2.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	40.4	38.3	35.3	31.8	28.0	24.3	20.0	15.4	11.7	7.66	2.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	61.2	58.4	53.9	48.9	42.8	36.4	30.5	24.6	19.4	14.3	8.59	3.52	1.23	0.00	0.00	0.00	0.00	0.00
-40	80.3	75.2	68.7	61.4	52.3	43.9	36.3	29.4	23.1	16.5	10.3	5.28	0.11	0.00	0.00	0.00	0.00	0.00
-35	129	119	105	89.4	75.4	63.3	52.4	41.7	32.6	24.6	17.3	10.8	4.75	0.00	0.00	0.00	0.00	0.00
-30	171	152	128	106	88.3	73.8	59.8	46.2	35.6	26.5	19.0	11.5	3.81	0.00	0.00	0.00	0.00	0.00
-25	387	332	263	195	141	104	80.0	62.5	47.6	35.2	25.5	17.0	8.38	0.52	0.00	0.00	0.00	0.00
-20	564	458	342	238	161	112	85.8	66.4	48.9	35.6	25.2	15.4	6.20	0.00	0.00	0.00	0.00	0.00
-15	1527	1063	698	451	284	176	116	84.6	63.2	45.3	32.1	21.3	11.3	2.53	0.00	0.00	0.00	0.00
-10	2129	1339	834	514	310	182	116	84.8	62.0	43.7	30.0	19.0	9.14	0.82	0.00	0.00	0.00	0.00
-5	4962	2930	1441	779	452	260	154	102	74.4	52.5	36.5	24.4	13.9	4.96	0.00	0.00	0.00	0.00
0	6183	3111	1401	734	418	237	141	94.6	68.4	47.3	32.6	21.3	10.9	2.66	0.00	0.00	0.00	0.00
5	6060	3493	1641	864	494	283	165	106	77.1	54.3	37.6	25.3	14.7	5.78	0.00	0.00	0.00	0.00
10	3935	2094	1110	641	378	217	132	92.3	66.7	46.4	32.0	20.7	10.7	2.45	0.00	0.00	0.00	0.00
15	2836	1792	1009	609	371	223	138	95.9	70.5	50.0	35.0	23.3	13.1	4.26	0.00	0.00	0.00	0.00
20	955	742	528	358	230	149	103	77.6	56.6	40.4	28.0	17.3	7.93	0.01	0.00	0.00	0.00	0.00
25	663	551	416	297	203	140	99.9	76.0	56.9	41.3	29.6	19.6	10.0	1.46	0.00	0.00	0.00	0.00
30	294	251	202	155	119	94.3	75.3	58.3	43.6	32.2	23.0	13.9	5.10	0.00	0.00	0.00	0.00	0.00
35	211	189	160	131	104	83.8	67.7	53.6	41.2	30.8	22.2	14.6	6.67	0.02	0.00	0.00	0.00	0.00
40	112	104	94.1	82.9	71.1	60.0	48.4	38.5	30.0	22.1	15.4	8.94	1.66	0.00	0.00	0.00	0.00	0.00
45	86.4	81.8	74.9	67.4	58.7	50.4	41.9	33.8	27.1	20.1	13.2	7.59	2.40	0.00	0.00	0.00	0.00	0.00
50	57.6	54.3	50.0	45.1	39.5	34.1	28.6	23.6	18.9	12.4	6.38	1.91	0.00	0.00	0.00	0.00	0.00	0.00
55	42.6	40.8	38.2	34.7	30.8	27.1	22.7	17.9	14.1	9.85	4.26	1.84	0.00	0.00	0.00	0.00	0.00	0.00
60	26.4	25.4	23.9	21.3	19.0	17.0	12.8	8.98	6.42	2.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	16.4	15.5	14.9	13.2	10.8	9.34	7.31	5.16	3.68	2.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	5.49	5.17	4.91	3.09	1.16	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	2.96	2.59	2.57	1.99	0.88	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-08

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: