

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	6026.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	39.4V x 39.2H
	At 50% of Imax	18.0V x 18.0H
	At 90% of Imax	5.6V x 6.6H

Beam Flux	Total	997.4 lumens per klm.
	To 10% of Imax	707.8 lumens per klm.
	To 50% of Imax	287.5 lumens per klm.
	To 90% of Imax	26.8 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.6V I:0.2501A P:34.38W PF:1.000 Freq:50.00Hz Lamp Flux:1738.92x1 lm		
NAME: LWL-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411008
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

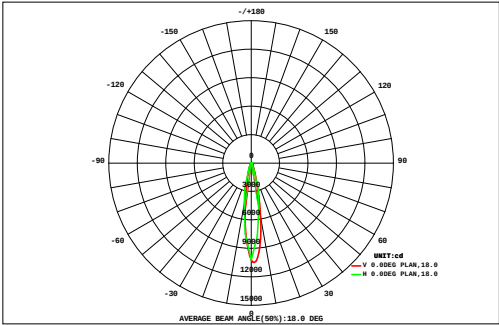

DATA OF LAMP		Eff:50.58lm/W	
MODEL	LWW-WZB-W55-L6-RDM	Imax(cd)	10479
NOMINAL POWER(W)	34	AVAILABILITY(%)	72.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1259
NOMINAL FLUX(lm)	1738.92	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1739
TEST VOLTAGE(V)	220	θ @50%(H,V)	18,18DEG


VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.42	0.52	0.63	0.76	0.89	1.01	1.12	1.21	1.25	1.24	1.18	1.08	0.96	0.83	0.70	0.58	0.48	0.40	15.2	0.00
27	0.50	0.65	0.84	1.06	1.30	1.55	1.80	2.00	2.13	2.16	2.09	1.91	1.68	1.43	1.18	0.95	0.75	0.59	24.6	0.00
24	0.68	0.90	1.16	1.45	1.77	2.09	2.37	2.59	2.69	2.67	2.50	2.23	1.92	1.59	1.28	1.01	0.78	0.60	30.3	0.96
21	0.86	1.16	1.49	1.86	2.25	2.64	2.96	3.20	3.26	3.17	2.89	2.53	2.12	1.73	1.37	1.06	0.80	0.60	36.0	14.0
18	0.83	1.13	1.57	2.14	2.91	4.02	5.58	7.31	8.61	8.85	7.91	6.27	4.64	3.41	2.54	1.88	1.39	1.03	72.0	59.0
15	1.01	1.41	1.97	2.74	3.85	5.48	7.74	10.1	11.5	11.5	9.85	7.54	5.45	3.94	2.89	2.11	1.55	1.13	91.7	80.4
12	1.45	2.03	2.84	3.94	5.64	8.16	11.3	13.9	14.8	13.4	10.5	7.47	5.18	3.71	2.67	1.91	1.38	0.99	111	101
9	1.27	1.79	2.55	3.65	5.51	8.62	12.8	17.0	19.9	19.7	16.6	12.3	8.36	5.40	3.60	2.50	1.77	1.26	145	135
-9	1.02	1.47	2.14	3.22	5.20	8.91	14.2	20.2	25.2	26.4	23.2	17.6	11.9	7.27	4.62	3.14	2.19	1.56	179	171
-12	1.65	2.40	3.58	5.74	10.1	16.5	23.6	29.6	31.4	27.6	20.9	14.1	8.51	5.02	3.29	2.27	1.59	1.11	209	201
-15	1.59	2.31	3.44	5.48	9.55	15.7	22.5	28.4	30.5	27.1	20.7	14.1	8.59	5.08	3.32	2.30	1.61	1.13	203	195
-18	0.87	1.22	1.70	2.26	3.05	4.94	8.28	12.4	16.4	18.3	16.8	13.1	9.26	5.95	3.89	2.70	1.92	1.37	124	113
-21	1.04	1.45	2.02	2.69	3.73	5.52	8.09	10.6	12.4	12.6	10.8	8.14	5.78	4.02	2.83	2.03	1.47	1.05	96.2	84.3
-24	1.26	1.76	2.45	3.32	4.79	6.65	8.50	9.44	8.59	6.51	4.17	2.59	1.84	1.80	1.60	1.26	0.95	0.68	68.2	53.7
-27	0.61	0.83	1.13	1.51	1.95	2.63	3.68	4.97	6.11	6.59	6.19	5.06	3.81	2.78	2.08	1.57	1.17	0.87	53.5	38.6
	0.46	0.60	0.79	0.99	1.08	1.18	1.46	2.04	2.85	3.54	3.81	3.43	2.78	2.12	1.63	1.26	0.95	0.72	31.7	13.5
	0.56	0.73	0.91	1.09	1.21	1.14	0.82	0.50	0.32	0.28	0.30	0.43	0.58	0.68	0.62	0.52	0.42	0.34	11.4	0.00
	0.41	0.51	0.63	0.75	0.85	0.83	0.79	0.89	0.95	0.97	0.95	0.88	0.78	0.70	0.63	0.54	0.44	0.36	12.8	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
Φ t	16.5	22.9	31.8	44.6	65.6	97.6	138	176	199	193	161	121	84.1	57.4	40.7	29.6	21.6	15.8	1516	---
Φ a	0.00	1.61	9.99	28.7	51.6	85.8	128	167	191	185	152	110	74.0	44.9	23.2	6.13	0.00	0.00	---	1259

one-half-peak spread: U:9.5,D:8.7 , L:8.8,R:9.4 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07
V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.6V I:0.2501A P:34.38W PF:1.000 Freq:50.00Hz Lamp Flux:1738.92x1 lm		
NAME: LWL-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411008
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

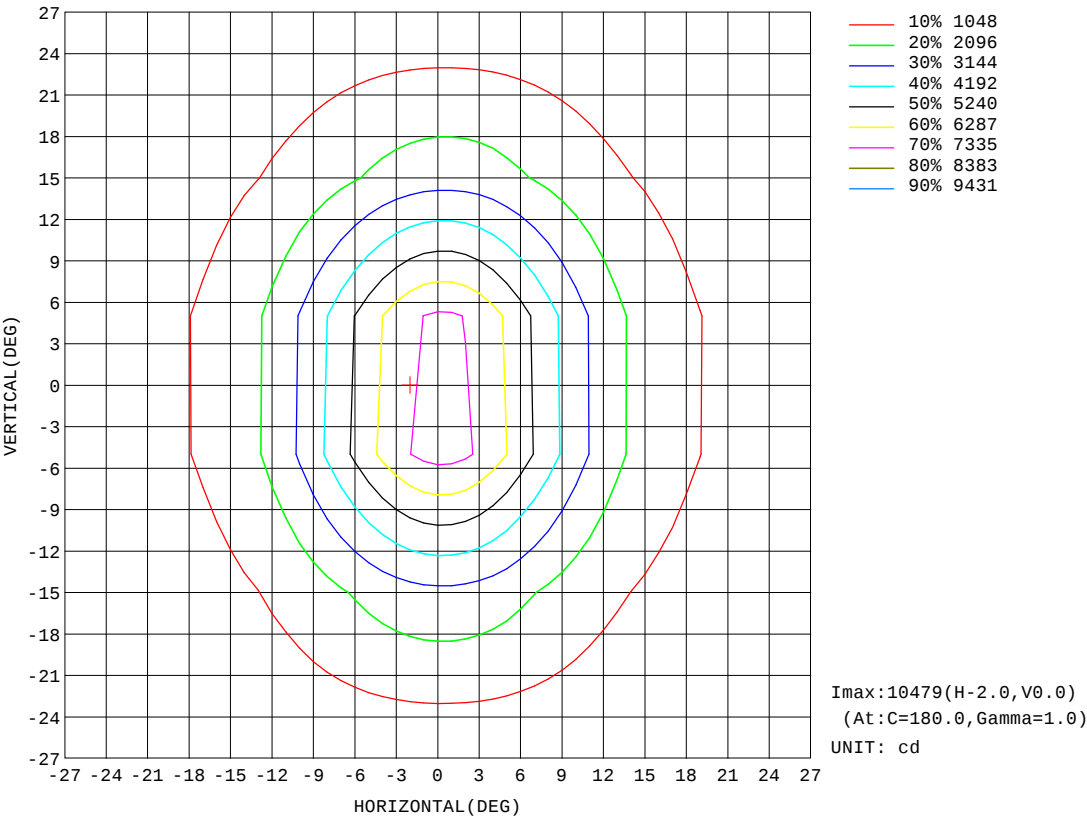


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.6V I:0.2501A P:34.38W PF:1.000 Freq:50.00Hz Lamp Flux:1738.92x1 lm		
NAME: LWL-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411008
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

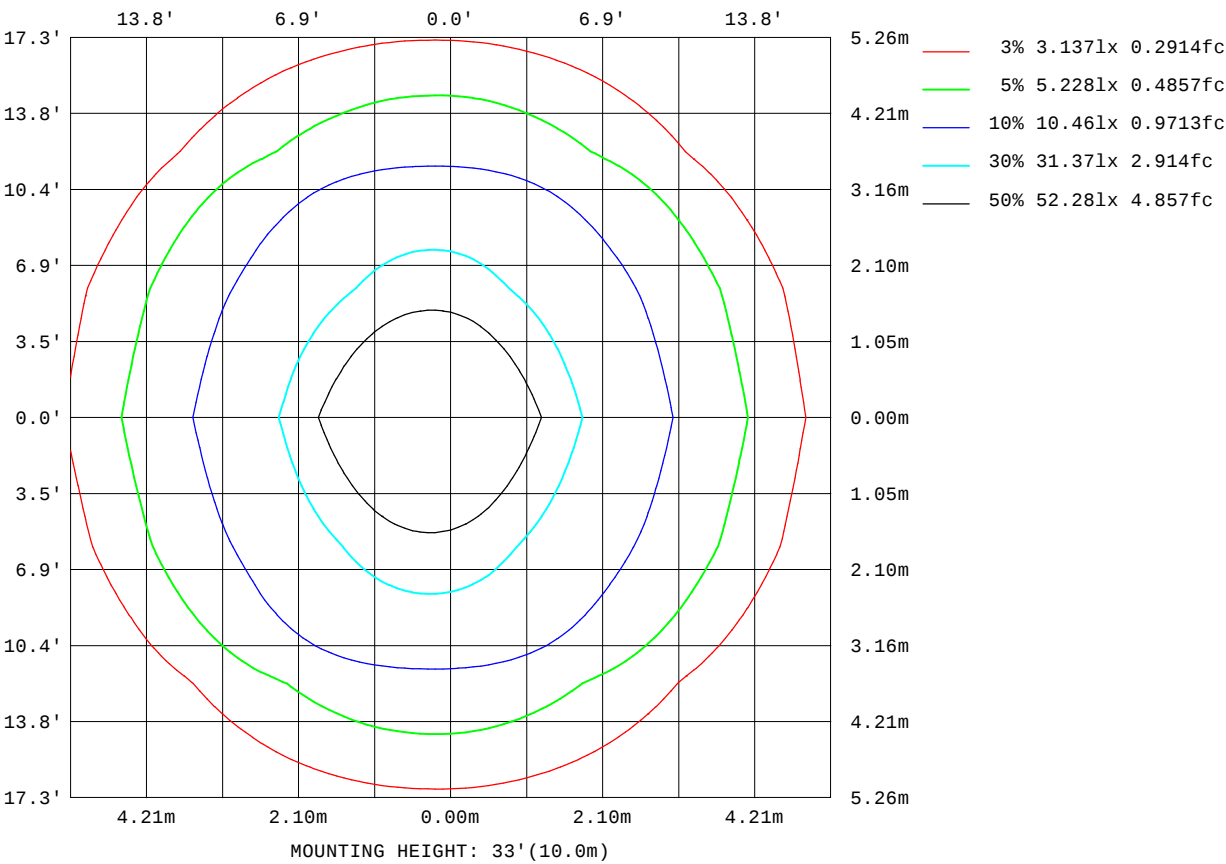

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

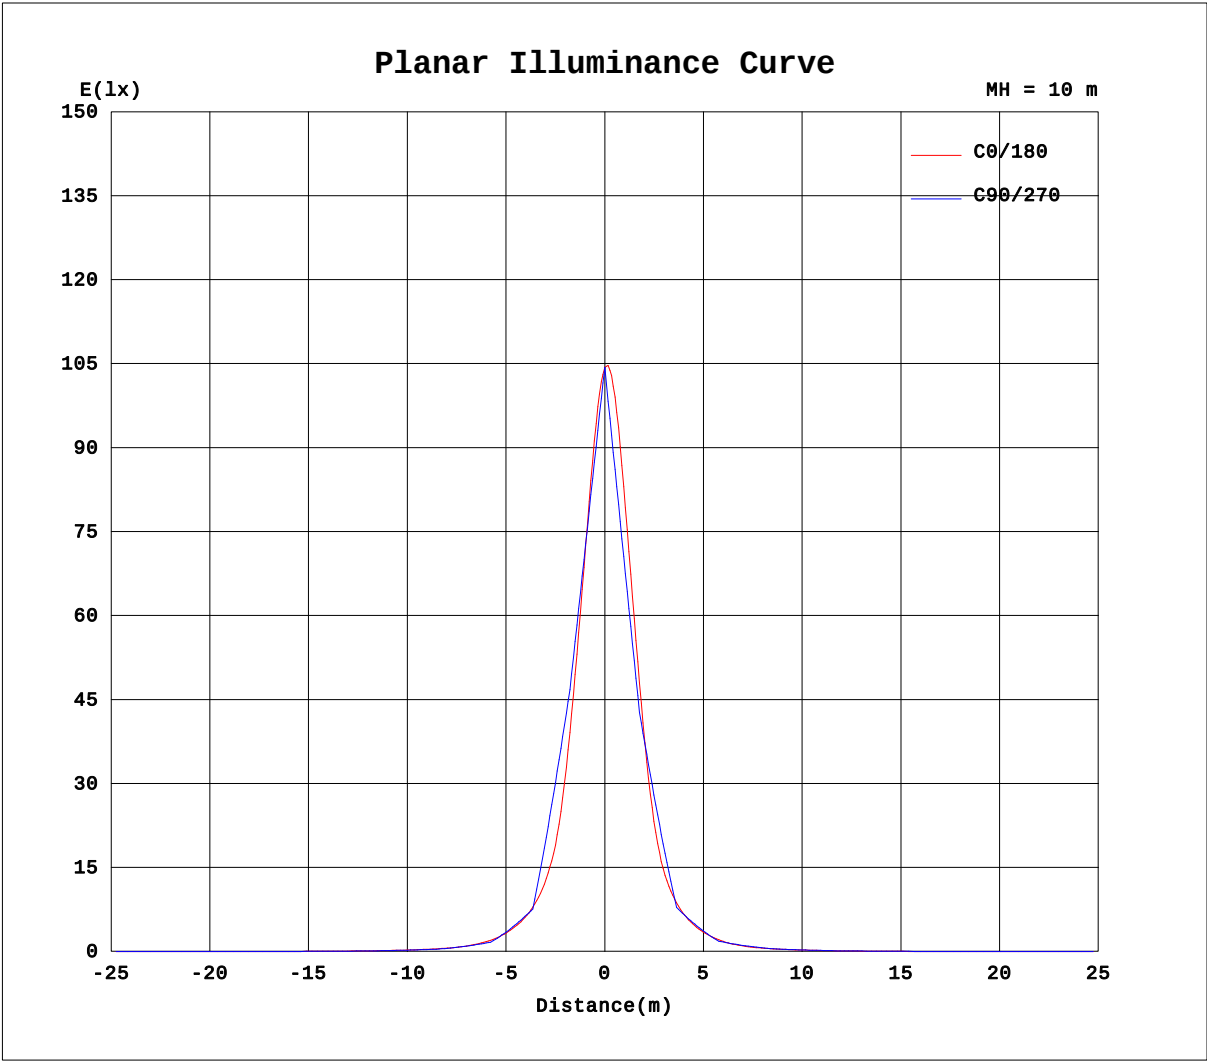


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.6V I:0.2501A P:34.38W PF:1.000 Freq:50.00Hz Lamp Flux:1738.92x1 lm		
NAME: LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411008
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

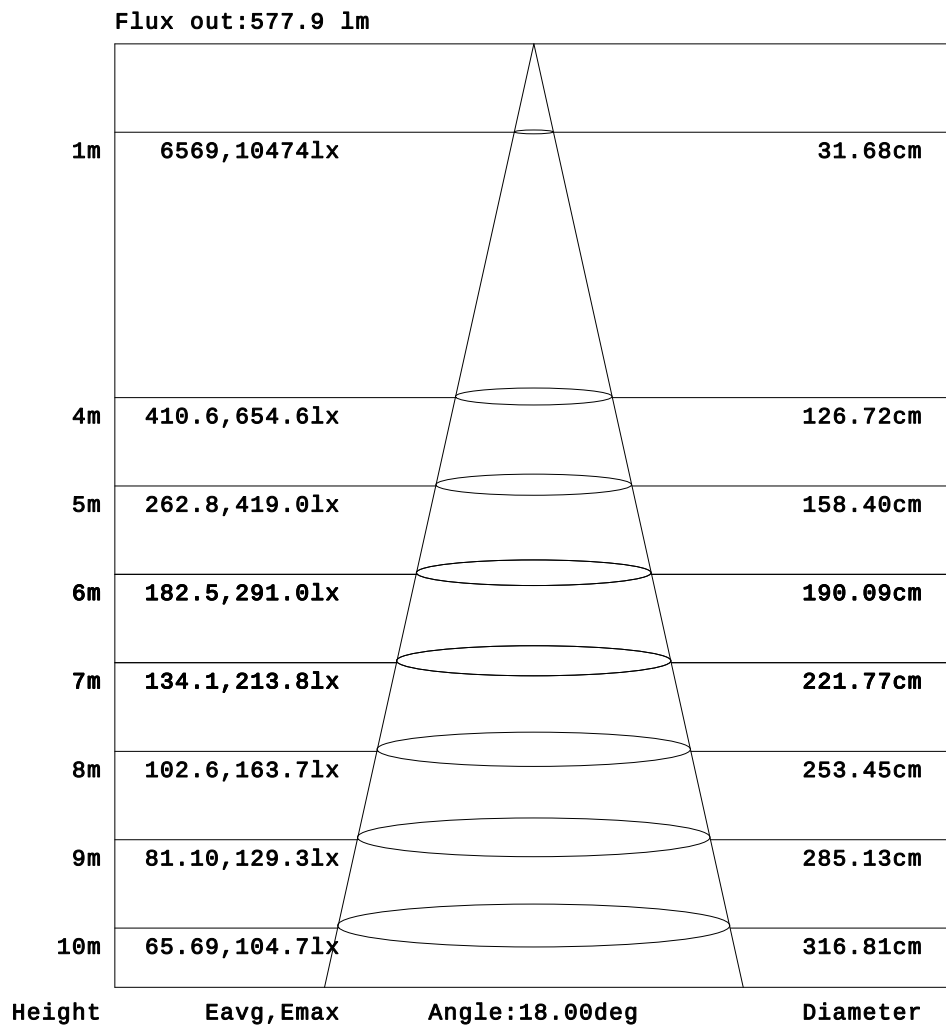

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-11-07

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.2501A P:34.38W PF:1.000 Freq:50.00Hz Lamp Flux:1738.92x1 lm		
NAME: LWV-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411008
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: ×10cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.08	0.12	0.15	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.12	0.19	0.29	0.29	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.19	0.41	0.68	0.80	0.96	1.14	1.22	1.34	1.41	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.27	0.53	1.04	1.47	1.72	2.03	2.22	2.34	2.48	2.50	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.56	0.94	1.28	1.76	2.30	2.67	3.07	3.42	3.68	3.88	3.96	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.69	1.37	1.87	2.38	2.93	3.45	3.94	4.41	4.84	5.20	5.39	5.40	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.29	0.91	1.66	2.36	3.01	3.75	4.55	5.33	6.10	6.76	7.34	7.77	7.92	
-40	0.00	0.00	0.00	0.00	0.00	0.17	0.96	1.70	2.53	3.36	4.22	5.20	6.29	7.35	8.34	9.16	9.89	10.3	10.4	
-35	0.00	0.00	0.00	0.00	0.00	0.18	0.98	1.85	2.75	3.75	4.88	6.18	7.60	9.13	11.1	13.2	15.6	17.4	18.3	
-30	0.00	0.00	0.00	0.00	0.00	0.79	1.76	2.68	3.75	5.00	6.57	8.27	10.1	12.4	15.5	19.2	22.9	25.5	26.2	
-25	0.00	0.00	0.00	0.00	0.00	0.56	1.63	2.67	3.83	5.28	7.08	9.16	12.1	16.7	24.1	33.9	45.1	54.7	59.2	
-20	0.00	0.00	0.00	0.00	0.14	1.20	2.33	3.53	4.98	6.94	9.18	12.1	17.3	26.2	40.1	57.4	75.6	89.1	92.0	
-15	0.00	0.00	0.00	0.00	0.00	0.90	2.03	3.27	4.75	6.75	9.20	12.6	19.3	31.4	52.0	84.5	145	237	292	
-10	0.00	0.00	0.00	0.00	0.38	1.48	2.69	4.11	5.95	8.45	11.5	17.6	29.4	50.7	86.6	149	286	448	481	
-5	0.00	0.00	0.00	0.00	0.07	1.15	2.31	3.64	5.33	7.72	10.7	15.7	26.4	46.4	81.4	150	327	598	770	
0	0.00	0.00	0.00	0.00	0.57	1.73	2.93	4.40	6.44	9.19	13.0	20.9	37.1	65.3	119	255	577	943	1019	
5	0.00	0.00	0.00	0.00	0.09	1.20	2.34	3.65	5.37	7.79	10.9	16.1	27.1	47.3	82.1	150	319	578	748	
10	0.00	0.00	0.00	0.00	0.46	1.56	2.74	4.15	6.04	8.66	12.0	18.6	31.1	52.4	87.7	147	260	404	441	
15	0.00	0.00	0.00	0.00	0.02	0.95	2.05	3.30	4.83	6.90	9.61	13.4	20.8	33.7	54.4	86.5	139	219	271	
20	0.00	0.00	0.00	0.00	0.17	1.18	2.31	3.58	5.09	7.17	9.77	13.2	19.3	29.2	43.7	60.8	78.6	92.1	95.0	
25	0.00	0.00	0.00	0.00	0.00	0.54	1.59	2.70	3.90	5.40	7.37	9.79	13.3	18.6	26.7	36.9	48.0	57.5	62.1	
30	0.00	0.00	0.00	0.00	0.00	0.72	1.75	2.74	3.80	5.13	6.78	8.77	11.1	13.8	17.5	21.8	25.8	28.4	28.9	
35	0.00	0.00	0.00	0.00	0.00	0.16	1.03	1.90	2.77	3.79	4.99	6.43	8.09	9.95	12.3	14.9	17.6	19.6	20.5	
40	0.00	0.00	0.00	0.00	0.00	0.24	1.03	1.73	2.51	3.38	4.29	5.37	6.56	7.87	9.15	10.2	11.3	11.9	12.0	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.37	0.91	1.60	2.35	3.06	3.82	4.69	5.60	6.55	7.39	8.15	8.73	8.99	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.62	1.29	1.91	2.39	2.97	3.55	4.11	4.66	5.18	5.59	5.86	5.96	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.51	1.00	1.40	1.87	2.36	2.76	3.18	3.61	3.92	4.14	4.30	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.42	0.74	1.18	1.50	1.74	2.05	2.32	2.43	2.57	2.66	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.29	0.51	0.70	0.82	0.96	1.12	1.20	1.28	1.39	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.09	0.14	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.07	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.2501A P:34.38W PF:1.000 Freq:50.00Hz Lamp Flux:1738.92x1 lm		
NAME: LWV-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411008
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																		UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.12	0.07	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.19	0.14	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	1.34	1.23	1.16	0.97	0.81	0.70	0.55	0.32	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	2.38	2.29	2.13	1.80	1.53	1.31	0.92	0.50	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	3.89	3.71	3.47	3.10	2.69	2.32	1.90	1.41	1.03	0.57	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	5.27	4.96	4.55	4.05	3.54	3.03	2.48	2.00	1.50	0.86	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	7.84	7.46	6.90	6.19	5.42	4.60	3.79	3.06	2.41	1.71	1.00	0.43	0.07	0.00	0.00	0.00	0.00	0.00	
-40	10.2	9.56	8.72	7.72	6.65	5.51	4.50	3.60	2.77	1.96	1.26	0.58	0.00	0.00	0.00	0.00	0.00	0.00	
-35	17.9	16.4	14.2	11.8	9.69	7.99	6.51	5.15	3.96	2.95	2.07	1.24	0.39	0.00	0.00	0.00	0.00	0.00	
-30	24.6	21.5	17.7	14.1	11.3	9.24	7.41	5.69	4.31	3.19	2.22	1.23	0.26	0.00	0.00	0.00	0.00	0.00	
-25	56.6	48.0	37.2	27.1	19.0	13.6	10.1	7.73	5.79	4.22	3.00	1.90	0.85	0.03	0.00	0.00	0.00	0.00	
-20	82.6	65.9	48.3	33.1	21.8	14.6	10.7	8.13	5.90	4.22	2.90	1.71	0.64	0.00	0.00	0.00	0.00	0.00	
-15	249	158	94.8	60.0	37.5	22.9	14.7	10.4	7.60	5.38	3.76	2.45	1.28	0.26	0.00	0.00	0.00	0.00	
-10	342	190	110	66.5	39.8	23.3	14.6	10.3	7.36	5.12	3.51	2.23	1.07	0.05	0.00	0.00	0.00	0.00	
-5	630	360	171	94.5	55.4	31.9	19.0	12.3	8.78	6.12	4.23	2.82	1.60	0.50	0.00	0.00	0.00	0.00	
0	698	348	159	85.7	49.7	28.2	16.9	11.2	7.91	5.43	3.73	2.43	1.21	0.13	0.00	0.00	0.00	0.00	
5	614	356	173	95.2	55.9	32.4	19.4	12.5	8.90	6.19	4.27	2.83	1.59	0.47	0.00	0.00	0.00	0.00	
10	322	187	111	67.5	40.9	24.2	15.2	10.6	7.55	5.24	3.59	2.22	1.04	0.00	0.00	0.00	0.00	0.00	
15	235	155	97.1	61.6	38.8	24.1	15.6	10.9	7.91	5.58	3.90	2.55	1.33	0.25	0.00	0.00	0.00	0.00	
20	85.5	68.5	50.5	35.0	23.5	16.0	11.6	8.66	6.23	4.45	3.10	1.87	0.73	0.00	0.00	0.00	0.00	0.00	
25	59.4	50.4	39.3	28.9	20.6	14.9	11.0	8.36	6.21	4.52	3.21	2.09	1.01	0.05	0.00	0.00	0.00	0.00	
30	27.1	23.6	19.5	15.7	12.6	10.3	8.16	6.25	4.71	3.46	2.42	1.42	0.46	0.00	0.00	0.00	0.00	0.00	
35	20.0	18.2	15.7	13.2	10.9	8.98	7.29	5.73	4.42	3.29	2.27	1.39	0.57	0.00	0.00	0.00	0.00	0.00	
40	11.7	10.9	9.91	8.80	7.51	6.27	5.13	4.10	3.20	2.27	1.40	0.68	0.00	0.00	0.00	0.00	0.00	0.00	
45	8.90	8.46	7.81	7.05	6.17	5.27	4.40	3.53	2.78	2.04	1.22	0.50	0.15	0.00	0.00	0.00	0.00	0.00	
50	5.81	5.53	5.13	4.63	4.10	3.57	2.97	2.33	1.79	1.15	0.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	4.26	4.06	3.83	3.50	3.06	2.66	2.25	1.71	1.21	0.78	0.36	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
60	2.57	2.42	2.30	2.02	1.69	1.45	1.14	0.65	0.29	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	1.37	1.24	1.18	1.08	0.90	0.77	0.64	0.43	0.20	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: