

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		6769.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	38.9V x 38.2H
	At 50% of Imax	17.5V x 17.7H
	At 90% of Imax	6.5V x 6.2H
Beam Flux	Total	994.6 lumens per klm.
	To 10% of Imax	745.5 lumens per klm.
	To 50% of Imax	299.4 lumens per klm.
	To 90% of Imax	28.2 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.5 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.6V I:0.0882A P:10.37W PF:1.000 Freq:50.00Hz Lamp Flux:668.773x1 lm		
NAME: LW-WZB-W55-L6-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

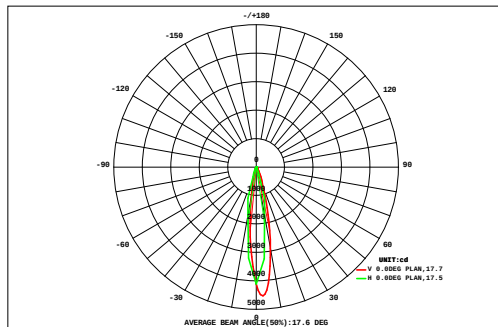

DATA OF LAMP		Eff:64.46lm/W	
MODEL	LW-WZB-W55-L6-RDM-G	Imax(cd)	4527
NOMINAL POWER(W)	10	AVAILABILITY(%)	76.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	513.9
NOMINAL FLUX(lm)	668.773	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	668.8
TEST VOLTAGE(V)	220	θ @50%(H,V)	18,17DEG

		AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
VERTICAL (DEG)	27	0.20	0.25	0.30	0.36	0.40	0.44	0.46	0.46	0.45	0.42	0.37	0.31	0.26	0.20	0.16	0.13	0.10	0.08	5.36	0.00		
	24	0.25	0.34	0.43	0.53	0.63	0.72	0.80	0.85	0.87	0.84	0.77	0.66	0.53	0.41	0.30	0.22	0.17	0.13	9.46	0.00		
	21	0.39	0.51	0.64	0.76	0.88	0.98	1.05	1.09	1.07	1.00	0.86	0.71	0.55	0.40	0.29	0.21	0.16	0.12	11.7	0.00		
	18	0.54	0.70	0.85	1.00	1.14	1.25	1.31	1.33	1.27	1.14	0.94	0.73	0.54	0.38	0.27	0.20	0.14	0.11	13.8	4.65		
	15	0.46	0.63	0.84	1.09	1.43	1.92	2.55	3.21	3.67	3.68	3.16	2.36	1.61	1.10	0.76	0.50	0.33	0.22	29.5	24.1		
	12	0.59	0.80	1.07	1.44	1.96	2.71	3.62	4.45	4.88	4.63	3.78	2.72	1.83	1.25	0.84	0.54	0.35	0.23	37.7	33.0		
	9	0.95	1.24	1.63	2.19	3.07	4.24	5.44	6.22	6.07	4.94	3.42	2.15	1.42	0.96	0.60	0.38	0.24	0.17	45.3	41.8		
		0.77	1.04	1.39	1.92	2.82	4.20	5.88	7.48	8.49	8.10	6.52	4.57	2.89	1.69	1.03	0.64	0.40	0.25	60.1	56.3		
		0.55	0.79	1.08	1.55	2.46	4.04	6.22	8.72	11.1	11.6	9.96	7.29	4.54	2.51	1.51	0.95	0.58	0.36	75.7	71.8		
		1.05	1.43	2.12	3.49	5.74	8.51	11.3	13.6	13.1	10.5	7.21	4.25	2.13	1.21	0.76	0.46	0.28	0.18	87.3	84.3		
		1.00	1.36	2.01	3.29	5.39	8.03	10.7	12.9	12.7	10.3	7.20	4.33	2.23	1.27	0.79	0.48	0.30	0.19	84.6	81.4		
	-9	0.45	0.63	0.78	0.88	1.16	1.95	3.27	4.91	6.99	7.89	7.11	5.46	3.64	2.09	1.26	0.80	0.50	0.32	50.1	44.8		
	-12	0.60	0.80	1.02	1.27	1.71	2.46	3.40	4.22	4.82	4.71	3.89	2.85	1.97	1.25	0.78	0.50	0.33	0.22	36.8	32.1		
	-15	0.78	1.03	1.35	1.81	2.52	3.30	3.89	3.80	2.63	1.23	0.45	0.16	0.16	0.27	0.22	0.15	0.12	0.10	24.0	20.3		
	-18	0.29	0.40	0.54	0.67	0.82	1.07	1.47	1.99	2.48	2.64	2.38	1.86	1.28	0.88	0.63	0.42	0.29	0.20	20.3	13.9		
	-21	0.19	0.26	0.34	0.38	0.35	0.36	0.44	0.73	1.20	1.55	1.58	1.35	0.96	0.67	0.50	0.35	0.24	0.17	11.6	5.40		
	-24	0.29	0.37	0.44	0.50	0.51	0.43	0.26	0.14	0.08	0.06	0.06	0.06	0.07	0.08	0.07	0.07	0.07	0.06	3.62	0.00		
	-27	0.18	0.23	0.28	0.32	0.34	0.30	0.30	0.32	0.34	0.33	0.32	0.28	0.23	0.19	0.15	0.11	0.09	0.08	4.38	0.00		
		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
Φ t	9.54	12.8	17.1	23.4	33.3	46.9	62.4	76.4	82.2	75.5	60.0	42.1	26.8	16.8	10.9	7.13	4.69	3.18	611	---			
Φ a	1.08	4.12	9.50	16.8	28.0	42.3	58.5	72.8	78.7	71.3	56.2	38.8	23.1	9.19	3.35	0.13	0.00	0.00	---		514		

one-half-peak spread: U:8.8,D:8.8 , L:9.2,R:8.6


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.6V I:0.0882A P:10.37W PF:1.000 Freq:50.00Hz Lamp Flux:668.773x1 lm		
NAME: LWL-WZB-W55-L6-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

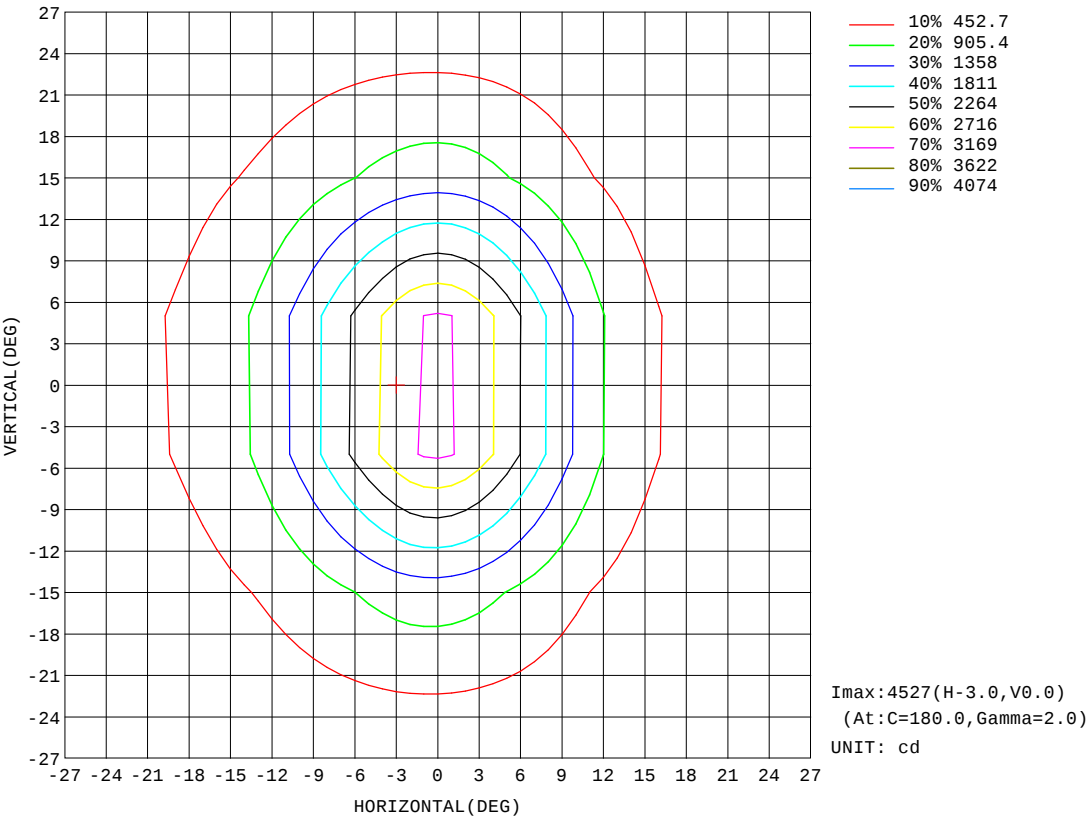


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.6V I:0.0882A P:10.37W PF:1.000 Freq:50.00Hz Lamp Flux:668.773x1 lm		
NAME: LWL-WZB-W55-L6-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

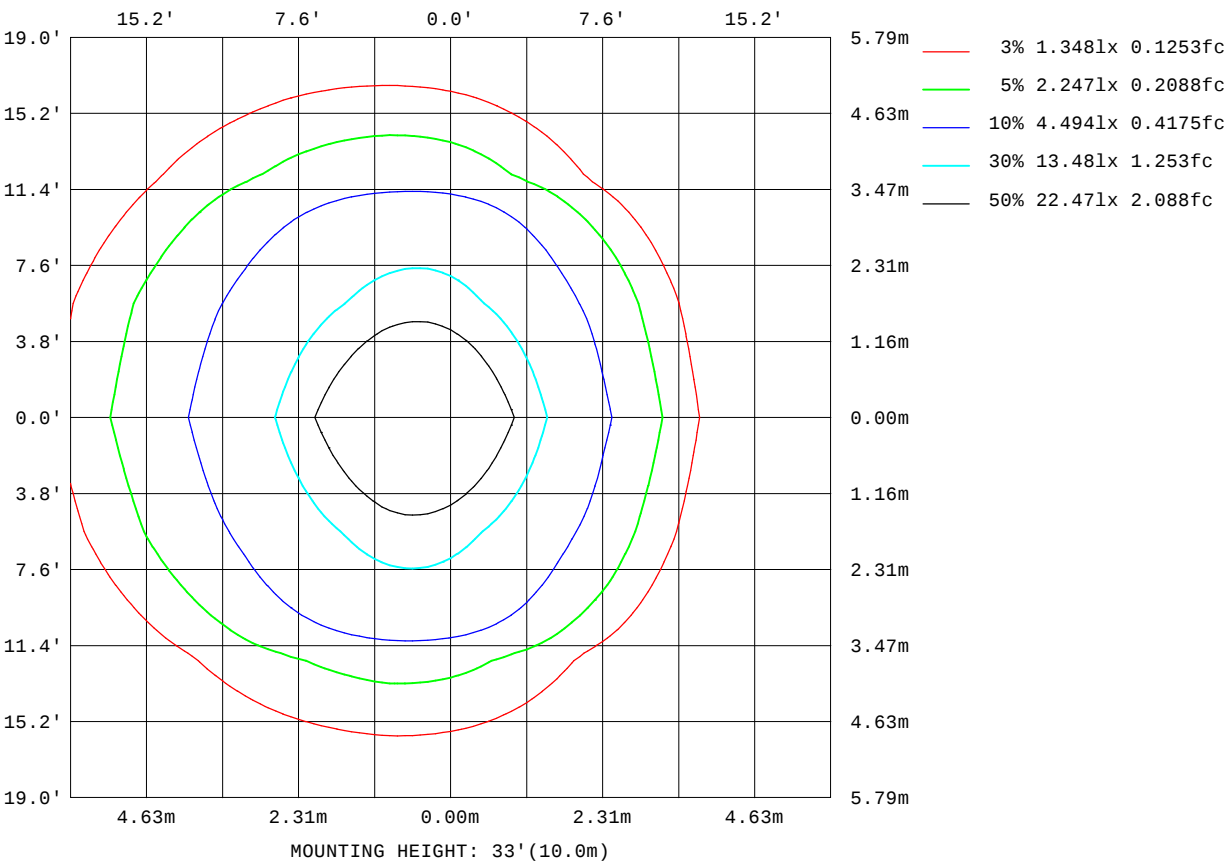

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

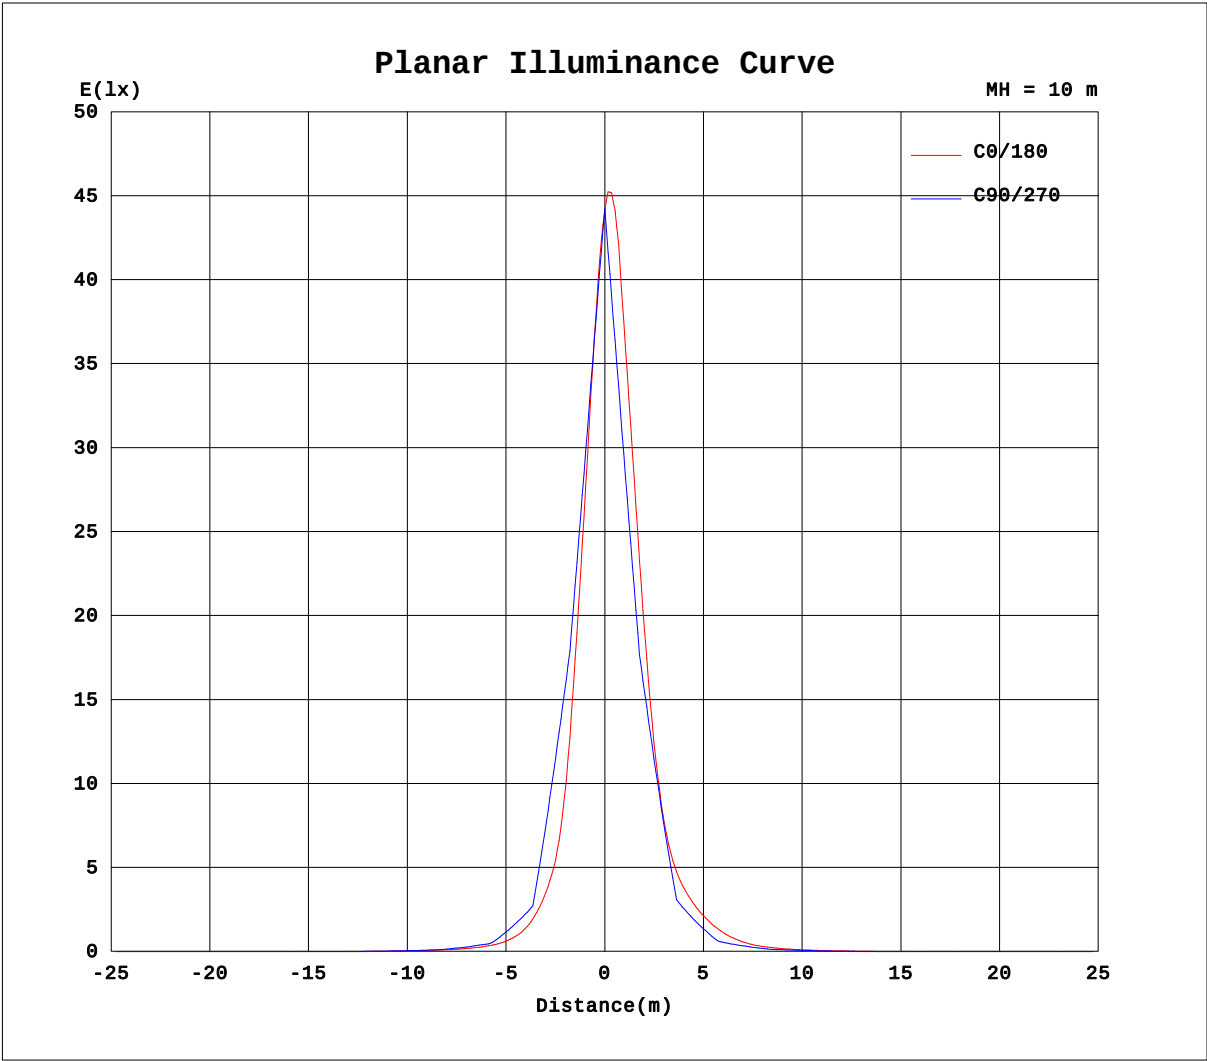


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.6V I:0.0882A P:10.37W PF:1.000 Freq:50.00Hz Lamp Flux:668.773x1 lm		
NAME: LWW-WZB-W55-L6-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

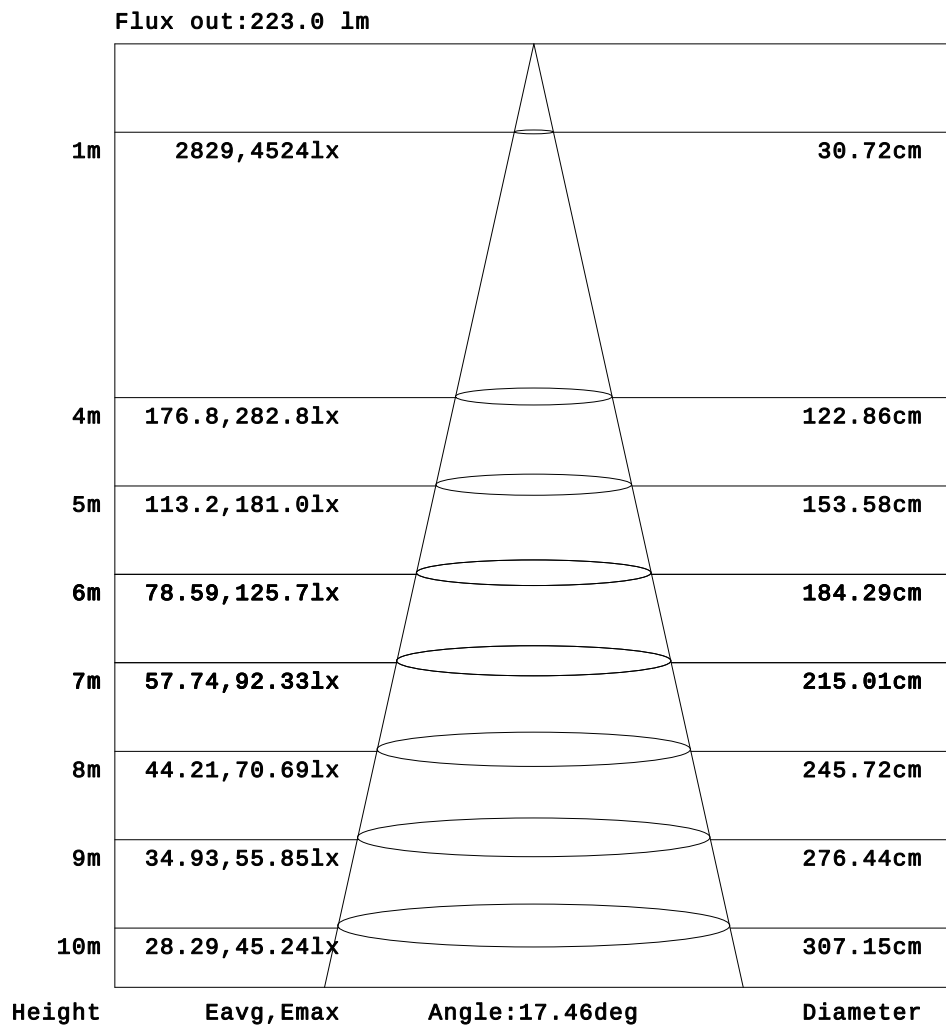

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.0882A P:10.37W PF:1.000 Freq:50.00Hz Lamp Flux:668.773x1 lm		
NAME: LWV-WZB-W55-L6-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	1.27	2.22	3.05	3.72	4.24	4.19
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	1.79	3.58	5.47	6.92	8.15	8.53	8.11
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	1.92	3.99	6.60	9.69	12.6	14.9	16.5	17.6	17.4
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.36	6.26	10.7	15.2	19.3	22.8	24.9	26.4	26.8	25.8
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.90	3.74	8.91	14.9	21.4	28.1	35.5	42.8	49.1	52.8	52.6
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	4.80	11.1	18.7	26.9	35.5	45.7	57.2	68.6	76.9	79.9	74.8
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.39	4.37	11.5	20.5	31.4	47.4	71.7	105	143	178	202	207
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.24	11.9	22.3	34.8	53.3	86.3	136	198	261	311	338	319
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.95	9.12	19.5	33.1	53.9	95.2	165	262	394	636	969	1135
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.57	7.64	18.1	32.2	53.0	97.7	182	303	470	781	1361	1894	1740
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.75	12.4	25.2	43.0	77.0	148	263	428	742	1497	2564	3231
0	0.00	0.00	0.00	0.00	0.00	0.00	1.73	9.36	21.1	37.8	66.6	130	244	406	689	1484	2906	4339	4108
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.84	12.7	25.8	44.8	80.7	155	275	441	758	1493	2531	3206
10	0.00	0.00	0.00	0.00	0.00	0.00	0.73	7.94	18.9	34.7	58.5	109	202	329	501	796	1317	1816	1739
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.19	9.85	21.0	36.7	61.8	110	190	295	433	658	962	1133
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.95	13.2	25.0	41.1	65.2	109	171	244	310	364	385	360
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	5.20	13.0	23.6	37.6	58.8	91.1	134	178	217	240	239
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.61	5.84	13.0	21.9	32.6	45.3	60.1	77.7	93.7	102	101	90.4
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.24	4.68	10.6	17.7	26.3	35.6	46.5	57.1	65.5	68.6	65.7
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.21	7.57	12.8	18.2	23.7	28.4	31.6	33.8	33.9	32.3
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	2.42	4.80	8.23	12.0	15.8	18.7	21.0	22.0	21.9
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	2.82	4.95	6.97	8.65	9.81	10.3	9.99
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.75	1.84	2.90	3.84	4.60	5.05	5.14
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.0882A P:10.37W PF:1.000 Freq:50.00Hz Lamp Flux:668.773x1 lm		
NAME: LWV-WZB-W55-L6-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	3.95	3.47	2.62	1.75	0.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	7.43	5.95	4.21	2.35	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	16.6	15.0	12.7	10.2	7.40	4.57	2.68	1.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	24.1	21.3	18.2	14.8	10.8	6.76	3.41	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	48.2	41.1	33.7	26.8	20.6	15.4	10.6	5.98	2.41	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	64.1	52.0	40.8	31.2	24.0	18.3	12.3	6.64	2.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	185	141	96.0	63.7	42.7	29.5	20.7	13.9	7.90	2.68	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	256	175	109	68.9	44.0	29.4	20.9	13.9	6.98	1.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	894	515	281	150	81.8	48.2	30.8	21.0	13.2	6.27	1.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	1066	531	278	138	74.0	43.5	27.9	18.7	10.6	4.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	2497	1304	537	254	121	64.3	38.2	25.1	16.3	8.44	2.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	2463	984	408	186	89.3	49.4	30.8	20.6	12.2	5.12	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	2506	1314	544	258	122	64.6	38.4	25.4	16.6	8.60	2.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	1084	551	289	142	75.1	44.0	28.6	19.3	11.1	4.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	921	534	293	156	83.3	49.0	31.7	21.9	13.8	6.71	1.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	281	189	114	69.9	44.7	30.7	22.2	14.6	7.60	2.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	209	155	103	66.3	44.2	31.0	22.2	15.1	8.73	3.29	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	73.8	56.7	43.5	33.6	26.4	20.2	13.6	7.75	3.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	57.6	47.1	37.3	29.6	22.9	17.4	12.3	7.19	2.97	0.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	29.0	25.2	21.4	17.4	12.5	8.49	4.72	1.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	20.2	18.1	15.2	12.4	9.21	5.89	3.48	1.66	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	8.92	7.55	5.71	3.75	1.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	4.81	4.22	3.42	2.47	1.48	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: