

Floodlight Summary:


Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		7579.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	38.2V x 34.4H
	At 50% of Imax	17.9V x 17.1H
	At 90% of Imax	5.2V x 7.1H
Beam Flux	Total	995.2 lumens per klm.
	To 10% of Imax	792.4 lumens per klm.
	To 50% of Imax	357.9 lumens per klm.
	To 90% of Imax	37.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.5 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2024-11-07	Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.8V I:0.0902A P:10.66W PF:1.000 Freq:50.00Hz Lamp Flux:245.24x1 lm		
NAME: LW-WZB-W55-L6-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411009
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

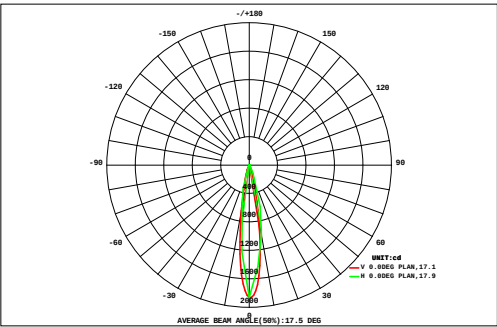

DATA OF LAMP		Eff:23.01lm/W	
MODEL	LW-WZB-W55-L6-RDM-R	Imax(cd)	1859
NOMINAL POWER(W)	11	AVAILABILITY(%)	81.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	200.7
NOMINAL FLUX(lm)	245.24	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	245.2
TEST VOLTAGE(V)	220	θ @50%(H,V)	17,18DEG


		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	27	0.00	0.01	0.01	0.02	0.04	0.05	0.06	0.08	0.08	0.08	0.07	0.06	0.05	0.03	0.02	0.01	0.01	0.00	0.69	0.00
	24	0.01	0.03	0.04	0.07	0.10	0.13	0.15	0.18	0.19	0.19	0.18	0.15	0.12	0.09	0.06	0.04	0.02	0.01	1.76	0.00
	21	0.02	0.04	0.06	0.09	0.13	0.17	0.21	0.24	0.26	0.25	0.24	0.20	0.16	0.12	0.08	0.05	0.03	0.02	2.36	0.00
	18	0.02	0.05	0.08	0.11	0.16	0.21	0.26	0.30	0.32	0.32	0.30	0.25	0.20	0.15	0.11	0.07	0.04	0.02	2.96	0.00
	15	0.05	0.09	0.16	0.24	0.34	0.48	0.72	0.97	1.13	1.11	0.92	0.67	0.46	0.33	0.23	0.15	0.09	0.05	8.19	5.89
	12	0.07	0.12	0.20	0.31	0.44	0.63	0.95	1.31	1.54	1.51	1.25	0.89	0.60	0.43	0.30	0.19	0.11	0.06	10.9	8.75
	9	0.08	0.15	0.25	0.38	0.54	0.78	1.19	1.65	1.95	1.91	1.57	1.11	0.74	0.52	0.37	0.24	0.14	0.08	13.7	11.7
		0.10	0.18	0.30	0.44	0.73	1.24	2.00	2.77	3.20	3.12	2.56	1.76	1.08	0.66	0.43	0.29	0.17	0.10	21.1	19.3
		0.12	0.22	0.35	0.50	0.93	1.73	2.89	3.99	4.55	4.43	3.64	2.47	1.45	0.80	0.50	0.33	0.21	0.12	29.2	27.5
		0.14	0.25	0.39	0.56	1.09	2.11	3.56	4.91	5.59	5.44	4.46	3.02	1.75	0.93	0.57	0.38	0.24	0.14	35.5	33.9
		0.14	0.26	0.40	0.57	1.10	2.12	3.55	4.89	5.56	5.42	4.44	3.01	1.75	0.93	0.58	0.39	0.25	0.14	35.5	33.9
	-9	0.12	0.21	0.34	0.48	0.77	1.34	2.14	2.91	3.32	3.23	2.66	1.85	1.15	0.69	0.48	0.33	0.21	0.12	22.4	20.4
	-12	0.11	0.21	0.32	0.46	0.68	1.12	1.71	2.29	2.62	2.55	2.10	1.49	0.97	0.62	0.46	0.32	0.21	0.12	18.3	16.5
	-15	0.11	0.20	0.31	0.44	0.59	0.89	1.28	1.68	1.91	1.87	1.54	1.13	0.79	0.55	0.43	0.31	0.20	0.11	14.3	12.2
-18	0.08	0.14	0.22	0.32	0.45	0.66	0.92	1.17	1.31	1.28	1.10	0.84	0.60	0.43	0.31	0.22	0.14	0.08	10.3	7.99	
-21	0.06	0.11	0.17	0.25	0.34	0.43	0.52	0.60	0.65	0.64	0.59	0.51	0.42	0.33	0.25	0.17	0.11	0.06	6.21	2.76	
-24	0.04	0.07	0.12	0.18	0.22	0.20	0.13	0.09	0.07	0.08	0.11	0.18	0.24	0.23	0.18	0.12	0.08	0.04	2.40	0.00	
-27	0.03	0.05	0.09	0.14	0.17	0.17	0.18	0.20	0.21	0.21	0.20	0.18	0.19	0.18	0.13	0.09	0.06	0.03	2.50	0.00	
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)					6	9	12	15	18	21	24	27
Φ t	1.29	2.36	3.82	5.56	8.79	14.5	22.4	30.2	34.4	33.6	27.9	19.8	12.7	8.02	5.50	3.71	2.32	1.29	238	---	
Φ a	0.00	0.00	0.05	1.74	6.44	12.9	21.3	29.0	33.2	32.4	26.7	18.6	11.0	5.67	1.75	0.05	0.00	0.00	---	201	

one-half-peak spread: U:11.1,D:7.0 , L:8.1,R:9.1 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07
V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.8V I:0.0902A P:10.66W PF:1.000 Freq:50.00Hz Lamp Flux:245.24x1 lm		
NAME: LWL-WZB-W55-L6-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411009
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

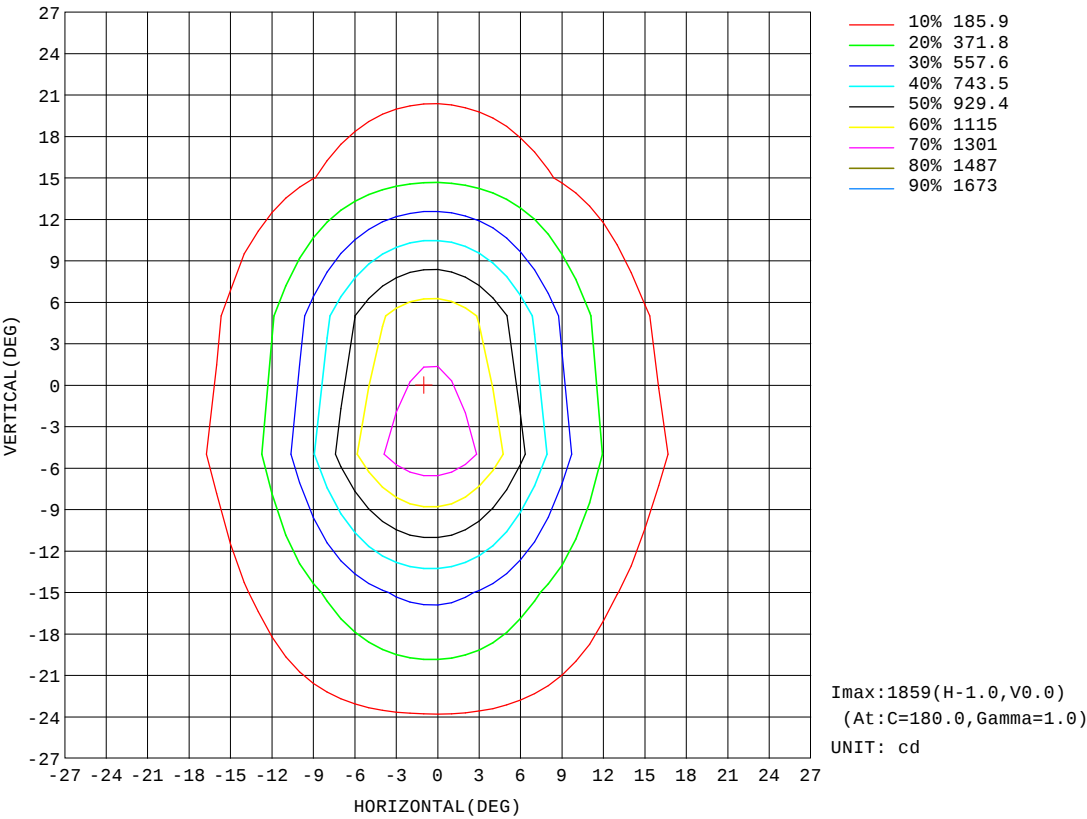


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.8V I:0.0902A P:10.66W PF:1.000 Freq:50.00Hz Lamp Flux:245.24x1 lm		
NAME: LWL-WZB-W55-L6-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411009
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

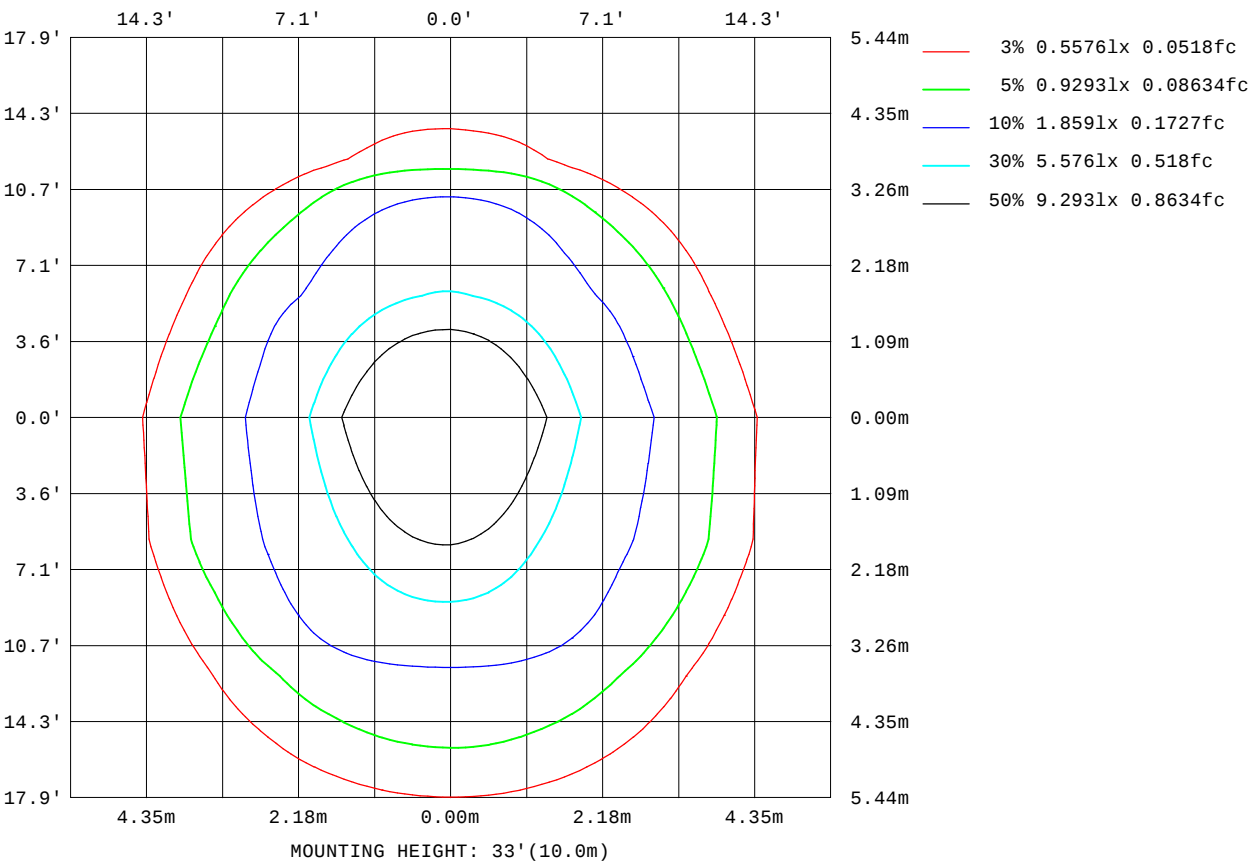

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

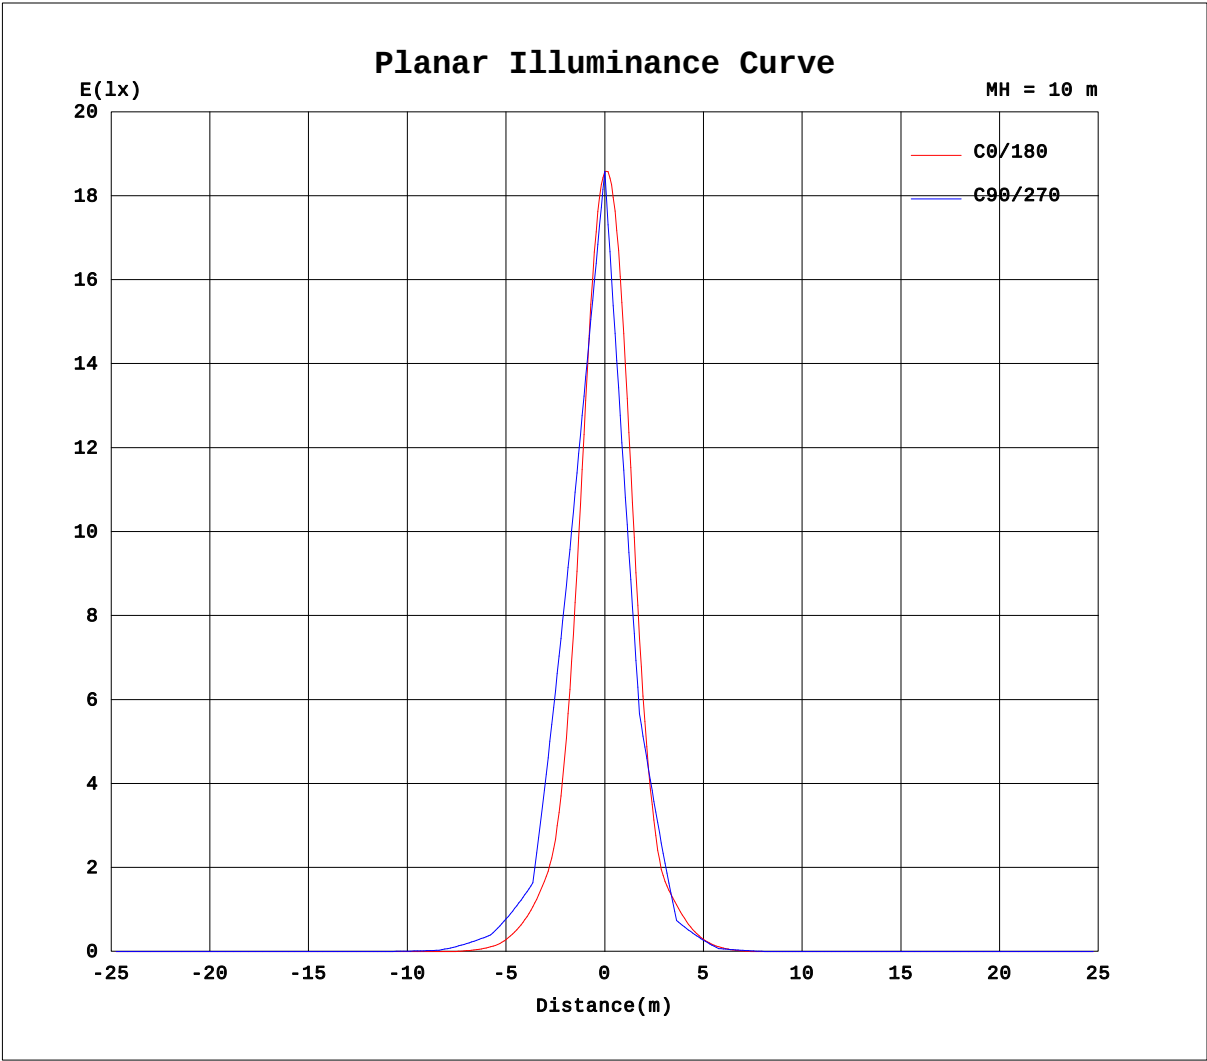


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.8V I:0.0902A P:10.66W PF:1.000 Freq:50.00Hz Lamp Flux:245.24x1 lm		
NAME: LWL-WZB-W55-L6-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411009
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

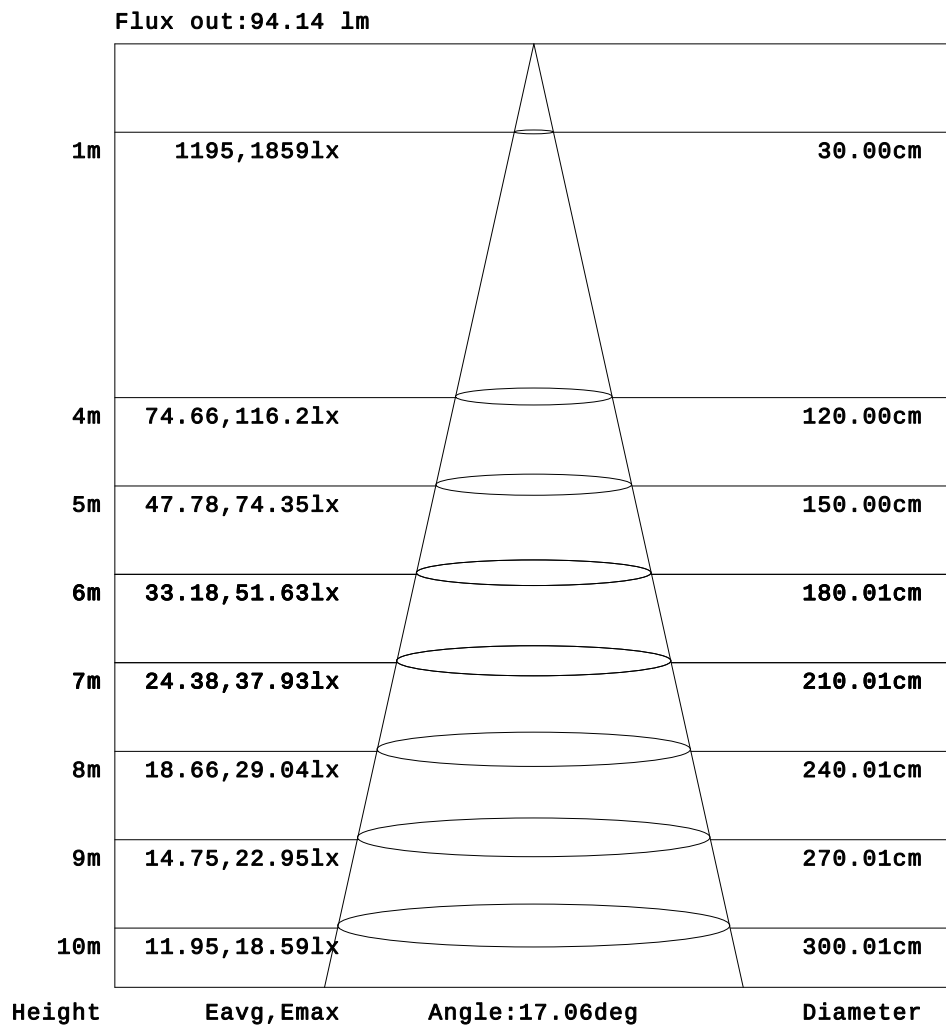

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.8V I:0.0902A P:10.66W PF:1.000 Freq:50.00Hz Lamp Flux:245.24x1 lm		
NAME: LWL-WZB-W55-L6-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411009
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.63	2.17	3.36	3.78	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.26	4.35	6.72	7.55	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.08	6.94	14.8	24.7	32.1	34.9	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.16	13.9	28.3	45.0	57.5	62.2	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.31	14.2	36.4	66.7	97.6	121	130	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.63	24.2	58.9	105	150	184	198	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.17	11.3	38.0	88.9	157	306	514	600	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.34	16.0	51.7	119	210	462	843	1003	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.72	17.1	54.6	127	239	623	1204	1431	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.10	18.2	57.4	135	268	783	1564	1859	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.65	13.8	44.0	105	207	522	1022	1226	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	9.33	30.5	75.5	146	261	480	594	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	4.94	19.2	47.9	92.5	161	281	342	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.55	7.85	20.3	39.0	62.2	82.7	89.8	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	3.93	10.2	21.5	35.0	46.8	50.7	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	3.95	7.83	10.9	11.7	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	1.98	3.91	5.46	5.85	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.8V I:0.0902A P:10.66W PF:1.000 Freq:50.00Hz Lamp Flux:245.24x1 lm		
NAME: LWV-WZB-W55-L6-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411009
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	3.53	2.32	0.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	7.05	4.64	1.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	32.6	25.4	16.0	7.75	2.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	58.1	46.2	30.1	15.5	5.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	120	97.3	66.8	37.3	15.5	3.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	183	148	103	59.1	25.6	7.81	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	474	274	153	88.0	39.2	12.7	1.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	766	400	202	117	52.7	17.6	3.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	1088	527	225	123	54.8	17.7	4.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	1409	654	247	129	56.9	17.8	4.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	932	450	194	100	43.1	13.5	2.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	455	246	141	71.7	29.2	9.23	0.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	268	153	88.8	45.0	18.1	4.90	0.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	81.5	59.6	36.5	18.3	6.88	0.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	45.9	33.4	20.0	9.27	3.44	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	10.4	7.19	3.52	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	5.19	3.59	1.76	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: